

## §32. Development of Two Dimensional Ion Doppler Velocity Measurements

Ono, Y., Balandin, A.L., Imazawa, R., Kawamori, E., Murata, Y., Itagaki, T., Yamanoue, T., Sato, K., Arimoto, K., Timura, T., Tawara, T. (Univ. Tokyo, Faculty of Frontier Sciences), Narushima, Y., Nagayama, Y., Yamazaki, K.

For the past five years, we have been developing a new visible-light tomography system for two dimensional (2-D) measurements of ion temperature and velocity. In 2007, 1) we increased projection number to 100 and 2) studied a new reconstruction error for 2-D plasma velocity measurement. We reconstructed the local 2-D plasma velocity profile from the measured line-integrated line spectrum with Doppler shift. The 2-D plasma velocity profile is composed of two components as shown in  $\mathbf{v} = \nabla \times \psi + \nabla \phi$  -----(1), so that we obtain the following Radon transformation form:

$$R\{\zeta\}(u, \eta) = - \int_{-\infty}^u \mathbf{v}\{\theta\}(u', \eta) du' \text{-----}(2),$$

based on an assumption that our plasma is incompressible as  $\nabla \cdot \mathbf{v} = 0$ . We solved the equation (2) using the maximum entropy method. Figure 1 shows the 2-D velocity profiles (vectors plot) and assumed and reconstructed toroidal velocity profiles of low aspect ratio toroid. They indicate that the assumed 2-D velocity profile was reconstructed successfully within the error of 20%. Figure 2 shows dependence of the reconstruction error on projection number. Artificially, 10% white noises (n=1 component) were added to the line-integrated signals of line spectrum. It was found that the optimized projection number is about 12-18. Figure 3 top shows the HeII line spectrums measured for three projections. Based on those data, radial velocity profile of two merging spheromaks with counter helicity were calculated as shown in Fig. 3 bottom. The bipolar toroidal velocity by the counter helicity reconnection was reconstructed successfully using our 1-D velocity measurement system.

S. You, Y. Ono et al., International invited talk in 2007 annual meeting of JPSJ, Himeji, (2007)

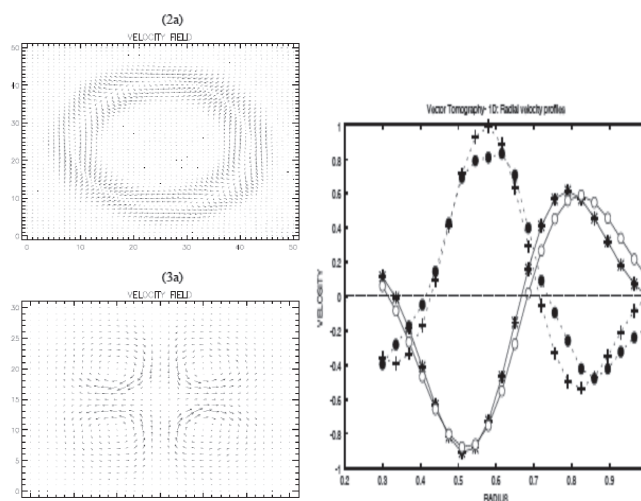


Fig. 1 Two examples of plasma flow reconstruction when they have radial flow shears (top and middle) and comparison of the original velocity profiles and the reconstructed ones where + and ● are the original and reconstructed values, respectively (bottom).

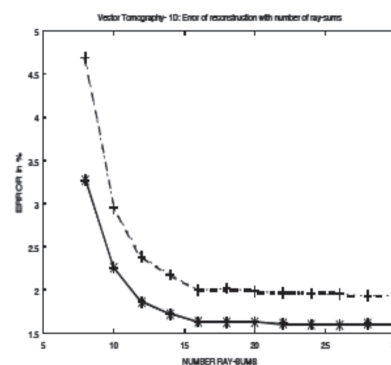


Fig. 2 Errors of reconstructed values as a function of projection number when 10% white noise is applied to the measured projection signals (+ : type 1 flow. ●: type 2 flow).

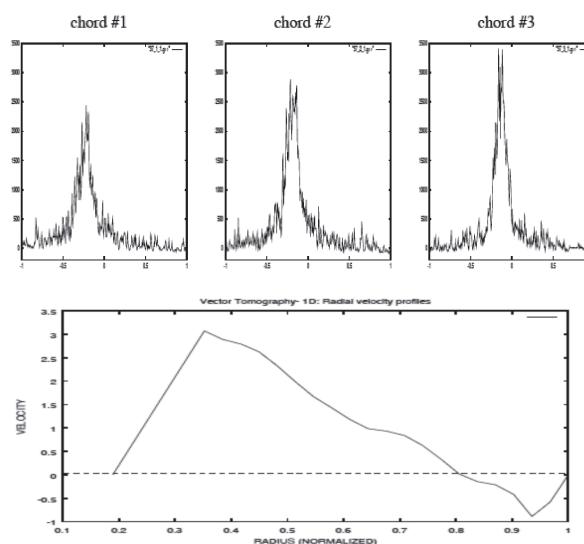


Fig. 3 Examples of HeII spectrums measured by 2-D Doppler diagnostics (top) and the radial velocity profile reconstructed from those data (bottom).