



Perrett, T., Mirmehdi, M., & Dias, E. (2016). Visual Monitoring of Driver and Passenger Control Panel Interactions. *IEEE Transactions on Intelligent Transportation Systems*. DOI: 10.1109/TITS.2016.2567540

Publisher's PDF, also known as Version of record

Link to published version (if available):  
[10.1109/TITS.2016.2567540](https://doi.org/10.1109/TITS.2016.2567540)

[Link to publication record in Explore Bristol Research](#)  
PDF-document

© 2016 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works, for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works

## **University of Bristol - Explore Bristol Research**

### **General rights**

This document is made available in accordance with publisher policies. Please cite only the published version using the reference above. Full terms of use are available:  
<http://www.bristol.ac.uk/pure/about/ebr-terms.html>

# Visual Monitoring of Driver and Passenger Control Panel Interactions

Toby Perrett, Majid Mirmehdi, *Senior Member, IEEE* and Eduardo Dias

**Abstract**—Advances in vehicular technology have resulted in more controls being incorporated in cabin designs. We present a system to determine which vehicle occupant is interacting with a control on the centre console when it is activated, enabling the full use of dual-view touchscreens and the removal of duplicate controls. The proposed method relies on a background subtraction algorithm incorporating information from a superpixel segmentation stage. A manifold generated via the diffusion maps process handles the large variation in hand shapes, along with determining which part of the hand interacts with controls for a given gesture. We demonstrate superior results compared to other approaches on a challenging dataset.

## I. INTRODUCTION

**D**ETERMINING which vehicle occupant is interacting with controls on the cabin’s centre console is of growing interest to vehicle manufacturers. Dual-view touchscreens are beginning to be included in cabin designs, which for example allow the driver to see a GPS display while the passenger sees a movie<sup>1</sup>. One current drawback is that the driver and passenger are confined to interacting with their “half” of the screen. Technological advances and competition between manufacturers has also led to a larger variety of controls being included for the purposes of safety, comfort and entertainment. This can result in a cluttered interface, with duplicate functionality for both the driver and passenger (*e.g.* multiple temperature dials).

A number of challenges are presented when trying to design and implement a system that monitors control interactions with the required reliability to be included in production vehicles. As it will be necessary to monitor occupants’ arms and hands, such a system must be able to handle different combinations of skin colour, jewellery, and clothing (including gloves). In more complicated cases where gesture information is needed to make a decision, different hand shapes and sizes must be accounted for. There will also be a high inter- and intra-person variability in performing these interaction gestures. In cases where there is occlusion, it will be necessary to predict how the hand shape, and thus the area being interacted with, changes.

Weight sensors in seats [1], RGB cameras [2], or depth sensors [3] could be considered to monitor control interactions. We have chosen to use a near infra-red (NIR) camera as it has the required fidelity, is well suited to an automotive environment and is cost effective. These issues are addressed further in Section II. Fig. 1 gives examples of the centre console using RGB and NIR cameras.



Fig. 1. A control panel: (left) under normal lighting conditions with an RGB camera, (right) with a near infra-red camera with near infra-red illumination.

Other works have attempted driver hand tracking [4], [5] or have determined if an occupant’s hand is in the vicinity of a control panel [6], but none have attempted to establish which occupant is interacting with specific controls. In order to do this accurately, a method of modelling hand shapes and gestures is needed. Accurate hand shape modelling has been achieved with depth cameras [3], but most relevant are works that model certain gestures in low light conditions using standard infra-red cameras [7], [8].

We propose a system, using a single camera mounted in the ceiling of the cabin, to determine which occupant is interacting with which control on the centre console. This would enable the full use of the dual-view touchscreen for both driver and passenger. Another advantage is that duplicate controls would no longer be needed (*e.g.* a single temperature or air conditioning dial would be sufficient in luxury cars with multiple climate control zones), resulting in a cleaner cabin design and the space to add a choice of other controls.

We adopt a background subtraction algorithm as the first stage in the proposed method. The foreground mask is then cleaned up using superpixel voting and the hand contours are extracted, using optical flow if necessary. Our main contribution lies in the next stages, where hand outlines are modelled with a manifold generated via the diffusion maps process. The manifold is constructed using a difference measure that takes into account both overall hand shape and the parts of the hand which interact with different controls. This gives an accurate location for a sample hand’s interaction, and the path through this manifold is used to provide gesture information. When a control is activated, each hand is scored based on these attributes in addition to the position of the control. The hand using the control is determined to be the one with the highest score. Fig. 2 illustrates an overview of the proposed method.

The rest of this paper is laid out as follows. Section II presents an account of related literature, Section III gives an

<sup>1</sup>This work is supported and guided by Jaguar Land Rover Research.

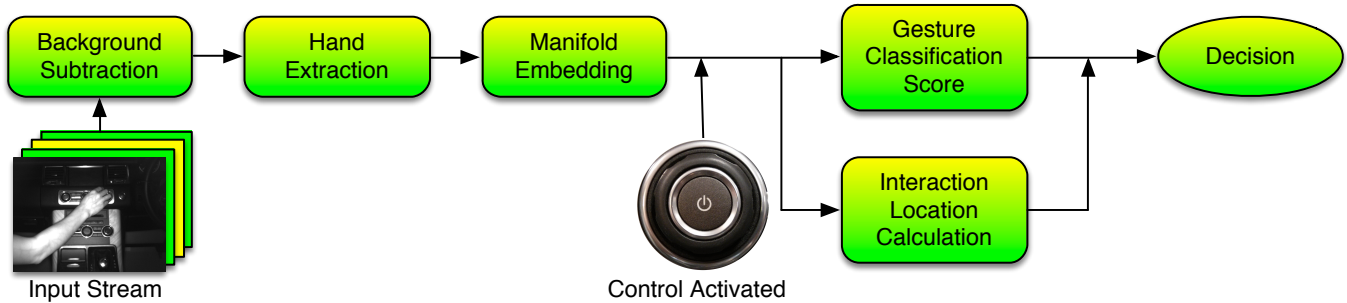


Fig. 2. A schematic overview of the proposed method, which gives a decision on which occupant is interacting with a control when it is activated.

overview of data we work with, and we detail the various stages of our methodology in Section IV. Section V outlines our experiments and results, and we present our concluding arguments in Section VI.

## II. BACKGROUND

The majority of computer vision based monitoring systems for use in vehicles have focussed on safety [2], [4], [9]–[19]. Examples of this include drowsiness monitoring by observing head pose and gaze direction [9]–[11] or via the PERCLOS measurement [12]–[15] and occupant classification for automatic airbag suppression [16]–[18]. In this work however, we will be looking at monitoring the occupants in order to improve the vehicle’s cabin layout and the occupant experience.

As no previous works have attempted to solve this problem per se (see Section V for an explanation on how we adapt other methods for comparison), we start by reviewing the suitability of sensors typically available in vehicle cabins for this task. We then look at computer vision systems for observing a driver’s position in a vehicle. Next, we cover previous methods specifically designed to track a driver’s hands, moving onto shape-change based gesture recognition methods for use in low light conditions and ways of representing these complex hand shapes. As the tracking procedure in the proposed method isolates hand shapes and positions, global feature based gesture recognition techniques are not considered here.

An alternative to a computer vision based approach might be to monitor the weight sensors in the driver and front passenger seats, typically used to indicate whether these seats are occupied [1]. It is possible that weight sensors applied to our task could work for simple cases where just the driver or passenger is interacting with a control. However, more complicated cases where both occupants are interacting with controls simultaneously would be problematic - there would be no way of deciding which occupant is interacting with which control. Additionally, as cameras could eventually replace weight sensors for the task of occupant detection and classification [16]–[18], using a camera for this task could make it more suitable for inclusion in cabin designs of the future.

Zhao *et al.* [2] classified the driver’s posture into one of four categories (hands on the steering wheel, changing gear, eating, and on the phone) and relied on head and hand detection and

relative positions. The aim of this work was to enhance driver assistance systems, whereby the driver could be prompted to pay attention to the road when eating, or warned that using a mobile phone is prohibited and dangerous. Tran and Trivedi [19] used two cameras to fit a simplified torso model using the locations of the driver’s head and hands, again with the aim of providing more information to a driver assistance system. The hand detection parts in these methods, along with many others [20], [21], rely on colour information as the first stage in the detection process. One obvious failure case is when the subject is wearing gloves. Some skin colours can also be more difficult to detect, but the greatest limitation which makes these methods unsuitable for our use is that they struggle, or else completely fail, during night time operation. Similarly, depth based methods for hand tracking using time of flight cameras, such as that by Oikonomidis *et al.* [3], which looked at interlocking hands with a frontal view in an indoor environment, are not practical in a vehicle due to the direct sunlight they may encounter.

Perhaps the most relevant and robust work is that by McAllister *et al.* [5], which looked at tracking a driver’s hands, using a greyscale camera, in the vicinity of the steering wheel. A background subtraction method was used, followed by a simple circle fitting, which can give a rough approximation to the hands’ positions, but this lacks the fidelity required for our task. Crespo *et al.* [4] used background subtraction with prioritising of certain locations, such as around the steering wheel and on the gear stick, for the same task. They used a NIR camera with NIR illumination to ensure successful night time operation, but again this tracking alone is not accurate enough for our problem.

Cheng *et al.* [6] investigated monitoring controls by taking histogram-of-orientated-gradients over an image patch containing the control panel, with the aim of alleviating driver distraction. However, they did not attempt to determine which occupant was interacting with which control, only giving an indication whether the occupants’ hands were in the vicinity of the control panel.

In addition to a hand tracking stage, we will also need a way to model which part of the hand interacts with controls. This is because just taking the closest hand from the hand tracking stage provides insufficient accuracy when two hands are interacting with controls close together. Manifolds provide a way to represent nonlinear data in a reduced space, and




Fig. 3. Some examples from our hand shape training set, which consists of 900 images.

are thus ideal candidates for modelling human hand attributes. Key works on gesture recognition in low light conditions are those of Lee and his co-workers [7], [8] which looked at recognising grasping gestures. An infra red camera was used, and thus they operated on the hand outline. Manifolds were pre-specified, one for each gesture, and the path of a testing sample through one of these manifolds represents the gesture being performed. Choi *et al.* [22] used a manifold generated by the kernel isomap method to classify strokes as gestures, but only looked at paths through space, not how the hand shape changes. Etyngier *et al.* [23] showed how a single manifold generated by the diffusion maps process [24], [25] can be used to organise and model a set of shapes with a large degree of variation, and applied this approach as part of a level set segmentation framework.


### III. DATASET

Only a simple set of hand shape training images is needed to construct the hand shape manifold in our method (detailed in Section IV-C). We perform this using 900 hand images taken from *one subject only* with a webcam from a similar angle to the main experiments (see Fig. 3).

To evaluate the proposed method, two datasets are introduced. First, for training and testing, control interactions with the dashboard of a Range Rover Sport were filmed (see Fig. 4). To verify that the proposed method can be used in other vehicles and with different control panels, a second dataset was collected just for testing. This consists of footage from two additional Sports Utility Vehicles (SUVs) and a Saloon car with a lower ceiling height and more vertically mounted control panel (see Fig. 5). In both cases the camera was mounted at ceiling height, just back from and inbetween the two front seat headrests. Fig. 4a gives a profile view of the camera position within the cabin. This camera position was chosen because it allows the camera to capture the hands

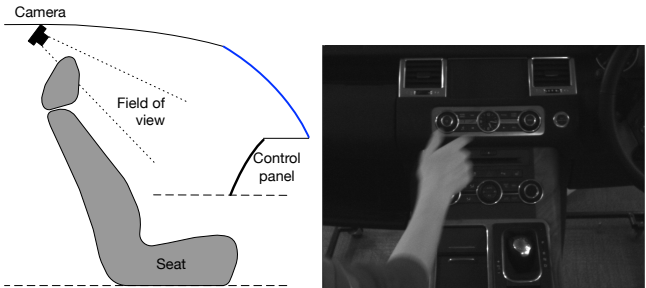

(a) Cabin layout. The camera is mounted on the centre line of the vehicle so its view is not obscured by the front seats.

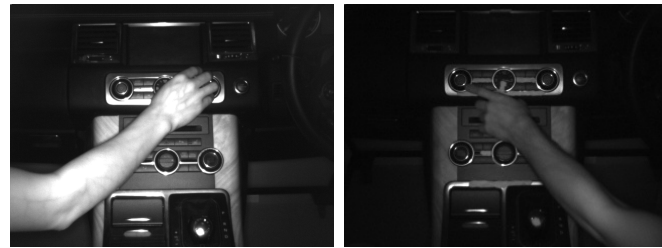

(c) Day, NIR illumination and filter. (d) Night, NIR illumination and filter.

Fig. 4. Camera setup examples.

before they start using controls towards the edge of the control panel, which provides more information to the method in Section IV-E (increasing gesture classification accuracy), and ensures that the occupants' hands enter the frame from their respective sides. A further benefit is that the camera can be incorporated into an area not commonly taken up by a sunroof. A consumer grade monochrome camera with a 60° field of view lens, a NIR pass filter and NIR illumination was used to capture footage in daytime and night time, and the same camera was used without these additions for daytime examples (see Fig. 4). Using NIR illumination and filtering provides a number of benefits in an automotive environment. The illumination allows for a shorter exposure time as more light is available to the camera, which reduces the amount of motion blur, and during night time operation it allows the scene to be lit without creating a possible distraction for the driver. There is also more consistency between night and day time footage as a significant proportion of the scene lighting is under control. We had 10 adult volunteers and one child with a wide range of skin tones, jewellery and clothing.

As controls can be approached from any angle, we do not need motion information to be included in our gesture model. As such, we are only interested in how the hand shape changes independent of its position, and this makes our method unsuitable for comparison with standard gesture recognition datasets, such as [26], [27]. In these works, the best performance is obtained by taking global features over the whole image - clearly not a suitable approach for the task addressed here. Additionally, we found that hand shape change over time was a much more reliable indicator of the gestures our test subjects performed than positional trajectories. If we were to incorporate hand trajectories, we would need a much larger quantity of training gestures (which could also reduce

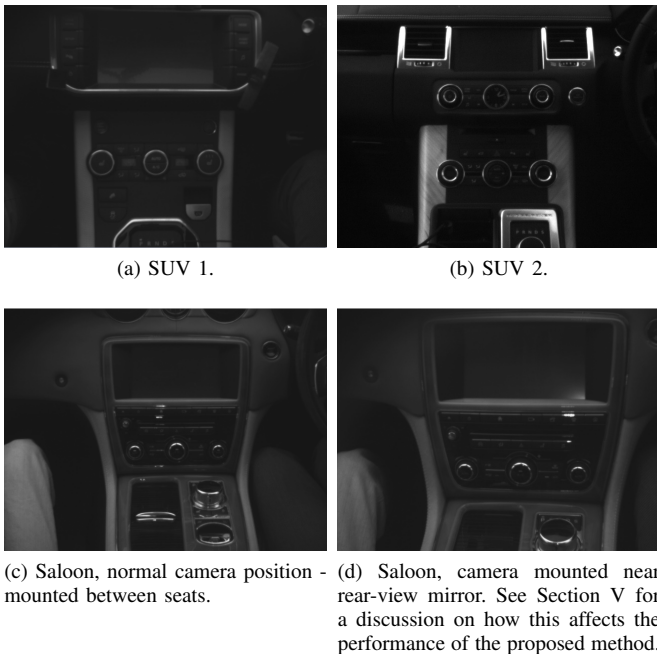


Fig. 5. Examples of other cabin layouts used to verify that the proposed method works in different vehicles.

accuracy compared to the more consistent hand shape change information). These would be necessary to handle the larger variation between different test subjects, as well as in multiple runs by the same subject. Reference trajectories from every control to every other control would be needed, further increasing the volume of training data required. Another potential issue is that the system would be less portable, as additional training trajectories would be needed for every control that is added or moved.

#### IV. PROPOSED METHOD

We proceed by first using background subtraction and a superpixel-based method to obtain a cleaned foreground mask, as explained in Section IV-A. Next, in Section IV-B, hand contours are extracted from the foreground mask. Then in Section IV-C, training hand shapes are used to generate a manifold that takes into account both overall hand shape and the parts of the hand which interact with controls. The procedure for embedding new hands into this manifold is in Section IV-D and a method for obtaining gesture information from manifold embeddings is then given in Section IV-E. Finally, the interaction confidence score, used to determine which hand is interacting with a specific control, is presented in Section IV-F. Fig. 2 gives an overview of the entire process.

##### A. Background Subtraction and Superpixel Cleaning

In the first stage of the proposed approach, we use the Pixel-based Adaptive Segmenter [28] for background subtraction. It was chosen as it allows small foreground objects (in our case these are likely to be noise) to decay into the background model quickly whilst larger objects persist. It consists of a background model derived from previous frames, and dynamically updates per pixel decision thresholds and learning rates. This results in a foreground mask - see Fig. 6b for an example.

Method	Successful classification rate
Median filter	77.3%
Erosion and dilation	73.4%
Superpixel-based	80.1%

TABLE I  
GESTURE CLASSIFICATION SUCCESS RATES WITH A RANDOM FOREST CLASSIFIER WHEN USING DIFFERENT FOREGROUND MASK CLEANING PROCESSES.

The foreground mask generated by the background subtraction process next needs to be cleaned up to remove noise. One possible approach would be to apply a median filter to the foreground regions (an example is given in Fig. 6c). However, a disadvantage of this is that edge information is not necessarily preserved. A more recent approach by Schick *et al.* [29] introduced the idea of *probabilistic superpixels*.

Before background subtraction, the image is over-segmented using the Simple Linear Iterative Clustering (SLIC) algorithm [30] (we use the gSLIC implementation [31]). See Fig. 6d for an example. This is essentially a k-means clustering of pixels in the combined image and intensity space. We apply a high intensity weighting in order to capture more edge information. In [29], each superpixel is assigned a probability of being in the foreground based on the number of pixels in the foreground mask. A Markov Random Field then minimises an energy functional consisting of this probability and the colour similarity to neighbouring superpixels. In our case, because we are just looking for large foreground regions and have no guarantee of intensity similarity between neighbouring superpixels (*e.g.* due to a textured background and clothing patterns), it proves sufficient to just take those superpixels with a foreground probability above a certain threshold. This has an additional benefit of reducing the frame processing time.

After the image is segmented into  $n$  superpixels, each pixel  $p$  is assigned to the superpixel  $P_i$  containing it. Given a foreground mask  $F$ , its cleaned form  $\hat{F}$  is then

$$\hat{F} = \bigcup_{i \in Q} P_i \quad \text{where} \quad Q = \left\{ i : \sum_{p \in P_i} \frac{F(p)}{\|P_i\|} > \lambda \right\}. \quad (1)$$

Here  $\lambda = 0.5$  is a threshold determined empirically. As our application features large foreground objects with clearly defined edges, slight variation in this value has no adverse effects. Eq. (1) selects superpixels to make up the new foreground mask  $\hat{F}$  if they satisfy the criteria of containing a minimum density of pixels in the original foreground mask.

Table I compares the successful gesture classification rates, using the method in Section IV-E with a Random Forest classifier applied to 5 previous frames. Results are given for the superpixel-based method presented here, along with a median filter and an erosion and dilation approach. Fig. 6 shows an example of the superpixel-based method in operation. It is worth noting that a background subtraction method may fail if the hand is the same colour and texture as the background - further explanation and examples are given in Section V.

##### B. Hand Contour Extraction

When there is no occlusion, *e.g.* starting when a hand first enters the frame at location  $e$ , contours can be extracted from

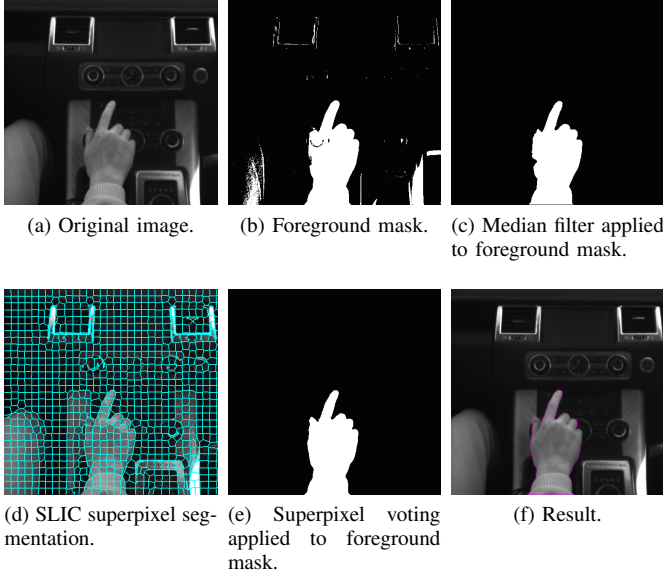


Fig. 6. The background subtraction process. We do not use a median filter, instead using SLIC superpixel voting to obtain a better foreground mask.

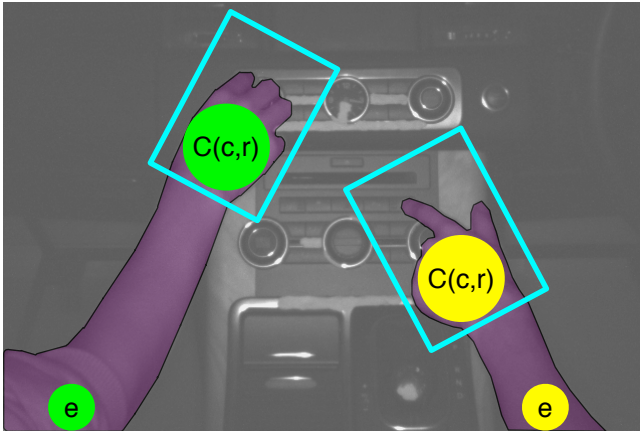


Fig. 7. Hand Localisation. Circles  $C(c, r)$ , bounding boxes (blue) and entry points  $e$  in two arm contours (purple - denoted  $A$  in Eq. (2)).

the cleaned foreground mask. Given the set of pixels in an arm contour,  $A$ , the hand location and size can be taken as the circle  $C(c, r)$  with centre  $c$  and radius  $r$  satisfying

$$\arg \max_{c, r} (\alpha r^2 + d_E(e, c)) \left| \begin{array}{l} r_{min} < r < r_{max} \\ \text{and } C(c, r) \subset A \end{array} \right. \quad (2)$$

In (2),  $\alpha$  is a weighting constant,  $d_E$  is the Euclidean distance and  $r_{min}$  and  $r_{max}$  are the predefined minimum and maximum radii, chosen to be just below the smallest and above the largest expected palm sizes. This avoids accidentally selecting a finger or shoulder as a hand centre. The hand contour is taken as the outline of  $A$  enclosed within a bounding box around  $C$ , resized relative to  $r$  and orientated with respect to the arm angle. Fig. 7 shows examples in two arm contours. This is similar to the method in [5], which attempts to maximise the hand circle radius and fit of a straight line to the arm, whereas Eq. (2) attempts to maximise the hand circle radius and distance to arm entry point. However, neither the proposed

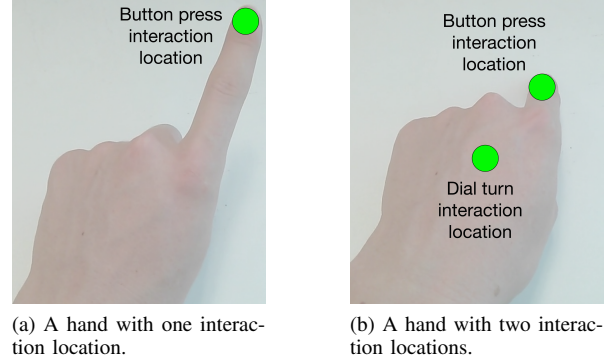


Fig. 8. Hand interaction locations.

method for hand localisation nor the method in [5] provide the accuracy we require when two hands are part of the same contour. In the event of such occlusions, an enhanced approach is needed, so optical flow is used to infer the movement of the occluded hand. First, sparse Lucas-Kanade optical flow [32] is calculated for each superpixel. This information is used to assign each superpixel to the contour it was in before the occlusion. If the hand is visible, its outline is extracted, resized and rotated as above. If not (i.e. when two separate arm contours overlap), then  $r$  is assumed constant and the positional change in  $c$  is computed from the flow within the contour containing it. The hand shape change is predicted using the embedding path described in Section IV-E.

### C. Manifold Generation

Each hand shape can have one (Fig. 8a) or more (Fig. 8b) interacting areas, depending on the available control types. Before any hand contours are used, they are resized by finding the largest circle in their outline as in Eq. (2), and scaling appropriately. As right and left hands are symmetrical, we can generate one manifold with just left handed shapes (those of the driver in a right hand drive vehicle), and vertically flip any right hand (belonging to the passenger) prior to its embedding.

We choose to proceed with a shape manifold based method, rather than a global feature based approach such as [26], because the shape of the hand is linked to the area with which it interacts. With a properly constructed manifold, we are able to organise hand outlines such that those nearby will be both close in shape and have similar interacting locations. The works by Lee and his co-workers [7], [8] demonstrate how a well chosen manifold is able to represent a specific gesture. Cylindrical manifolds are used to represent grasping gestures, although other gestures, such as pointing, are not investigated. A disadvantage to requiring a separate manifold for each gesture type is that they need to be specified in advance, and this can be difficult if the underlying hand shape change is not as obvious as a grasp/ungrasp. Also, in our case, people can perform the same gesture in different ways, which would require either constructing many manifolds per gesture or a complicated embedding operation.

Here, we construct a single manifold to represent all hand shapes no matter which control types they interact with (e.g. pressing a button or turning a dial), and rely on a classifier

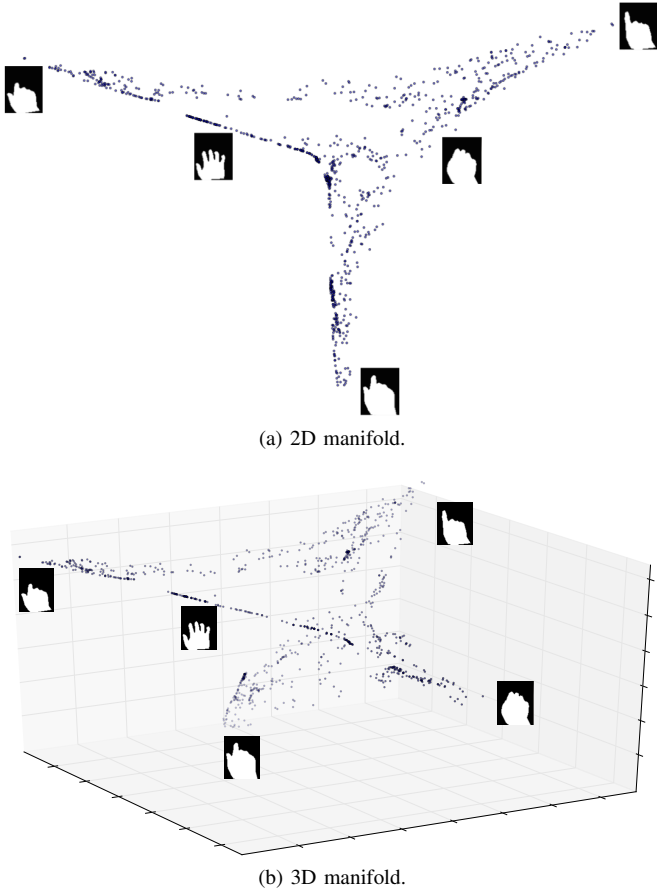


Fig. 9. Training sample embeddings in manifolds generated by the diffusion maps process with the difference measure  $d_{WI}$ .

to determine which gesture the path through the manifold represents. Note how we do not use a separate manifold for children (although we still include child test subjects in Section V). Given a suitable embedding scheme, knowledge of the occupants' ages does not add any useful information when determining which part of the hand is interacting with a control or the gesture being performed. Including this extra manifold in our pipeline would introduce the problem of deciding which side of the adult/child cutoff a hand is, particularly in borderline cases. It would also increase the amount of training data needed in both the manifold construction and shape change stages, in addition to the issues raised above.

We use the manifold learning method of [23] to create the hand shape manifold from our training hand set via the diffusion maps process. Briefly, this relies on a measure of difference between training shapes, which are arranged such that when this difference is low, shapes are close in the manifold, and vice versa. The manifold construction technique in [23] has not previously been applied to the task of modelling hands or gestures, and we introduce a difference measure designed to organise hand shape embeddings with respect to how they interact with controls.

In [23], the difference measure between two contours  $U$  and  $V$  is taken as the Sobolev  $W^{1,2}$  norm,  $d_W$ , between their signed distance functions,  $\mathcal{D}_U$  and  $\mathcal{D}_V$  (which can be quickly computed from the original contours using the Fast Marching

method [33]). This is given by [23] as

$$d_W(U, V)^2 = \|\mathcal{D}_U - \mathcal{D}_V\|^2 + \|\nabla \mathcal{D}_U - \nabla \mathcal{D}_V\|^2. \quad (3)$$

We wish to also take into account the distance between the hands' interaction locations, so the difference measure  $d_I$  is introduced as

$$d_I(U, V) = \sum_{t=1}^{\omega} \begin{cases} d_{E_t}(U, V) & \text{if both interaction} \\ & \text{types } t \text{ are annotated} \\ \Theta_t & \text{otherwise} \end{cases} \quad (4)$$

where  $d_{E_t}$  is the Euclidean distance between interaction locations of type  $t$ ,  $\Theta_t$  is the maximum distance between hand interaction locations of type  $t$ , and  $\omega$  is the number of interaction types. We then combine  $d_W$  and  $d_I$  to give  $d_{WI}$ , which is the difference measure used to construct the manifold

$$d_{WI}(U, V) = d_W(U, V) + \beta d_I(U, V), \quad (5)$$

where  $\beta$  is a weighting constant. Eq. (3) essentially places similarly shaped contours close to each other on the manifold. If the manifold is generated with just Eq. (3), then embedding methods that rely on combining information from multiple training samples can result in the interaction location being calculated as outside of the hand contour. Eq. (4) is introduced to ensure contours with similar interaction locations have close embeddings, and thus alleviates this concern.

Now we have a difference measure, the manifold is constructed using Eq. (5). Given the training set  $\Omega$  containing  $\mu$  samples, we construct the difference matrix  $M$  using a Gaussian kernel equipped with  $d_{WI}$  with  $\sigma$  being approximated by the median difference between all  $\mu$  samples in  $T$ .

$$M_{ij} = \exp \left[ -\frac{d_{WI}^2(\Omega_i, \Omega_j)}{2\sigma^2} \right]. \quad (6)$$

As a way of denoising the manifold, only the largest  $\mu/10$  entries in each row of  $M$  are retained. This is then made symmetrical by adding  $M$  to its transpose, then normalised via the Beltrami normalisation process. We call this normalised difference matrix  $\bar{M}$ . Eigen decomposition is then performed on  $\bar{M}$ , with  $\nu$ -dimensional manifold being taken as the  $\nu$  eigenvectors corresponding to the  $\nu$  largest eigenvalues.

Fig. 9 shows example 2D and 3D manifolds generated by this process. In our experiments, we found that using a manifold with a dimension higher than 3 provided negligible improvements.

#### D. Sample Embedding

Previous approaches to embedding a sample into a shape manifold (outlined in [23]) have either been a nearest-neighbour embedding, which can lack accuracy, or via the Nyström extensions method. This requires calculating the difference between the sample to be embedded and all the training samples, and is thus unsuitable for a real time application. We require a method that is more robust to noise than the nearest-neighbour embedding, yet still able to run in real time, and so we use a k-nearest neighbour embedding.

Along with an  $\nu$ -dimensional training set embedding, we also store the possible hand interaction locations for each

sample in the training set. Now, given a sample  $S$ , we find the  $\nu + 1$  nearest neighbours of the sample in the training set,  $K_S$ , and the reciprocals of their distances from  $S$ , denoted  $R_{K_S}$  via the difference measure used to create the manifold ( $d_{WI}$  in Eq. (5)). We also find the embeddings of the training samples  $K_S$ , denoted  $\Phi_{K_S}$ , and their interaction locations for each control type  $t$ , denoted  $\Psi_{K_S}^t$ . The sample embedding  $\Phi_S$  and sample interaction location  $\Psi_S^t$  of  $S$  are then

$$\Phi_S = \hat{R}_{K_S} \cdot \Phi_{K_S} \quad \text{and} \quad \Psi_S^t = \hat{R}_{K_S} \cdot \Psi_{K_S}^t, \quad (7)$$

where  $\hat{R}_{K_S}$  is the normalised form of  $R_{K_S}$ . To enable this process to run in real time with a large training shape set, a vantage-point (or metric) tree [34] is constructed during the initialisation stage using  $d_{WI}$  and the training samples. This then provides a fast k-nearest neighbour search when queried.

### E. Path Classification

At a given moment, it is necessary to determine which action is being performed. We would like to use the path through the manifold to make this decision. To build our path classifier, we first gather some example gestures, for example pressing a button with the index finger or turning a dial clockwise.

Given a sample gesture  $g$  that consists of  $f$  frames, the manifold embedding  $g_i$  for each frame  $i$  is calculated. As gestures can occur at different rates, we use the training gestures to generate many training samples of different lengths with which to compare testing samples. In each generated sample, some embeddings are randomly left out to allow for noisy hand shape data being fed into the manifold, for example by a bad hand location, dropped frame or failed segmentation. The set of generated samples  $G$  from gesture  $g$  is defined as

$$G_g = \{P(k, j, b) | l_1 \leq j \leq l_2, 0 \leq k \leq f - j\}, \quad (8)$$

where  $l_1$  and  $l_2$  are the minimum and maximum sample lengths respectively in frames to be classified.  $P(k, j, b)$  denotes the path from  $g_k$  to  $g_{k+j}$ , with each coordinate having probability  $b$  of being removed and replaced by a hermite interpolation of its neighbours. This step prevents the classifier over-relying on a single coordinate. In our case, we found  $b = 0.2$  to be appropriate. In the event of an occlusion, the change in hand shape - and hence its interaction location - can be estimated by finding the nearest neighbour (with the gesture type as indicated by the classifier) in the generated set to the testing sample. The sample that this nearest neighbour was generated from can then be used, stretched as necessary. Fig. 10 gives three example hand shape change embedding paths.

We evaluate the classification success rates of nearest-neighbour, radial basis function support vector machine (SVM), decision tree, and random forest classifiers, as well as a comparison against dynamic time warping (DTW) on the non-generated example gestures. Fig. 11a shows these classifications on whole single interactions, from the time the hand enters the frame until the control is pressed (Fig. 12 shows two video examples). The embedding path is subsampled, and the number of sample points varied. Here, the nearest-neighbour

is the best choice as it performs well at both low and high sample rates.

Fig. 11b shows the results of just classifying the previous few frames at a random interruption before the control is activated to simulate an occlusion. This interruption is restricted to occurring between the halfway point in the sequence and when the control is used. As can be seen in Fig. 12, the earlier this interruption is made the more difficult it is to make a correct classification. When looking at a small number of previous frames (less than 10 frames at 60 fps, i.e. 0.17s), the random forest classifier performs best, but it is reliably outperformed by the nearest-neighbour and SVM classifiers when looking further back (greater than 10 frames). In both cases, 5-fold cross validation was performed 100 times on a verification set containing 25 button presses, dial turn right, and dial turn left interactions from one subject.

### F. Interaction Confidence Score

Now, when a control is used, each hand can be scored based on how well the gesture agrees with the control type and the distance between the hand's interacting point and the control. Given a control activation at location  $x$ , this score is defined as

$$\text{Interaction score} = \underbrace{\tau^\gamma}_a \underbrace{\left(\frac{k}{f-j}\right)^\delta}_b \underbrace{\frac{1}{d_E(x, l)}}_c. \quad (9)$$

In (9),  $\tau$  is the classifier confidence score that the current gesture being performed is used to interact with the type of control being activated. The Euclidean distance is given by  $d_E$ , and  $l$  is the interaction location of current hand shape with the queried control type from Eq. (7). The weighting constants  $\gamma$  and  $\delta$  are learned via a grid search from a validation set. For this search, the validation set is split randomly in half, with the condition enforced that all control types must appear in each half. The first half is taken for training and the second half for testing, with the mean taken over five runs. Whichever hand obtains the highest interaction score is determined as the hand interacting with the control at location  $x$ . Part  $a$  of Eq. (9) is the weighting of the gesture contribution, and prioritises a hand which is performing a gesture likely to be interacting the control type being used. Part  $b$  corresponds to how far through the gesture path the current hand shape embedding is (or the embedding of a predicted hand shape change in the event of an occlusion). As all hand shape change training samples end with a control interaction, this prioritises a hand that is more likely to be currently using a control. Part  $c$  prioritises a hand with its interaction location close to the current control being activated. The form of Eq. (9) was initially chosen as it provides a simple way of combining the interaction location and hand shape change information, where only two weighting parameters need to be found. It is less susceptible to overfitting with a small validation set and outperformed an SVM applied to the same problem.

## V. EXPERIMENTS

To construct the hand shape manifold, 900 images from one subject are used, as introduced in Section III with examples





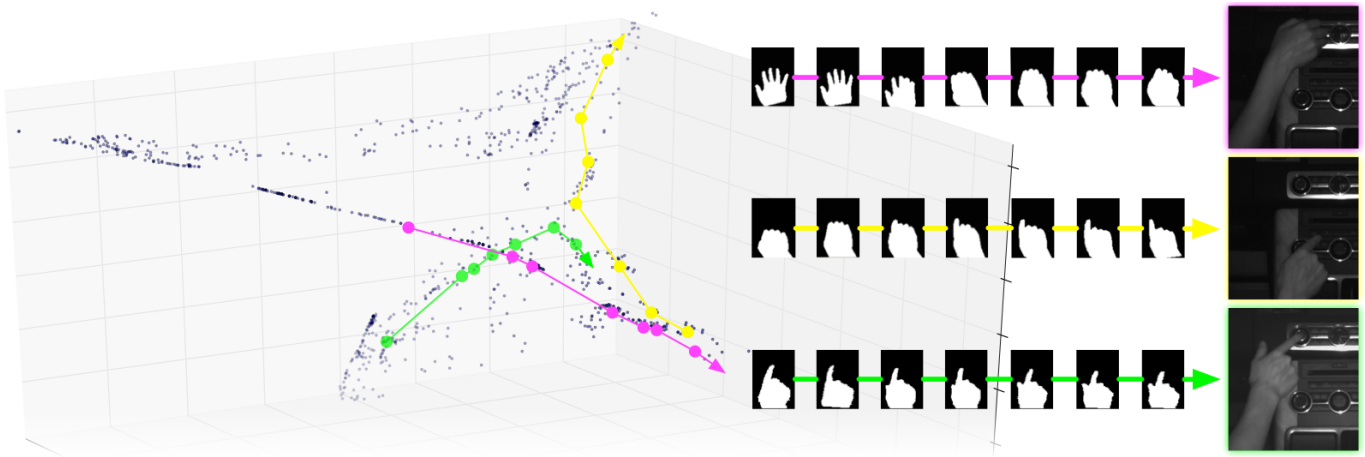


Fig. 10. Some sample paths through a 3D manifold. The top row of images correspond to a clockwise dial turn. The middle row corresponds to a button press with the index finger, and the bottom shows how finer details such as a thumb extending can be determined.

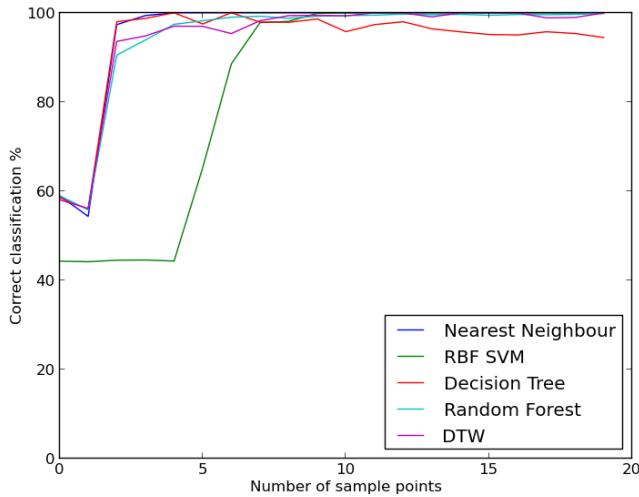

(a) The whole interaction (hand entering the frame until control activation) is classified, with a variable number of sampling points.

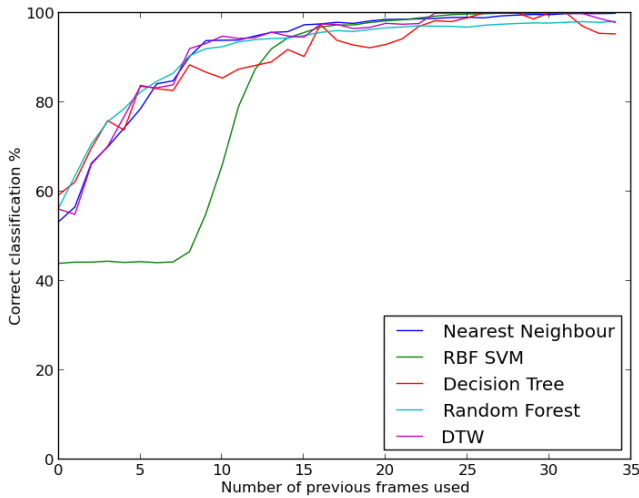

(b) The interaction is classified at a random interruption after the hand has entered the frame. The number of previous frames used before the interruption is varied.

Fig. 11. Comparison of classifiers on the whole interaction and a set number of previous frames. Footage was taken at 60 frames per second.

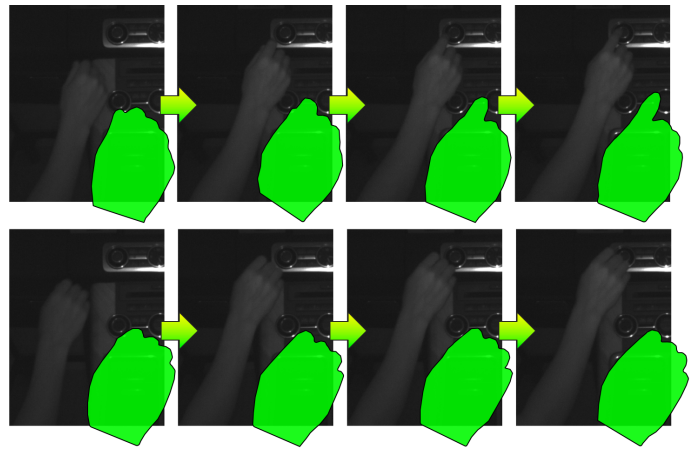


Fig. 12. Frames taken from two of the video sequences used to generate Fig. 11b with the hand shapes enlarged for clarity. The top row is part of a button press with the index finger and the bottom row is part of a clockwise dial turn. The gesture classification is made at a random point during the sequence.

shown in Fig. 3. Due to the diffusion maps process, more could be added with little effort to include additional poses as required. For the gesture and interaction training and verification sets, 25 interactions with each control type (button, dial and touchscreen) from the same participant are used. For the validation set required by Eq. (9), 50 complex interactions are used. The main testing dataset consists of 1544 control interactions by 10 adults and one child with a wide variety of skin tones, clothing and jewellery (Table II gives the number of times items of clothing and jewellery occur in the test set). Of these, 596 are daytime and 603 night time with NIR illumination and filtering, and 345 are daytime at normal greyscale. Our data is captured at 60 fps, so when testing at 30 fps one out of every two frames is ignored and three out of every four ignored when testing at 15 fps.

We compare the effectiveness of the proposed method with and without knowledge of hand interaction locations. When making a decision without this information, we choose the hand that is closest to the control when it is activated (marked as *C.H.* for Closest Hand in the results table). We also use

Clothing/jewellery	Count
Watch	127
Ring	151
Glove	21
Sleeve	186
Rolled up sleeve	253

TABLE II

NUMBER OF TIMES ITEMS OF CLOTHING AND JEWELLERY APPEAR ON A HAND INTERACTING WITH A CONTROL IN THE TEST SET.

Method	Day + NIR (596)	Night + NIR (603)	Day - NIR (345)	Average (1544)
Proposed	98.5%	96.8%	95.0%	97.1%
Proposed <i>C.H.</i>	79.3%	88.9%	87.8%	85.0%
[5] <i>C.H.</i>	61.1%	68.5%	68.4%	65.6%

TABLE III

SUCCESSFUL DECISION PERCENTAGE ON OUR DATASET AT 30 FRAMES PER SECOND. *C.H.* DENOTES METHOD JUST USES THE CLOSEST HAND WHEN MAKING THE DECISION. DAY + NIR REFERS TO THE DAYTIME FOOTAGE WITH NIR ILLUMINATION AND FILTERING, NIGHT + NIR REFERS TO THE NIGHT TIME FOOTAGE WITH NIR ILLUMINATION AND FILTERING AND DAY - NIR REFERS TO DAYTIME FOOTAGE WITH NO ILLUMINATION OR FILTERING. THE NUMBER OF INTERACTIONS FOR EACH CAMERA SETUP ARE IN BRACKETS.

this same criteria applied to McAllister's driver hand tracking method [5]. Table III shows these results, clearly indicating the substantial improvement obtained by including interaction location information over the naive closest hand approach. This improvement is consistent across the day time footage with infra-red illumination (98.5% compared to 79.3%), night time footage with infra-red illumination (96.8% compared to 88.9%) and the unilluminated day time footage (95.0% compared to 87.8%). On average, across all test footage, the driver or passenger is chosen correctly 85.0% of the time when just looking for the closest hand, and this increases to 97.1% when including the interaction location and gesture confidence in the decision making process.

Table III also highlights improvements in the hand segmentation and locating components of the proposed method over [5]. For example, when just taking the closest hand to make a decision, improved results are observed across all footage types. [5] makes the correct decision for 65.6% of the interactions in the test set, whereas the proposed method scores 85.0%.

There are two main reasons for this improvement. The first is better hand segmentation due to the use of a more advanced background subtraction method and the preserving of edge information. The second is how the two approaches handle occlusions. Using the motion of the visible part of the arm to adjust the position of an occluded hand results in a more accurate hand location than the distance transform approach applied to the foreground mask in [5].


Table IV details the effectiveness of the proposed method at different frame rates. Across all test sequences, the proposed method makes the correct decision 95.9% of the time on footage provided at 15 fps, and this rises to 97.1% at 30 fps and 97.7% at 60 fps. Increasing the frame rate results in a higher successful decision score as the gesture classifier performs better with more hand shape samples, as illustrated in Fig. 11.

Fig. 13 demonstrates the proposed method handling complex situations such as hand crossing and occlusion (13a), the


Frame rate	Day + NIR (596)	Night + NIR (603)	Day - NIR (345)	Average (1544)
15 fps	93.8%	97.2%	97.4%	95.9%
30 fps	98.5%	96.8%	95.0%	97.1%
60 fps	99.2%	98.7%	93.6%	97.7%

TABLE IV


SUCCESSFUL DECISION PERCENTAGE OF THE PROPOSED METHOD AT DIFFERENT FRAME RATES.

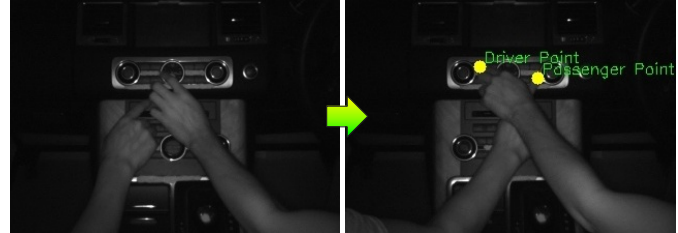


(a) Occlusions.

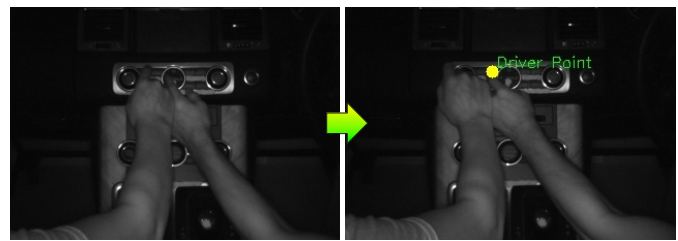

(b) Collisions.

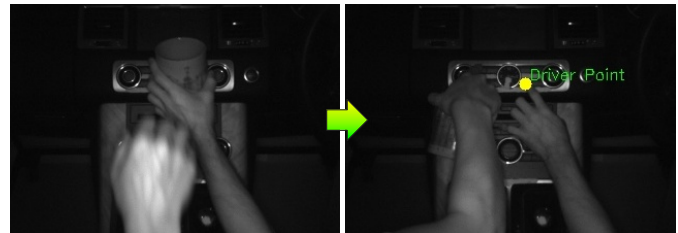

(c) Foreign objects.

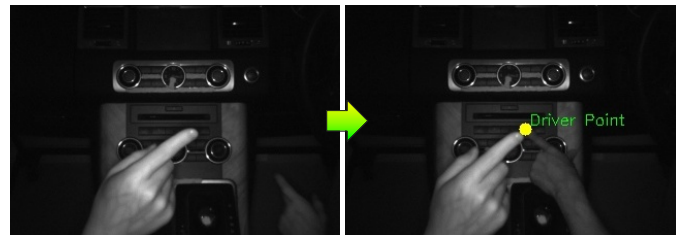

(d) Pointing at other cues.

Fig. 13. The proposed method working on examples from our dataset. In each case the right image is captured a few frames after the left.

driver and passenger contesting over a control with contact occurring (13b), objects being passed around (13c) and distracting hands (13d).<sup>2</sup>

Table V shows the results when using the above methods in the additional vehicle cabins introduced in Fig. 5. A similar trend is observed to the main test footage - the proposed method achieves average 93.3% with the interaction confidence score and 89.2% without. The closest hand implementation of [5] scores an average rate of 79.5%. We also trialled a more forward camera mount in the Saloon (Fig. 5d),

<sup>2</sup>See the supplementary material for video examples.

Method	SUV 1 (176)	SUV 2 (178)	Saloon (246)	Average (600)
Proposed	94.9%	94.9%	91.1%	93.3%
Proposed <i>C.H.</i>	91.6%	92.0%	85.4%	89.2%
[5] <i>C.H.</i>	80.3%	73.9%	82.9%	79.5%

TABLE V

SUCCESSFUL DECISION PERCENTAGE IN DIFFERENT CABINS, AS INTRODUCED IN FIG. 5. FOR THE SALOON CAR IN THIS EXPERIMENT, THE NORMAL CAMERA POSITION WAS CHOSEN (FIG. 5C).

but results were not as good since the above methods scored 87.4%, 78.8% and 82.3% on 198 test interactions. This can be attributed to a number of factors, including the hand shape manifold and gesture training relying on hand shapes taken from a different viewpoint. Also, the hand appears in the frame later (which provides less gesture information) and with less, if any, of the arm visible (which can cause a less accurate optical flow calculation).

In general, if the hand tracking succeeds, the correct decision is made. However, a failure in the hand segmentation stage can result in an incorrect decision. An example is given in Fig. 14, where a texture-less glove, the same colour as the background, is not clear in the foreground mask. This is an inherent disadvantage to using a background subtraction based method. Nevertheless, as in [4] and [5], we found background subtraction to be the preferred choice for hand segmentation. Edge based methods that use training shape examples [35] struggle to reliably segment the large variety of possible hand configurations, particularly against a backdrop of a control panel with well defined edges. Additionally, segmentation techniques that rely on skin colour (used in [2], [19], [20]) are clearly not suitable for use with the greyscale images provided by NIR cameras.

There are two basic approaches to background subtraction. The first is to have a static model, learned from example images with different lighting conditions, and new frames are compared against this model. This approach functions well when there is a sudden large change in the scene lighting (when entering or leaving a tunnel, for example), but cannot handle an evolving background. This makes it unsuitable for an automotive environment, as the background will change throughout the life of the vehicle, degrading the performance of the static model over time. The second approach (used here) is to have a constantly evolving model of the background. In the event of a sudden change in lighting, the background model will take a few frames to be updated, resulting in a foreground mask containing errors for this period. This approach is still preferable for our use case, due to the background changing throughout the life of the vehicle. This constantly evolving approach can still handle small or slower changes to illumination, and the performance under these conditions can be improved by maintaining more control over the scene lighting. One example of how this can be achieved is with more powerful illumination, which makes any natural change less significant.

Assuming a reasonable hand segmentation, if just one hand is in view then the decision is trivial and a naive closest hand method is sufficient - no knowledge of interaction location or the hand shape change is necessary. Similarly, this information is not needed if both hands are in view and not close. The

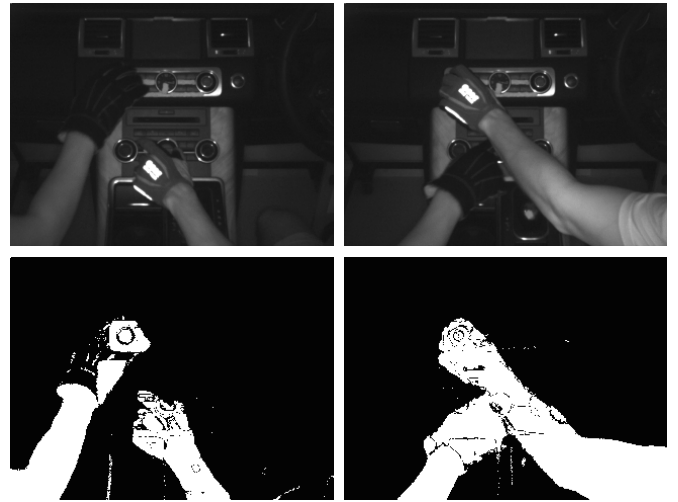


Fig. 14. The top row shows night time NIR footage with gloves, and the bottom row the corresponding foreground masks. Note how the black glove does not show up clearly in the foreground mask when it is over an area of the same colour and texture.

interaction location becomes important when the hands get very close (if it is not possible to accurately segment one hand from the other) and when contact is made. The hand shape change information is required when significant occlusion occurs.

## VI. CONCLUSION

We presented a method that determines the interaction of the driver and the passenger with the controls on the centre panel of a car - the first attempt in the literature to distinguish between individual controls. This will enable the driver and passenger to interact with both sides of a full view touchscreen, and allow manufacturers to remove duplicate controls.

The proposed method uses a background subtraction algorithm, followed by a novel use of a shape manifold to determine which part of the hand is interacting with a control, as well as providing gesture information. An evaluation was performed on a challenging dataset, and inclusion of information obtained from this manifold provided improved results over a closest hand approach.

We suggest a number of possibilities for future work. One is to investigate if the proposed method is capable of recognising a wider variety of gestures that incorporate motion as well as hand shape change (*e.g.* swipe to open the sunroof). Another possibility is to focus on safety. For example, a distracted driver might interact with a control in a different manner to an alert driver, and it would be interesting to see whether the hand shape change considered in this paper can be a reliable indicator for this. Such an indicator can be a trigger to prompt a distracted driver to refocus on the road.

## ACKNOWLEDGMENT

The first author is funded by an EPSRC/Jaguar Land Rover Industrial CASE award.

*Data access statement:* Due to a confidentiality agreement with Jaguar Land Rover, the data supporting this article is not openly available.

## REFERENCES

- [1] T.J. Schousek, "Vehicle occupant restraint with seat pressure sensor", Dec. 12 1995, US Patent 5,474,327.
- [2] C Zhao, B Zhang, J He, and J Lian, "Recognition of driving postures by contourlet transform and random forests", *IET Intelligent Transport Systems*, vol. 6, no. 2, pp. 161, 2012.
- [3] I Oikonomidis, N Kyriazis, and A Argyros, "Tracking the articulated motion of two strongly interacting hands", in *Proc. CVPR*, 2012.
- [4] R Crespo, I Diego, C Conde, and E Cabello, "Detection and tracking of drivers hands in real time", *Progress in Pattern Recognition, Image Analysis, Computer Vision, and Applications*, vol. 6419, pp. 212–219, 2010.
- [5] G McAllister, "Tracking drivers hands using computer vision", in *Proc. International Conference on Systems, Man and Cybernetics*, 2000.
- [6] S Y Cheng and M M Trivedi, "Vision-based infotainment user determination by hand recognition for driver assistance", *IEEE Transactions on Intelligent Transportation Systems*, vol. 11, no. 3, pp. 759–764, 2010.
- [7] C Lee and S Park, "Tracking hand rotation and grasping from an IR camera using cylindrical manifold embedding", in *Proc. ICPR*, 2010.
- [8] C Lee, S Chun, and S Park, "Tracking hand rotation and various grasping gestures from an IR camera using extended cylindrical manifold embedding", *Computer Vision and Image Understanding*, vol. 117, no. 12, pp. 1711–1723, 2013.
- [9] F Vicente, Z Huang, X Xiong, F Torre, W Zhang, and D Levi, "Driver Gaze Tracking and Eyes Off the Road Detection System", *IEEE Transactions on Intelligent Transportation Systems*, vol. PP, no. 99, pp. 1–14, 2015.
- [10] R O Mbouna, S G. Kong, and M G Chun, "Visual analysis of eye state and head pose for driver alertness monitoring", *IEEE Transactions on Intelligent Transportation Systems*, vol. 14, no. 3, pp. 1462–1469, 2013.
- [11] J Nuevo, L M Bergasa, M A Sotelo, and M Ocana, "Real-time robust face tracking for driver monitoring", in *IEEE Intelligent Transportation Systems Conference*, 2006.
- [12] A. Dasgupta, A. George, S. L. Happy, and A. Routray, "A vision-based system for monitoring the loss of attention in automotive drivers", *IEEE Transactions on Intelligent Transportation Systems*, vol. 14, no. 4, pp. 1825–1838, 2013.
- [13] I Garcia, S Bronte, L M Bergasa, J Almazan, and J Yebe, "Vision-based drowsiness detector for real driving conditions", in *IEEE Intelligent Vehicles Symposium*, 2012.
- [14] I. G. Daza, N. Hernandez, L. M. Bergasa, I. Parra, J. J. Yebe, M. Gavilan, R. Quintero, D. F. Llorca, and M. A. Sotelo, "Drowsiness monitoring based on driver and driving data fusion", in *Proc. IEEE Conference on Intelligent Transportation Systems*, 2011.
- [15] L M Bergasa and Jesús Nuevo, "Real-time system for monitoring driver vigilance", *IEEE Transactions on Intelligent Transportation Systems*, vol. 7, no. 1, pp. 63–77, 2006.
- [16] S. S. Huang, "Discriminatively trained patch-based model for occupant classification", *IET Intelligent Transport Systems*, vol. 6, no. 2, pp. 132–138, 2012.
- [17] Zhenhai Gao and Lifei Duan, "Vision detection of vehicle occupant classification with Legendre moments and Support Vector Machine", in *IEEE International Congress on Image and Signal Processing*, 2010.
- [18] S Y Cheng and M M Trivedi, "Human posture estimation using voxel data for "smart" airbag systems: issues and framework", in *IEEE Intelligent Vehicles Symposium*, 2004.
- [19] C Tran and M Trivedi, "Towards a vision-based system exploring 3D driver posture dynamics for driver assistance: Issues and possibilities", in *Proc. IEEE Intelligent Vehicles Symposium*, 2010.
- [20] Z Feng, B Yang, Y Chen, Y Zheng, T Xu, Y Li, T Xu, and D Zhu, "Features extraction from hand images based on new detection operators", *Pattern Recognition*, vol. 44, no. 5, pp. 1089–1105, 2011.
- [21] A Mittal, A Zisserman, and P Torr, "Hand detection using multiple proposals", in *Proc. BMVC*, 2011.
- [22] H Choi, B Paulson, and T Hammond, "Gesture recognition based on manifold learning", in *Proc. Structural, Syntactic, and Statistical Pattern Recognition, Joint IAPR International Workshop*, 2008.
- [23] P Etyngier, F Segonne, and R Keriven, "Shape priors using manifold learning techniques", in *Proc. ICCV*, 2007.
- [24] R Coifman, S Lafon, a B Lee, M Maggioni, B Nadler, F Warner, and S Zucker, "Geometric diffusions as a tool for harmonic analysis and structure definition of data: diffusion maps.", *PNAS*, vol. 102, no. 21, pp. 7426–7431, 2005.
- [25] S Lafon and A Lee, "Diffusion maps and coarse-graining: A unified framework for dimensionality reduction, graph partitioning, and data set parameterization.", *TPAMI*, vol. 28, no. 9, pp. 1393–1403, 2006.
- [26] T Kim, S Wong, and R Cipolla, "Tensor canonical correlation analysis for action classification", in *Proc. CVPR*, 2007.
- [27] L Liu and L Shao, "Learning discriminative representations from rgb-d video data", in *Proc. International Joint Conference on Artificial Intelligence*, 2013.
- [28] M Hofmann, P Tiefenbacher, and G Rigoll, "Background segmentation with feedback: the pixel-based adaptive segmenter", in *Proc. CVPR Workshop*, 2012.
- [29] A Schick, M Bauml, and R Stiefelwagen, "Improving foreground segmentations with probabilistic superpixel Markov random fields", in *Proc. CVPR Workshop*, 2012.
- [30] R Achanta, A Shaji, K Smith, and A Lucchi, "SLIC superpixels compared to state-of-the-art superpixel methods", *TPAMI*, vol. 34, no. 11, pp. 2274–2281, 2012.
- [31] C Ren and I Reid, "gslic: a real-time implementation of slic superpixel segmentation", Tech. Rep., University of Oxford, Department of Engineering Science, 2011.
- [32] S Baker and I Matthews, "Lucas-Kanade 20 years on: A unifying framework", *IJCV*, vol. 56, no. 3, pp. 221–255, 2004.
- [33] J Sethian, "A fast marching level set method for monotonically advancing fronts.", *PNAS*, vol. 93, no. 4, pp. 1591–1595, 1996.
- [34] J Uhlmann, "Satisfying general proximity / similarity queries with metric trees", *Information Processing Letters*, vol. 40, no. 4, pp. 175–179, 1991.
- [35] Tim Cootes, E. Baldock, and J. Graham, "An introduction to active shape models", *Image Processing and Analysis*, pp. 223–248, 2000.



**Toby Perrett** received the BSc in Mathematics in 2011, and the MSc in Computer Science in 2012, both from the University of Bristol, UK. He is currently working towards a PhD in Computer Vision at the University of Bristol under the supervision of Professor Majid Mirmehdi. His research interests include computer vision based approaches to vehicle occupant monitoring.



**Majid Mirmehdi** is a Professor of Computer Vision in the Department of Computer Science at the University of Bristol, and the Graduate Dean and Faculty Graduate Education Director in the Faculty of Engineering. His research interests include natural scene analysis and medical imaging, and he has more than 150 refereed conference and journal publications in these and other areas. He is a Fellow of the International Association for Pattern Recognition. He is Editor-in-Chief of IET Computer Vision journal and an Associate Editor of the Pattern

Analysis and Applications journal. He is a member of the IET, Senior Member of IEEE, and serves on the Executive Committee of the British Machine Vision Association.



**Eduardo Dias** is a Research Engineer in the Human-Machine Interaction area of the Jaguar Land Rover Research & Technology department. He received a Masters degree in Electronic and Telecommunications Engineering from the University of Aveiro, Portugal in 2009. From 2009 to 2012 he pursued his interest in the biomedical research area as a Researcher at the Institute of Electronics and Telematics Engineering of Aveiro (IEETA), Portugal, investigating automated endoscopic capsule analysis techniques and movement quantification during epileptic

seizures. In 2012, he decided to shift his career into the Automotive industry and applied for a Jaguar Land Rover Research role where he is currently working on future vehicle technologies.

(c) 2016 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other users, including reprinting/ republishing this material for advertising or promotional purposes, creating new collective works for resale or redistribution to servers or lists, or reuse of any copyrighted components of this work in other works