

Some Initial Results and Observations from a Series of Trials within the Ofcom TV White Spaces Pilot

Oliver Holland, Shuyu Ping, Nishanth Sastry,
Hong Xing, Suleyman Taskafa

King's College London
London, UK

{oliver.holland, shuyu.ping, nishanth.sastry, hong.xing,
suleyman.taskafa}@kcl.ac.uk

Mohammad Reza Akhavan, Julie McCann
Imperial College London

London, UK
{reza.akhavan, jam}@imperial.ac.uk

Raymond Knopp, Florian Kaltenberger,
Dominique Nussbaum

Eurecom
Sophia Antipolis, France
{raymond.knopp, florian.kaltenberger,
dominique.nussbaum}@eurecom.fr

Juhani Hallio, Mikko Jakobsson, Jani Auranen, Reijo
Ekman, Jarkko Paavola, Arto Kivinen
Turku University of Applied Sciences

Turku, Finland
{juhani.hallio, mikko.jakobsson, jani.auranen, reijo.ekman,
jarkko.paavola, arto.kivinen}@turkuamk.fi

Ha-Nguyen Tran, Kentaro Ishizu, Takeshi Matsumura,
Kazuo Ibuka, Hiroshi Harada

National Institute of Information and Communications
Technology (NICT)
Yokosuka, Kanagawa, Japan
{haguen, ishida, matsumura, ibuka, harada}@nict.go.jp

Pravir Chawdhry, Jean-Marc Chareau, James Bishop,
Michele Bavaro, Philippe Viaud, Tiziano Pinato,

Emanuele Anguili

Joint Research Centre of the European Commission
Ispra, Italy

{pravir.chawdhry, jean-marc.chareau, james.bishop,
michele.bavaro, philippe.viaud, tiziano.pinato,
emanuele.anguili}@jrc.ec.europa.eu

Yue Gao, Zhijin Qin, Qianyun Zhang

Queen Mary, University of London
London, UK

{yue.gao, z.qin, qianyun.zhang}@qmul.ac.uk

Rogerio Dionisio, Jose Ribeiro, Paulo Marques

Institute of Telecommunications
Aveiro, Portugal
{rdionisio, jcarlosvgr, pmarques}@av.it.pt

Heikki Kokkinen

Fairspectrum Oy
Helsinki, Finland
heikki.kokkinen@fairspectrum.com

Tomaž Šolc, Mihael Mohorčič

Jožef Stefan Institute
Ljubljana, Slovenia
{tomaz.solc, miha.mohorcic}@ijs.si

Abstract—TV White Spaces (TVWS) technology is a means of allowing wireless devices to opportunistically use locally-available TV channels (TVWS), enabled by a geolocation database. The UK regulator Ofcom has initiated a Pilot of TVWS technology and devices in the UK. This paper is on the topic of a large-scale series of trials under this pilot. The purpose of these trials is to test aspects of white space technology, including the white space device and geolocation database interactions, the validity of the channel availability/powers calculations by the database and associated interference effects on primary services, and the performances of the white space devices, among others. An additional key purpose is to undertake a number of research investigations such as on aggregation of TVWS resources with conventional (licensed/unlicensed) resources, secondary coexistence issues and means to mitigate such issues, and primary coexistence issues under challenging deployment geometries, among others. This paper provides an update on trials, giving an overview of their overall objectives and characteristics, some aspects that have been covered so far, and some early results.

Keywords—TV white spaces, geolocation databases, field trials

I. INTRODUCTION

TV White Spaces (TVWS) is a hot research topic, underlined by the FCC's production of its initial opinion on rules for TVWS Devices (WSDs) in November 2008. After much regulatory tweaking [1], [2], and the initial deployments of such devices taking place in the US, Europe is now following with the finalization of rules and the testing of TVWS technology and WSDs on a large scale [3], [4], [5], [6]. This is particularly driven through the UK regulator Ofcom's work and instantiation of a large pilot of the devices and underlying enabling technology [6]. Of course, all trials within this pilot must operate under Ofcom's prospective rules for WSDs, which are reflected in the ETSI 301 598 harmonized standard for WSD requirements at the European level [5].

Under the UK/EU rules, embodied in the device requirements of ETSI 301 598 [5], the Ofcom Pilot aims to serve a number of purposes, such as:

- Provision a proof of concept of the TVWS framework.
- Provision of a step of verification before full-scale TVWS operations start.
- Involvement of the regulator, industry, and end users in the process, such that the interactions between the relevant stakeholders can be verified.

The Ofcom Pilot also aims to test several aspects, such as:

- Device operations.
- Geolocation Database (GDB) contract qualification.
- GDB operation and calculations.
- Ofcom's provision of the qualifying GDB listing.
- Ofcom's DTT calculation results and provision of Programme Making and Special Events (PMSE) data.
- Interference management.
- Coexistence.

In practice, this further includes verification of a number of aspects, such as the methodology for testing of the WSDs RF performances, the methodology for testing of their interactions with Ofcom's "database of GDBs" and selection of the appropriate GDB to use, the methodology for testing of WSD interactions with the GDB (including aspects such as security of interactions), the methodology for testing the correct operation of WSDs (e.g., RF channel/power settings based on information from the GDB, ceasing to transmit when communication with the Ofcom "database of GDBs" or the GDB itself is not successfully carried out, changing of RF channels and powers if necessary, in response to changed information from the GDB, etc.), the methodology for monitoring interference levels and the correctness of interference levels around deployments of WSDs under the Ofcom Pilot, the assessment of any possible effects on primary services, and verification of security precautions, among other aspects. The correct performance of all of these elements is essential to the assurance of the viability of the wider picture of TVWS technology and the confidence that the regulator is able to authorize a move of such a technology to commercial use within its domain.

Our trials are the subject of this paper, noting that reference [7] can be referred to for more on objectives. Some of our conformance testing work is described in Section II. Our range of WSDs and the locations that are being investigated are described in Section III. Section IV discusses deployment and performance testing scenarios, and research topics that we are investigating. Section V presents some early results of our trials, before Section VI concludes this paper.

II. CONFORMANCE TESTING

We expect that Ofcom is most interested in testing the validity of the underlying TVWS technology (e.g., the GDBs and interactions thereof) and the conformance of WSDs with certification requirements (i.e., compliance with ETSI 301 598 [5]). This serves the key interest of the regulator in ensuring that the spectrum of primary services is adequately protected.

It is a requirement for all trialists participating in the Ofcom TVWS pilot to certify their devices are performing according to ETSI 301 598, both in terms of RF aspects and in

terms of logical aspects such as communication with the GDB and appropriate setting of parameters in accordance with responses from the GDB. Reaching even beyond such requirements, our trials have very strong capabilities and are undertaking a range of work for such conformance testing.

A wide range of equipment is available for conformance testing as a part of our trials. Some of the equipment, in particular the Rohde and Schwarz FSV series of spectrum analysers, for example, available at King's College London and at the Joint Research Centre of the European Commission, is able to perform measurements on Adjacent channel Channel Leakage Ratios (ACLR) directly, as configured by the user. This is a useful option to confirm performance in terms of the spectrum mask ("Class" of device, as specified by Ofcom/ETSI) and compare with the ETSI 301 598 specified procedure, noting that ETSI 301 598 requires that the spectrum analyser should merely be set to sweep the spectrum and output the observed values at a resolution bandwidth (RBW—i.e., in chunks) of 10 kHz, which must then be manually processed to assess the RF performance of the WSD using a more complicated procedure. This means that, for the purpose of conformance assessment of WSDs, the key parameter of interest is the dynamic range of the spectrum analyser (aside from other more obvious important parameters, such as accuracy and distortion performance, and ability to set the RBW correctly to 10kHz, among others). Although maximum input levels to spectrum analysers and RF output levels of WSDs of typically much less than 30 dBm imply that only minimal external attenuation, or in most cases zero external attenuation, is necessary, sensitivity is generally affected, e.g., by the automatic addition of internal attenuation by the analyser for high input levels, meaning that dynamic range is a more important item of interest than sensitivity. Further, it is noted that the ACLR measurements for performance Classes 1 and 3 are very challenging, typically requiring a high dynamic range spectrum analyser to measure down to -84 dB from the power in the intended channel.

In terms of RF performance, Ofcom/ETSI specify 5 performance classes (see p. 15 of [5]). These performance classes compare power in the intended channel of width 8 MHz with power outside of the intended channel in 100 kHz chunks, and specify requirements in terms of the intended channel emissions ± 1 , ± 2 , and ± 3 channels, with limits further out from ± 3 channels being equal to those for the ± 3 channel. Ofcom also specifies stringent requirements for assessment of emissions outside of the TV bands, i.e., outside of 470 MHz to 790 MHz, for the range from 30 MHz up to 4 GHz. Importantly, these are fixed for all devices and not dependent on different classes of performance. Our trials have assessed such emissions and found devices to be generally compliant, however, there can sometimes be issues with conformance close to the edges of the TV bands if the WSDs are transmitting on the TV channels closest to those edges. Practically however, most of the WSDs we consider have their upper frequency limit some distance away from the 790 MHz upper end of the TV spectrum in the UK—this is commonly because they were originally developed for operation in other countries such as the US and Japan, with different ranges for TV spectrum.

III. TV WHITE SPACE DEVICES AND DEPLOYMENT LOCATIONS

Our trials have amassed a wide range of devices for use at various times within the trials:

- Three different forms of WSDs created by collaborators at NICT, Japan, namely: IEEE 802.11af high-power and low-power variant WSDs [8], and FD/TD-LTE base station and terminal WSDs [9]. These devices obtained white spaces information from NICT's geolocation database, which is included in the list of qualified databases by Ofcom. The database-device interface is compliant with PAWS.
- WSDs that are based on Eurecom ExpressMIMO2 software radios [10], driven by OpenAirInterface LTE-MBMS waveforms (and perhaps, at a later stage, TD-LTE, 802.11af, and other waveforms) [11].
- Carlson RuralConnect devices [12], which use a proprietary waveform.
- KTS/Sinecom Agility White Space Radio [13] WSDs, which use a proprietary waveform.

It is important to verify performance for a range of locations. Given our trials being driven by academics and research institutes, a large number of University campuses are made available for usage as part of the trials. These include:

- Numerous locations at King's College London campuses, including the Strand, Waterloo, Guys (London Bridge), St. Thomas (opposite Westminster), Denmark Hill, and Hampstead Campuses.
- Queen Mary University of London (Mile End, East London).
- University of York.
- University of Surrey (Guildford).
- Strathclyde University (Glasgow).
- Cambridge University.
- University of Bath.

These locations range from some of the most challenging that it is possible to envisage for operation of WSDs in the UK, such as at the Strand, close to perhaps the most extensive licensed PMSE usage in the world through West-End theatres, concert halls, television studios, etc., to less busy cases such as at the University of York, with a large, mainly rural, low population-density area to the South-East of the campus. Rooftop sites at locations including King's College London Denmark Hill, Queen Mary University of London, and others such as the University of York, allow for the investigation of relatively large-area provisioning in TVWS, and the option of point-to-point links, e.g., to provide backhaul via TVWS.

In addition to the wide-area coverage and point-to-point scenarios involving rooftop transmissions or installations, it is noted that numerous other likely scenarios for WSD deployment are covered by our trials and the range of locations available, including indoor coverage and indoor-to-outdoor coverage with a range of building characteristics, and of course a range of building characteristics and geometries with which to study outdoor-to-indoor coverage provision.

IV. DEPLOYMENT AND PERFORMANCE TESTING SCENARIOS, AND RESEARCH TOPICS

Our trials are investigating a large number of deployment and performance testing scenarios, attempting to both play to the strengths of the wide range of WSDs that we have available, and to test a diversity of challenging cases for WSDs deployment. The following scenarios are anticipated:

- LTE Multicast/broadcast (eMBMS), using the Eurecom ExpressMIMO2/OpenAirInterface SDR equipment/software, and extensions to that. A range of transmission coverage scenarios will be investigated, from wide-area rooftop to relatively limited area (indoors or ground level), dependent on the deployment locations and associated characteristics.
- TD-LTE in TVWS, using NICT LTE WSDs. Moderate coverage ranges are anticipated to be investigated.
- Broadband for Public Protection and Disaster Relief (PPDR), LTE+TVWS, using Carlson Wireless WSDs.
 - This case also involves the investigation of point-to-point links in TVWS, as might provide emergency backhaul in PPDR scenarios.
 - A further case, video surveillance using Carlson WSDs, is also being investigated.
- WiFi in TVWS (802.11af draft), using NICT devices. It is an aspiration of the Eurecom OpenAirInterface software to also be enhanced to support this, although uncertain whether that will be achieved.
 - Conventional wireless local-area coverage using low-power WiFi, based on NICT devices.
 - High-power WiFi for direct point-to-point links, again serving PPDR among other scenarios, based on NICT devices.
- M2M implementations, using KTS/SineCom devices. More specifically, smart city-wide networking based on those devices.
- Broadband provisioning using KTS/SineCom devices and Carlson Wireless devices.

Being driven by academics and research institutes, a very strong emphasis is put on the research elements of our trials. The research studies that are being undertaken include:

- Solutions for Aggregation of resources/links (TVWS with licensed and unlicensed ISM, and within TVWS).
 - Qualitative and quantitative performance surveys.
- Secondary coexistence (e.g., LTE with 802.11af in TVWS).
- To undertake studies and surveys on the performances achieved, e.g., in terms of interference to primary TV services and PMSE services, and secondary performance through objective user opinion polling.

V. SOME INITIAL RESULTS AND OBSERVATIONS

Our trials have been running, in various phases of work, from July 2014. A number of observations can be reported.

A. Scenarios for TV White Space Usage

One initial observation, referring to Figure 1, has been that the busy nature of TV bands usage in London points to some particular applications being most useful/viable for TVWS. For scenarios where the WSDs are placed high above rooftops, a high degree of interference has been experienced towards WSDs, originating, for example, from distant primary (e.g., DTV) transmitters that are not meant to be covering the area. This is the case even in the many channels/locations at which WSDs are allowed to operate with maximum EIRP according to the Ofcom/ETSI framework. Given knowledge about the spatial TV channel usage mapping applied across the UK, it is anticipated that a similar situation exists across much of the UK, and particularly in areas where there is an overlap, or at the boundary, of TV broadcast station coverage areas.

This has implications for the viability of TVWS scenarios where WSD receivers are placed high above rooftops aiming to receive a low-power signal. For example, our 7km point-to-point backhaul link between King’s College London Denmark Hill and Queen Mary University of London has been affected significantly by this issue, with the interference from distant primary DTV stations (even in the many channels that the WSDs are maximum EIRP on) effectively reducing the received SINR from a viable/useable value (of typically slightly less than 10dB) by an order of magnitude to negative dB values or lower. Consequently, it is highly important to scan the spectrum for the best channel to use based on the interference situation, before choosing a channel, noting that some WSDs already support that capability. Indeed, our trial has observed that for this long-distance backhaul link case, it is far better to use an alternative channel that is allowed lower than maximum EIRP (in this case, TV channel 37, allowed 31 dBm—5dB lower than the maximum EIRP according to the framework) than TV channels that are allowed a maximum EIRP of 36 dBm (e.g., channel 48) in the GDB response.

We infer, based on such observations, that TVWS is perhaps most interesting in below roof-top cases, or cases where the propagation characteristics at TV frequencies can be used to greatly improve coverage in challenging cases, such as inside buildings, metro systems, among others.

B. WSD Parameter Values and Parameter Acquisition

Another key observation of our trials relates to the procedures for WSDs obtaining parameters, and the values of those parameters that are obtained. The Ofcom/ETSI framework specifies the concepts of master and slave devices, and specific and generic WSD operational parameters. The slave devices must obtain parameters via a master device, first forwarding their characteristics to the master device such that the master device can query the database on their behalf. The master device must transmit initial allowed parameters that any slave device can use anywhere within the coverage area of the master, such that the slave is able to transmit its characteristics to the master over those parameters. Parameters

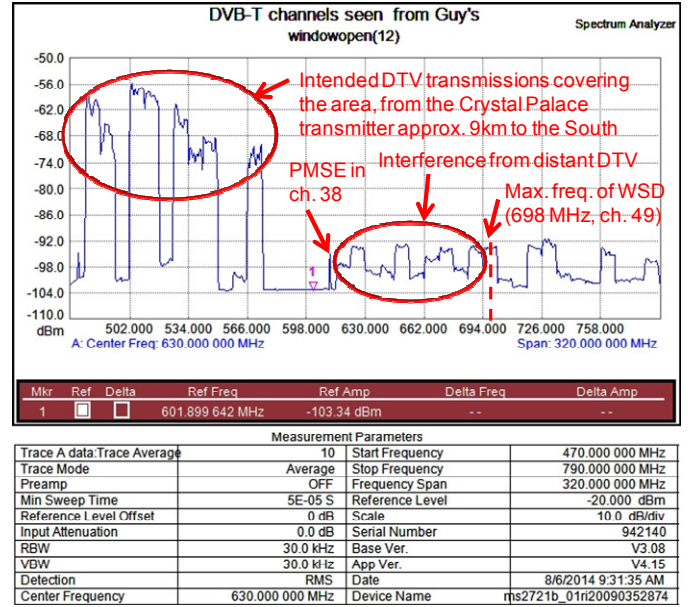


Fig. 1. A spectrum survey performed looking South from the King’s College London Guys Campus hospital tower, clearly showing the intended TV transmissions covering the area, interference from distant DTV transmissions that are not meant to be covering the area, and other characteristics such as PMSE device transmitting on the shared PMSE channel 38.

that allow this initial, “inspecific” transmission by slave devices are termed “generic” slave parameters, and parameters that are based on the later-obtained precise information from slave devices are termed “specific” slave parameters. An issue is that, given that generic slave parameters are effectively the worst case allowed power for any possible location within the master coverage area, their allowed powers are typically extremely low—so low as to not be usable even for the purpose of initial link formation. For example, in the challenging case of King’s Strand Campus, for a master WSD transmitting at 31 dBm, the generic slave EIRP is lower than 3 dBm in all channels. This EIRP is not sufficient for the slave to transmit information to the master and the link be formed.

C. WSD Performance Assessments

First assessed are the long-distance links between King’s College London Denmark Hill and Queen Mary University of London at Mile End (7 km distance), and King’s College London Denmark Hill and King’s College London Guys at London Bridge (3.7 km distance). These links are depicted in Figure 2. In both cases, channel 37 was used, for which the maximum allowed EIRP returned from the GDB was 31 dBm. This choice was because of aforementioned issues concerning interference to the WSDs from DTV, even on channels on which the absolute maximum EIRP of 36 dBm was allowed. It is noted that the former 7 km link was only just able to be formed. Although there is optimisation that could be done on that link, the best rate that could be achieved was around 60 kbps over 7 km, and the least challenging modulation and coding (BPSK with 1/2-rate convolutional coding) could only achieve a BER of around 1-2%. The best-case SINRs achieved were in the range of 8-10 dB. The 3.7 km link enjoyed far better performance, where 16-QAM 1/2-rate convolutional

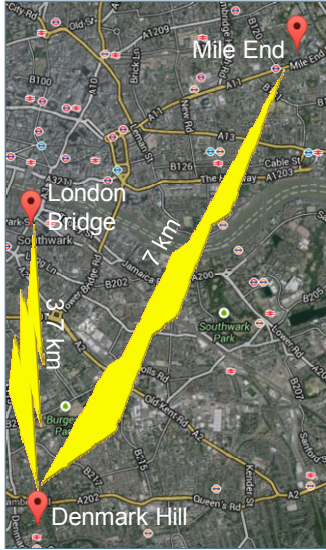


Fig. 2. The 7 km and 3.7 km long-distance links across London, that were have thus-far been tested in our trials.

coding achieved a BER of 10^{-6} . Lab testing implies this leads to a downlink rate of 6.4 Mbps, and uplink rate of 5.1 Mbps.

Another area of performance assessment has been for indoor broadband provisioning, e.g., using the WSDs to provide indoor point-to-point backhaul for broadband access points. This assessment has been done at the Strand Campus of King’s College London, which is immensely valuable for such as effort given its wide range of building types and implementable scenarios, including even underground transmissions through floors in the Strand Building extending to approximately 15m below Street level. Figure 3 depicts the layout of the parts of the Strand and King’s buildings in the Strand Campus combined, pertinent to the assessments that were done. Four links have been tested in initial results presented in this paper. Link 1 is from the “Flexible Radio” lab of the Centre for Telecommunications Research at King’s College London to the first author’s office, on the same floor and through some 4-5 walls including a closed metal blind covering a high-loss glass wall at the author’s office. The distance of the direct path for Link 1 is approximately 10 m. Link 2 is from the lab to the “Old Committee Room” in the King’s Building, some 20m away over a partial change in floor level, noting that the King’s Building is of very rugged stone construction. Link 3 is across numerous rooms/walls to the “Refectory”, some 80m away on the same level of the King’s building as the Old Committee room. Link 4 is to a classroom on the second floor of the Strand Building, transmitting diagonally up through at least 3 walls/floors, and across by some 10m.

Initial results are in terms of the performance for various modulation and coding rates, using the Carlson RuralConnect WSDs. It is noted that the Carlson devices are capable of 16-QAM, QPSK and BPSK modulation, and convolutional coding rates of $\frac{1}{2}$ and $\frac{3}{4}$, or indeed transmission with no coding applied. Before any tests were done, a first assessment was the achievable performance for a (near-)ideal link, through transmission in the same room between the base station and terminal, with antennas directed away from each

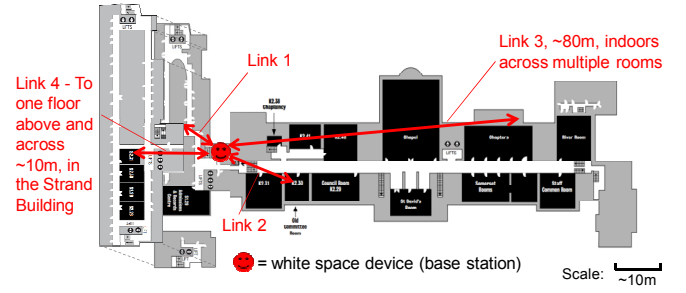


Fig. 3. Indoor room plans of the Strand and King’s buildings (combined) of the King’s College London Strand Campus. The Strand Building is to the left of the WSD, and the King’s Building is to the right. Both the 1st and 2nd floors of the Strand Building are depicted, whereas only the 2nd floor of the King’s Building is depicted.

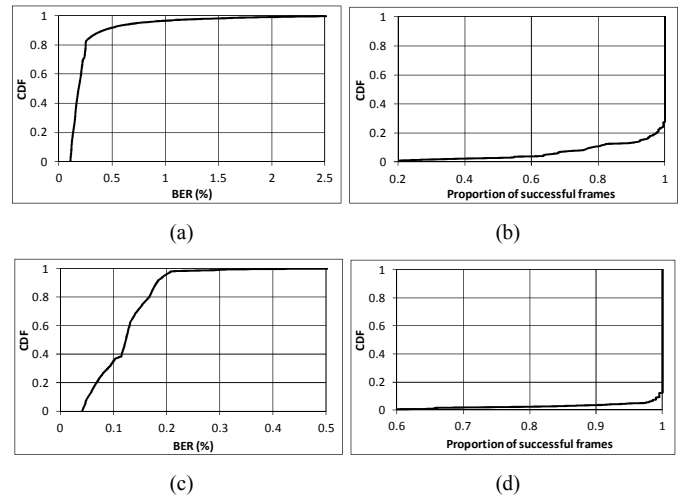


Fig. 4. Modulation and coding testing results for Link 1: (a) BER for 16-QAM with no coding, (b) frame success probability for 16-QAM with no coding, (c) BER for 16-QAM with $\frac{1}{2}$ -rate convolutional coding, (d) frame success probability for 16-QAM with $\frac{1}{2}$ -rate convolutional coding.

other and the transmission power attenuated by 19 dB such to ensure (by estimation) that the receive radio was not saturated/compressed by the high signal level. The SINR observed by the receive radio in this case was 34.8 dB. We assessed this link for a number of minutes, using the highest rate modulation (16-QAM) and no coding. In the entire duration that the link was assessed, not a single bit (hence frame) error occurred. This demonstrated that the radios were operating with optimal performance.

First testing Link 1, the performance for 16-QAM—the highest modulation rate—with no coding and with $\frac{1}{2}$ coding rate, is shown in Figure 4. No other modes were tested as it was found that the WSDs were able to achieve sufficient performance in these tested most-challenging modes of operation. Moreover, for Link 1, the WSDs anyway default to 16-QAM with no coding applied, if configured to automatically select the best modulation and coding scheme. These results were obtained by extracting statistics from the device on a per-second basis. The average BER, for example, being assessed for each second, and the resulting values used to form the CDF and other statistics discussed here. Moreover, it is noted that the radios for the devices themselves were

operating at an output of 20 dBm, the feeder cable had a loss of 1 dB, and the antenna gain was 11dB. This gave an EIRP output from the devices of 30 dBm. The devices were set to use TV channel 37, noting that only channels 27 and 37 were viable for the Carlson class 3 WSD usage at the Strand, due to extremely high PMSE activity in the vicinity. For the location and height at the Strand that the work was done, the GDB allowed a maximum transmission power of 31 dBm for both of these channels.

Referring to the 16-QAM with no coding case, the average BER from the distribution presented in Figure 4(a, b) was 2.7×10^{-3} , noting that the average SINR that the receiver saw in this case was 29.7 dB. The average frame success probability was 95%. With $\frac{1}{2}$ -rate convolutional coding applied (Figure 4(c, d)), the average BER was reduced to 1.2×10^{-3} despite the average SINR seen by the receiver for this experiment being reduced to 28.8dB. The average frame success probability was increased to 99%. It is inferred that the reduction in average SINR seen for this latter case was caused by activity in the building, e.g., people moving and obstructing paths between the transmitter and receiver. Moreover, the rate that the Link achieved, with the devices operating in automatic modulation and coding selection mode and the link being stress-tested using a number of speed testing tools, was in the range of 6.5-8.3Mbps in the downlink, and 2.6-3.2 Mbps in the uplink. It is noted that a radio-firmware update has been made available for the Carlson devices, which has been applied and the rates tested again until this. The firmware update improved the downlink rate to somewhere in the range of 10.0-11.5 Mbps; the uplink rate was unchanged.

Moving on to Links 2-4, Link 2 achieved a performance of in the range of 5.7-9.9 Mbps on the downlink, and 1.0-2.2 Mbps on the uplink. It is noted that the high range of achieved rates was due to the link falling back to 16-QAM with $\frac{1}{2}$ -rate convolutional coding both on the downlink and uplink during the testing. Interestingly, in coding/modulation testing 16-QAM with no coding achieved a bit error rate of 1.1×10^{-3} , and an average frame success probability of 99.98% (to two d.p.). This is despite the average observed SINR at the receiver being only 26.6 dB. For reasons of such good performance with the most challenging modulation and coding scheme, further testing of modulation and coding schemes that were less challenging for this link was not done. Moreover, two observations are proposed related to the observed performance for this link. First, the high variability in performance was due to activity in the building hence attenuation by students and staff, noting that the initial modulation/coding link testing that demonstrated excellent performance was done in August when the building was almost empty, whereas the later link rate stress-testing was done in October when the building was extremely busy and there was a high variability of students and staff using the corridors/rooms (this ranged from the corridors/rooms being almost empty, to being extremely busy, often changing within the timescale of a few minutes). Second, it seems likely that Link 2 had time-diversity characteristics that were extremely favourable for the Carlson WSDs, compared with, say, Link 1, leading to the exceptional performance of Link 2 in the best-case experiments, despite the reduced observed SINR compared with Link 1.

Regarding Link 3, the performance of this link was extremely variable depending on the optimal placing and orientation of the antennas at each end of the link, noting that we only used orientations where the antenna was pointed directly towards the receive radio, or varied somewhat by a maximum of 90° to that direction. For example, with BPSK modulation and no coding, by optimising the antenna position/origination at each end of the link the bit error rate could be reduced from approximately 5×10^{-2} to approximately 2×10^{-6} , more than a reduction of a factor of 10,000. It is noted that through varying antenna positions on this link, it was possible to achieve good performance even with 16-QAM modulation and no coding. This is reflected in the rates that were achieved under testing of the devices, in the range of 1.1-9.8 Mbps on the downlink, and 0.1-1.2 Mbps on the uplink.

Finally, Link 4 was able to achieve a near-perfect performance. The observed SINR on the downlink for this link was 29.4 dB, and the observed SINR on the uplink was 31.2 dB. Noting that all testing was done using the new firmware update for the devices, the achieved downlink rate was in the range of 10.9-11.6 Mbps. The uplink achieved rate was in the range of 1.7-2.3 Mbps.

D. Coexistence with Primary Services

Some initial experiments assessing coexistence with both DTV and PMSE devices have been done. For the DTV coexistence experiments, two antenna configurations have been investigated whereby the WSD antenna and the DTV receive antenna are mounted on the same pole, separated by at most 10 cm. All of this work has been done at King's College London Denmark Hill campus. In one case, the WSD antenna and the PMSE receiver were pointed in different directions, and in the other case they were pointed in the same direction in order to increase coupling between them. In all assess cases, the WSD was operating at maximum allowed power in the adjacent channel to the DTV signal that was received. The DTV signal was being received direct line-of-sight from the Crystal Palace TV transmitter which was located 5km away to the South. Moreover, the Crystal Palace TV transmitter was transmitting with a power of 200 kW in each of the TV channels that we assessed. Figure 5 depicts our antenna configurations for this work.

Using Wavecom Wavesys DTV monitors [14], the performance of the DTV signal has been assessed by various means, including audio/visual and statistical analysis. It has not been possible to observe any effect on the DTV picture of the WSD transmission in the adjacent channel, and early statistical analysis has also yielded no obvious effect. Figure 6 presents the most challenging case of a 256-QAM DTV signal being received in the adjacent channel to a transmitting WSD at maximum allowed EIRP, in the form of the constellation of the received DTV signal. Noting that this is for the more-challenging configuration in Figure 5(b), no obvious effect of the WSD on the DTV constellation can be observed.

Regarding PMSE assessment, and referring to Figure 7, the WSD has been configured to transmit at maximum allowed power (31 dBm in this case), in the adjacent channel to the PMSE, with the PMSE tuned as close as allowed to the

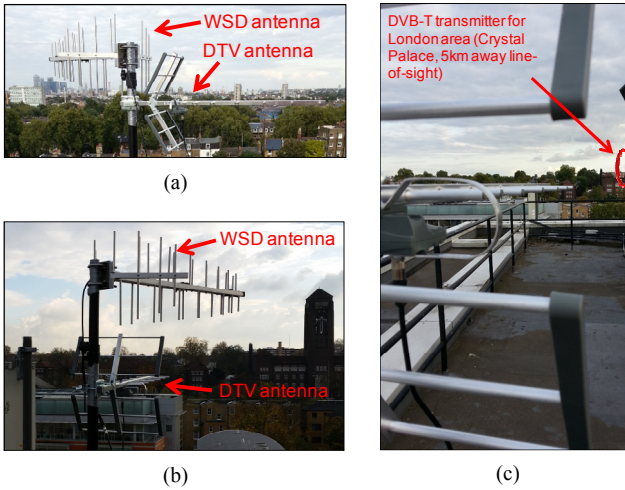


Fig. 5. Antenna configurations for DTV coexistence assessments: (a) antennas pointing in different directions, (b) antennas pointing in approximately the same direction, (c) view along the DTV antenna to the Crystal Palace London-area TV transmitter.

WSD, and the WSD at 5m distance and pointing directly at the PMSE receiver. The PMSE was an analogue FM wireless microphone, which would be immediately (audibly) affected by interference. The PMSE transmitter was located approximately 6m away from the PMSE receiver, highly attenuated (by >20dB) by placing it behind a metal cabinet.

A range of audio recordings were made over the PMSE link using audio test files, with and without the WSD transmitting. Thus far, it has been impossible to hear any audible effect of the transmitting WSD on the PMSE link.

VI. CONCLUSION

The Ofcom TV White Spaces (TVWS) Pilot represents an important milestone in the realisation of TVWS technology. This paper has described trials that are being undertaken in this pilot by an extensive consortium. It has also detailed some initial results that have been obtained, still at a relatively early stage in this trials. It is noted that further investigations as part of the trials have and are being done, with more results likely to be presented in further future publications.

ACKNOWLEDGMENT

This work has been supported by the "ICT-ACROPOLIS Network of Excellence", www.ict-acropolis.eu, and the "Spectrum Overlay through Aggregation of Heterogeneous Dispersed Bands" project, ICT-SOLDER, www.ict-solder.eu, and the CRS-i project, www.ict-crsi.eu.

REFERENCES

- [1] FCC, "In the Matter of Unlicensed Operation in the TV Broadcast Bands, Additional Spectrum for Unlicensed Devices Below 900 MHz and in the 3 GHz Band, Second Memorandum, Opinion and Order," September 2010.
- [2] FCC, "In the Matter of Unlicensed Operation in the TV Broadcast Bands, Additional Spectrum for Unlicensed Devices Below 900 MHz and in the 3 GHz Band, Third Memorandum, Opinion and Order," April 2012.
- [3] Ofcom, "TV white spaces - A consultation on white space device requirements," consultation, November 2012.
- [4] Ofcom, "TV white spaces - approach to coexistence," consultation, September 2013 (an addendum to this from November 2013 also exists).

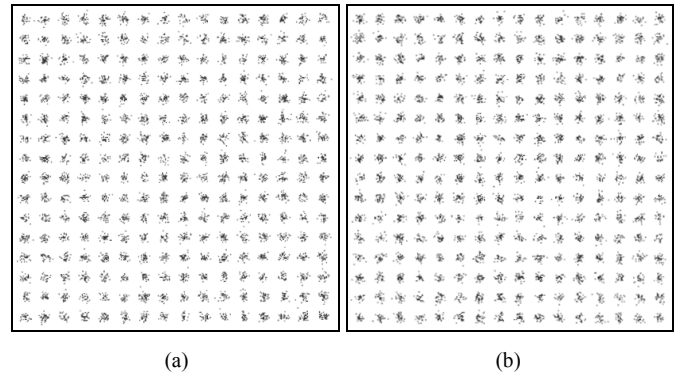


Fig. 6. 256-QAM DTV constellations observed on channel 30: (a) without the WSD transmitting, and (b) with the WSD transmitting at maximum allowed power in the adjacent channel 31.

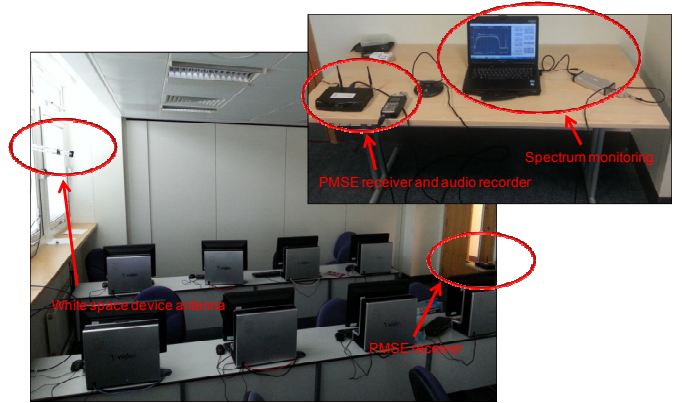


Fig. 7. Configuration of PMSE wireless microphone coexistence experiments.

- [5] ETSI, "White Space Devices (WSD); Wireless Access Systems operating in the 470 MHz to 790 MHz frequency band; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive," v1.1.1, April 2014.
- [6] Ofcom TV White Spaces Pilot, <http://stakeholders.ofcom.org.uk/spectrum/tv-white-spaces/white-spaces-pilot>, accessed May 2014.
- [7] O. Holland, et. al., "A Series of Trials in the UK as part of the Ofcom TV White Spaces Pilot," IEEE CCS 2014, Rhine River, Germany, September 2014.
- [8] NICT Press Release, "World's First TV White Space WiFi Prototype Based on IEEE 802.11af Draft Standard Developed," October 2012, accessible at <http://www.nict.go.jp/en/press/2012/10/17-1.html>, accessed May 2014.
- [9] NICT Press Release, "Alleviating Overcapacity, Specially Developed Smartphone Utilizing TV Whitespace with LTE Technology," March 2014, accessible at <http://www.nict.go.jp/en/press/2014/03/19-1.html>, accessed May 2014.
- [10] Eureka ExpressMIMO2, <http://www.openairinterface.org/expressmimo2>, accessed May 2014.
- [11] OpenAirInterface Twiki, <https://twiki.eurecom.fr/twiki/bin/view/OpenAirInterface/WebHome>, accessed May 2014.
- [12] Carlson Wireless RuralConnect, <http://www.carlsonwireless.com/ruralconnect>, accessed May 2014.
- [13] KTS Agility White Space Radio, <http://www.ktswireless.com/agility-white-space-radio-awr>, accessed May 2014.
- [14] Wavecom Wavesys DTV monitoring devices, http://www.wavecom.pt/en/noticias_detalle.php?id_noticia=49, accessed December 2014.