

Development of a Nitrous Oxide Monopropellant Thruster


Presenter: Stephen Mauthe

Authors: V. Tarantini, B. Risi, R. Spina, N. Orr, R. Zee

Space Flight Laboratory
Toronto, Canada

Motivation

- The use of small satellites is booming.
- Capabilities are always evolving:
 - Powerful computing
 - High performance 3-axis ADCS
 - High speed communications
 - Highly capable payloads
- Propulsion requirements
 - Orbit acquisition
 - Station-keeping
 - Formation flying
 - Collision avoidance
 - De-orbit

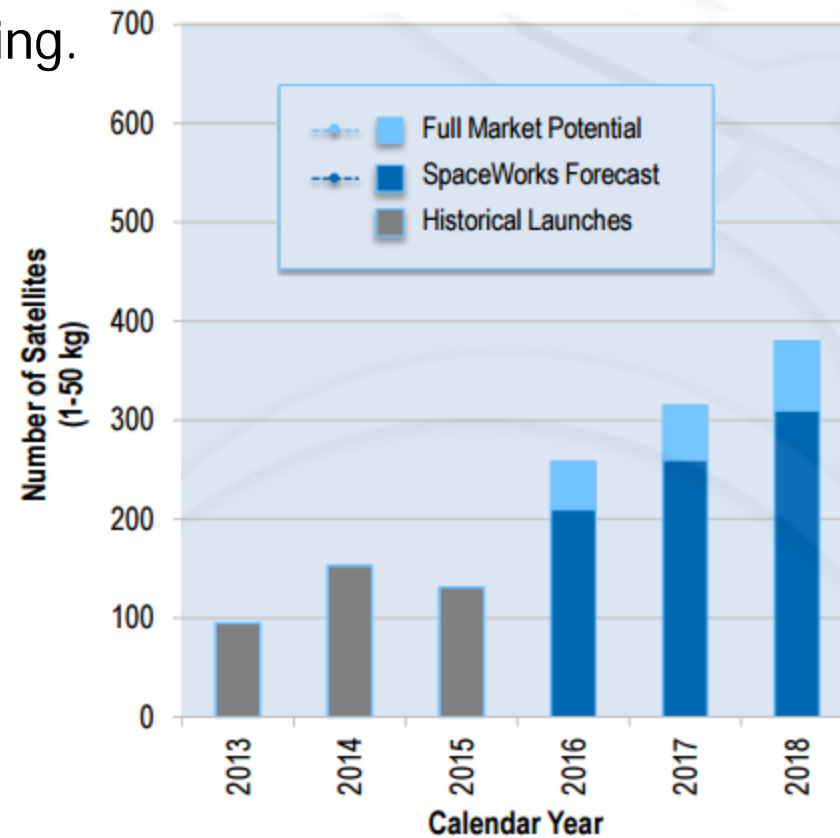


Copyright Spaceworks Enterprises Inc. 2016

Background

- 2008: NANOPS (the CanX-2 mission)
- 2014: CNAPS (the CanX-4&5 mission)
- SFL wins a Canadian Space Agency contract to develop next generation propulsion systems.
- Two systems chosen: CHT and monopropellant.
- The primary propulsion system requirements were:
 - 150 kg spacecraft
 - 100 m/s delta v
 - >50 mN thrust
 - <25 kg wet mass
 - Safety and ease of handling


CNAPS

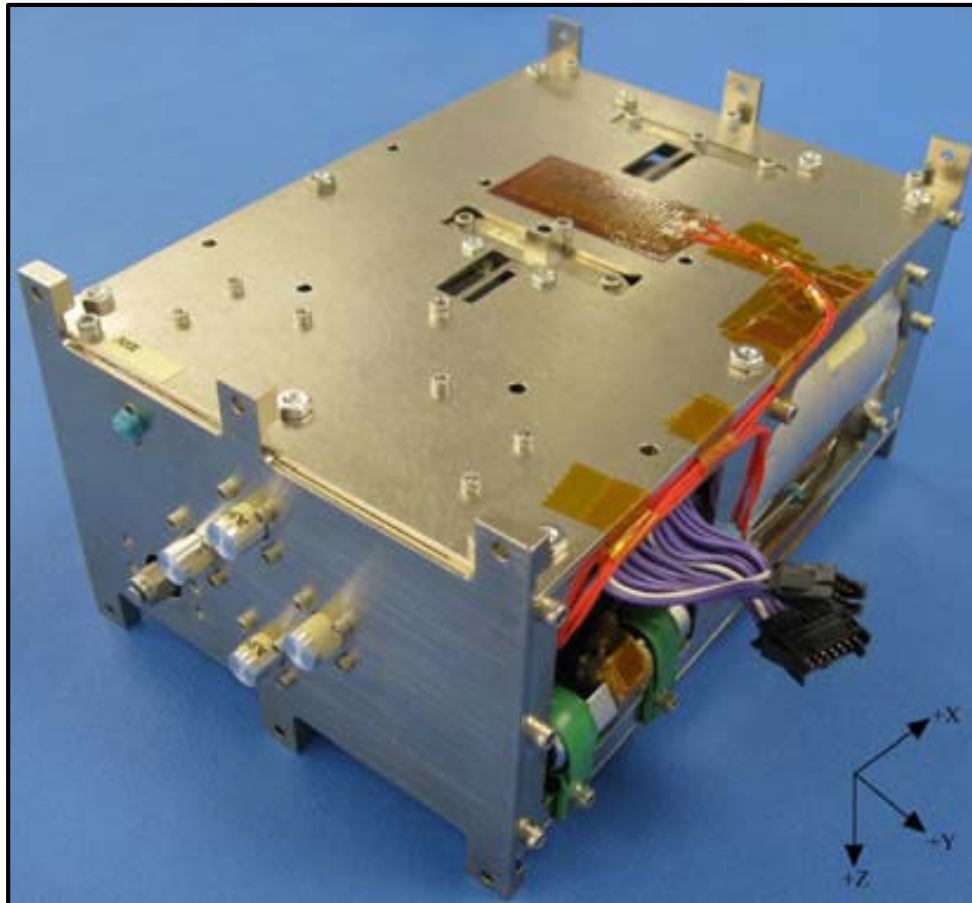

- Enabled the success of the CanX-4&5 Formation Flying Mission in 2014.
- SF₆-based cold gas propulsion system
- F = 12 mN to 50 mN
- I_{sp} = 45 s

Nitrous oxide (N₂O)

- Nitrous oxide is:
 - Safe to handle; i.e., it is non-toxic, non-flammable, and ~non-explosive.
 - Self-pressurizing (733 psia at 20 °C).
 - Easily obtainable.
 - A decent resistojet propellant.
 - Capable of being operated as a monopropellant.

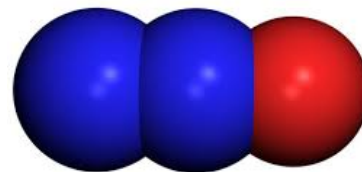

AllPosters

SFL's Resistojet





Performance with Nitrous Oxide (N₂O)

- $I_{sp} = 105 \text{ s}$
- $F = 100 \text{ mN}$
- $P = 75 \text{ W}$
- $m_p = 13.6 \text{ kg}$


Monopropellant

- Under the right conditions nitrous oxide will exothermically decompose according to:

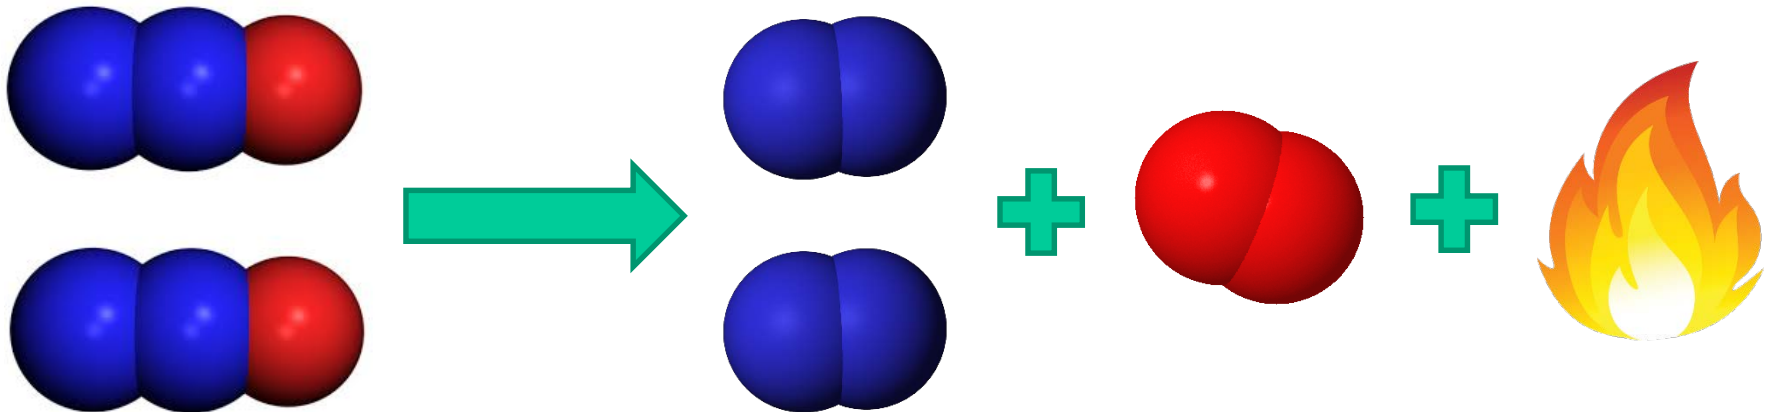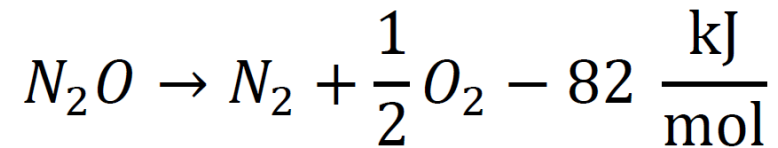


#AllPosters


Monopropellant

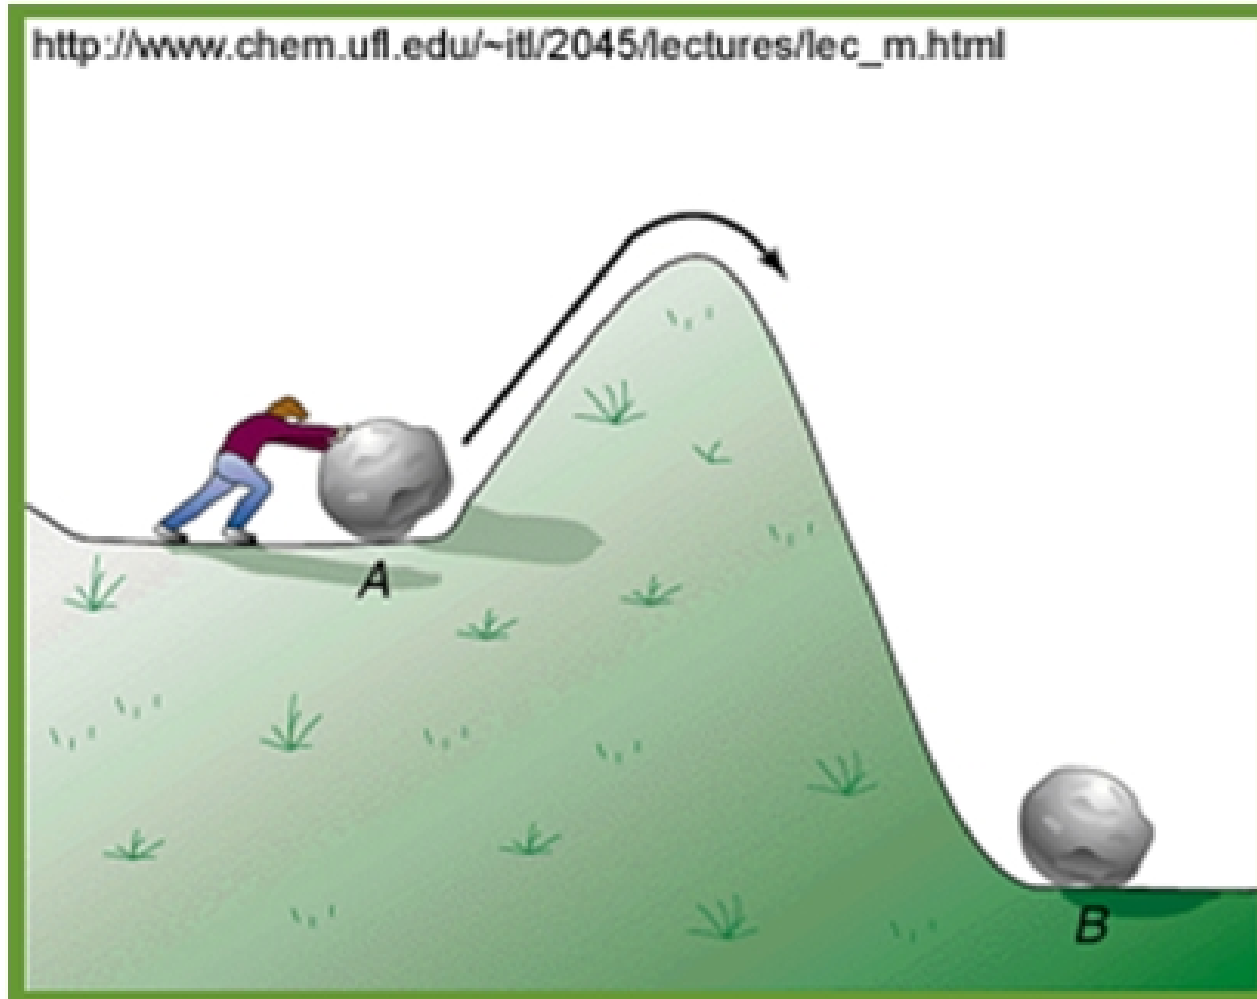


Monopropellant

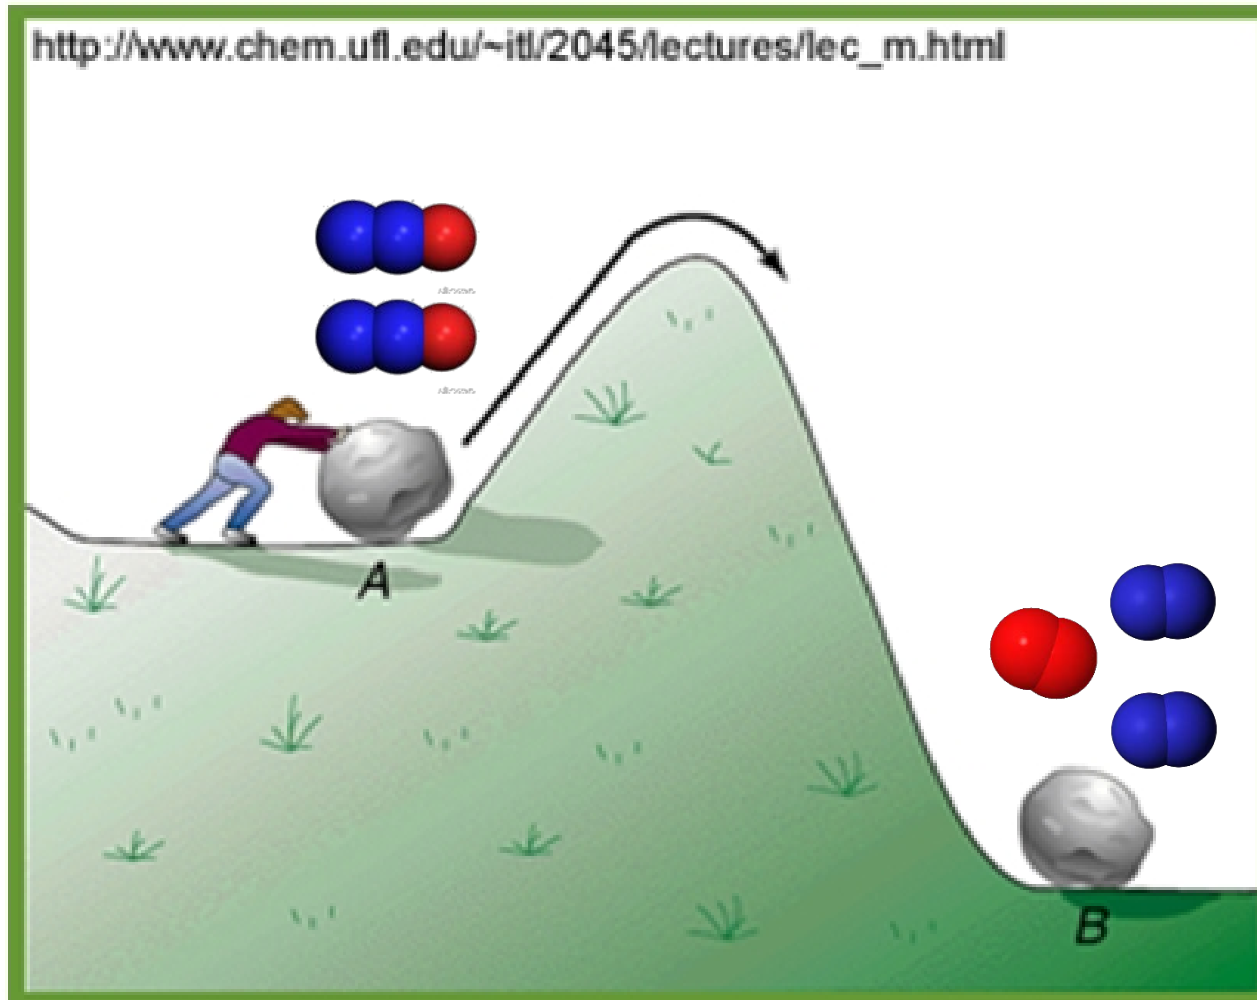

Monopropellant

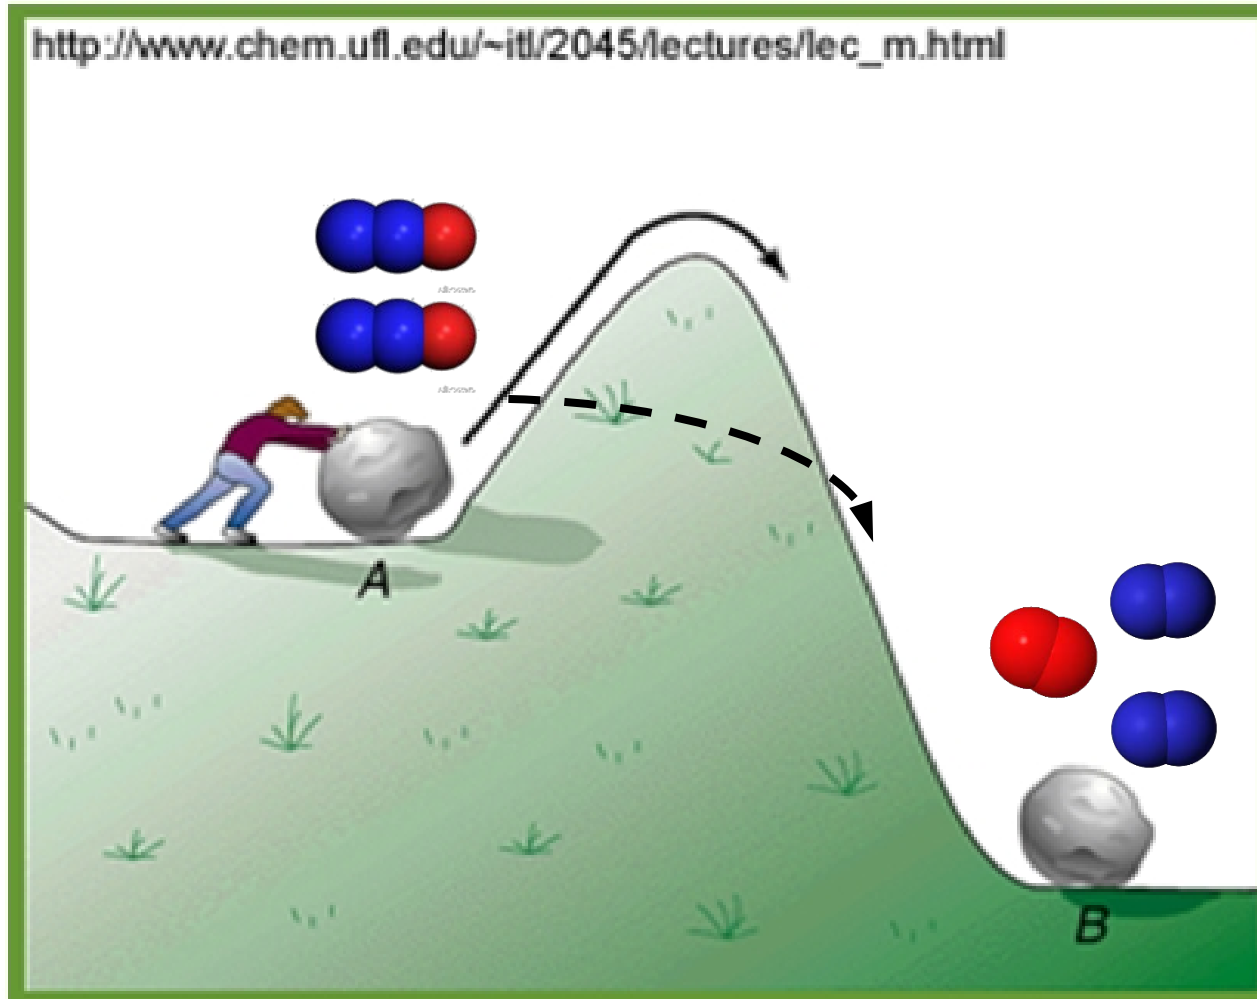


Nitro-100

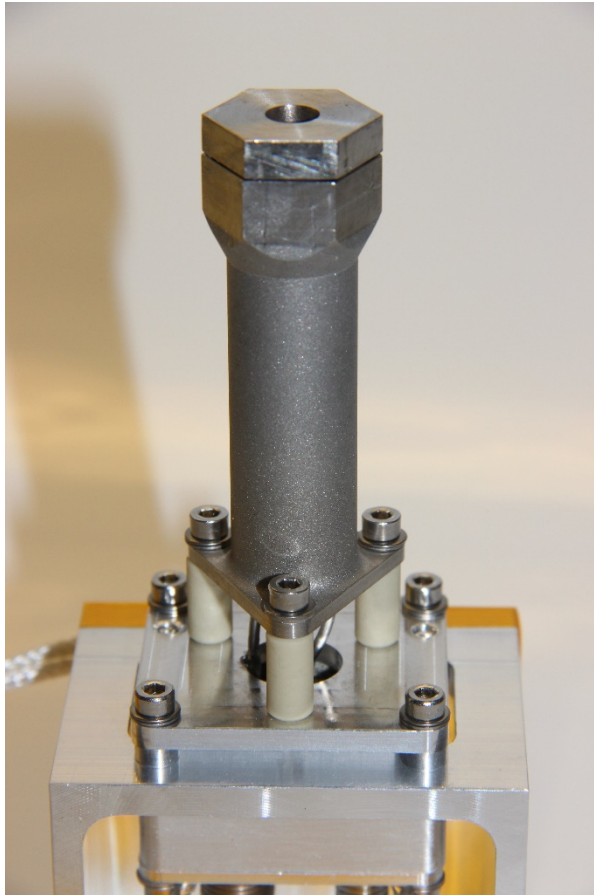


<i>Thruster performance</i>	
Thrust [mN]	100
Specific impulse [s]	131
Mass flow rate [mg/s]	78
<i>Chamber details</i>	
Diameter [mm]	15.0
Max. temperature [°C]	700
Casing material	Stainless steel 316
Radiation shield material	Aluminum 6061-T6
Temperature feedback	K-type thermocouple
<i>Catalyst pack</i>	
Catalyst material	Rhodium metal (Rh)
Support material	γ -alumina (γ -Al ₂ O ₃)
Heater voltage [VDC]	28
Heater power [W]	30
<i>Pre-heat</i>	
Pre-heat temperature [°C]	400
Pre-heat duration [minutes]	<5


Nitro-100

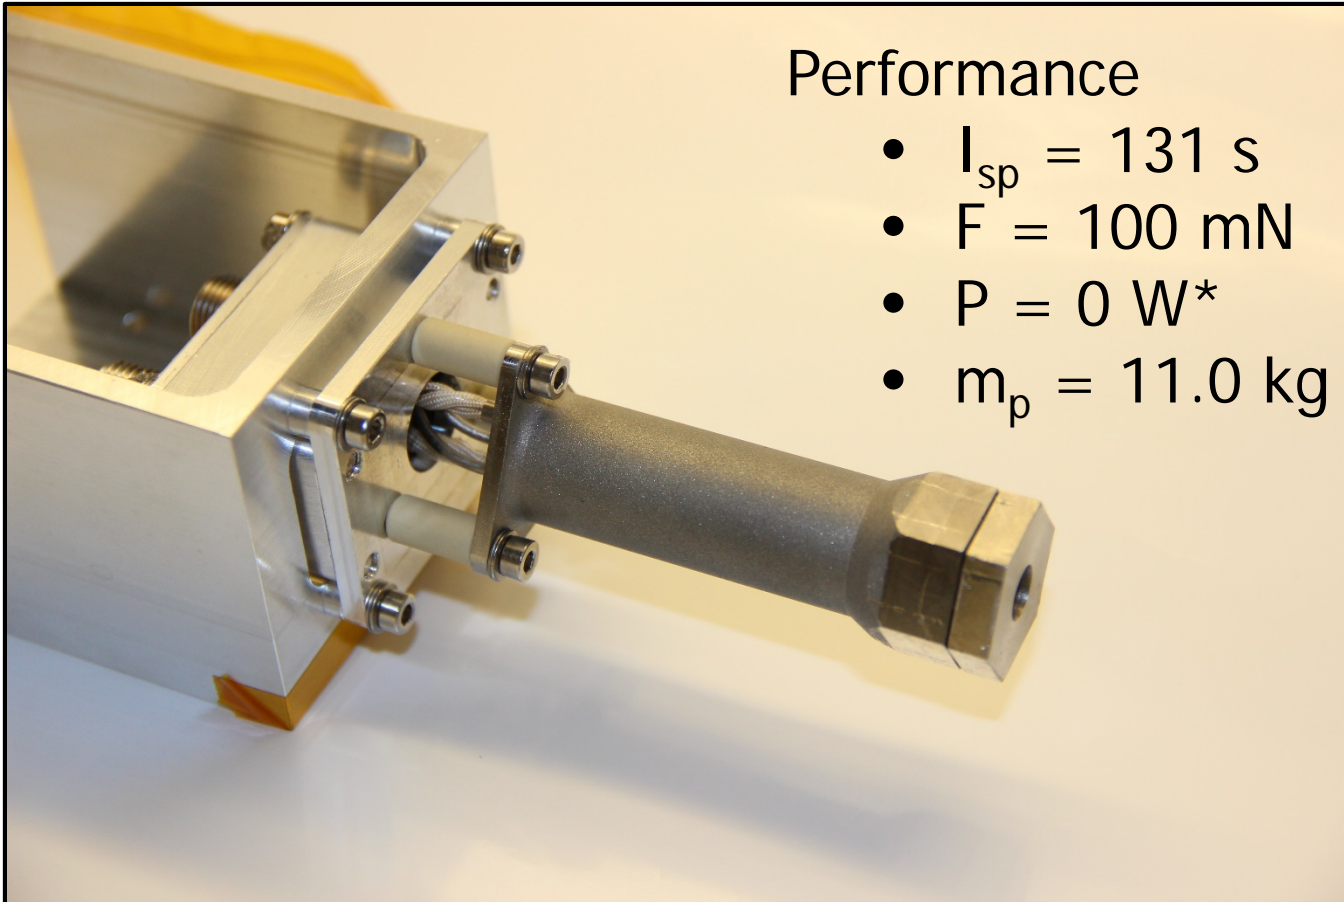


Vacuum thrust testing

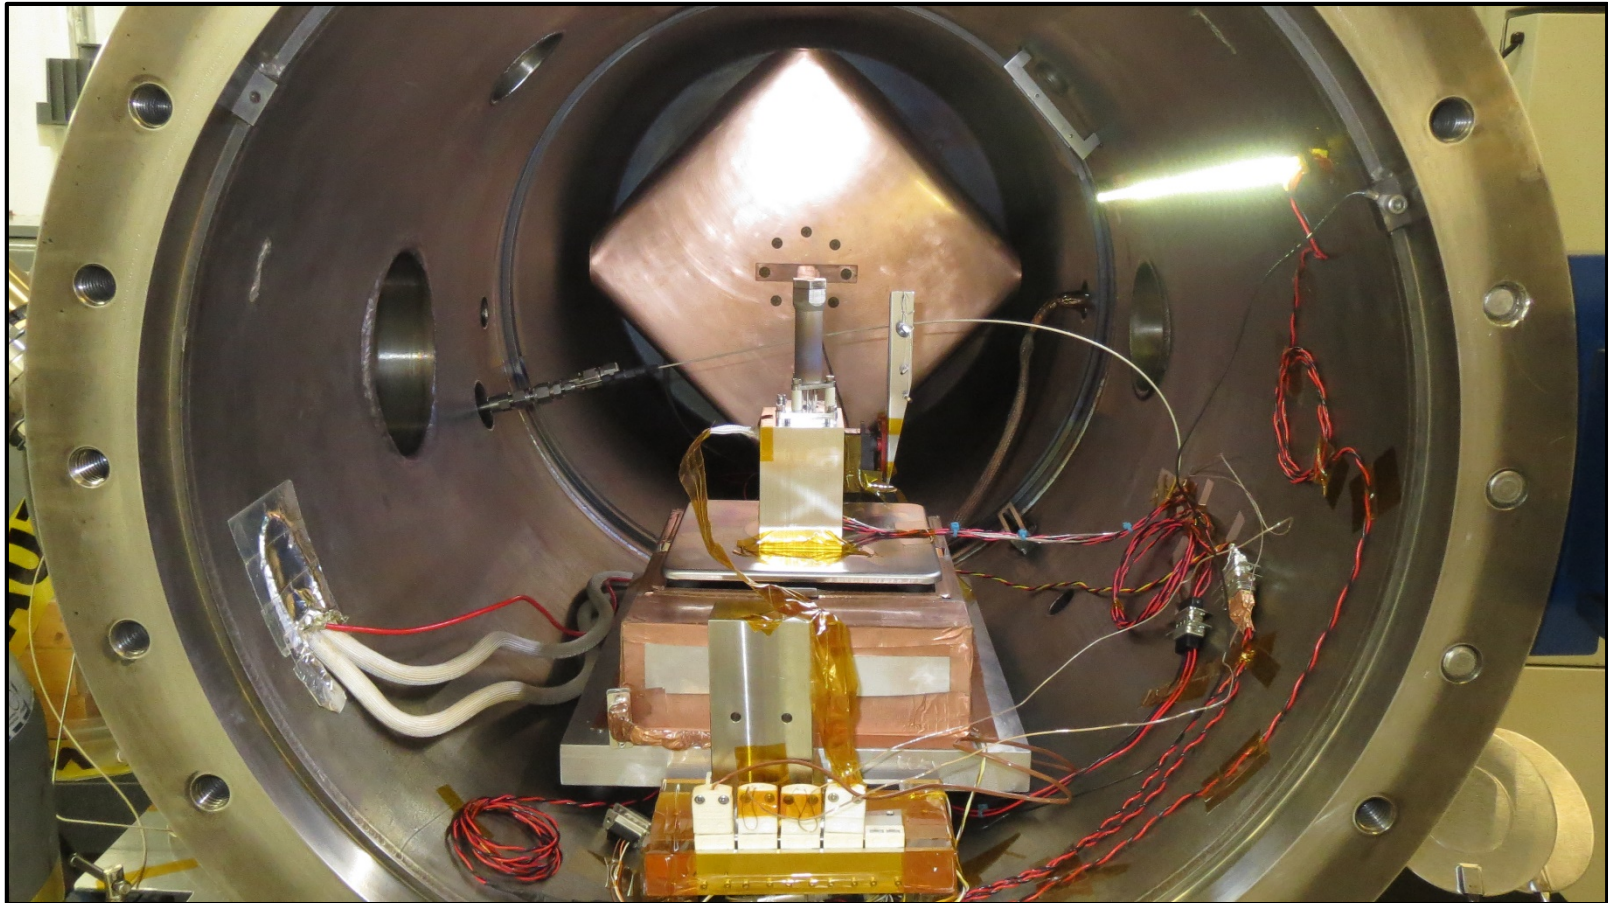


Vacuum thrust testing

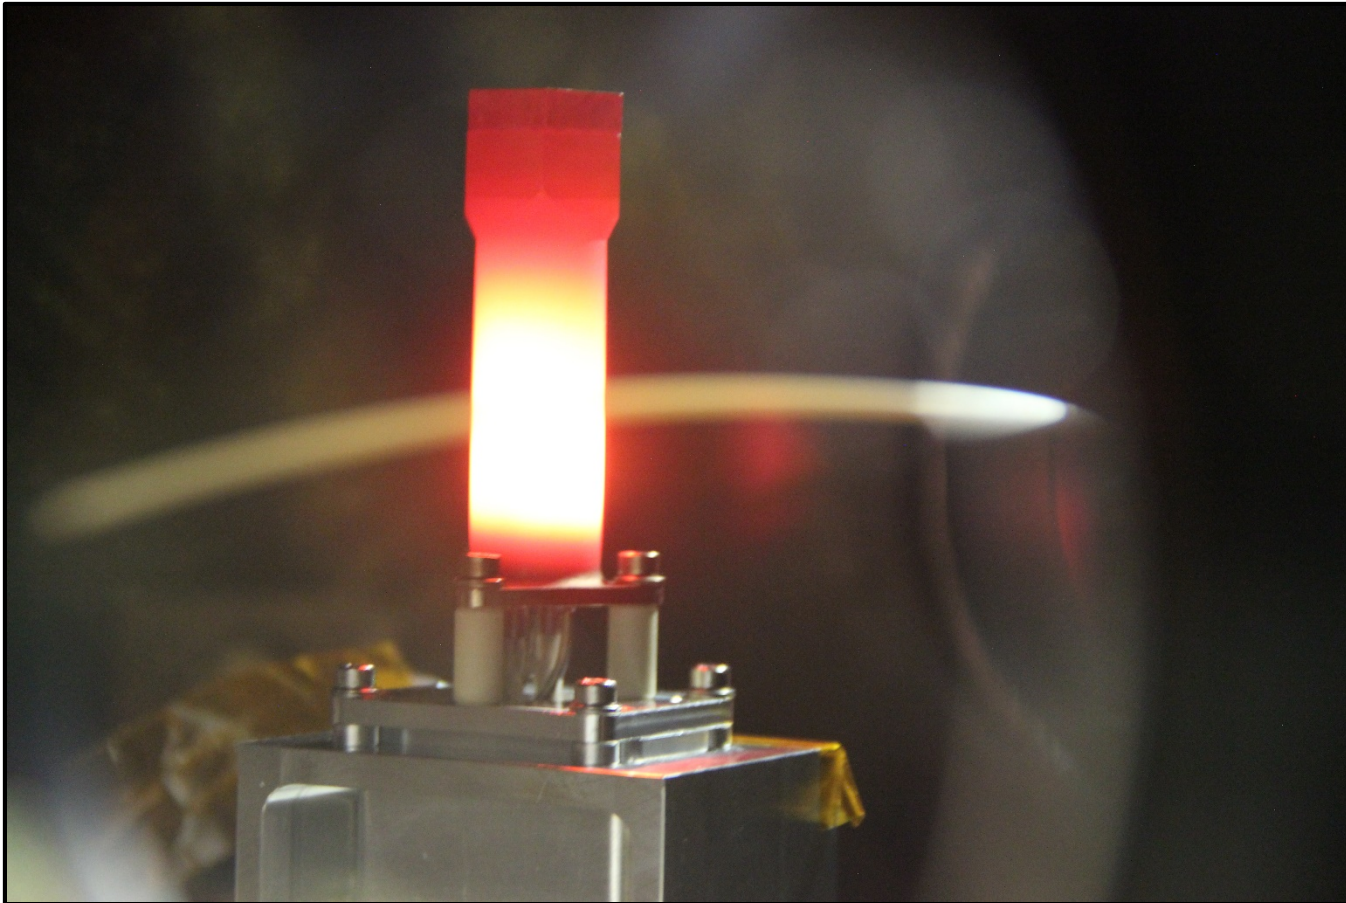


Vacuum thrust test

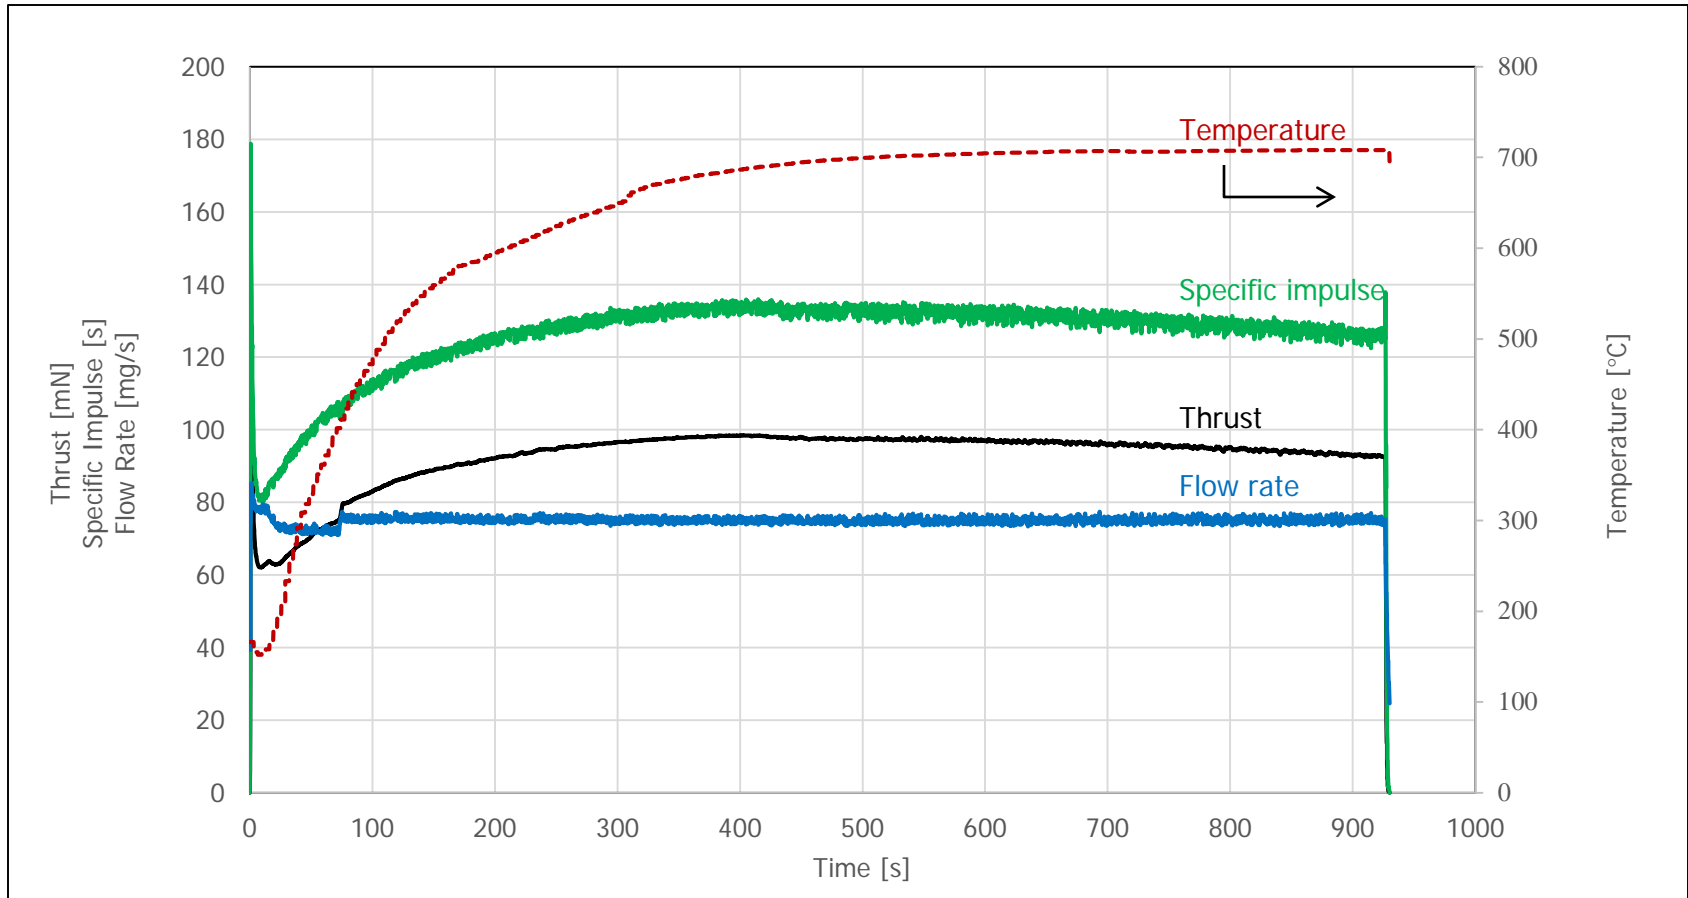


Vibration testing

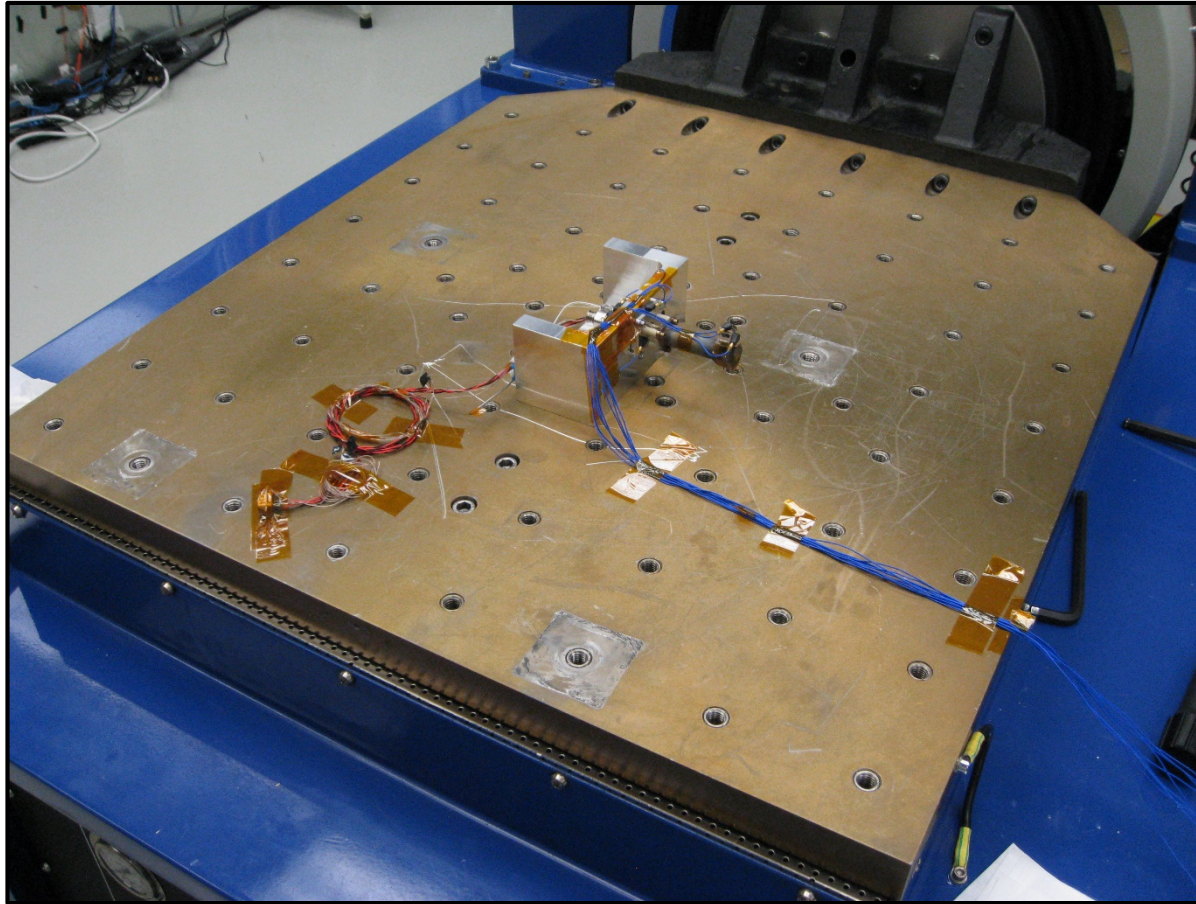

Preheat from cold

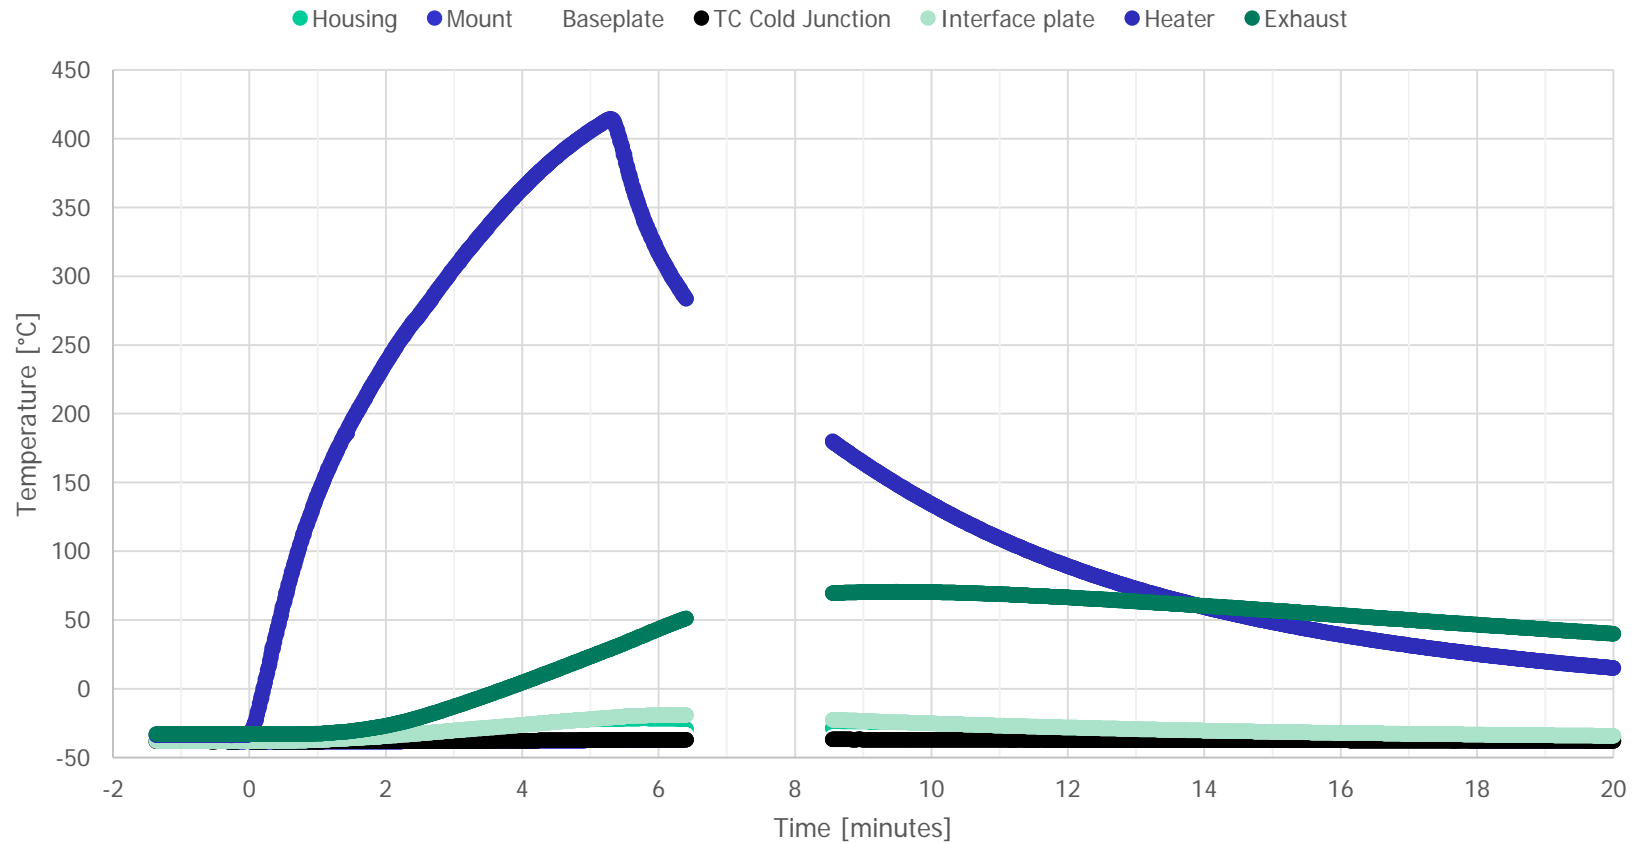

Lifetime testing

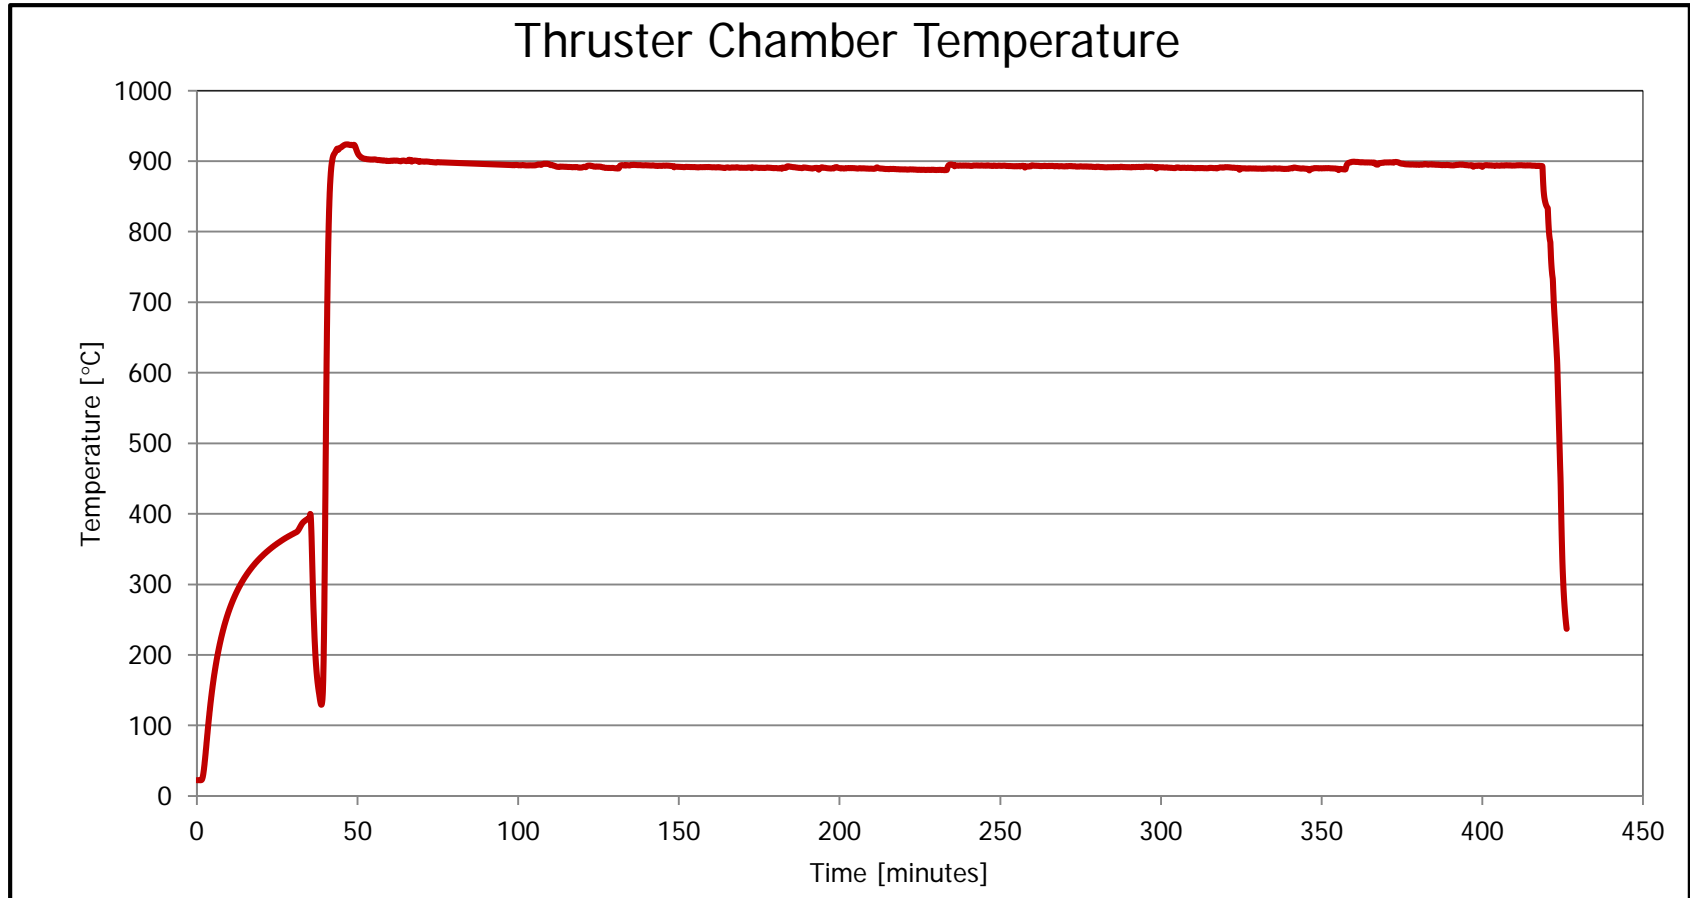

Summary


- A nitrous oxide-based monopropellant thruster was developed and qualified.
- The thruster provides 100 mN at 131 s while requiring no power following pre-heat.
- The propellant to provide 100 m/s to a 150 kg spacecraft is 11 kg.
- Evidence of catalyst degradation hints at an potential upper limit on thruster lifetime.
- Research into catalyst deactivation is currently ongoing.
- Propellant feed system and tank are in prototype phase.
- System will be ready-to-fly by late 2016.


visit

www.utias-sfl.net




Lifetime testing

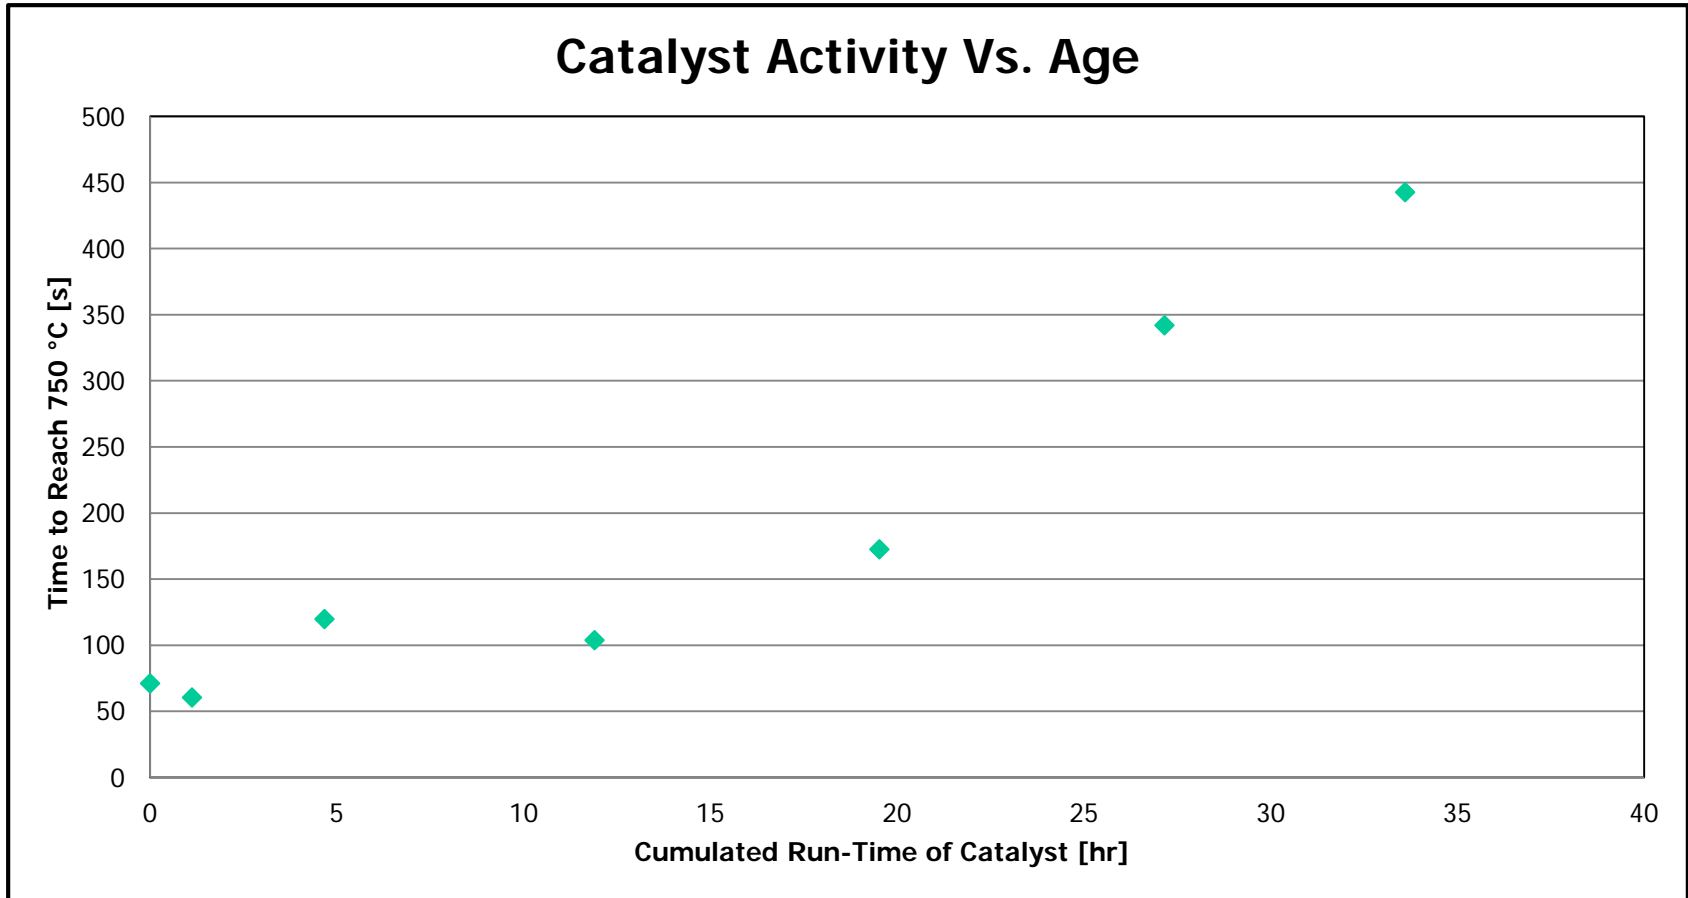


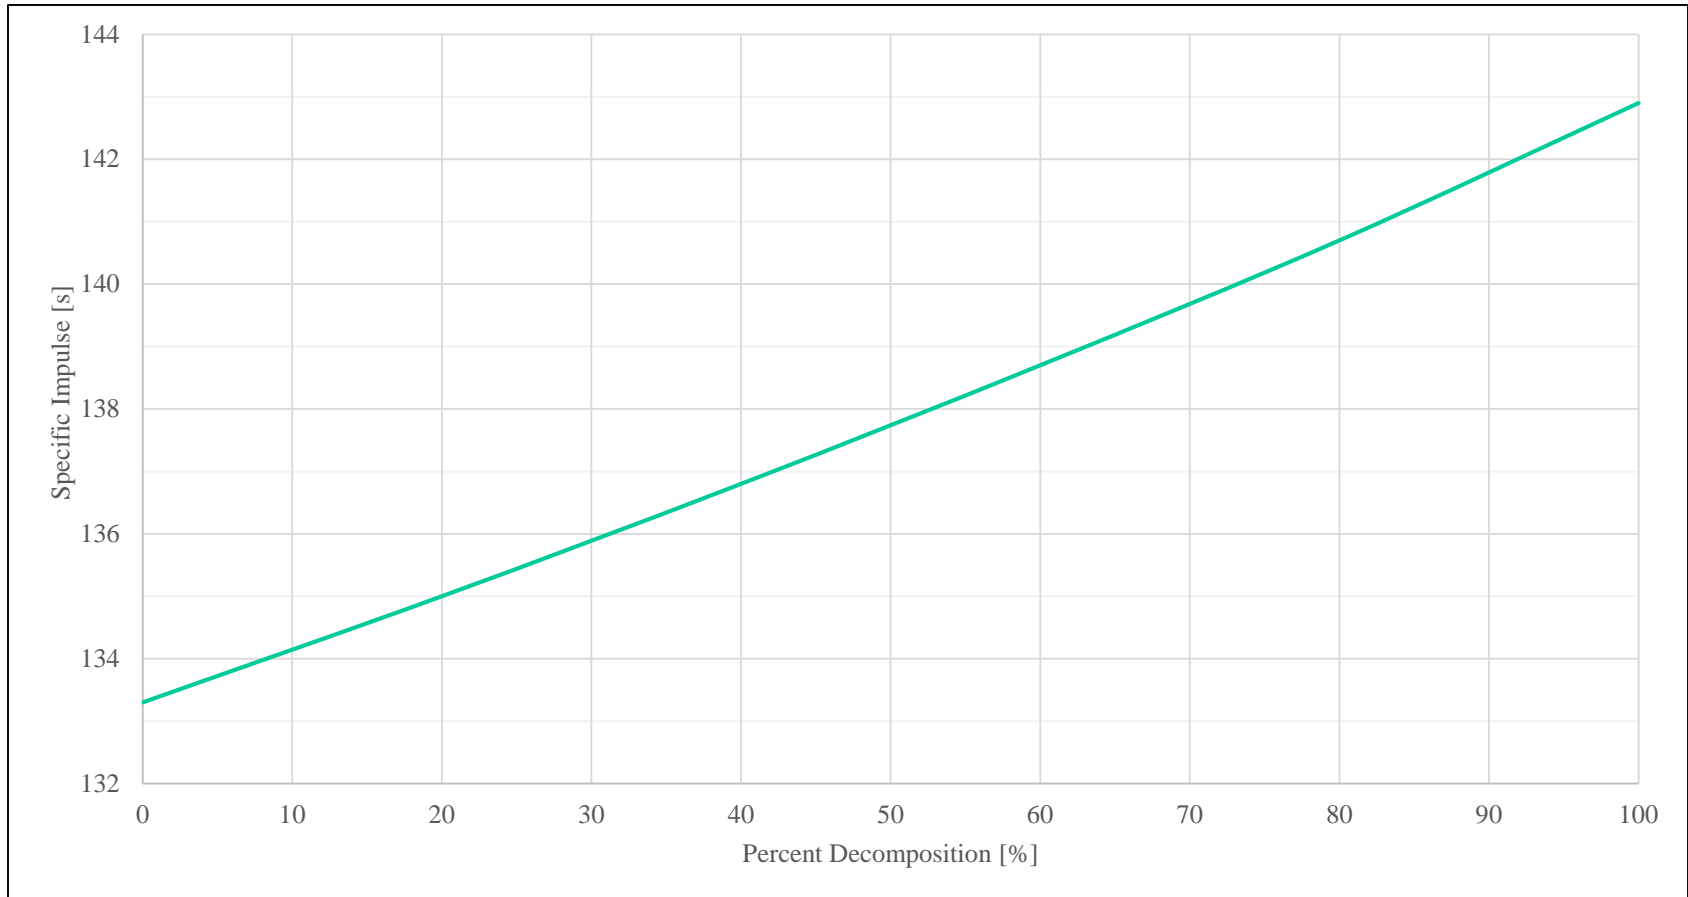

Monoprop. Vs. Resisto.

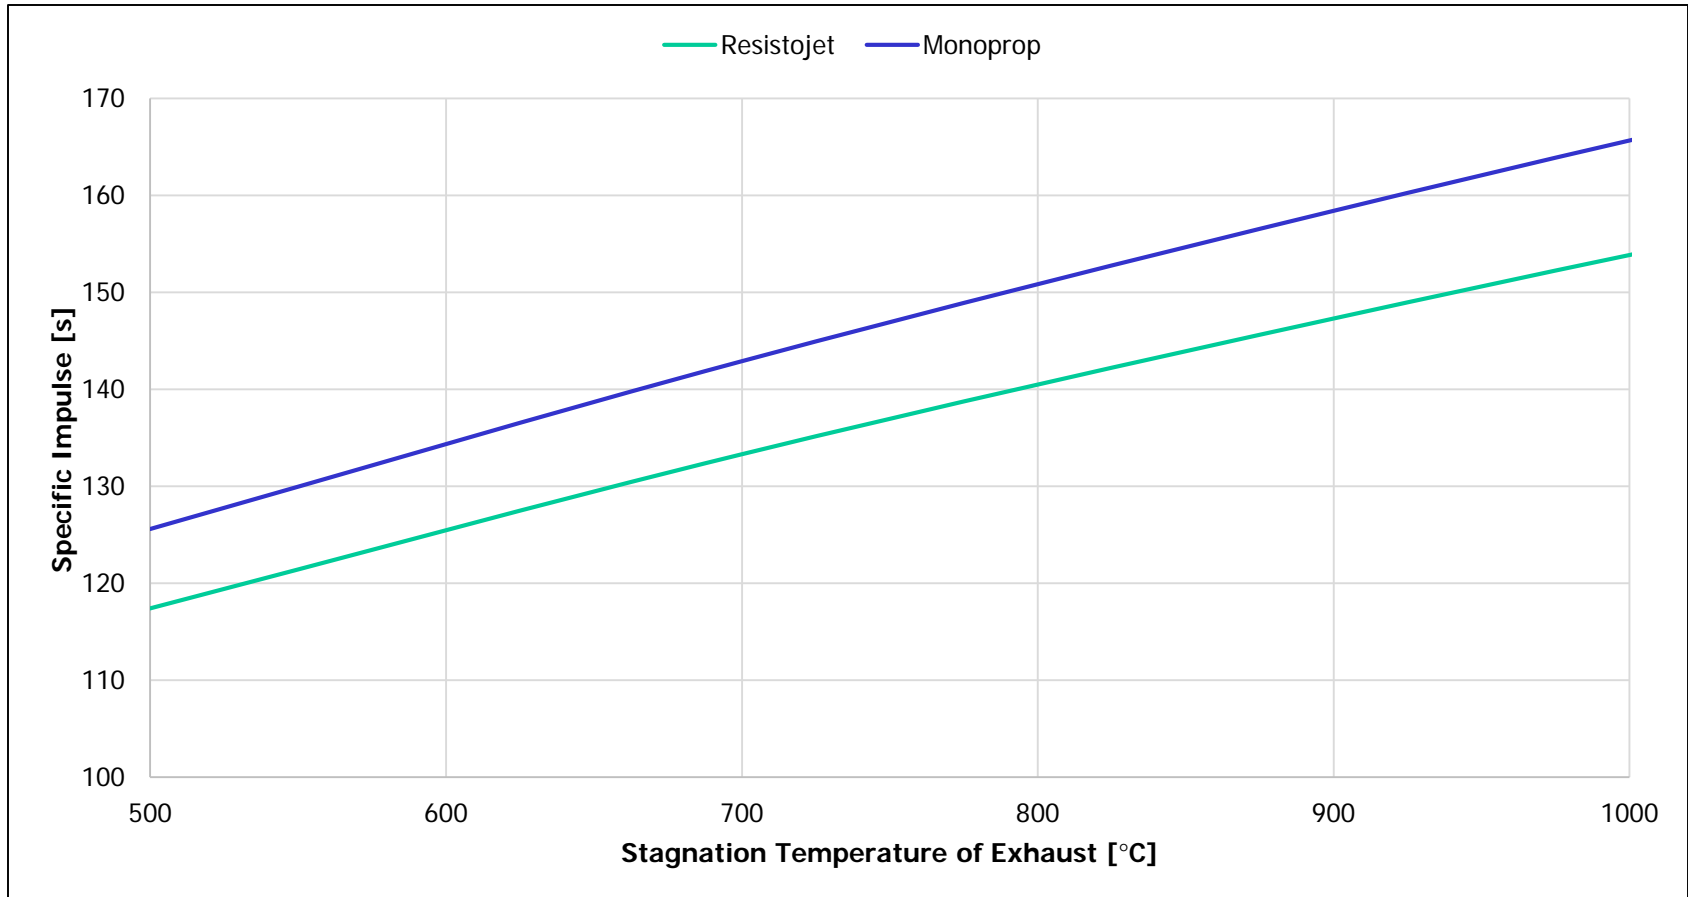


Vacuum thrust test

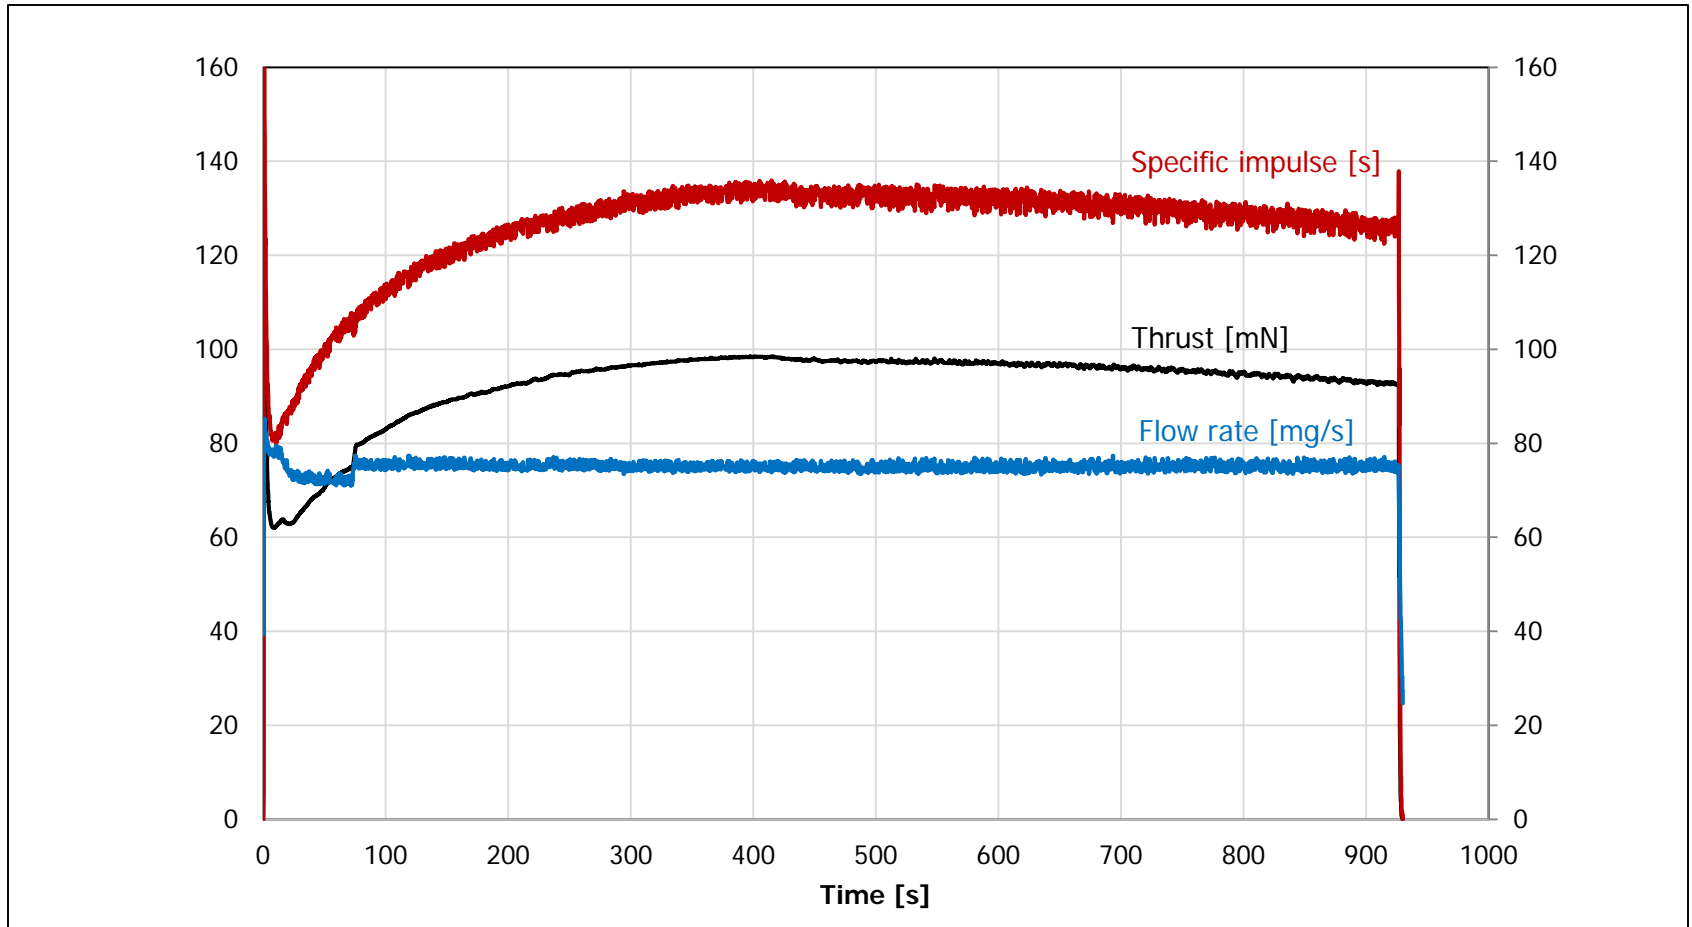

Monopropellant

- Under the right conditions nitrous oxide will exothermically decompose according to:

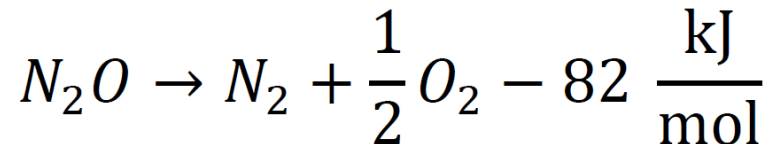

- That's a release of 145 W per 100 mN thrust!
- This heats up the exhaust gases for free.
- There's a theoretical limit of about 1640 °C.
- There's another advantage in that the products have a lower molar mass.

Catalyst lifetime testing

- For the reference mission the system will run for a total of 40 hours.
- A dedicated lifetime test was performed to demonstrate that the system will perform as expected for the whole mission life.
- The system was run with a single catalyst pack for a total of 50.4 hours, resulting in about 25 % margin.
- Changes in catalytic activity were observed.
- Ultimately, decomposition could not be initiated after 50 hours runtime.
- System can be restarted with fresh catalyst.