

# Analysis of Peer Intersection Data for Arterial Traffic Signal Coordination Decisions

Christopher M. Day<sup>1</sup>, Thomas M. Brennan, Jr.<sup>1</sup>, Hiromal Premachandra<sup>1</sup>, James R. Sturdevant<sup>2</sup>, and Darcy M. Bullock<sup>1</sup>

1: Purdue University; 2: Indiana Department of Transportation

Paper No. 11-0037

## Concept

Decisions on whether to coordinate adjacent intersections are currently made by rules of thumb, coupling indices based on ratios of volume to distance, and modeled traffic flows.

$$\text{CouplingIndex} = \frac{\text{Volume}}{\text{Distance}} = \frac{V}{D}$$


$$\text{CouplingIndex} = \frac{\text{Volume}}{\text{Distance}^2} = \frac{V}{D^2}$$

As high resolution event data from signalized intersections becomes more readily available, it becomes possible to analyze actual link vehicle flows to better characterize whether (and when) signal coordination is desirable. This paper proposes and demonstrates a methodology to assess opportunities to improve arterial progression if a non-coordinated system is coordinated, using peer data obtained from adjacent intersections.

## Context of Study

### Question 1

- When should free operations begin and end?

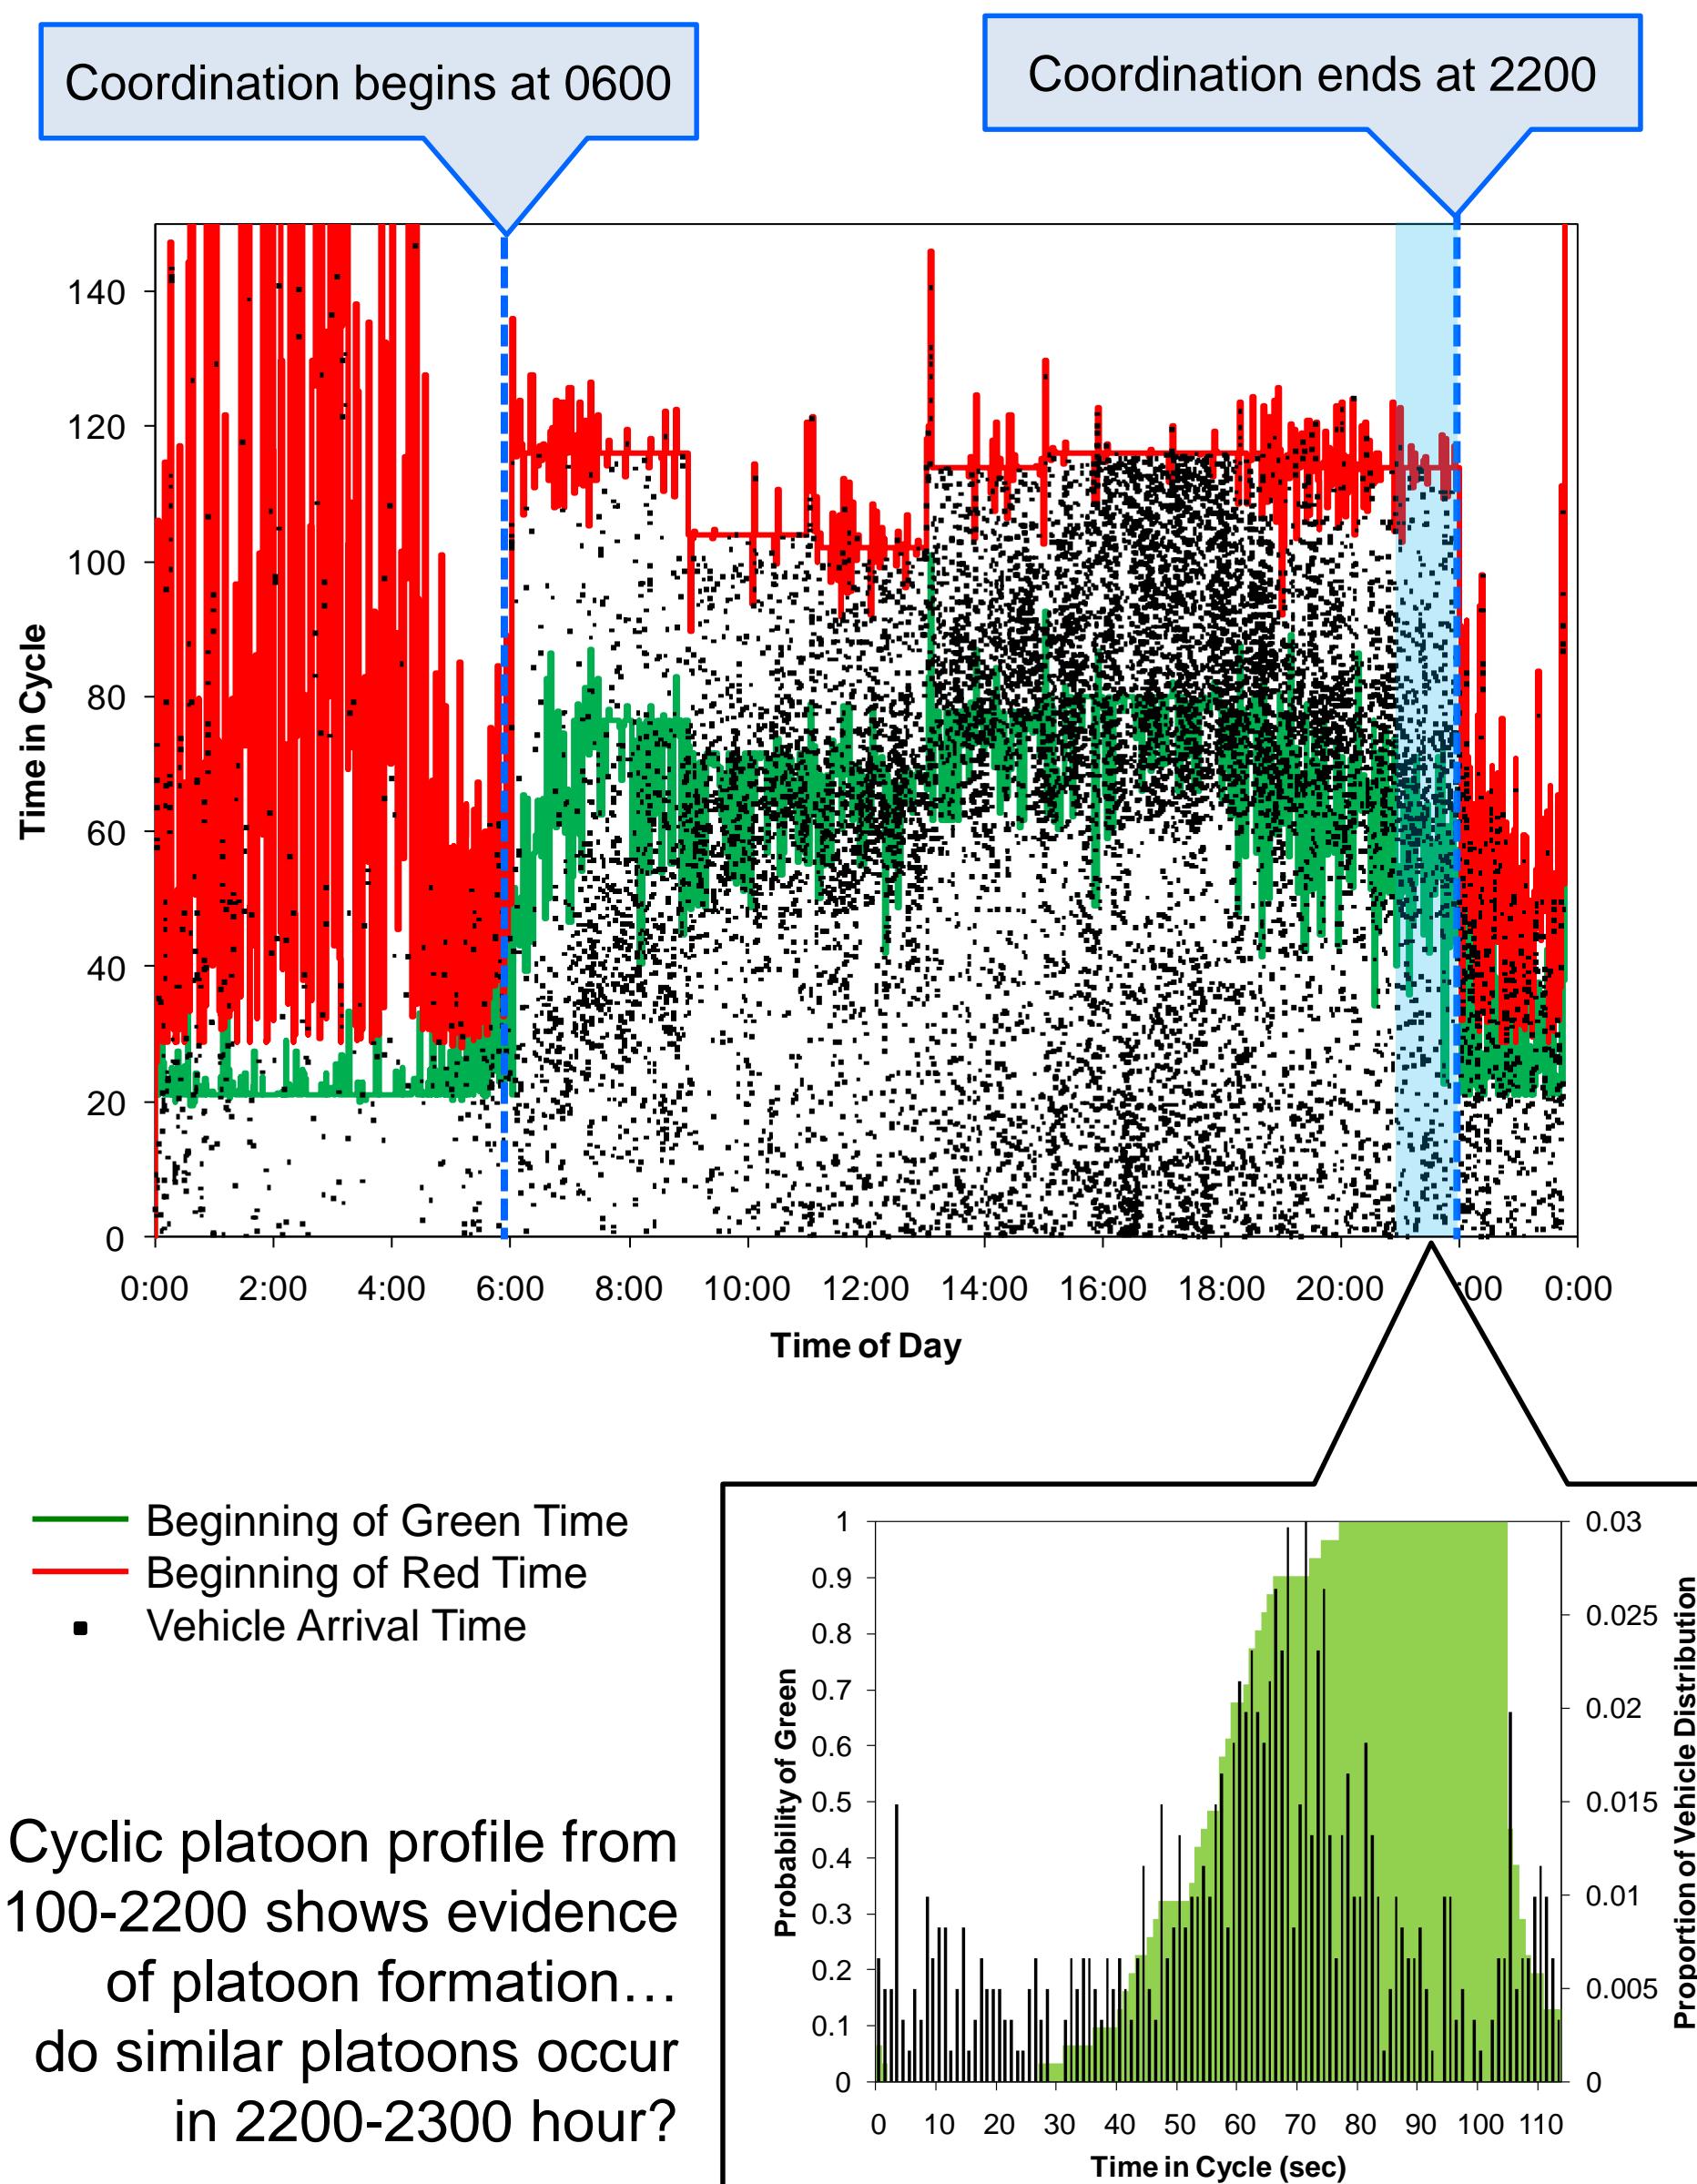


### Question 2

- Can we change the frame of reference of arrival data to be based on an adjacent intersection to assess platoon characteristics and progression opportunities?


## Analysis of Non-Coordinated, Fully Actuated ("Free") Corridor Operations During Overnight Time Periods

### Impact of Perspective: Cyclic Flow Profiles From Fully-Actuated Operation Arrival Data



- Traffic engineers think in terms of platoon formation & dispersion down a corridor
- In non-coordinated, fully-actuated operations, a local controller is only able to "see" local arrivals and only knows when its own green indications occur, not the upstream ones
- Using adjacent intersection beginning of green time enables trends in vehicle platoons to be visualized from field data

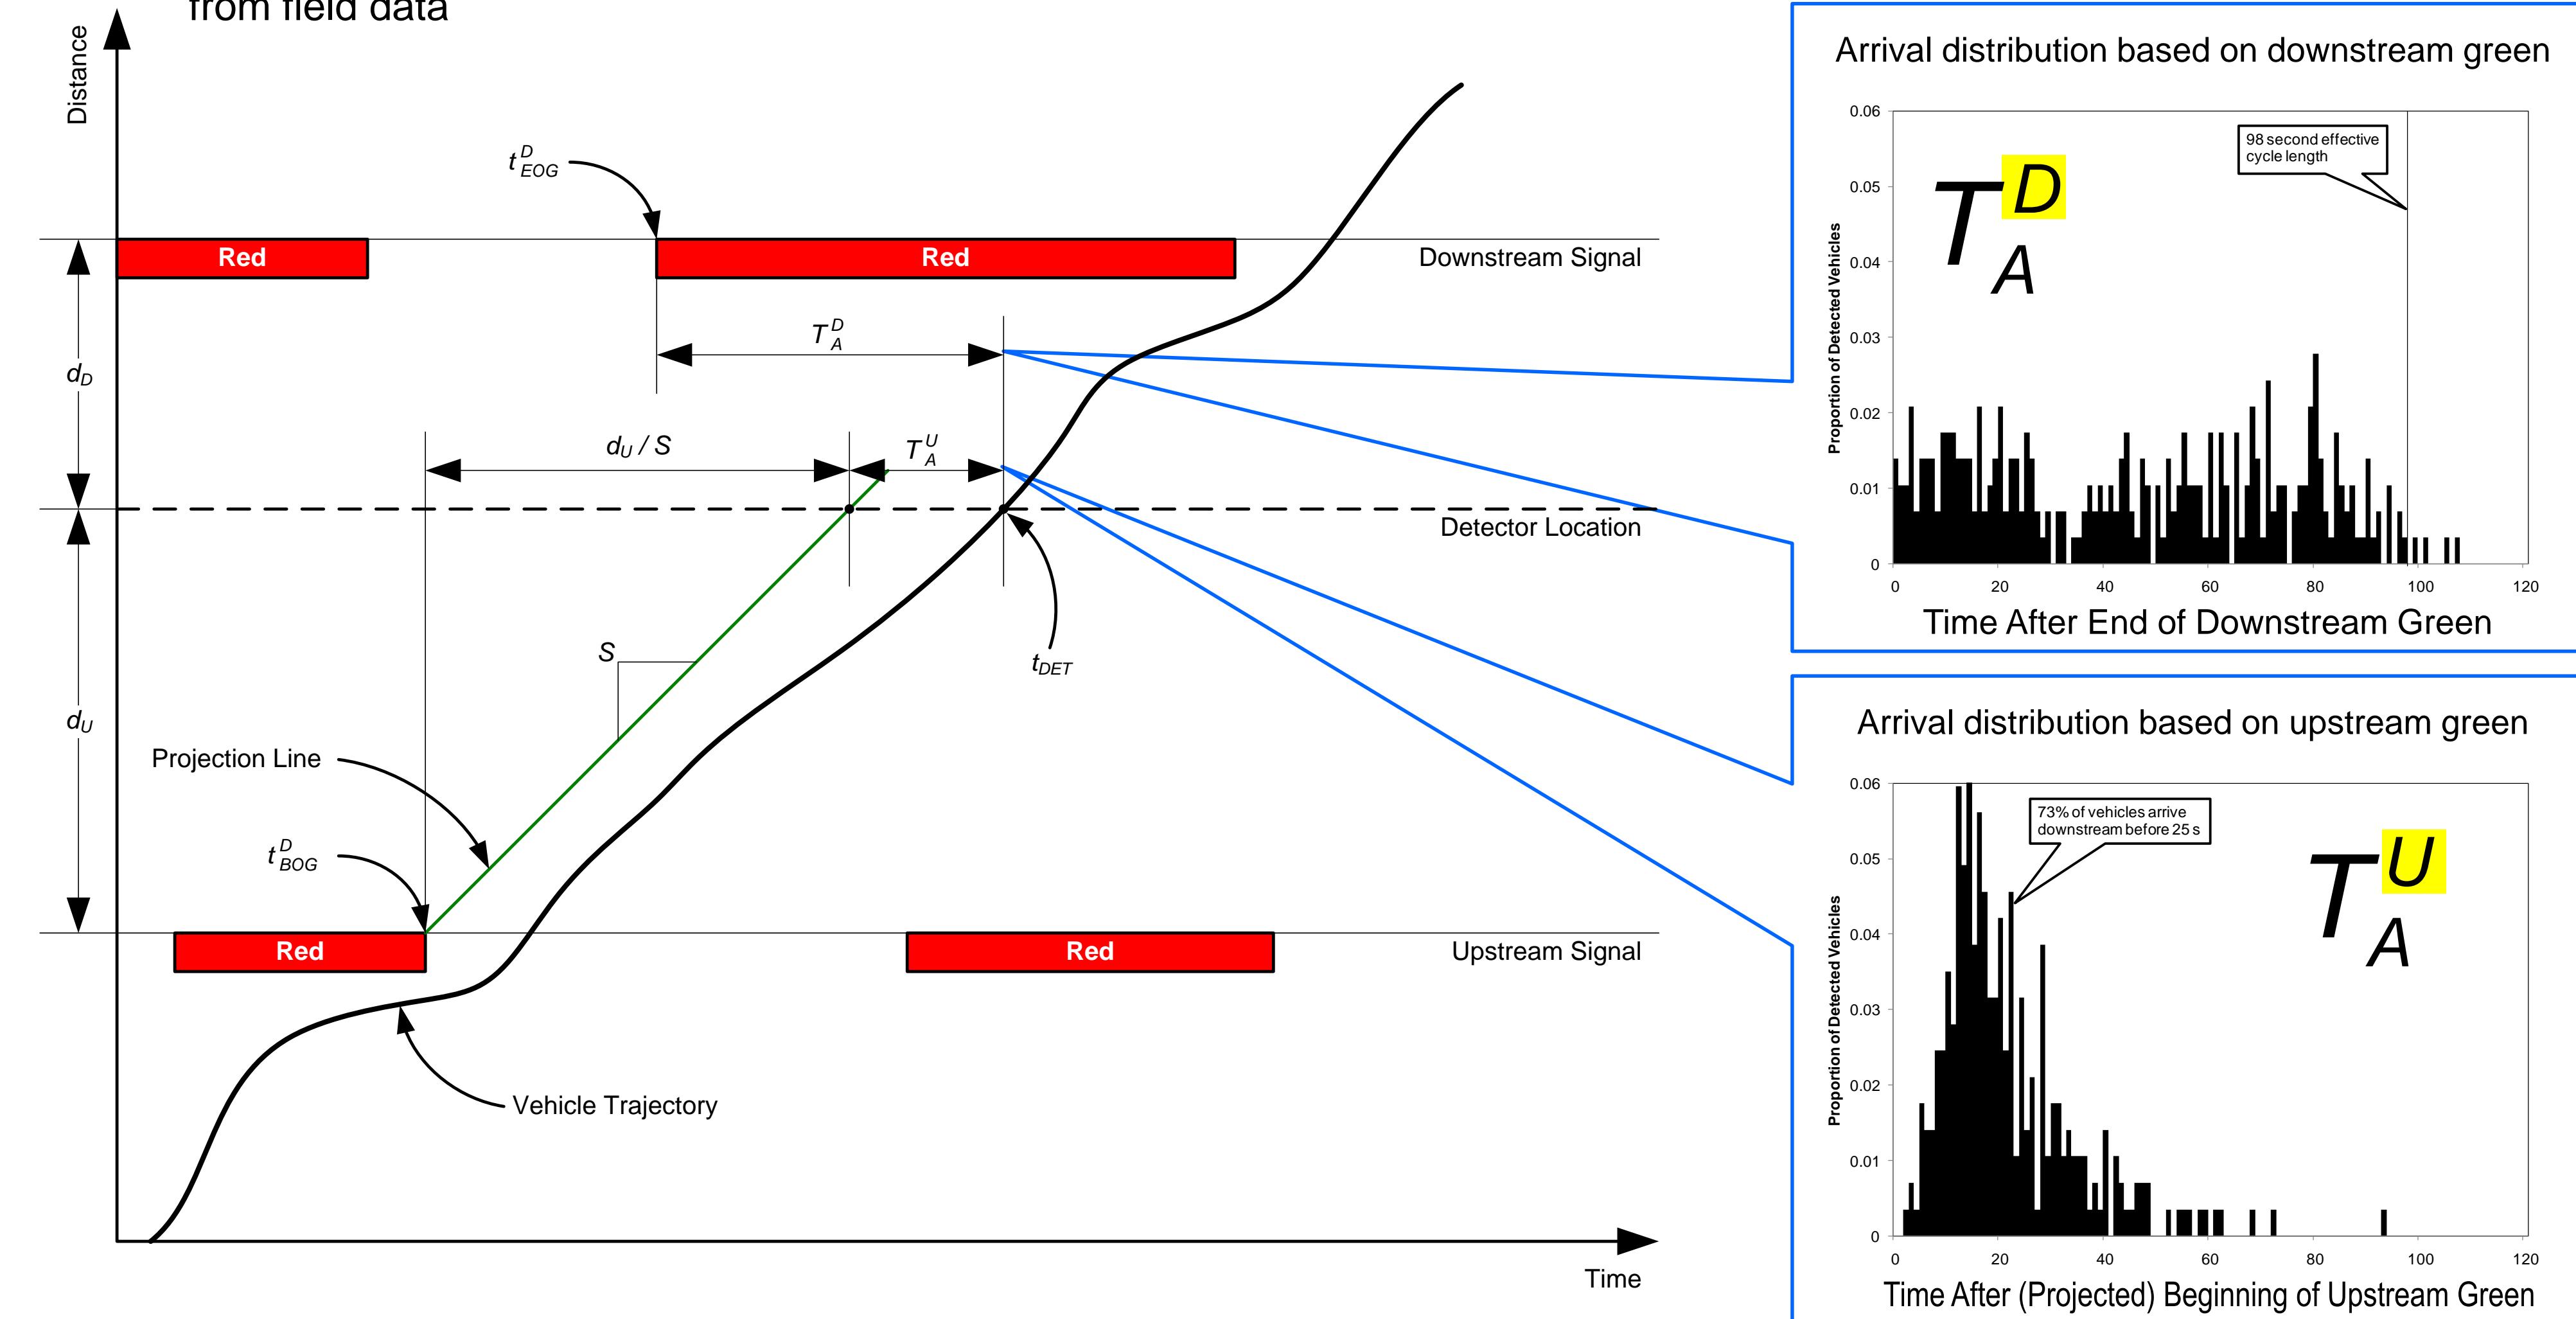

### Changes in Platoon Formation Characteristics During the Fully-Actuated Period

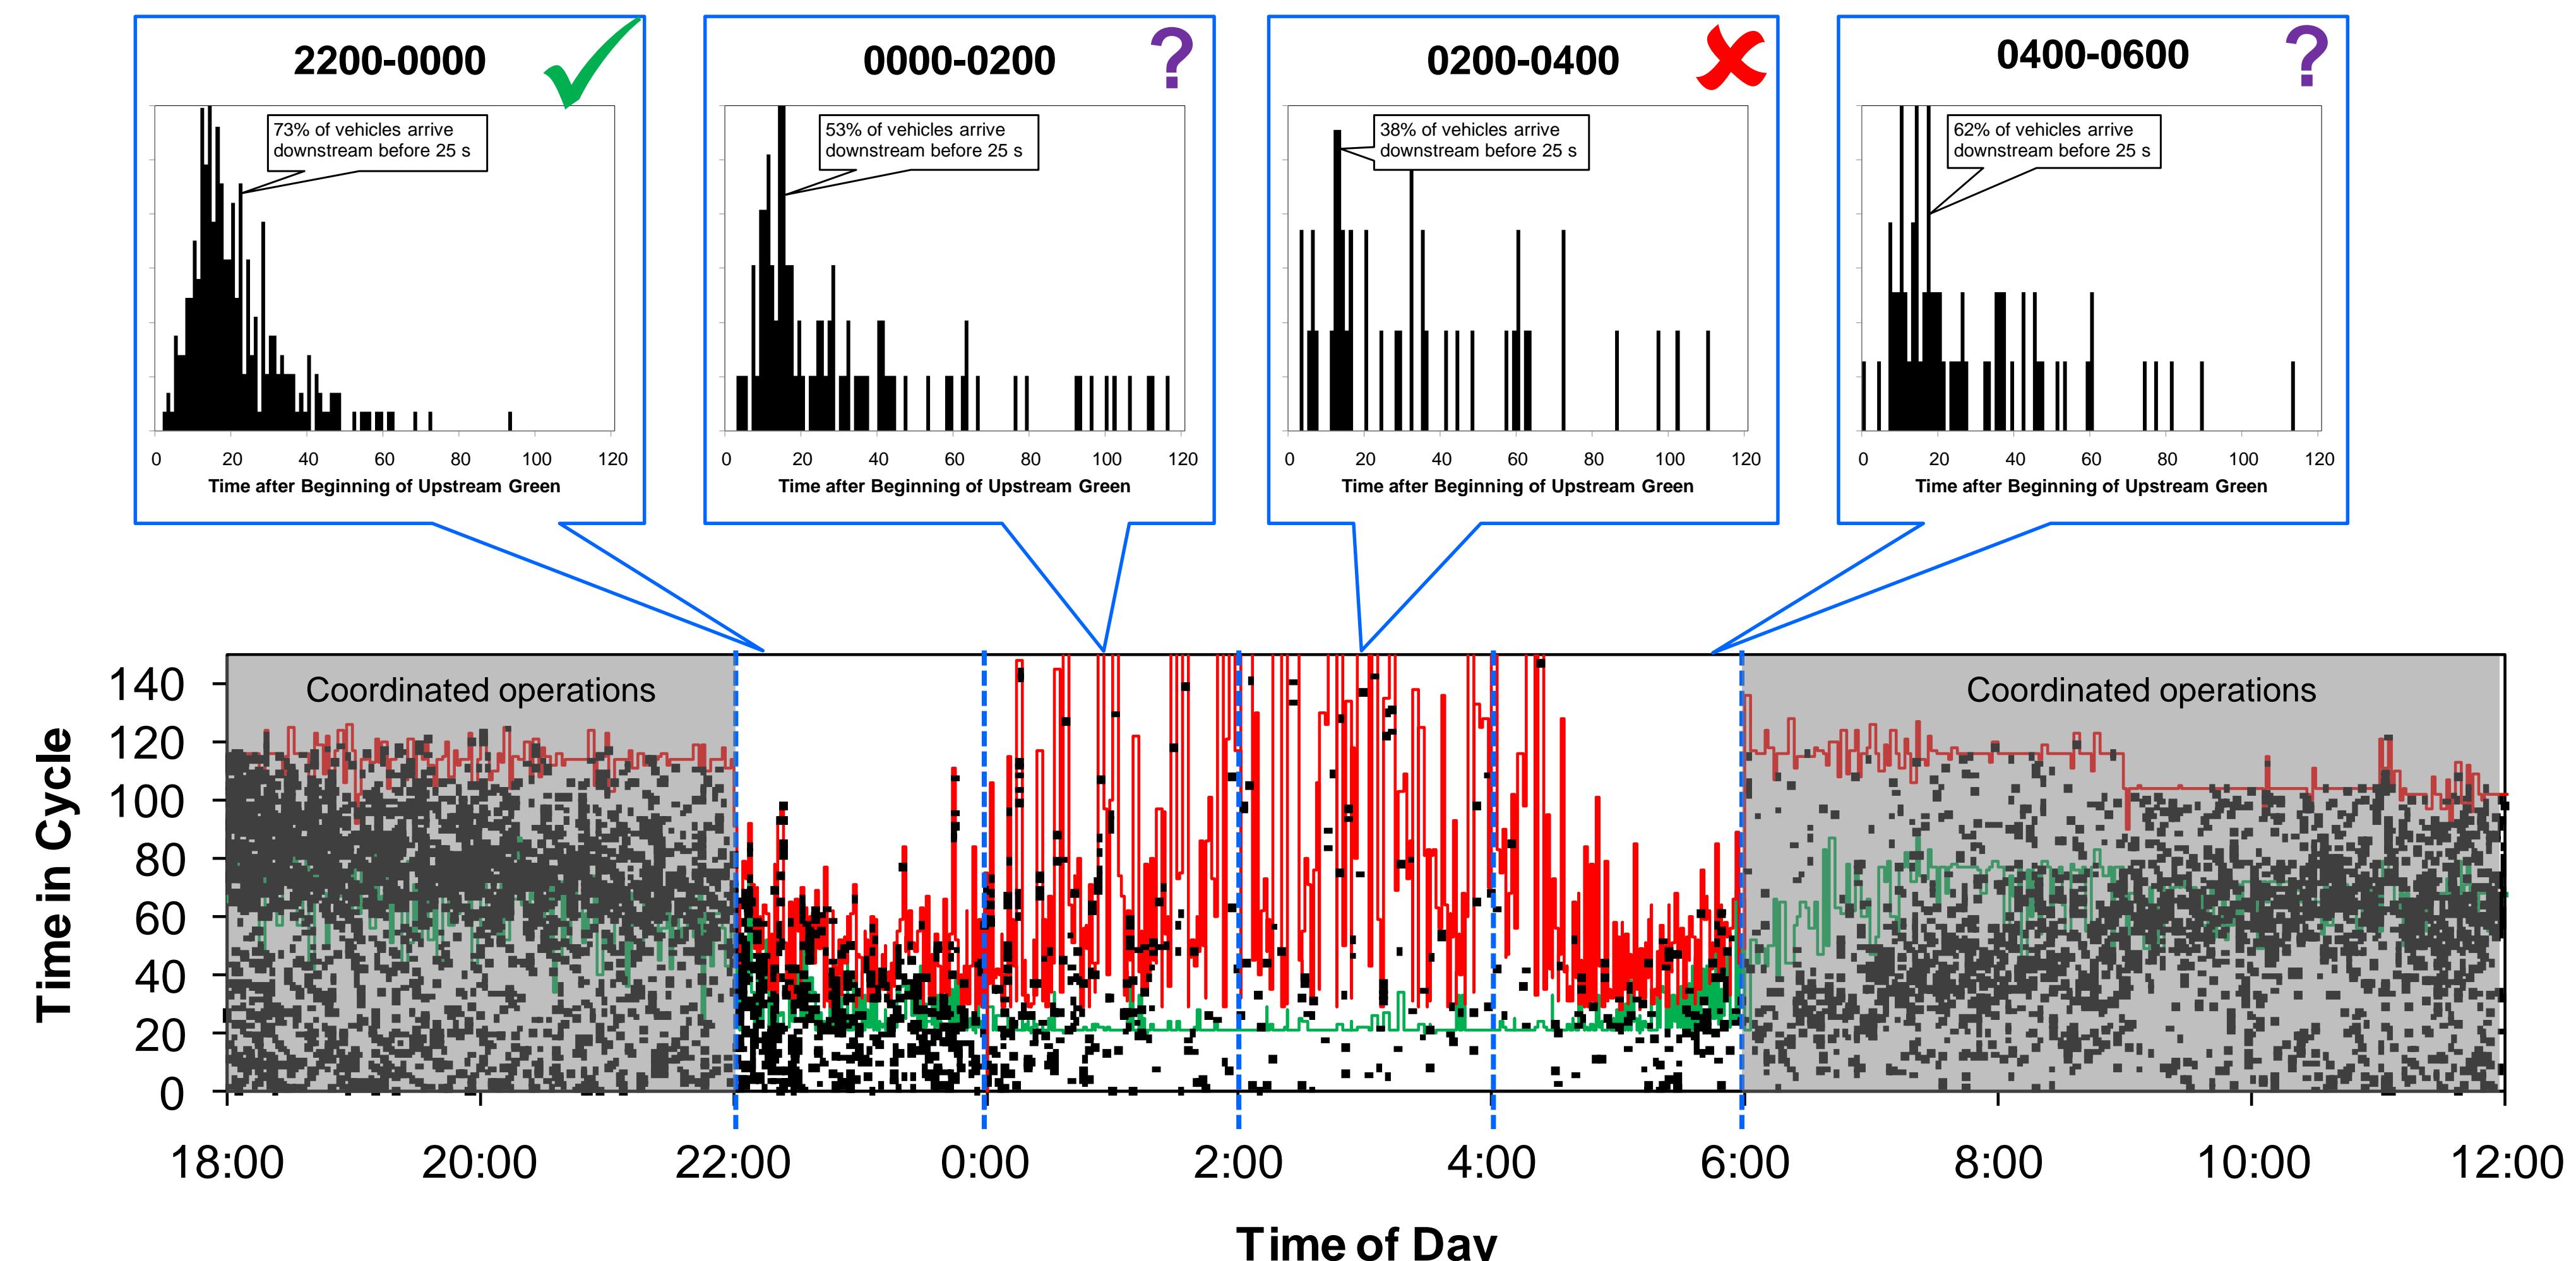

## Study Corridor

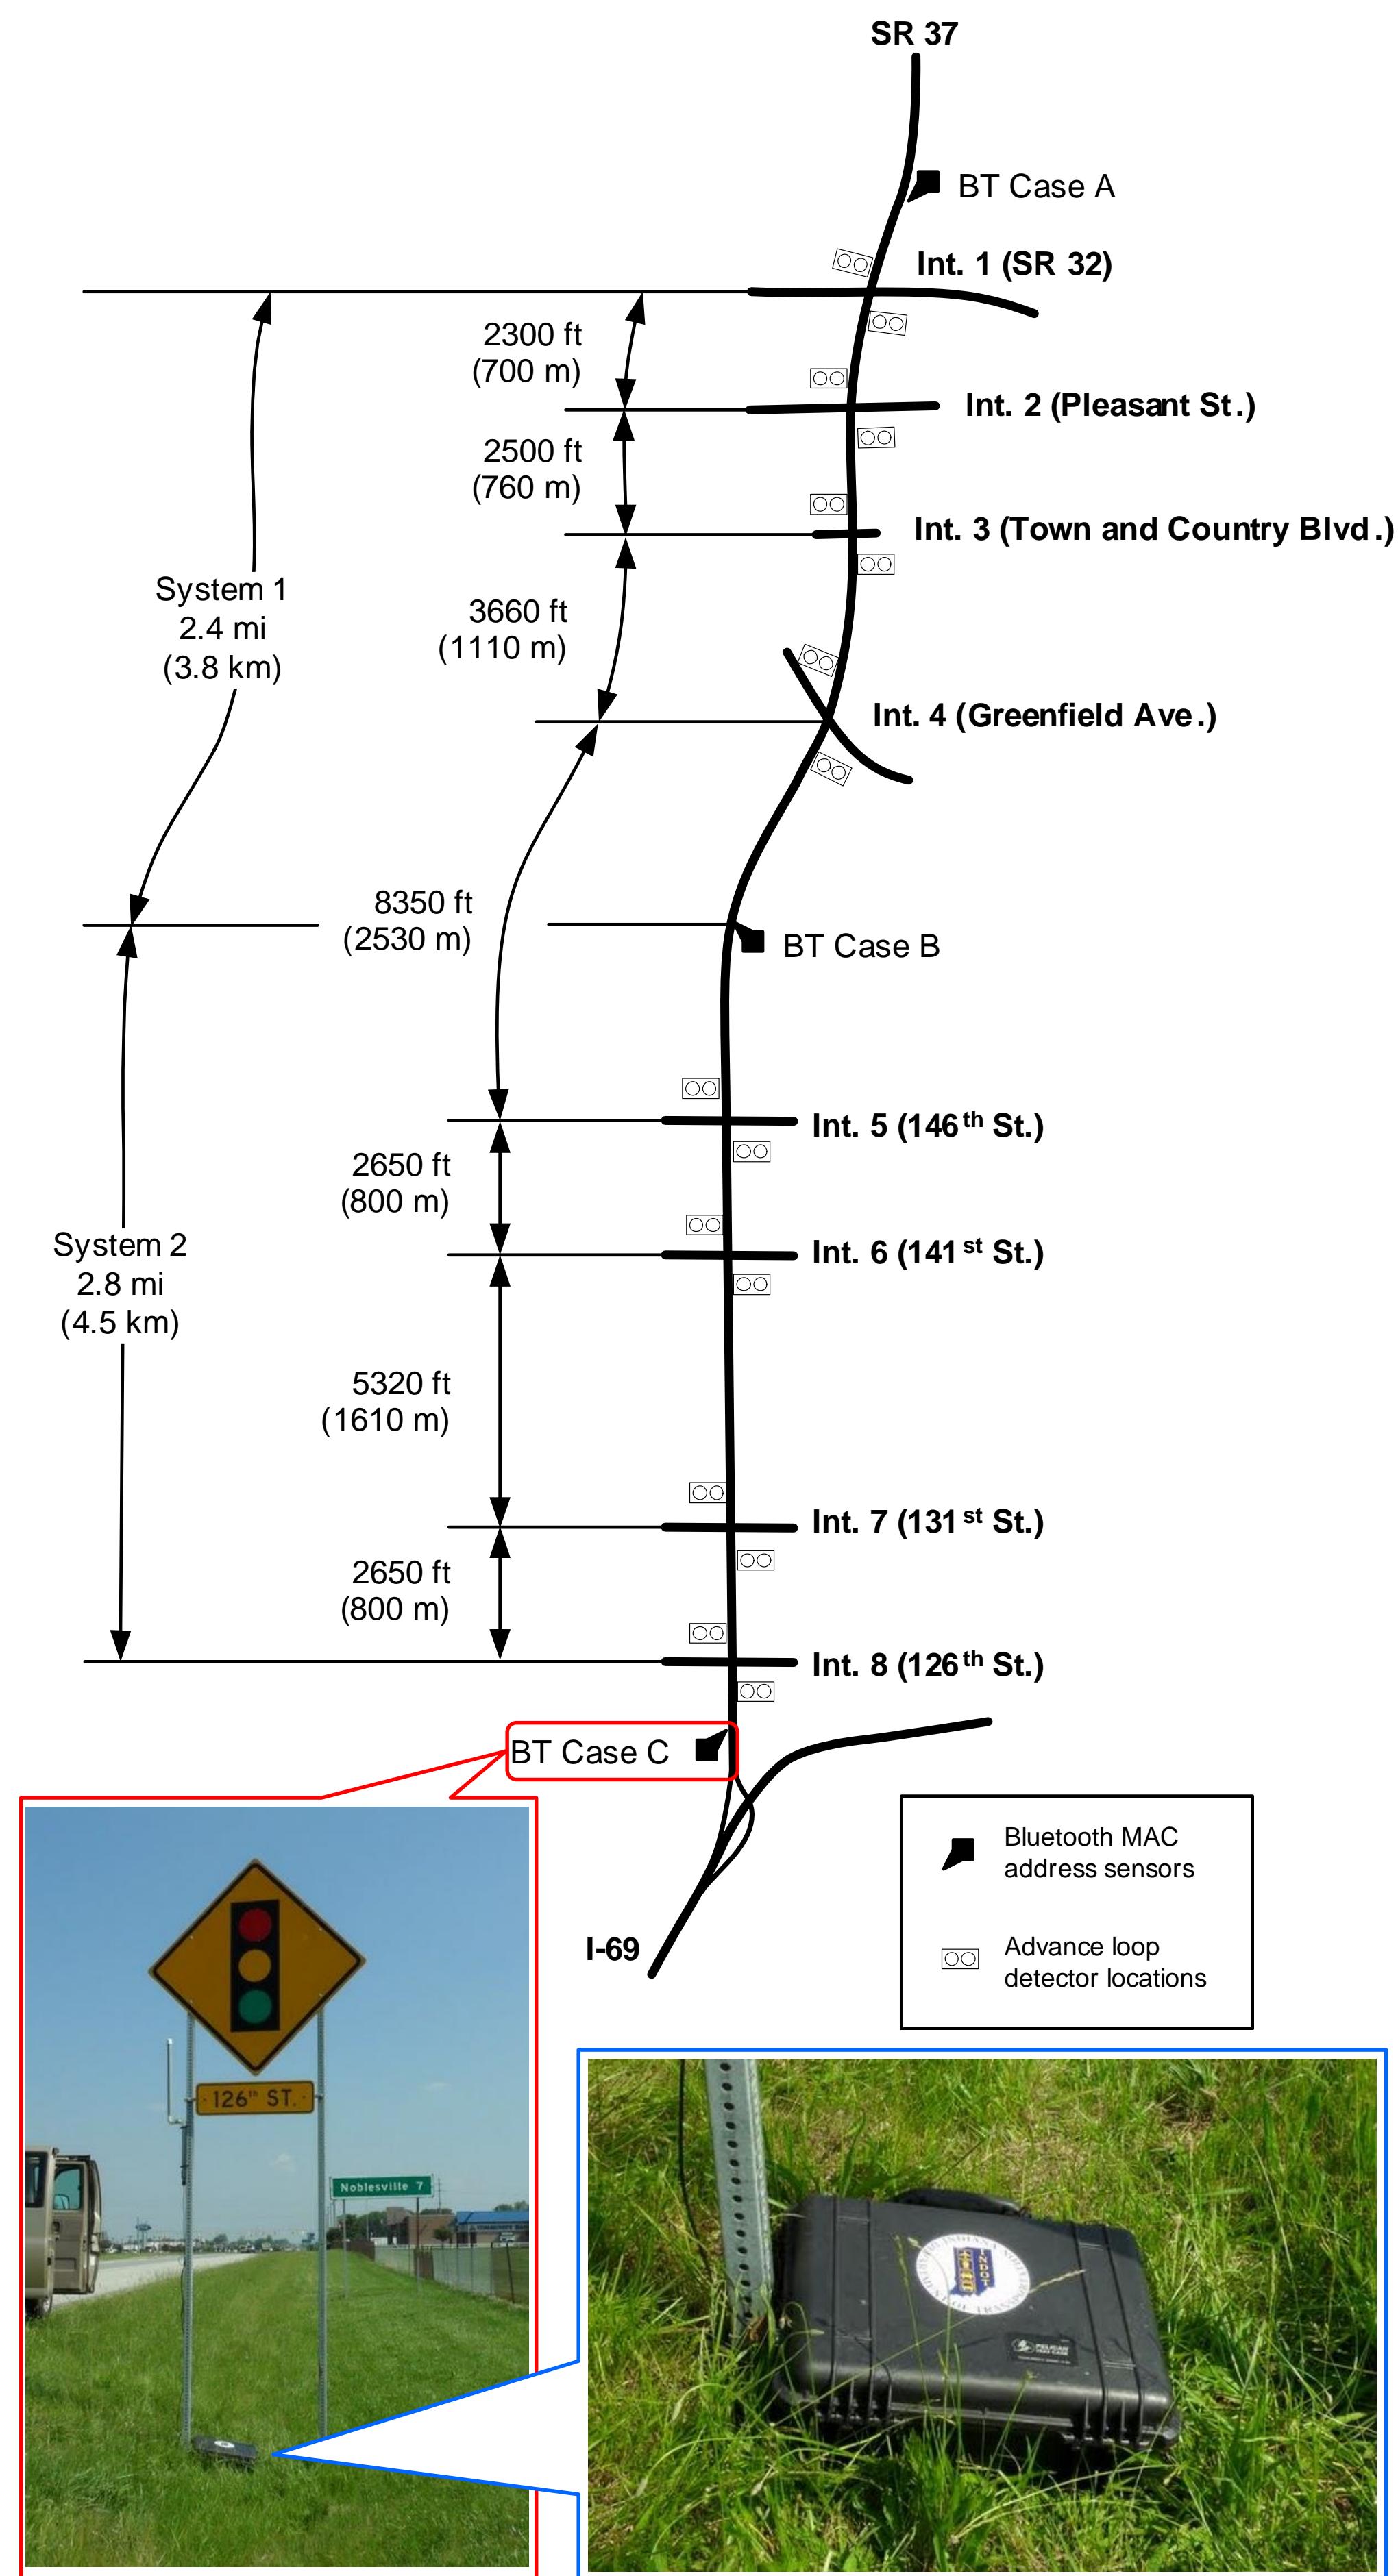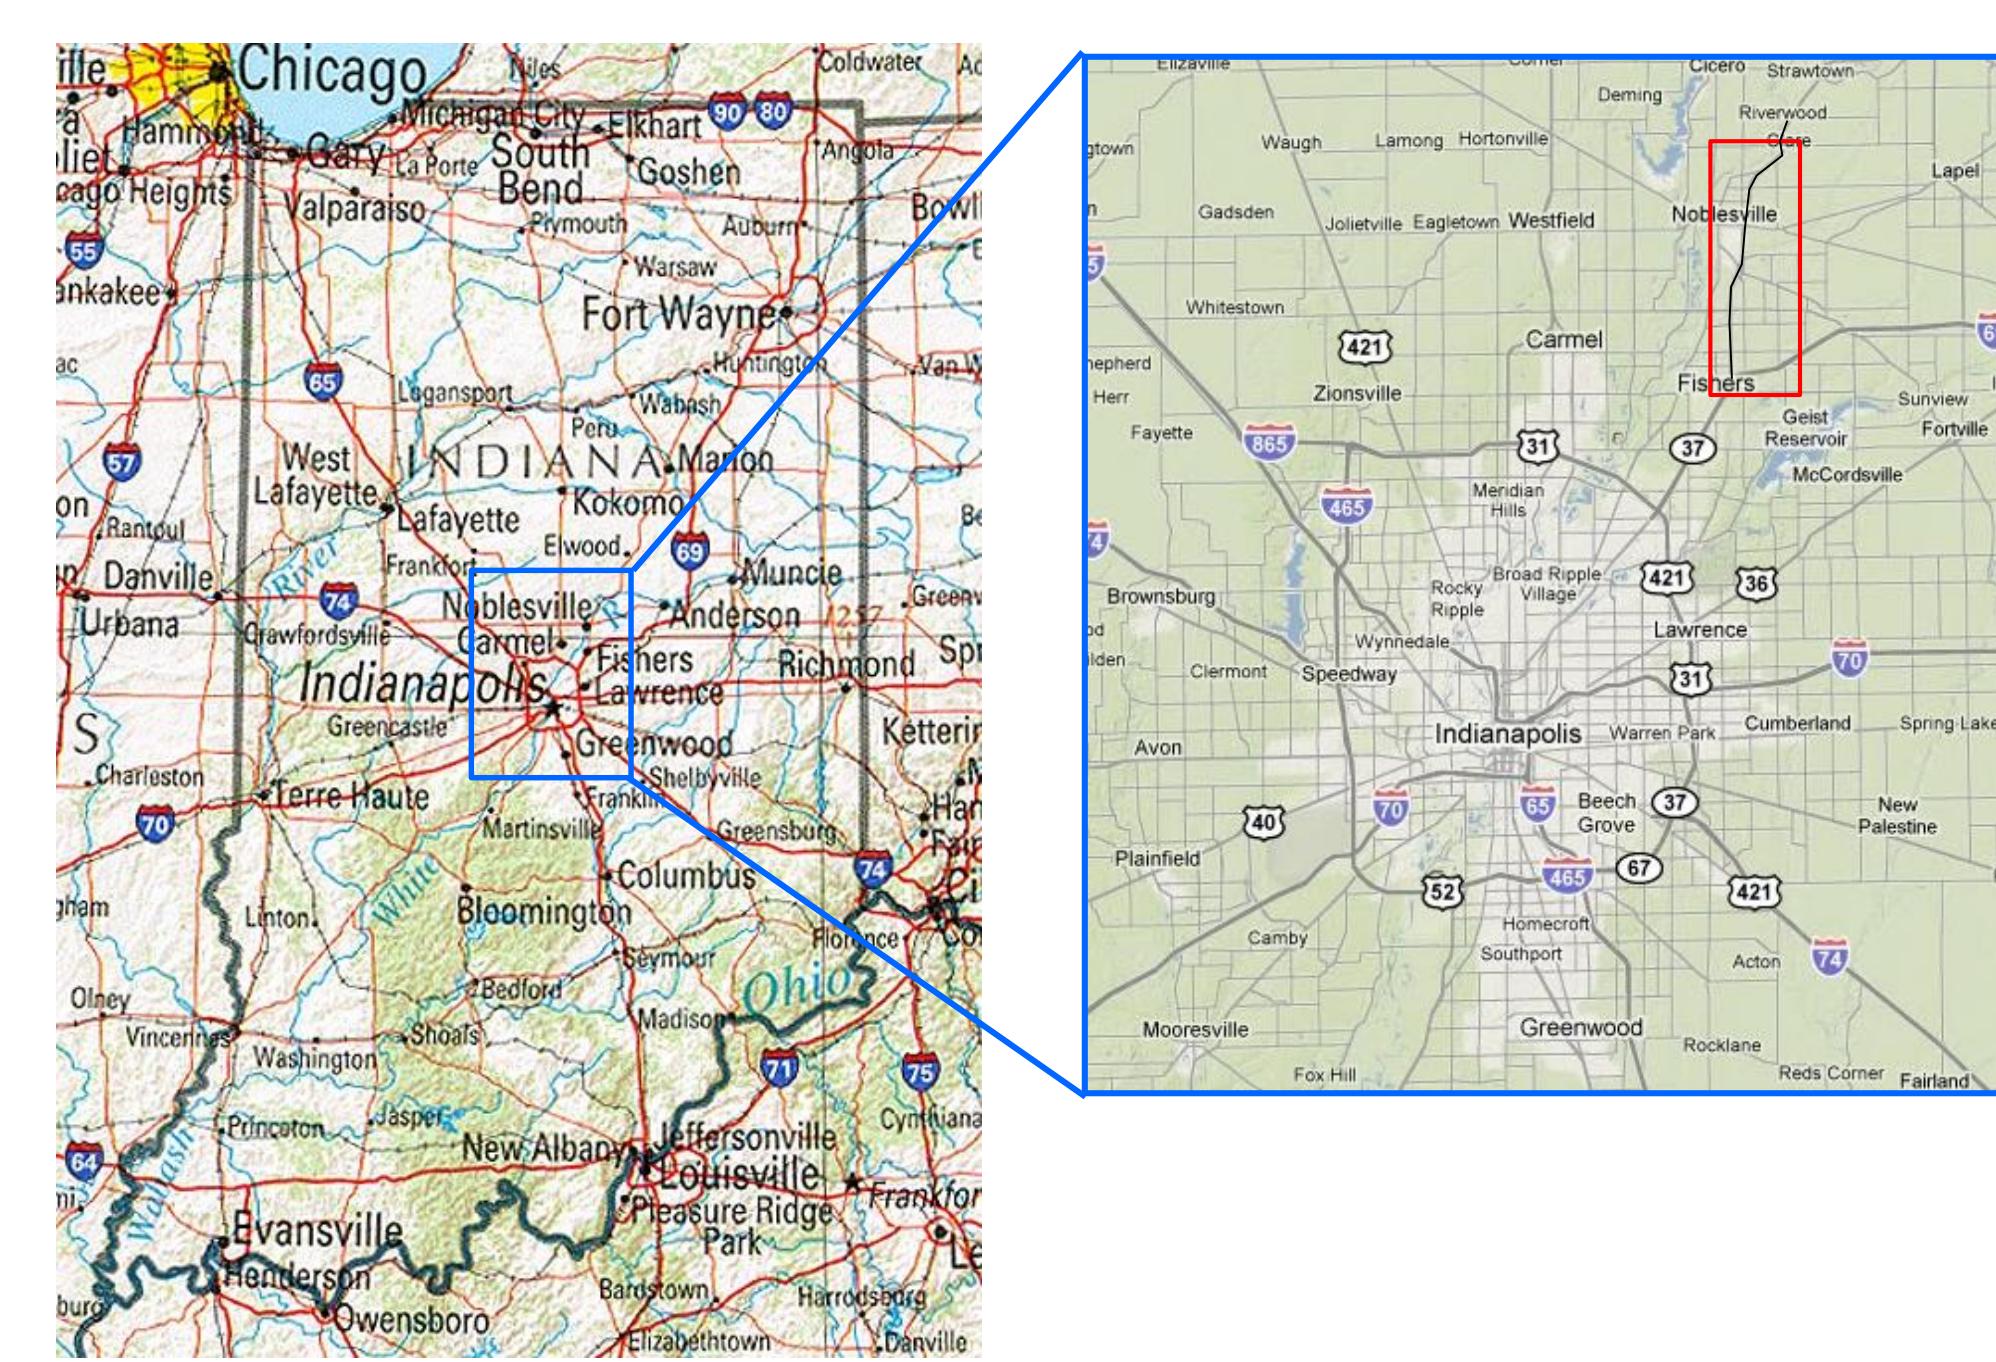

# Analysis of Peer Intersection Data for Arterial Traffic Signal Coordination Decisions


Christopher M. Day<sup>1</sup>, Thomas M. Brennan, Jr.<sup>1</sup>, Hiromal Premachandra<sup>1</sup>, James R. Sturdevant<sup>2</sup>, and Darcy M. Bullock<sup>1</sup>

1: Purdue University; 2: Indiana Department of Transportation


Paper No. 11-0037

## Analysis of Free Operations (2200-2400)

### Southbound

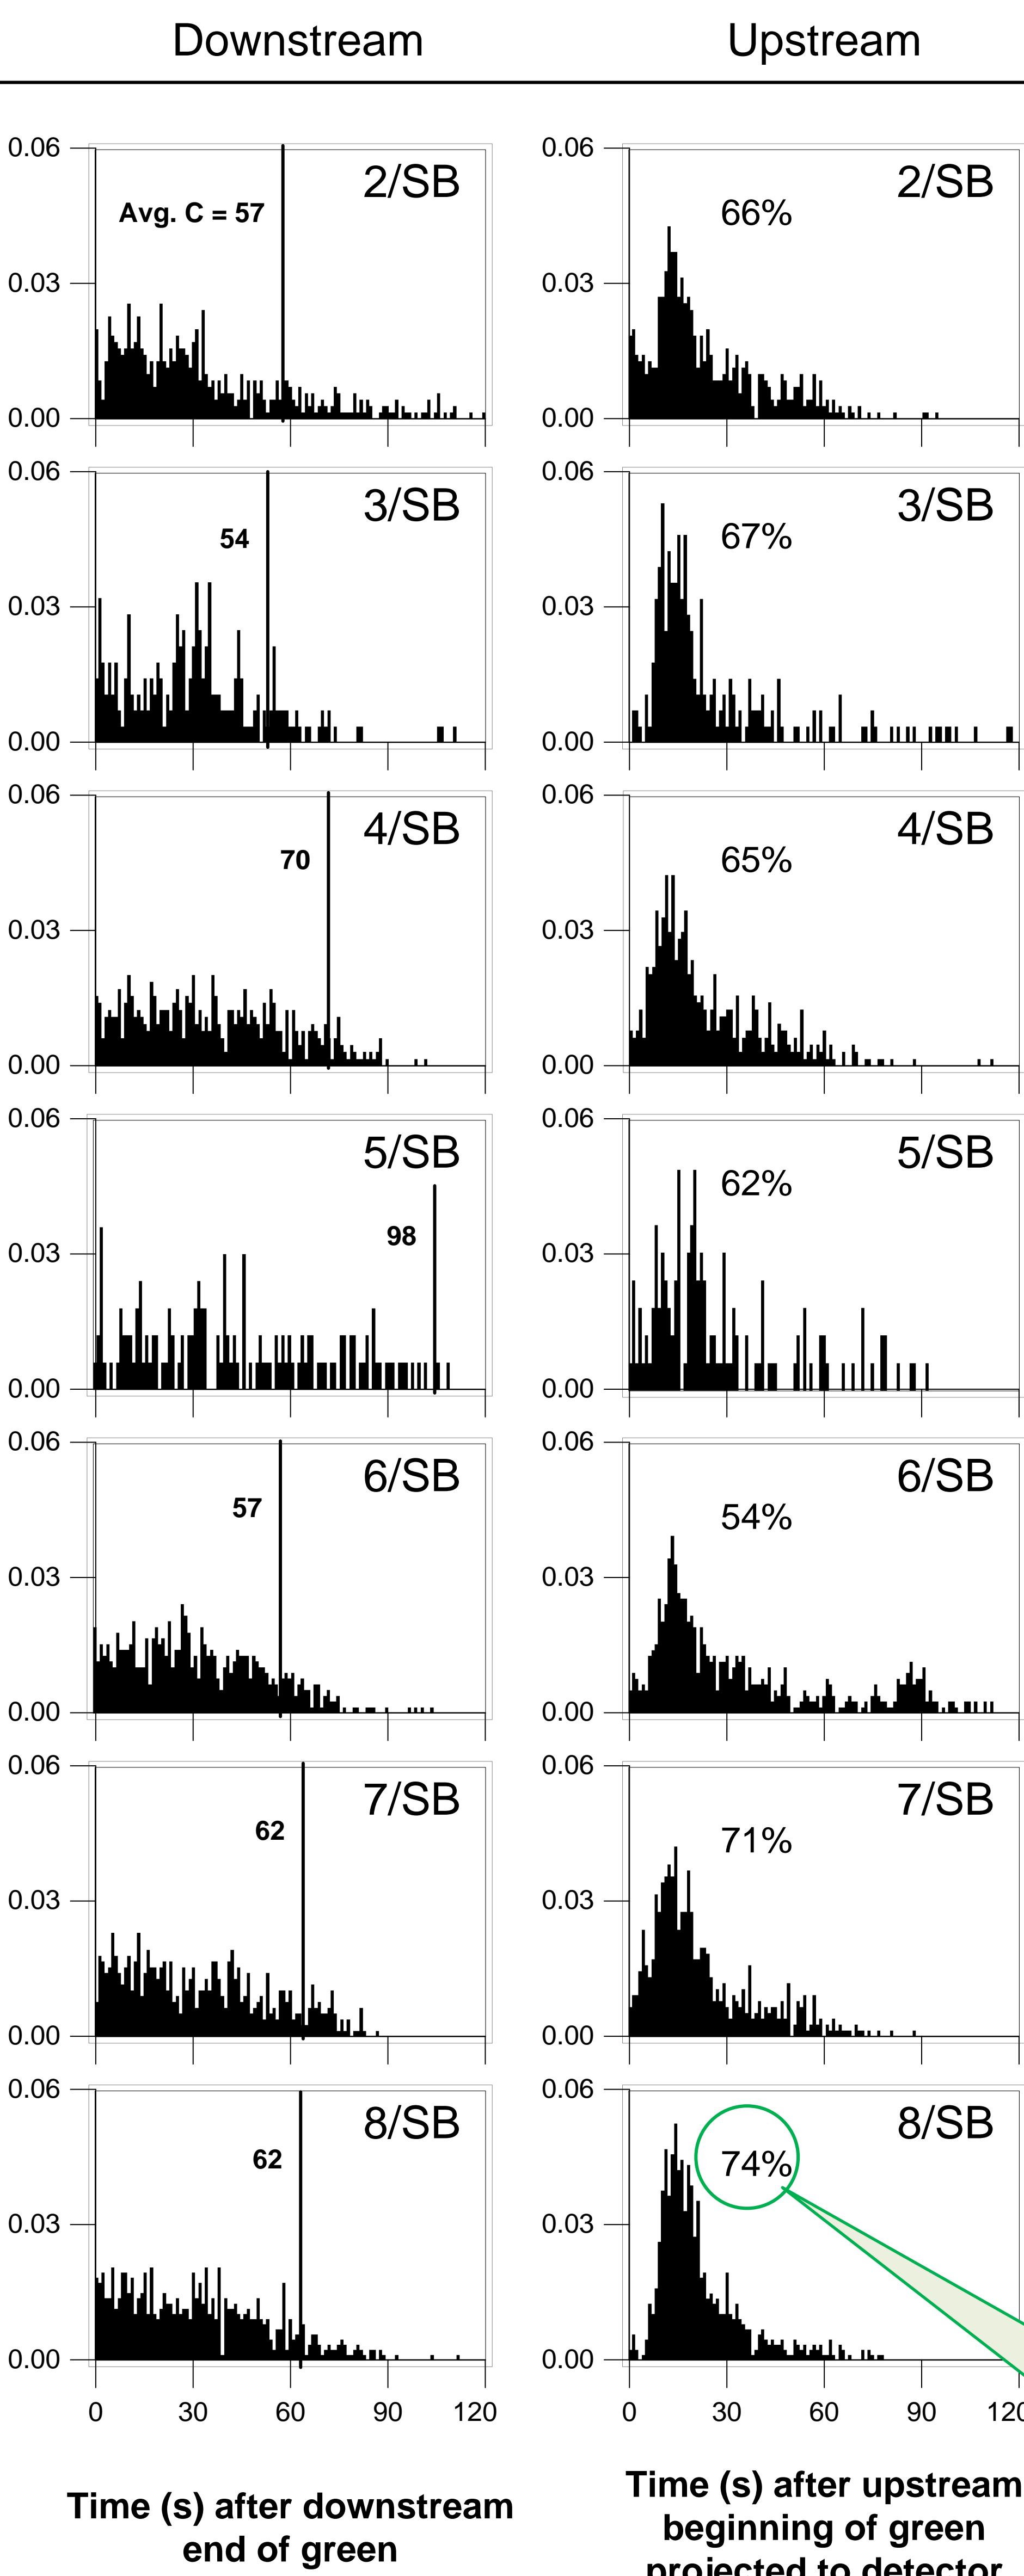


### Northbound

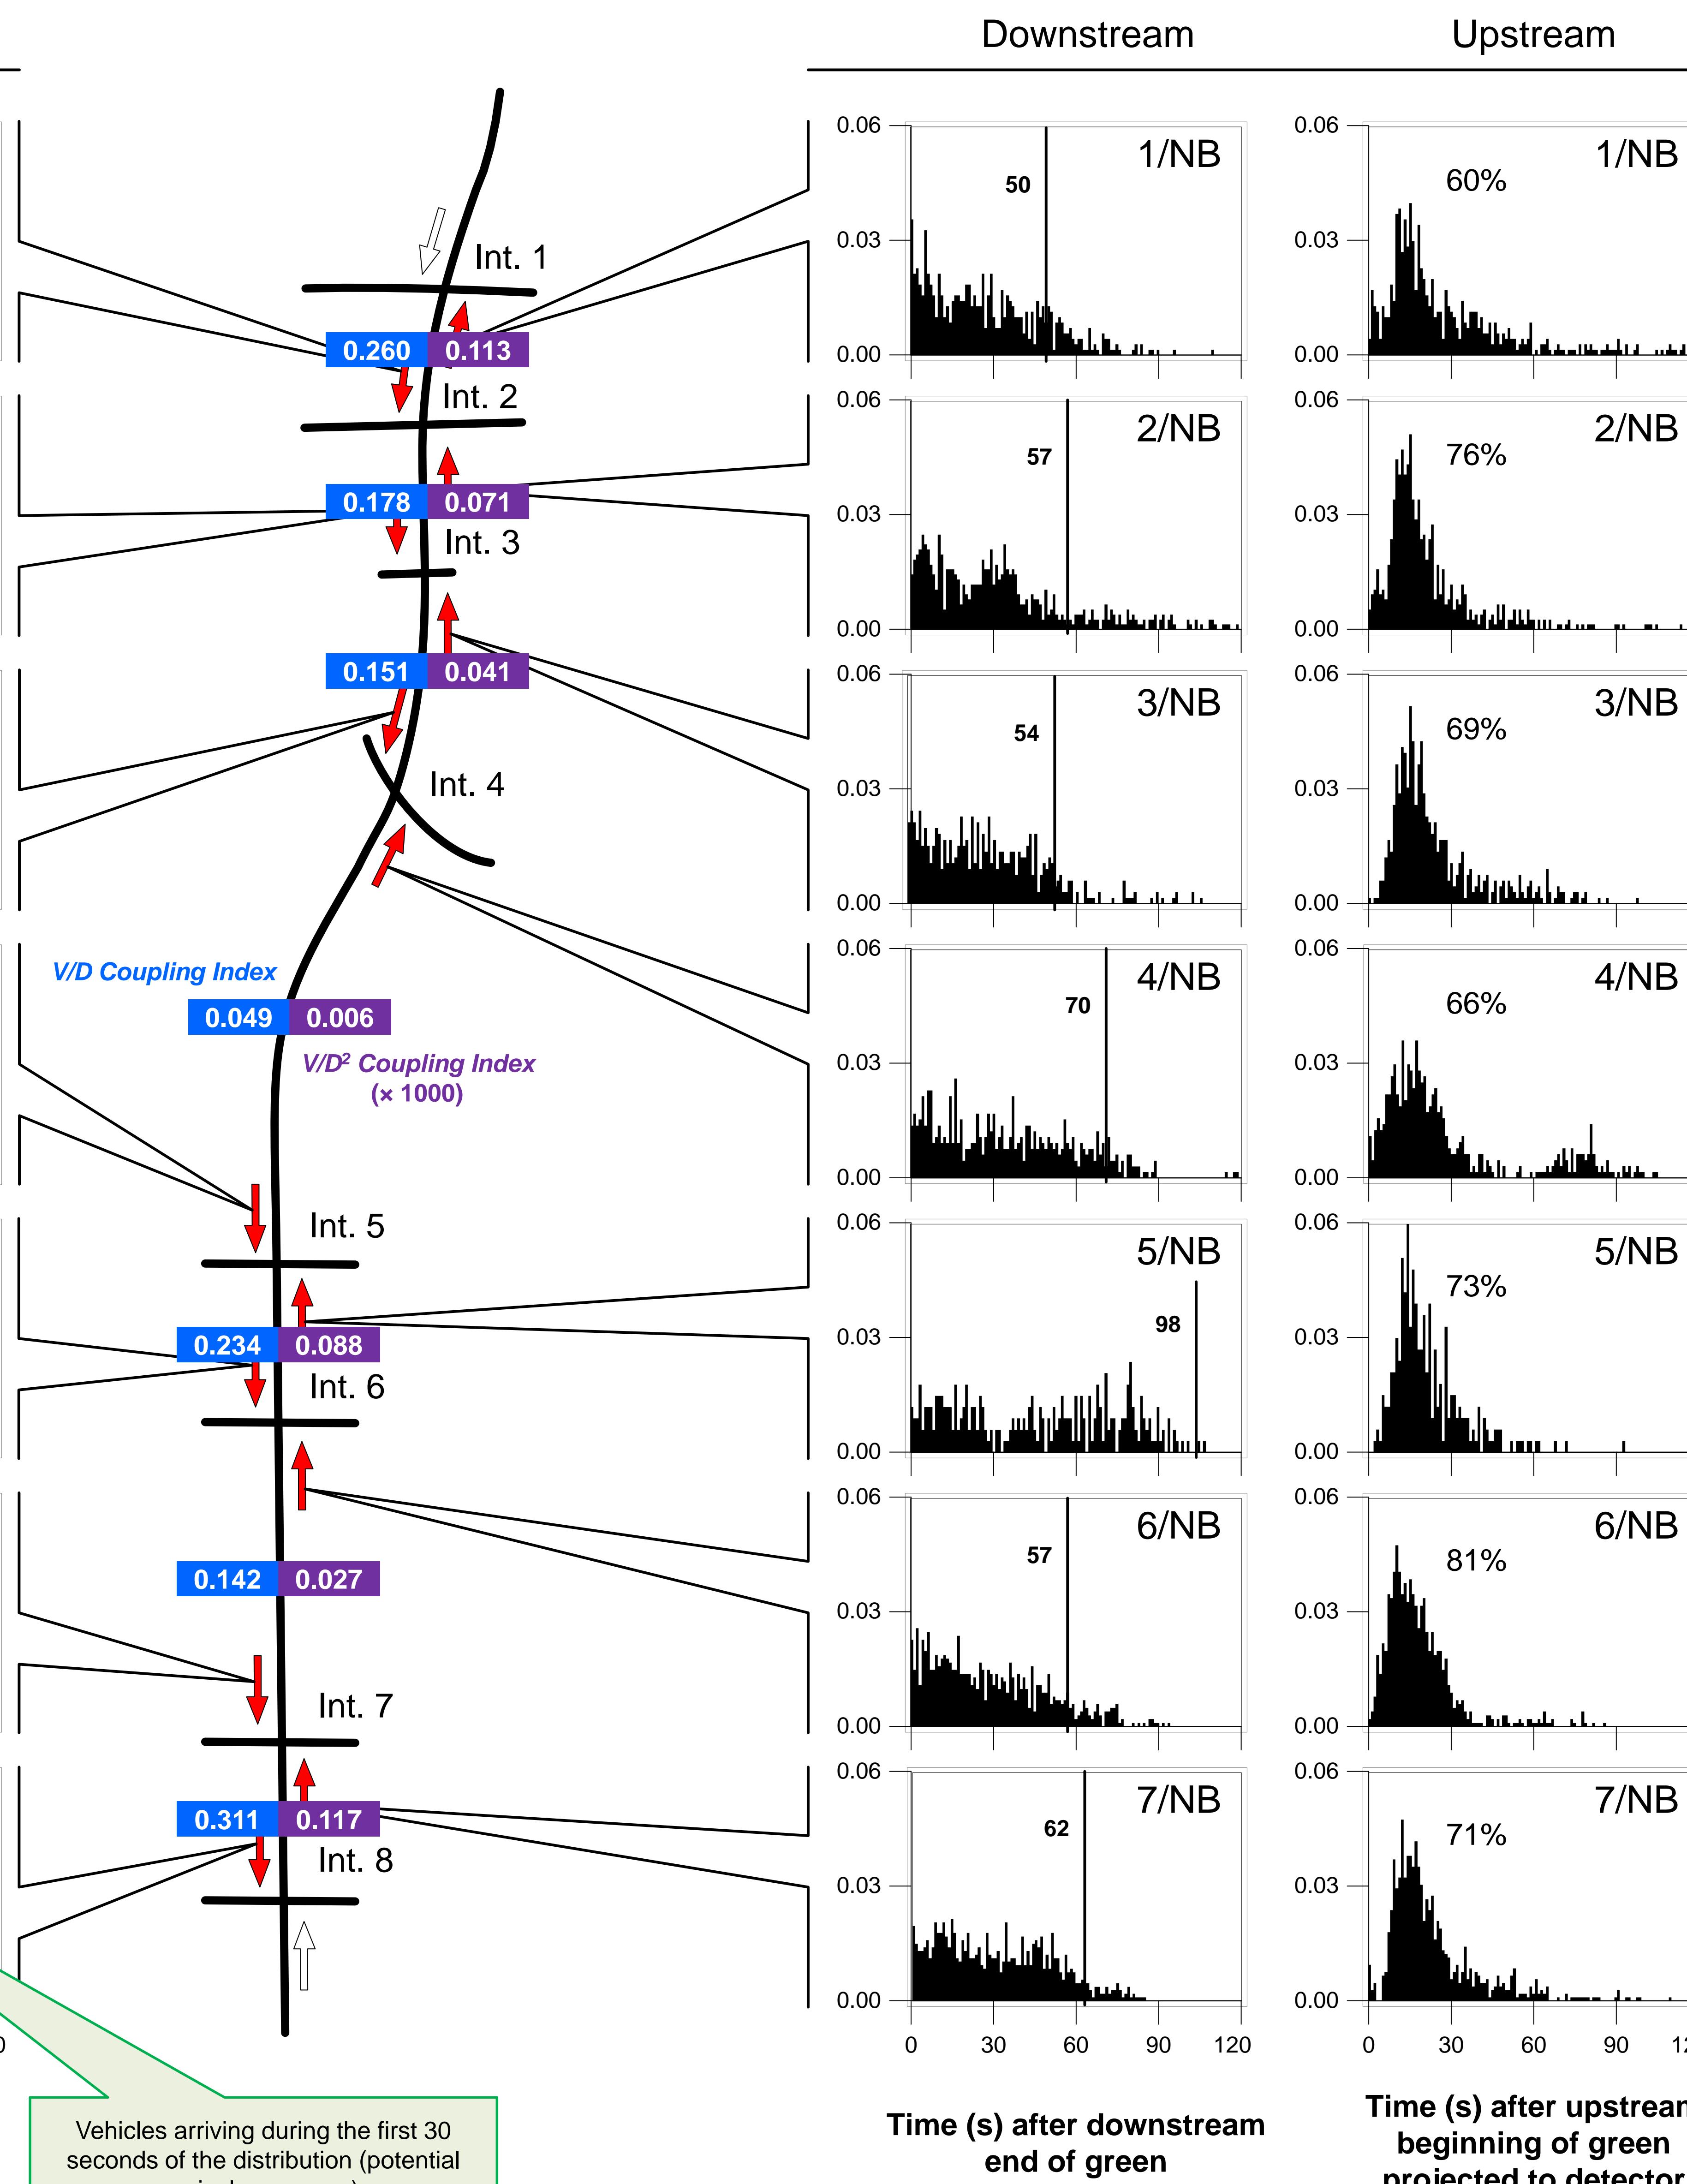


Vehicles arriving during the first 30 seconds of the distribution (potential arrivals on green)

## Implementation of Coordination Plan from 2200-2400


### Change in Cycle Length and Delay

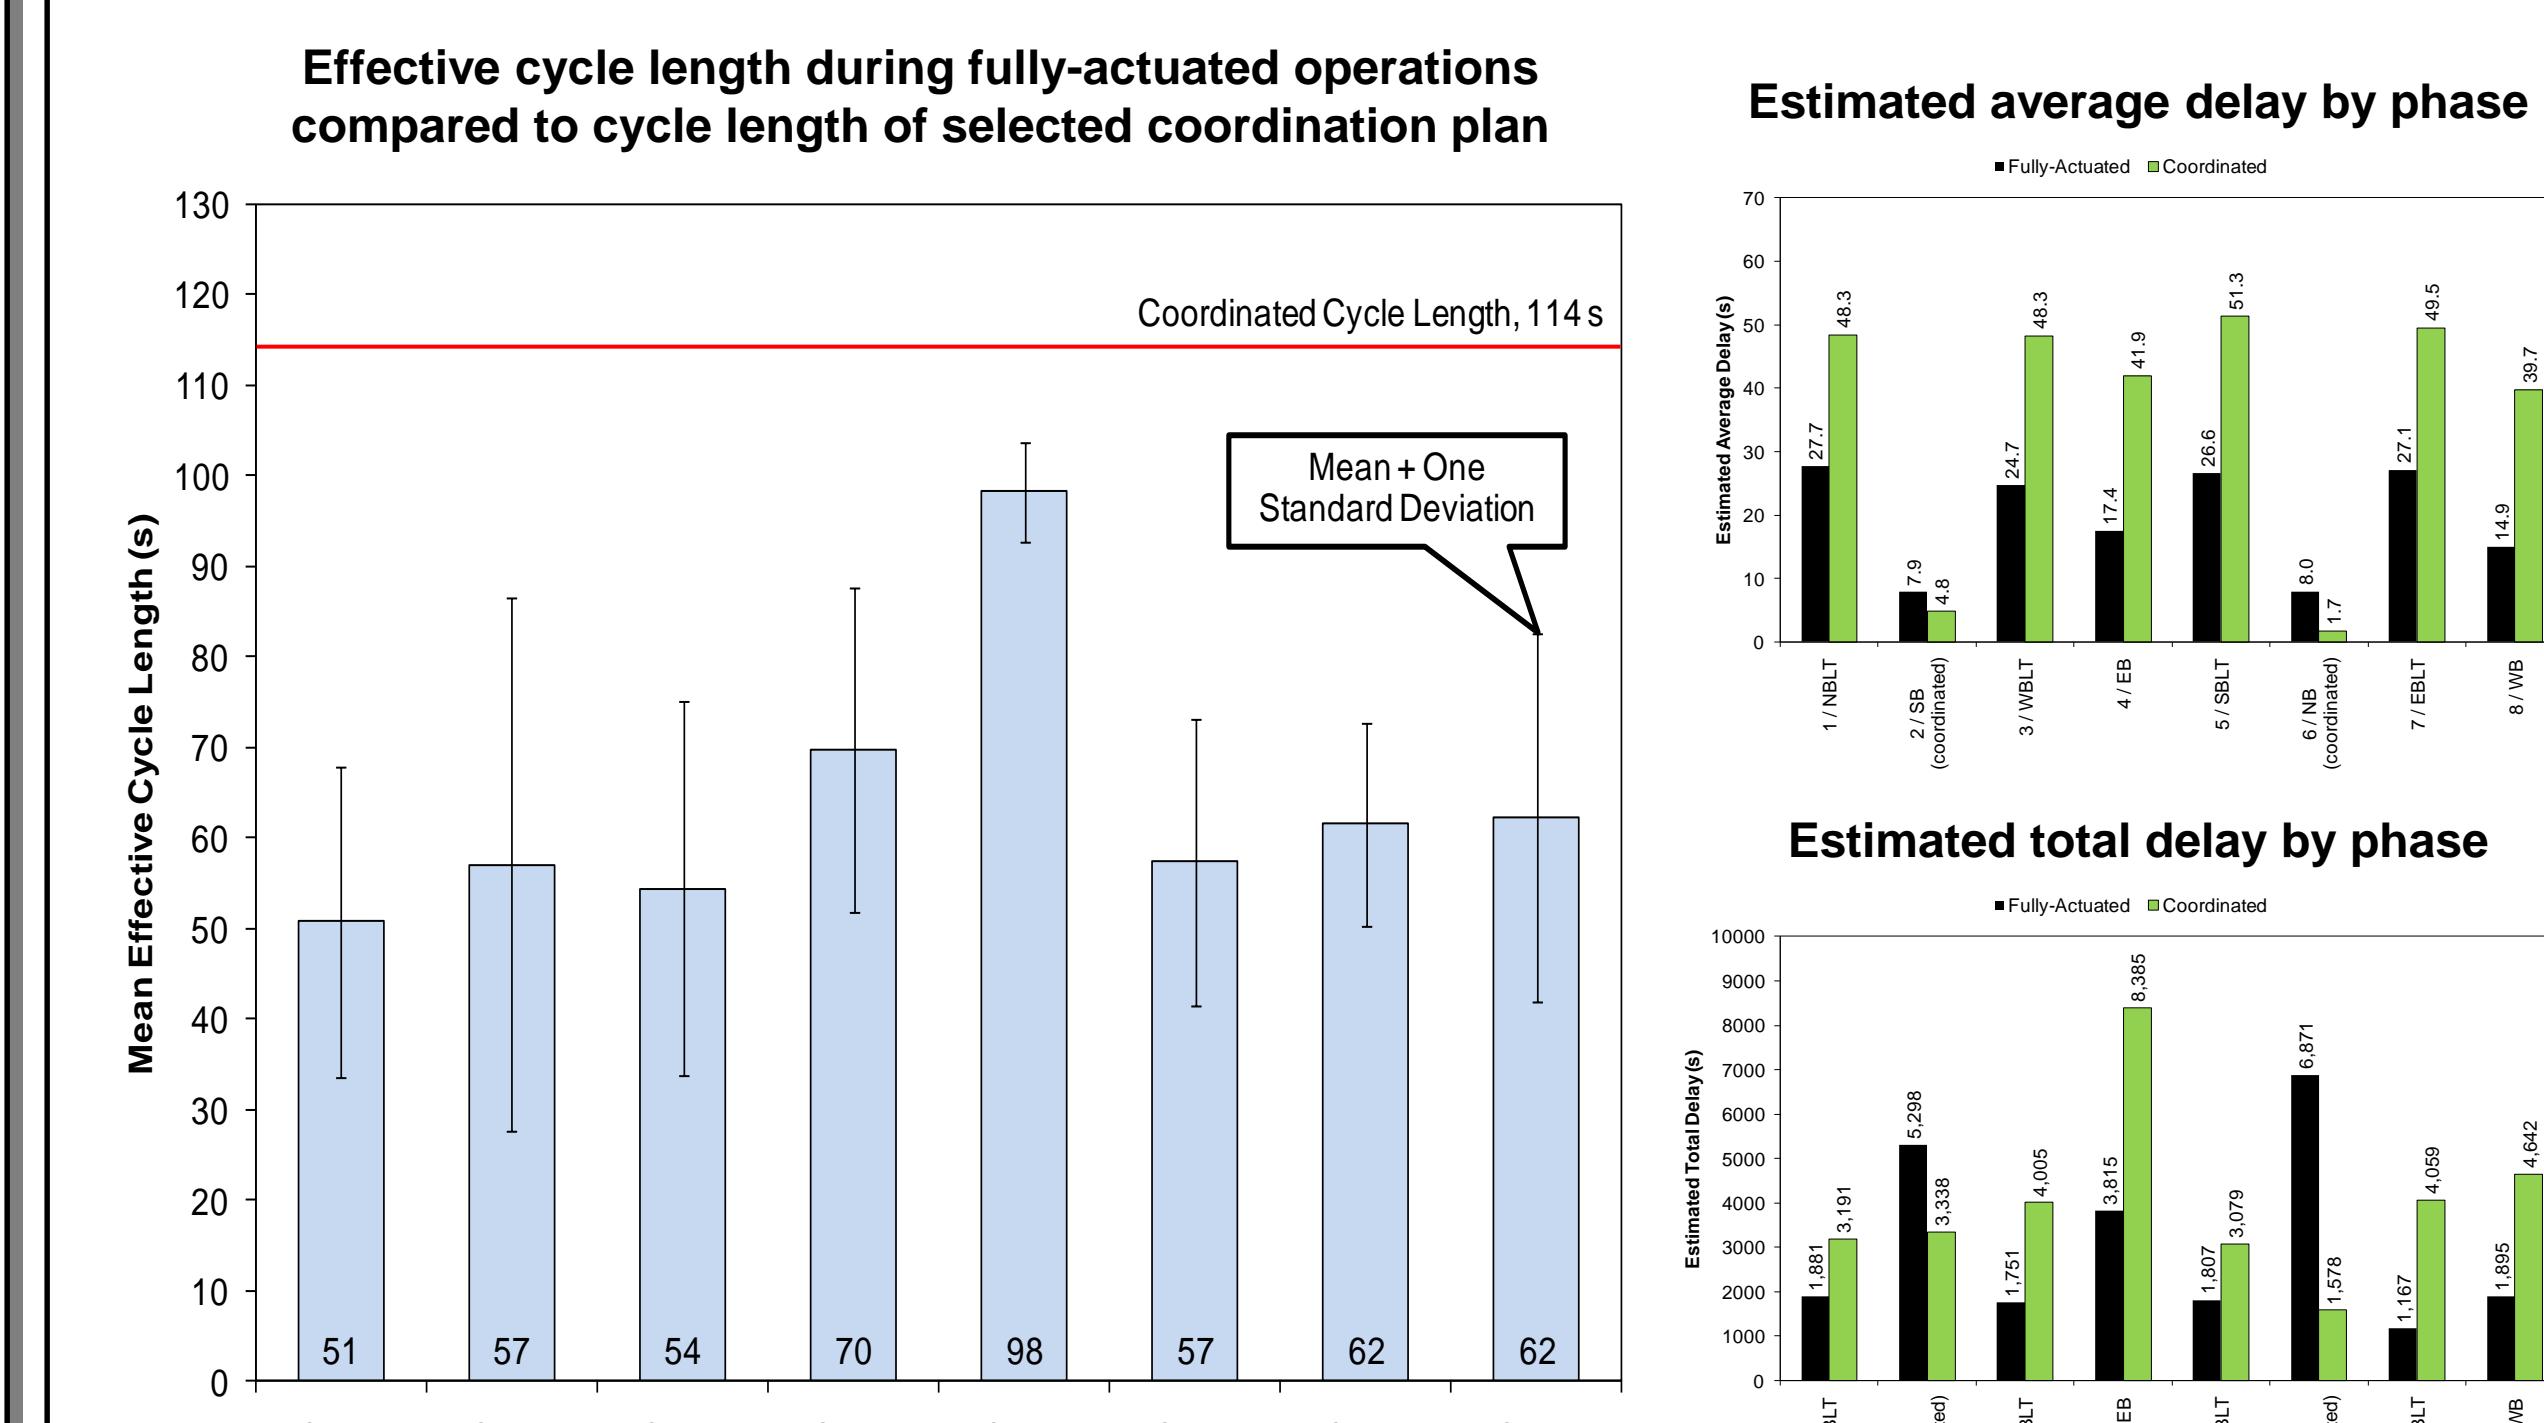

### Percent on Green (POG) at Coordinated Approaches

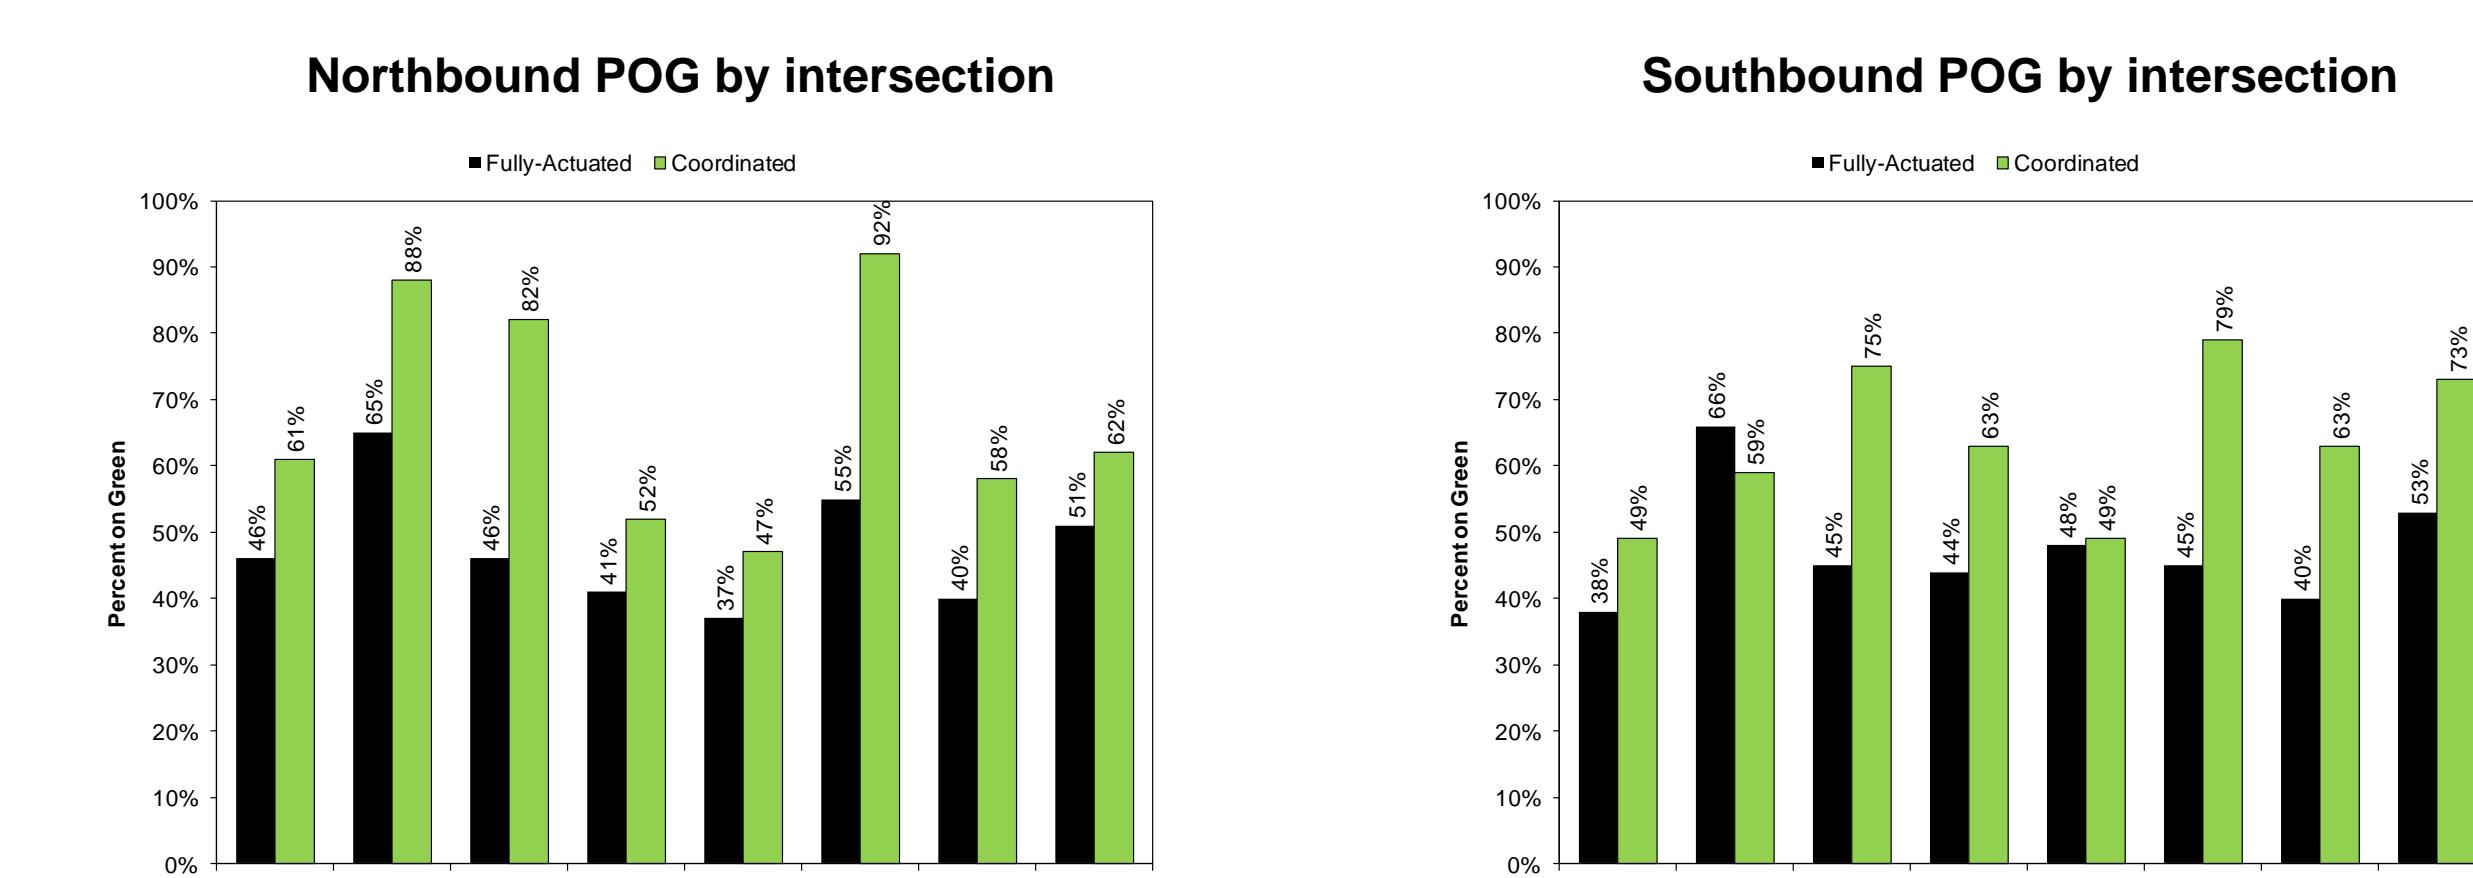

### Arterial Travel Time

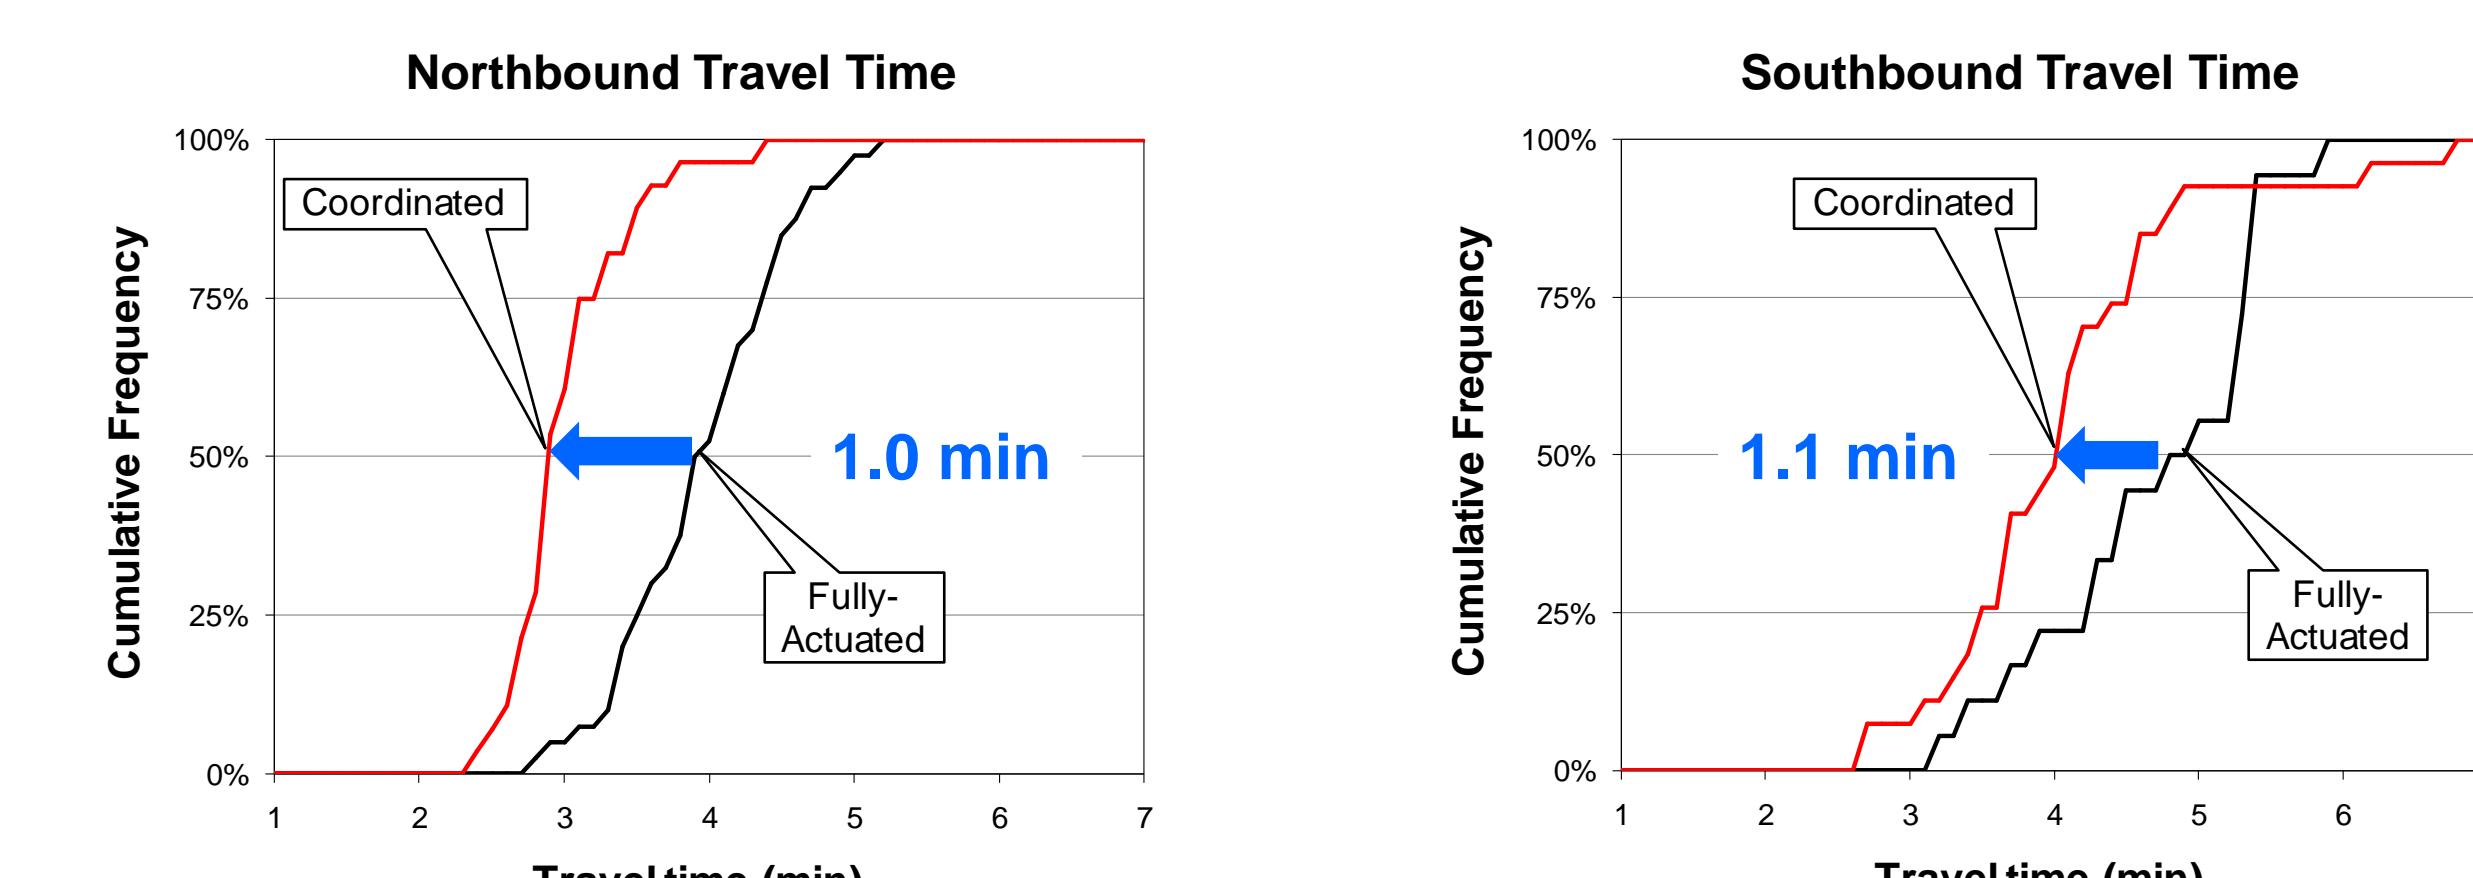

### Conclusions

- Analysis of data showed that platoon profiles can be constructed with peer intersection data during fully-actuated operations with no fixed cycle length. Using only local intersection data, arrivals appeared random on average.
- Extending an existing coordination plan to cover two additional hours formerly operated as fully-actuated resulted in improvement of 1 minute of travel time over 5 miles.
- The shifted time reference technique provides a tool for leveraging field data to make coordination decisions.