


Contents lists available at ScienceDirect

Applied Acoustics

journal homepage: www.elsevier.com/locate/apacoust

Levels and sources of neighbour noise in heavyweight residential buildings in Korea

Sang Hee Park^a, Pyoung Jik Lee^{a,*}, Byung Kwon Lee^b^aAcoustics Research Unit, School of Architecture, University of Liverpool, Liverpool, UK^bKorea Environment Institute, 370 Sicheong-daero, Sejong, 30147, Republic of Korea

ARTICLE INFO

Article history:

Received 11 August 2016

Received in revised form 6 January 2017

Accepted 11 January 2017

Keywords:

Indoor environment

Neighbour noise

Noise level

Noise source

Residential building

ABSTRACT

Indoor noise level is a significant factor for occupants' health, comfort, and psychological well-being in residential buildings; hence the World Health Organization (WHO) recommends guidelines for residential buildings based on the 24-h sound levels. However, only few studies have examined 24-h noise levels and sources from neighbours. Consequently, 24-h noise measurement is necessary for understanding noise level and acoustic comfort in homes. Field measurements were performed in 26 residential apartments in Korea to investigate levels and types of noise from neighbours. Noise recordings were carried out at each residence in unoccupied conditions. The recordings were analysed at 1 min intervals in terms of the A-weighted equivalent (L_{Aeq}) and maximum sound pressure levels (L_{AFmax}) for three different time periods during the day. It was found that 20 apartments met the recommended WHO guidelines during the daytime (07:00–23:00). However, at night (23:00–07:00), eight apartments were in excess of the WHO guideline value in terms of L_{Aeq} while L_{AFmax} exceeded the WHO limit level in 22 apartments during the night. Human footsteps, movement of furniture, and dropping of small items were found to be major sources accounting for approximately 80% of all the noise events. L_{AFmax} of children's jumping and dropping small items were greater than others. Adults' walking showed larger variation of noise levels than other sources. Moreover, it was found that indoor noise levels were not affected by slab thickness and major noise sources.

© 2017 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

1. Introduction

Noise has been considered as a threat to public health and well-being [1]. Several studies have reported that chronic exposure to noise can cause annoyance, sleep disturbance, and health problems. Miedema [2] argued the significant effect of transportation noise on the prevalence of noise annoyance. It has been known that noise has not only auditory health effects (e.g., hearing loss, noise-induced hair-cell damage) but also various non-auditory health risks such as daytime sleepiness or it can impair cognitive performance in schoolchildren [3,4]. It was also reported that aircraft and road traffic noise has a high impact on cardiovascular health (e.g., high blood pressure, ischemic heart diseases) [5].

However, the majority of work has mainly focused on environmental noise such as road traffic noise and railway noise. In contrast, few studies have investigated the impact of neighbour noise on residents' psychophysiological well-being. Maschke

et al. [6] conducted a cross-national questionnaire surveys in eight European cities and found that annoyance caused by neighbour noise increased health risks in the cardio-vascular system. But noise exposure level at home is unknown because they did not perform noise measurement. Pujol et al. [7] investigated children's exposure to noise at home in an urban area by measuring long-term indoor noise levels at homes. They were mainly concerned with noise from outside rather than indoor noise sources, and noise sources were not identified during the measurements [7]. Therefore, it is still unknown which indoor noise sources contribute to noise levels in residential buildings.

In order to examine the health effects of environmental noise exposure, 24-h noise measurements have commonly been conducted [8,9]. Several noise descriptors such as day-night level (DNL) and day-evening-night level (DENL) have been introduced to describe overall noise exposure for 24 h. Noise measurements for 24 h or working hours have also been occasionally performed in non-residential buildings such as hospitals and offices [10,11]. On the other hand, very little data exists describing 24-h noise exposure and most previous studies on residential buildings measured only short-term indoor noise levels. Jeon et al. [12] measured

* Corresponding author at: Acoustics Research Unit, School of Architecture, University of Liverpool, Liverpool L69 7ZN, UK.

E-mail address: p.j.lee@liverpool.ac.uk (P.J. Lee).

noise levels while the apartment was empty and the windows were closed. Lai et al. [13] measured the noise levels for 15 min in 32 residential apartments and the average noise levels for 15 min were found to be 67.1 dBA with a variation from 52 to 77.9 dBA. Noise levels for one hour were also measured in urban residential buildings under a natural ventilation condition [14]. Similarly, Pujol et al. [7] measured the noise levels in bedrooms and the main rooms to analyse children's exposure to environmental noise at home. They found the averages of noise levels for day, evening, and night in 44 dwellings were 51.3, 53.6, and 36.9 dBA, respectively. However, short-term field measurements only represent a snapshot condition of an indoor built environment at a specific time. In addition, the World Health Organization (WHO) recommends guidelines for residential buildings in terms of the average sound levels for 16 h (daytime) and eight hours (night) [1]. Therefore, 24-h noise measurement in residential buildings is required to improve our understanding of noise level and acoustic comfort at homes.

The majority of dwelling types in South Korea are multi-story and heavyweight (i.e. reinforced concrete) apartment buildings [15]. In multi-story buildings, residents are easily exposed to a number of noises from their neighbours, thus a large number of complaints regarding dwelling noise have been raised by apartment residents [15]. In order to resolve noise problems in apartment buildings, multi-layered floor structures, consisting of a concrete slab, resilient isolator, lightweight concrete, and finishing mortar, have been used. In addition, the Korean Government strengthened the domestic regulations in 2005 and 2007 by increasing the concrete slab thickness to 180 mm and 210 mm, respectively [16] because the slab thickness of the apartments mostly ranged between 135 mm and 150 mm before 2005. Empirical studies [17,18] supported the decision of the Korean Government reporting that the impact sound insulation of the floors had improved with the increases of the concrete slab thickness. According to Jeong et al. [18], a 30 mm increase of slab thickness led to an increase of heavyweight impact sound insulation of 2 dB. However, contrary to expectations, the complaints of neighbours' noises have still increased; number of complaints about floor impact sound recorded in the Ministry of Environment of Korean Government increased from 114 in 2005 to 341 in 2010. However, the complaints were also raised from residents living in old apartments built before 2005, so it is still unknown whether or not increased slab thickness is effective in reducing indoor noise levels in real buildings.

The present study aims to determine noise levels and noise sources from neighbours in residential buildings. It is hypothesised that noise levels are influenced by noise sources and that indoor noise levels are hypothesised to be affected by slab thickness. To validate these hypotheses, 24-h noise measurements were conducted in the living rooms of 26 residential apartments. During the measurements, the apartments were empty and windows were closed to minimise the influence of outdoor noise on indoor noise levels. The recording were analysed in terms of the equivalent and maximum noise levels (L_{Aeq} and L_{AFmax} , respectively) based on three time periods of the day: day (07:00–19:00), evening (19:00–23:00), and night (23:00–07:00). Furthermore, noise sources from neighbours were identified by listening to the recordings and the levels of each noise source were analysed.

2. Method

2.1. Sites

Twenty-six reinforced concrete apartments were selected for the 24-h noise recordings. Of these, 15 were in Seoul and others

were located in cities nearby Seoul. As listed in Table 1, the net floor areas of the apartments ranged from 42.0 to 212.5 m². The number of bedrooms in each home varied from two to five. The house age also varied; the oldest apartment was built 32 years ago and the latest one was just 3 years old. Slab thicknesses of the apartment buildings varied from 135 mm to 210 mm; the apartments built before the domestic regulation was strengthened in 2005 had slab thickness of 135 mm and 150 mm. Sizes of groups were quite similar; 14 sites were classified into Group 1, while Group 2 had 12 sites. This distinction was made because the Korean Government introduced a domestic regulation requiring construction companies to increase the concrete floor slab thickness by 30 mm at that time. Most homes under measurement were away from traffic roads, which provides a relatively consistent environmental noise condition.

2.2. Procedure

Noise levels in living rooms were measured under unoccupied conditions from the morning to the following morning for 24-h periods while the residents were vacated. The windows in the living rooms and balconies of all the homes were closed during the measurements to minimise the effects of outdoor noise. All the windows were double glazed and the balconies were adjacent to the living rooms at all sites; thus, it was expected that the influence of outdoor noise on indoor noise levels is limited. The measurements were performed only during weekdays to avoid influences of neighbour's daily activities on the recordings. The noise was recorded using a half-inch free field microphone (B&K Type 4189) positioned at a sitting position in the living rooms. The microphone was directly connected to the noise monitoring system (DUO, 01 dB) which has the calibrated recording feature as all-in-one device. The noise levels were monitored continuously for 24 h and noise was recorded whenever the noise level exceeded 30 dBA (L_{Aeq}) at a sample rate of 51.2 kHz. The recordings were then transferred to a laptop computer. Before the data collection, the entire measurement system was calibrated using an acoustic calibrator (B&K Type 4280).

2.3. Data analysis

One-minute interval noise level data were exported from the noise monitoring system (DUO, 01 dB). The data were then processed using dBTrait software from 01dBmetravib. According to the WHO guidelines [1], all noise events for 1 min, and 2) A-weighted maximum sound pressure level (L_{AFmax}) of the noise event. The L_{AFmax} was calculated using the 'fast' time constant for analyses of the recorded noises. The WHO guideline recommends the noise levels for daytime (07:00–23:00) and night time (23:00–07:00); however, in the present study, 24-h period is classified into the day (07:00–19:00), evening (19:00–23:00), and night (23:00–07:00) according to ISO 1996-2 [19].

In order to identify the noise source, the occurrence of the noise events was defined as an event exceeding the WHO recommended values for day and night noise in dwellings. During the daytime, the recommended values are 35 dBA (L_{Aeq}), while the values for the night are 30 dBA (L_{Aeq}) and 45 dBA (L_{AFmax}). The present study also set the threshold L_{AFmax} value for the daytime as 50 dBA, which is adopted from the domestic guidelines of the Korean Government. Firstly, the noise levels exceeding the recommended value were identified based on the one-minute interval noise level data. Secondly, the noise sources and lengths of the noise events were then manually recognised by listening to small sections of the recordings and visually observing time histories as an interval of 125 ms. All airborne and structure-borne noise events were identified; of structure-borne noise sources, heavyweight and

Table 1
Information of apartments at which indoor noise levels were measured.

No.	House age [year]	Floor area [m ²]	Number of bedrooms	Number of floors ^a	Slab thickness [mm]	Distance from road [m]	Number of lanes per side
1	23	42.0	2	9/17	150	79	2
2	27	62.6	2	1/5	135	80	3
3	10	107.7	3	4/23	180	51	1
4	5	101.5	3	7/11	210	123	4
5	4	131.5	3	14/17	210	61	3
6	11	99.8	3	7/18	180	51	2
7	13	88.0	3	18/22	150	56	1
8	12	151.0	4	3/13	150	25	4
9	16	108.5	3	13/24	150	92	3
10	12	106.9	3	7/16	150	106	4
11	11	107.6	2	11/42	180	41	4
12	13	96.7	3	4/7	150	46	3
13	11	84.9	3	16/19	180	42	1
14	17	84.5	3	4/15	150	29	2
15	17	109.6	3	13/22	150	37	2
16	3	110.1	3	2/13	210	110	3
17	8	126.6	4	20/21	180	171	5
18	11	114.3	3	12/28	150	87	3
19	32	198.1	5	12/15	135	181	2
20	26	97.0	3	8/15	135	35	1
21	18	107.3	3	10/19	150	31	4
22	7	149.1	4	3/12	180	22	1
23	6	212.5	4	32/34	180	75	3
24	24	193.7	5	2/15	150	26	1
25	10	106.2	3	10/29	150	70	3
26	12	110.0	3	9/15	150	33	1
Mean	13.8	115.7	3.2	–	159.8	67.7	2.5
Standard deviation	7.5	38.8	0.5	–	22	42.6	1.2
Minimum	3	42.0	2	–	135	22	1
Maximum	32	212.5	5	–	210	181	5

^a The former number is the floor on which the apartment is located; the latter is the total number of the building floors.

lightweight impact sources were also recognised through repetitive manual listening. Several sources were identified based on objective characteristics. For example, adults' walking and children's running were recognised mainly based on step frequency (speed of footstep) and interval between the steps. In addition, other noise sources before and after the footsteps were considered because children's running were usually accompanied by other activities such as playing with toys. Each noise source had a different length; therefore, the noise levels of each source were converted into an A-weighted sound exposure level (L_{AE}), which is the equivalent sound level during the event normalised to a period of one second.

3. Results

3.1. Noise levels

Table 2 lists percentage, median, minimum, and maximum values of $L_{Aeq,1min}$ and L_{AFmax} for the 24 h, day, evening, and night. The data of this study were non-normally distributed ($p = 0.05$, the Shapiro–Wilk test); therefore, the presentation of median values were used throughout the current paper since they are helpful for describing data which is not normally distributed. The median values for L_{Aeq} for 24 h, day, and evening were quite similar and slightly greater than 30 dBA, whereas that of night was less than 30 dBA. It was found that the variation in the noise levels was greatest in the evening followed by night and day. All the outliers above the 5% percentiles were due to loud announcements from the public address (PA) system installed in each home. The median of the L_{AFmax} for 24 h was the greatest, followed by day, evening and night. The boxplot of the L_{AFmax} for 24 h shows the highest median value as it contains all the data of L_{AFmax} for whole day. The medians for 24 h and day were greater than 60 dBA, whereas the median of night was less than 50 dBA. The variation in noise

levels at night was much shorter than other periods. For the $L_{Aeq,1min}$, most levels were below 40 dBA, and only less than 1% exceeded 40 dBA. Contrary to the L_{Aeq} , the percentage of the L_{AFmax} exceeding 40 dBA significantly increased. The levels between 30 dBA and 40 dBA showed the highest percentages, and more than 20% of the levels were greater than 40 dBA in the daytime and evening.

3.2. Noise sources

Noise sources and their number of occurrences from 26 apartments are listed in Table 3. Mean and standard deviation are also listed to show how many times each source is heard from each apartment. The noise sources were classified into airborne and structure-borne sound sources according to the sound transmission methods [17]. Five sources were airborne, and these were public address (PA) system, domestic equipment, voice, and other sounds such as musical instruments. It was found that a total of 77 occurrences were produced by airborne sound sources, and the number of occurrences of children's voice was the largest. Similarly, the structure-borne sound source had nine sub-sources such as footsteps and movement of furniture. The number of noise events due to the structure-borne sound sources was 495, which accounts for 86.5% of all noise events. This shows that structure-borne noise sources are dominant in residential apartments. The number of occurrences for movement of furniture was the largest, followed by dropping small items, children's running, and adults' walking. It was observed that only five noise sources had mean values which are greater than 1. This indicates that other noise sources occurred less than once during a 24-h period. However, low number of occurrences does not guarantee acoustic comfort in apartments because only noise events exceeding WHO recommended noise levels was counted in the present study. Table 3 included all the noise sources from above and the neighbouring

Table 2Percentages, median, minimum, and maximum of one-minute A-weighted equivalent sound levels ($L_{Aeq,1min}$) and A-weighted maximum sound levels (L_{AFmax}).

		Overall 24-h	Day (07:00–19:00)	Evening (19:00–23:00)	Night (23:00–07:00)
$L_{Aeq,1min}$	% \leq 30 dBA	57.6	54.1	56.3	63.7
	30 < % \leq 40 dBA	42.1	45.6	43.5	36.3
	40 < % \leq 50 dBA	0.2	0.3	0.1	0.1
	% > 50 dBA	0	0	0.1	0
	% > threshold		11.1	10.9	36.4
	Median	30.3	30.6	30.1	29.2
	Minimum	20.8	20.2	20.9	19.4
	Maximum	45.7	46.9	48.6	36.2
L_{AFmax}	% \leq 30 dBA	20.7	13.6	14.7	34.4
	30 < % \leq 40 dBA	63.1	66.2	63.8	58.2
	40 < % \leq 50 dBA	14.6	18.2	19.3	6.8
	% > 50 dBA	1.6	2.1	2.2	0.5
	% > threshold		2.1	2.2	2.1
	Median	61	59.7	54.5	49.7
	Minimum	48.8	48.8	45.9	43
	Maximum	87.1	87.1	86.6	70.2

Table 3

Number of occurrence and length of each noise event.

Noise source			Number of occurrence				Length		
			Number	%	Mean	Standard deviation	Median	Minimum	Maximum
Airborne sound source	PA system		11	1.9	0.4	0.9	62.5	43	113.8
	Domestic equipment		2	0.3	0.1	0.4	21.5	18.8	24.3
	Voice	Adults	12	2.1	0.5	1.2	22.8	3	556.8
		Children	37	6.5	1.4	4.5	56	4.5	1020
	Others (e.g., musical instrument)		15	2.6	0.6	1.4	61.8	8.3	428.5
	<i>Sub-total</i>		77	13.5					
Structure-borne sound source	Heavyweight impact	Adults' walking	65	11.4	2.5	4.1	18.4	1.3	302
		Children's running	82	14.3	3.2	7.4	32	3	1683
		Children's jumping	12	2.1	0.5	1.1	5.4	3	16
	Lightweight impact	Movement of furniture	159	27.8	6.1	8.3	6	1.3	212.5
		Dropping small items	99	17.3	3.8	5.1	5	1.3	82.5
		Door banging	41	7.2	1.6	1.7	3.3	1.5	4.75
		Scraping of small items	16	2.8	0.6	1.3	50.5	5	256.3
		Plumbing system	13	2.3	0.5	1.1	108	45.8	314.5
		Hammering	8	1.4	0.3	1.6	43.4	28.3	110
		<i>Sub-total</i>	495	86.5					
<i>Total</i>	572	100							

units on the same floor and hallway. The majority of the noise sources were coming from the upstairs. In particular, all the heavy-weight and lightweight impact sounds were generated by the residents above except for the door banging. In total, 17 of 41 door banging sounds (41.5%) came from the hallway and the neighbours on the same floor. Therefore, it was assumed that the inside noise levels were dominated by the structure-borne noises from upstairs. However, it was not possible to identify where the airborne sounds came from by listening to the recordings in the present study.

Durations of each noise source are also described in Table 3. The lengths of each noise source are quite different. The length of door banging was very short (median = 3.3 s), whereas noise from the plumbing system had a long duration (median = 108.0 s). Other sources such as musical instruments were found to have the largest duration. Among the structure-borne noise sources, the longest noise event was children's running at 1683 s.

Fig. 1 shows the number of occurrences for day, evening, and night across noise sources. It was found that the majority of noise events occurred during the daytime. This was mainly because the

period of daytime is the longest, and the activities of the neighbours are most active at this time. For instance, movement of furniture, dropping small items, and children's running were dominant in the daytime. The number of occurrences of movements of furniture was the largest during the day, but they were also observed during the evening and night. In particular, the noise events that occurred by movement of furniture consisted of various movements noise events of furniture (e.g., scraping noises of table or chairs, impact noises of chairs etc.) while most of the events at night were shorter impact noises of chairs. The noise from the movement of furniture also lasted two times longer during the day time than night.

Four major noise sources most frequently heard accounting for 75.8% of all noise events were chosen to be investigated: (1) adults' walking, (2) children's running, (3) movement of furniture, and (4) dropping of small items. Fig. 2 represents the number of occurrences of four sources across time of day at an interval of one hour. The adults' walking mostly occurred during the daytime, in particular it was the most frequently occurring between 07:00 and 10:00. This maybe because adults' activities are dominant because

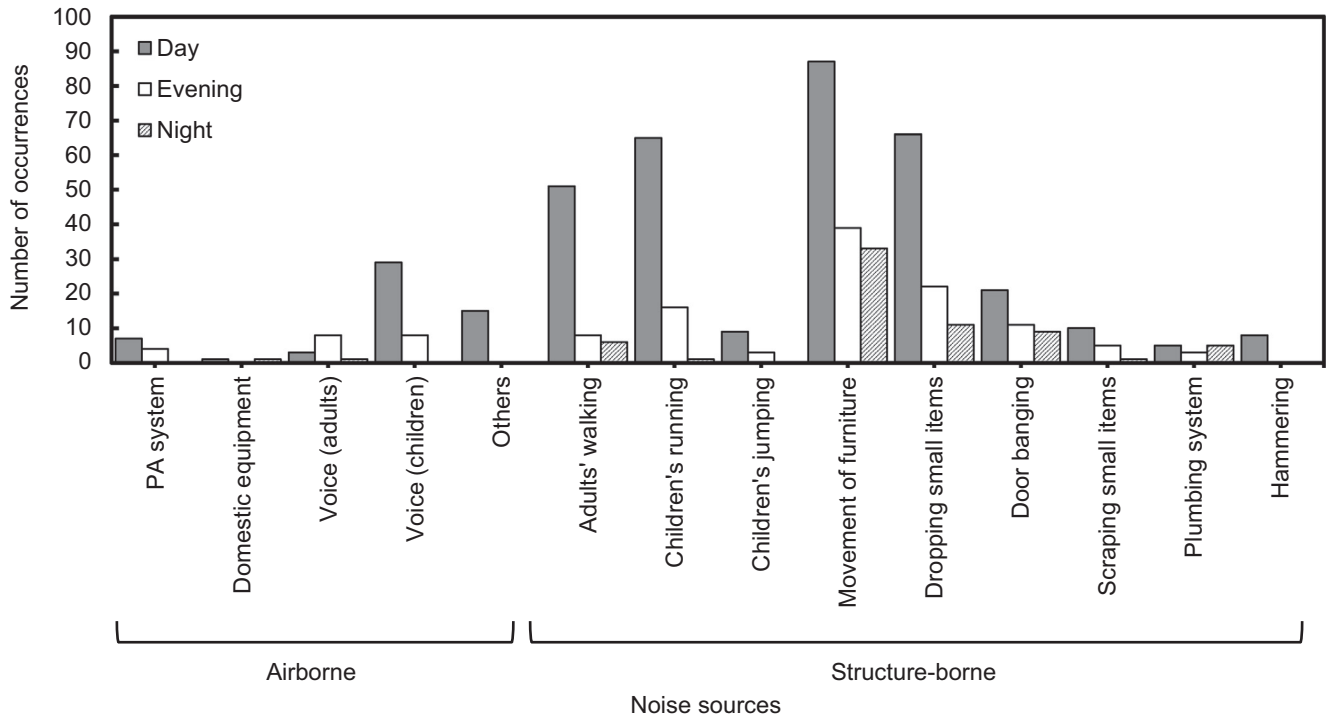


Fig. 1. Noise sources as a function of number of occurrences.

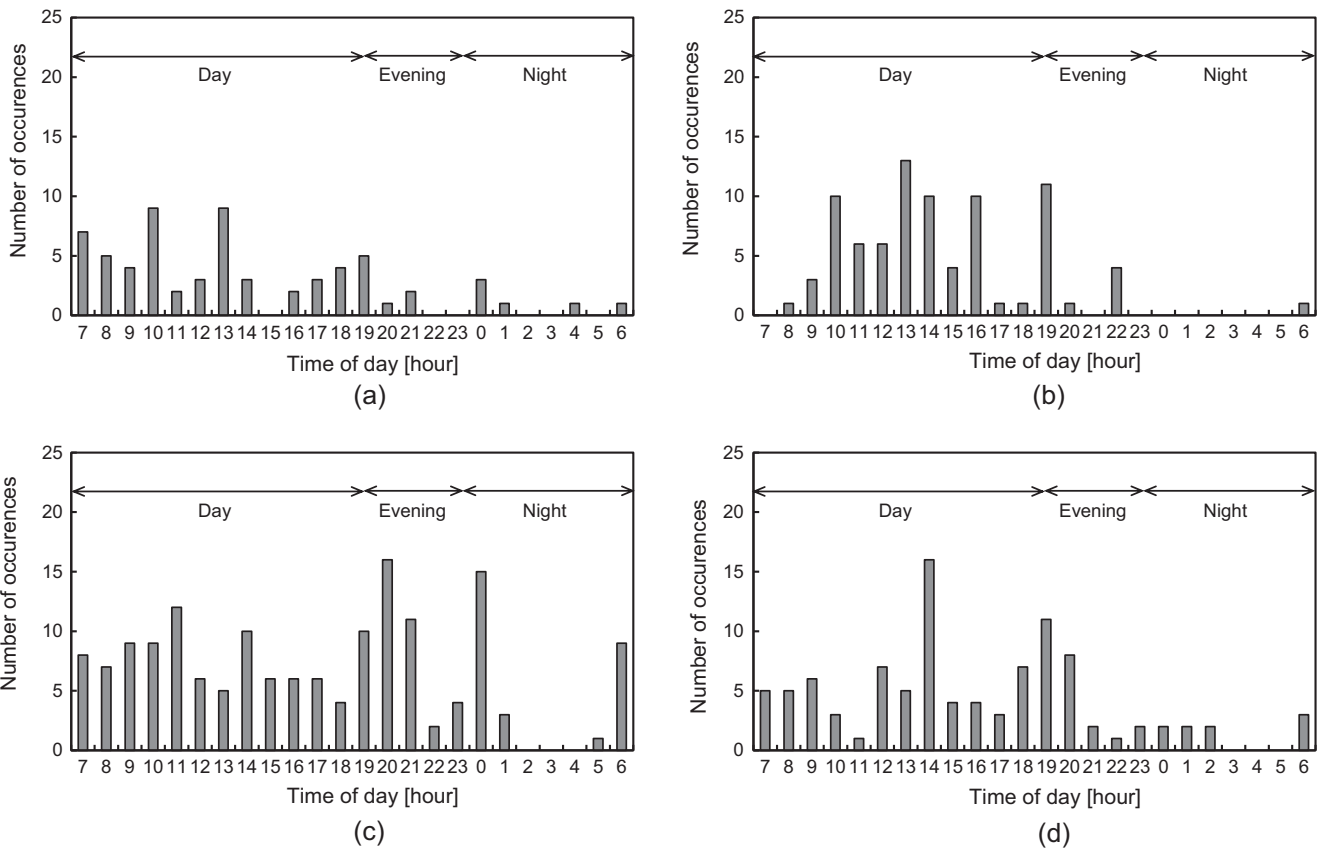


Fig. 2. Number of occurrences of the four most frequent noise sources in hourly interval for 24 h: (a) adults' walking, (b) children's running, (c) movement of furniture, and (d) dropping of small items.

it is time for getting ready to go to work, helping their children to go to school, or doing household chores. Movement of furniture (e.g., tables and chairs) also occurred frequently during that time

which related to people's activities such as having breakfast or doing household chores. In addition, adults' walking was found to most frequently occur at around 13:00–14:00 during which

other noise sources (children’s running, movement of furniture, and dropping of small items) occurred frequently. It can be said that all of the four noises were closely related at that period, were primarily related to children’s activities. In particular, it was identified that children’s running noises during the afternoon occurred more frequently with scraping noises of chairs, and dropping or scraping noises of small objects. Movement of furniture had a relatively large number of occurrences in the evening (19:00–20:00) and at night (23:00–00:00). These noise events might be relevant to people’s activities when coming back from work, for example, such as having dinner or resting.

Figs. 3 and 4 show the boxplots of the noise levels of each noise source in terms of the A-weighted sound exposure level (L_{AE}) and A-weighted maximum noise level (L_{AFmax}), respectively. Large variations of duration for noise sources indicate that L_{Aeq} is not appropriate to describe the noise levels of each source so the presentation of L_{AE} was adopted to describe noise levels of each source. Among the airborne noise sources, the noise from the PA system showed the highest median value in terms of L_{AE} followed by voice of children and other airborne noises. However, as listed in Table 3, the PA system was rarely identified throughout the measurement. Among the structure-borne sources, hammering and door banging produced the highest and lowest medians of L_{AE} , respectively. All the median values of adults’ walking, children’s jumping, movement of furniture, and dropping small

items were similar and children’s running and scraping small items had relatively higher median L_{AE} levels. Particularly, these two noise sources had higher median L_{AE} levels than other structure-borne noises (except hammering) since they lasted longer than the others and the time duration is applied to derive L_{AE} level. Children’s running lasted 109.4 s on average (standard deviation = 263.6, median = 32.0) and the scraping noise of small items lasted 66.1 s on average (standard deviation = 76.7, median = 54.0). A similar tendency was observed in the boxplots of L_{AFmax} (Fig. 4). The PA system and hammering were the sources producing the highest L_{AFmax} from airborne and structure-borne noise sources but both were barely heard (6 and 4 events in total, respectively). Once the PA system and hammering were excluded, children’s jumping and dropping small items were found to have the higher L_{AFmax} than others followed by children’s running and movement of furniture. In addition, airborne noise sources showed larger variations of median values than structure-borne sources.

3.3. Impact of slab thickness and number of noise events for different sources on noise levels

Fig. 5 shows the noise levels ($L_{Aeq,24-h}$, $L_{Aeq,Day}$, $L_{Aeq,Evening}$, and $L_{Aeq,Night}$) across the slab thickness. Contrary to expectations, the noise levels were not much changed with the increases of slab

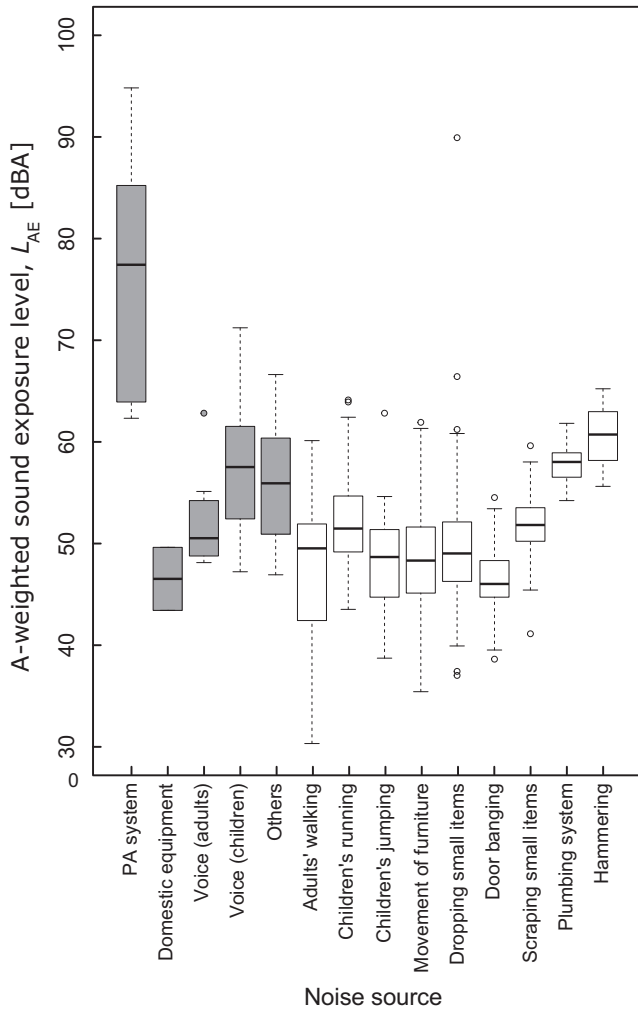


Fig. 3. Boxplots of A-weighted sound exposure levels (L_{AE}) for noise sources; airborne sound sources (grey boxes) and structure-borne sound sources (white boxes).

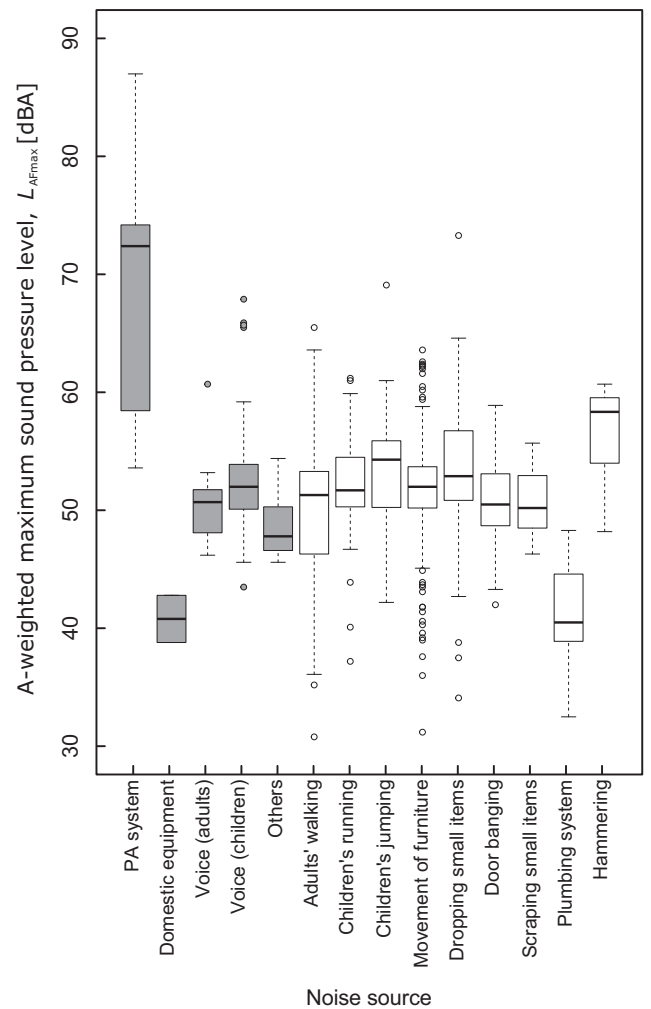


Fig. 4. Boxplots of A-weighted maximum sound pressure levels (L_{AFmax}) for noise source; airborne sound sources (grey boxes) and structure-borne sound sources (white boxes).

thickness. For example, the medians of $L_{Aeq,24-h}$ for 135 mm, 150 mm, 180 mm and 210 mm were 30.1, 30.4, 28.2 and 32.9 dBA, respectively. The 26 participating apartments were then classified into two groups according to their slab thickness (Group 1: 16 apartments with slab thicknesses of 135 mm and 150 mm; Group 2: 10 apartments with slab thicknesses of 180 mm and 210 mm) in order to investigate whether the increase in concrete slab thickness led to a reduction of noise events. Since the two sample sizes were unequal, the Mann-Whitney tests were conducted with noise levels (L_{AE} and L_{AFmax}), occurrence number, and length of noise events as dependent variables. The dependent variables only contained the data of structure-borne noises as the grouping factor (thicker slabs) would only affect noise events of structure-borne noises, not airborne noises. The median L_{AFmax} for Group 1 (53.1 dBA) was slightly higher than that of Group 2 (52.4 dBA) and there was no statistical significance found; the medians of L_{AE} for Groups 1 and 2 were 49.0 dBA and 49.1 dBA, respectively. The number of occurrences between Groups 1 and 2 were not significant, whereas Group 2 had significantly longer noise events than Group 1 ($p < 0.01$). These results indicate that better sound insulation performance due to increased slab thickness does not guarantee lower noise levels or fewer noise events in real environments because occurrence of neighbour noise is significantly influenced by neighbour's behaviours and activities.

In order to investigate whether indoor noise levels are affected by the number of occurrences and type of noise sources, correlation analyses were conducted. Noise levels (L_{Aeq} and L_{AFmax}) for 24 h, day, evening, and night were used. Meanwhile, the num-

ber of occurrences for all of the sources and number of occurrences for airborne, structure-borne, heavyweight impact, lightweight impact, and four major sources were introduced across different periods (24 h, day, evening, and night). The analysis was repeated for two groups, who were classified according to their slab thickness. The results of the correlation analysis are listed in Appendix B. Contrary to expectations, L_{Aeq} were not related with the number of occurrences for different types of sources. As shown in Fig. 6, this may be due to a couple of the outliers which showed opposite tendencies. For example, Site 1 showed the largest L_{Aeq} with just seven noise events for 24 h and L_{Aeq} of Site 14 is much lower than mean of 26 apartments although it has most number of noise events. The high noise level from Site 1 was caused by noise from a refrigerator in the kitchen. These results also revealed that indoor noise levels in apartment buildings are mainly influenced by neighbours' behaviours and activities. However, the exclusion of Sites and 1 and 14 resulted in some significant relationships between noise levels and noise sources. Specifically, L_{Aeq} for 24 h and during the daytime were significantly correlated with the number of occurrences. In contrast, L_{AFmax} had correlations with the number of occurrences for different types of sources. $L_{AFmax,24-h}$ and $L_{AFmax,Day}$ showed significant relationships with the number of occurrences of all sources, lightweight impact, and four major sources ($r = 0.40$, $r = 0.40$, and $r = 0.39$, respectively; $p < 0.05$ for all). Moreover, $L_{AFmax,Night}$ for the all participated sites and $L_{AFmax,Night}$ of Group 1 were found to have significant correlation with airborne noise ($r = 0.49$ and $r = 0.63$ respectively; $p < 0.05$).

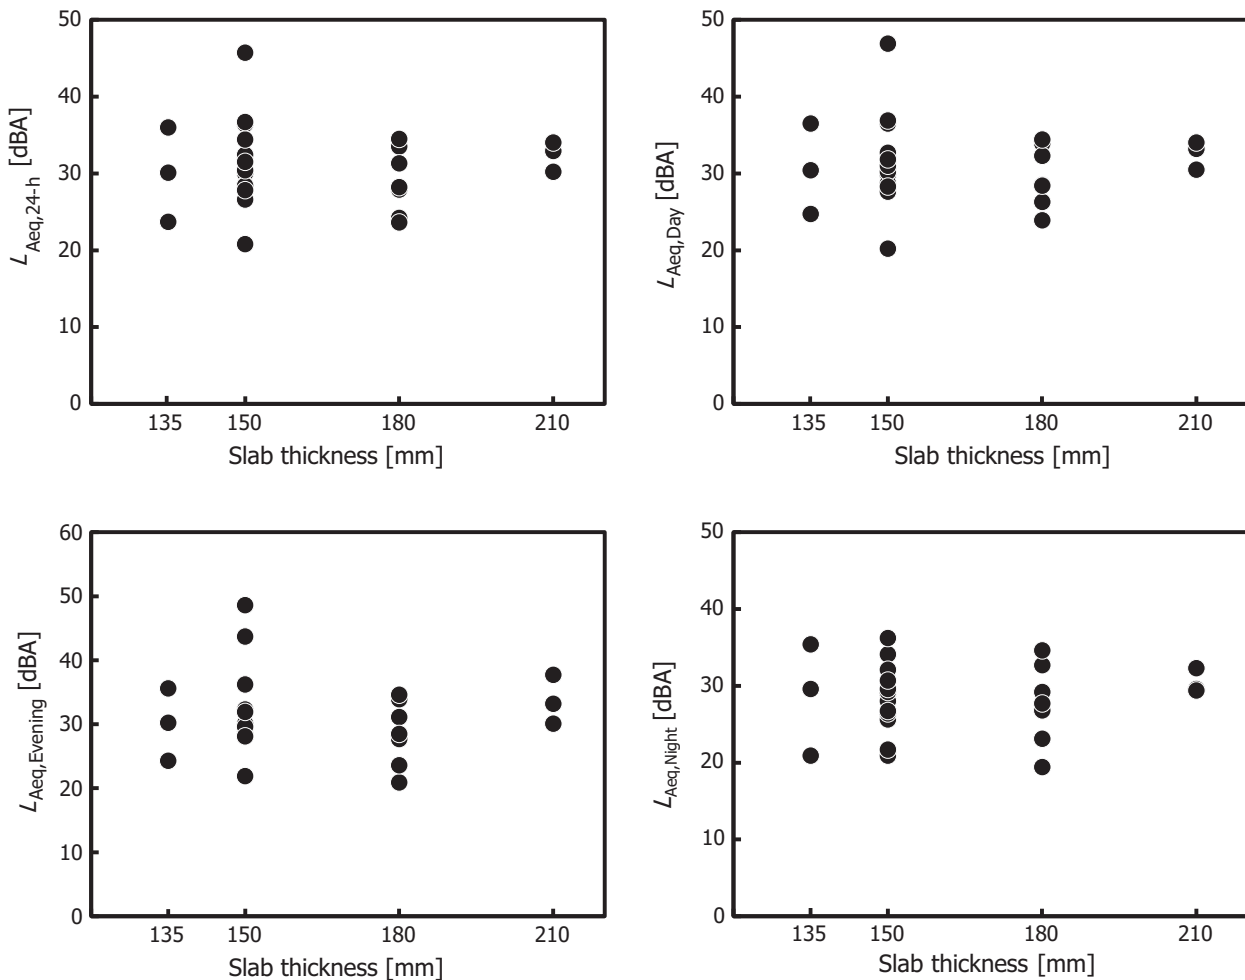


Fig. 5. Relationships between noise levels and slab thickness.

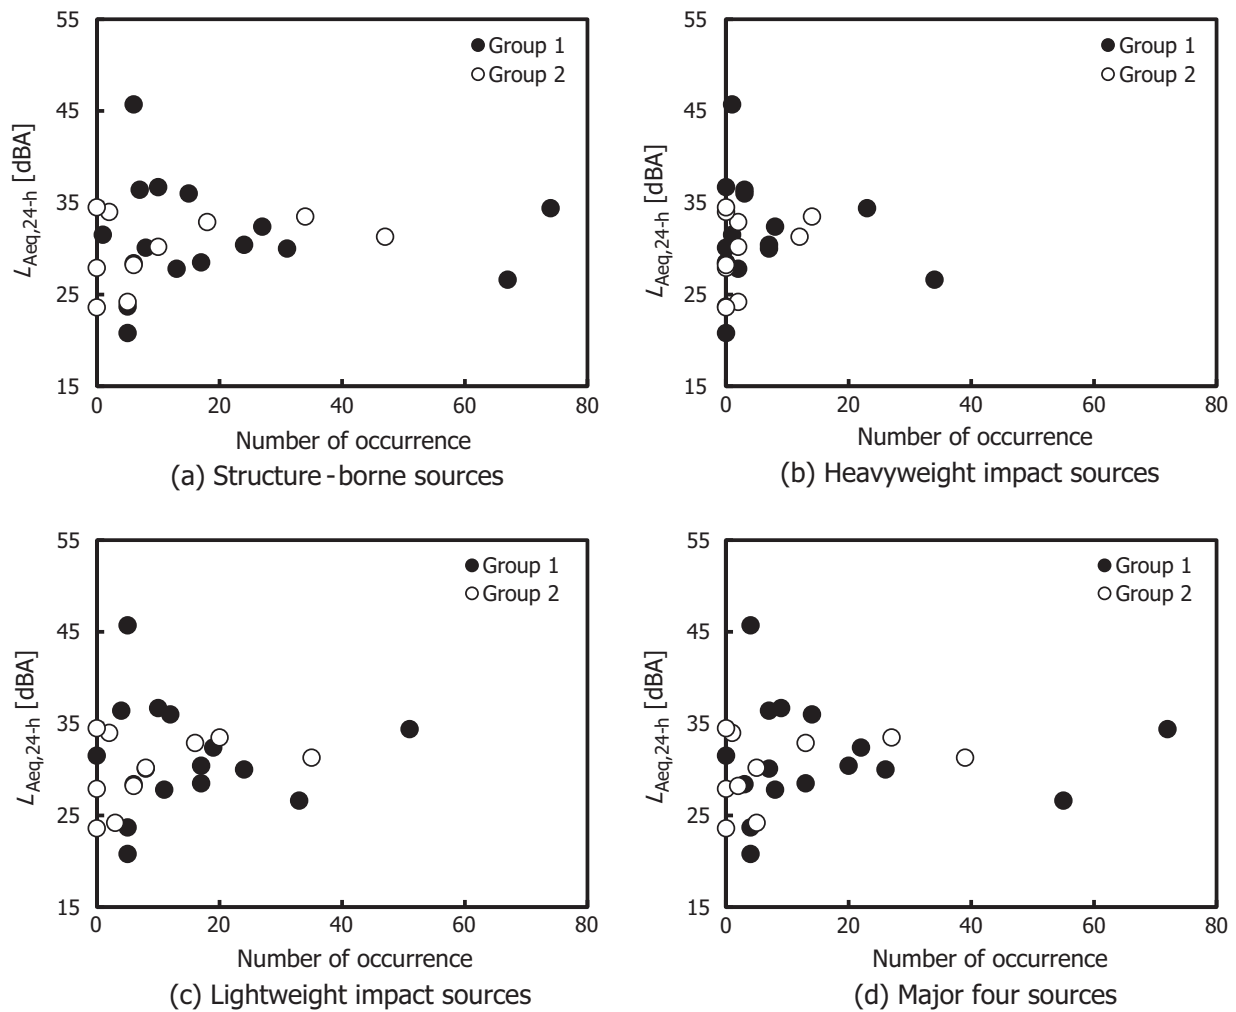


Fig. 6. Relationships between the number of occurrences of noise sources and $L_{Aeq,24-h}$ for Groups 1 and 2.

4. Discussions

The results of the overall noise levels showed that 20 of 26 apartments met the recommended daytime L_{Aeq} level of WHO guideline during the daytime. This does not indicate that the noise exposure levels are acceptable because the impact of outdoor noise sources on indoor noise levels was very limited because the windows were closed. The overall noise levels found in the present study had a good agreement with Jeon et al. [12] when they measured noise levels at empty apartments with closed windows. However, significant increase of indoor noise levels has been reported when properties are occupied or windows are opened so that outdoor noise is not controlled [7,12,13]. The noise levels might have increased if the current measurements were also conducted under natural ventilation conditions. During the night time, the levels of eight of the residential apartments showed an excess of the WHO limit value (30 dBA) in terms of L_{Aeq} for 8 h. The WHO guideline also recommends that L_{AFmax} should not exceed 45 dBA during the night. It was observed that only four residential apartments showed lower levels than this limit; thus, the residents in 22 apartments might have experienced sleep disturbance at night. Most of the L_{AFmax} at night were produced by movements of furniture between 05:00 and 07:00 or between 23:00 and 00:00. This finding is coincident with a previous study showing that some interviewees complained about noise coming from upstairs early in the morning and late night [20]. It was also found that the noise

levels showed large variations across the measured sites. The L_{Aeq} for 24 h varied from 20.8 to 45.7 dBA, while the difference between the lowest and highest levels of L_{AFmax} was 40.7 dBA in the evening. This indicates that noise levels in apartments are significantly affected by neighbours and their activities.

The present study reported that the dominant noise sources in residential apartments are human walking, movement of furniture, and dropping of small items. This is consistent with the findings of a questionnaire survey on floor impact sound [21] reporting that children's running, dropping of items, and adult's walking were major noise sources. However, surveys in European countries reported quite different findings. A survey in the UK [22] showed that the most annoying neighbouring noise sources were airborne sources such as voices, dogs, and radio/television, whereas the percentage of neighbours footsteps and banging on walls or floors was less than 10%. A survey in the Netherlands also indicated that flushing sounds from a neighbour's toilets were the most commonly heard [23]. It was also found that playing pop music was the most annoying, followed by TV/radio and footsteps. The difference between the present study and the European studies could be attributed to the dwelling types of the respondents. For instance, in the UK study, the majority of the samples lived in semi-detached, detached, or terrace houses, whereas only 13% of them lived in either a flat or a maisonette [22]. A recent study on loudness and annoyance of neighbour noise in residential buildings also reported that subjective ratings varied across housing types [24].

Most studies on auditory experiments have applied the same noise level variations to different noise sources. For example, Jeon et al. [25] reported the annoyance ratings of two drainage (i.e., a bathtub draining and a flushed toilet) and two airborne noises (i.e., conversation and piano) with the same noise level variations. Ryu et al. [26] also investigated noise annoyance caused by five airborne sources (conversation, piano, ringing telephone, music, and TV). During the experiments, the same noise variation of 30 – 50 dBA was applied to all the noise sources. However, the present study revealed that variations of noise levels were different across noise sources. Therefore, this finding is beneficial for future study, in particular, auditory experiments using neighbour noises.

Previously, improvement of impact sound insulation of the floors has been reported with increases of concrete slabs [17,18]. However, these measurements were mostly conducted in laboratories using standard impact sources (i.e. impact ball and tapping machine), and noise levels in real situations have not been reported. The present study carried out the Mann-Whitney tests to compare the two groups of apartment with different slab thickness and found no significant difference between them. Therefore, a different approach could be considered to enhance acoustic comfort in apartments. For instance, subjective impression of building noise could be improved by dealing with non-acoustic factors. Recent studies reported a few non-acoustic factors affecting subjective reactions to floor impact noise such as the relationship with neighbours and negative attitude to neighbours as a sound source [27]. It was also reported that residents with higher intimacy with neighbours expressed less noise annoyance than others. This implies that noise annoyance could be reduced by using non-technical factors.

In the present study, 23 of the 26 measurements were conducted in warm seasons (spring, summer, and autumn). Under such conditions, the measured noise levels might be greater than the levels in winter because neighbours' windows are frequently opened. Additionally, 21 of the 26 measurements were performed during the school term so that the noises produced by children's activities were limited. Therefore, additional longitudinal measurements would be necessary in the future to cover all seasons and school holidays. The noise measurements were conducted only in living rooms in this study because noise complaints in living rooms are much more common than in bedrooms [21]. However, approximately 20% of neighbour noise was generated in bedrooms [8]; thus, the measurements in the bedrooms is a topic for future research and practice. Another limitation of this study is the lack of subjective data such as the noise annoyance ratings of the residents. It is quite common to report dose-response functions based on 24-h noise levels and subjective ratings in the environmental noise fields, but no one has attempted to show the relationship between subjective impressions and 24-h noise level by highlighting indoor noise, especially noise from neighbours. Therefore, it would be valuable to conduct both field measurements and a questionnaire survey in residential buildings.

5. Conclusion

The present study carried out noise measurements for 24 h at 26 empty apartments in South Korea. From the measurements, L_{Aeq} and L_{AFmax} for 24 h, day, evening, and night were analysed. Levels (L_{AE} and L_{AFmax}) and length of identified noise sources were then calculated. Twenty of 26 apartments met the recommended WHO guidelines during the daytime, whereas L_{AFmax} in 22 apartments were in excess of the recommended levels which could potentially cause sleep disturbance. Airborne noise sources included PA systems, domestic equipment, voices of adults, and voices of children. Structure-borne noise sources were more dominant than airborne noise sources, for example human footsteps (adults' walking,

children's running and jumping), movement of furniture, dropping or scraping small items, doors banging, plumbing system, and hammering. It was found that adults' walking, children's running, movement of furniture, and dropping of small items were the most frequently occurring, accounting for approximately 80% of all the noise events. Among the airborne noise sources, children's voices were found to have relatively higher noise levels than other sources. Children's jumping was found to have the most severe structure-borne noise source in terms L_{AFmax} . Hammering showed the highest L_{AE} , followed by the scraping of small items and children's running. The present study could not find any statistically significant difference between the apartments with different slab thickness. Moreover, indoor noise levels were affected by neighbours' behaviours and daily activities rather than major noise sources and their number of occurrences. In the future, more preventative measurements, including both lightweight and heavy-weight buildings, are required. Measurement of the noise levels in source room would also be useful to better understand noise levels from residents' activities.

Acknowledgement

This research was supported by a grant from a Strategic Research Project (A study on noise reduction solution for adjacency household in apartment house) funded by the Korea Institute of Construction Technology.

Appendix A. Supplementary material

Supplementary data associated with this article can be found, in the online version, at <http://dx.doi.org/10.1016/j.apacoust.2017.01.012>.

References

- [1] Berglund B, Lindvall T, Schwela DH. Guidelines for community noise. Geneva, Switzerland: World Health Organization; 1999.
- [2] Miedema HME. Relationship between exposure to multiple noise sources and noise annoyance. *J Acoust Soc Am* 2004;116:949–57.
- [3] Clark C, Stansfeld SA. The effect of transportation noise on health and cognitive development: a review of recent evidence. *Int J Compar Psychol* 2007;20:145–58.
- [4] Basner M, Babisch W, Davis A, Brink M, Clark C, Janssen S, et al. Auditory and non-auditory effects of noise on health. *The Lancet* 2014;383:1325–32.
- [5] Babisch W. Cardiovascular effects of noise. *Noise Health* 2011;13:201–4.
- [6] Maschke C, Niemann H. Health effects of annoyance induced by neighbour noise. *Noise Control Eng J* 2007;55:348–56.
- [7] Pujol S, Berthillier M, Defrance J, Lardiès J, Petit R, Houot H, et al. Urban ambient outdoor and indoor noise exposure at home: a population-based study on schoolchildren. *Appl Acoust* 2012;73:741–50.
- [8] Miedema HME, Vos H. Exposure-response relationships for transportation noise. *J Acoust Soc Am* 1998;104:3432–45.
- [9] Miedema HME, Vos H. Noise annoyance from stationary sources: relationships with exposure metric day-evening-night level (DENL) and their confidence intervals. *J Acoust Soc Am* 2004;116:334–43.
- [10] MacKenzie DJ, Galbrun L. Noise levels and noise sources in acute care hospital wards. *Build Serv Eng Res Technol* 2007;28:117–31.
- [11] Kaarlela-Tuomaala A, Helenius R, Keskinen E, Hongisto V. Effects of acoustic environment on work in private office rooms and open-plan offices—longitudinal study during relocation. *Ergonomics* 2009;52:1423–44.
- [12] Jeon JY, You J, Chang HY. Sound radiation and sound quality characteristics of refrigerator noise in real living environments. *Appl Acoust* 2007;68:1118–34.
- [13] Lai ACK, Mui KW, Wong LT, Law LY. An evaluation model for indoor environmental quality (IEQ) acceptance in residential buildings. *Energ Build* 2009;41:930–6.
- [14] Chan EHW, Lam KS, Wong WS. Evaluation on indoor environment quality of dense urban residential buildings. *J Facil Manage* 2008;6:245–65.
- [15] Jeon JY, Hong JY, Kim SM, Lee PJ. Classification of heavy-weight floor impact sounds in multi-dwelling houses using an equal-appearing interval scale. *Build Environ* 2015;94:821–8.
- [16] Criteria on the Authorization and Management of Block Structures for Floor Impact Sounds in Multi-dwelling Houses. Ministry of Land Infrastructure and Transportation, Republic of Korea; 2014.
- [17] Hopkins C. *Sound insulation*. Routledge; 2007.

- [18] Jeong JH, Jeong Y, Jeon JY. The effect of concrete slab thickness on the heavy-weight impact sound. In: Proceedings of INTER-NOISE 2005. Rio de Janeiro, Brazil; 2005.
- [19] ISO 1996-2 Acoustics - Description, measurement and assessment of environmental noise, Part 2: Determination of environmental noise levels. International Organization for Standardization, Geneva, Switzerland; 2007.
- [20] Park SH, Lee PJ, Yang KS. Perception and reaction to floor impact noise in apartment buildings: a qualitative approach. *Acta Acust united Acust* 2016;102:902–11.
- [21] Jeong JH, Lee PJ, Jeon JY. Questionnaire survey on annoyance of floor impact sound. In: Proceedings of KSNVE Annual Autumn Conference. Korea; 2006.
- [22] Defra. Survey of noise attitudes (SoNA) 2013, Report Ref: 47067932.NN1501. R1/02. AECOM Infrastructure & Environment UK Limited; 2015.
- [23] van Dongen J. Noise Annoyance from Neighbours. In: Proceedings of INTER-NOISE 2001. Hague, Netherlands; 2001.
- [24] Wang C, Si Y, Abdul-Rahman H, Wood LC. Noise annoyance and loudness: acoustic performance of residential buildings in tropics. *Build Serv Eng Res Technol* 2015;36:680–700.
- [25] Jeon JY, Ryu JK, Lee PJ. A quantification model of overall dissatisfaction with indoor noise environment in residential buildings. *Appl Acoust* 2010;71:914–21.
- [26] Ryu JK, Jeon JY. Influence of noise sensitivity on annoyance of indoor and outdoor noises in residential buildings. *Appl Acoust* 2011;72:336–40.
- [27] Park SH, Lee PJ, Yang KS, Kim KW. Relationships between non-acoustic factors and subjective reactions to floor impact noise in apartment buildings. *J Acoust Soc Am* 2016;139:1158–67.