

Range-only benthic Rover localization off the central California coast

I. Masmitja, S. Gomariz, J. Del Rio
SARTI Research Group, Electronics Department
Universitat Politècnica de Catalunya
Vilanova i la Geltrú, Spain
ivan.masmitja@upc.edu

B. Kieft, T. O'Reilly
Monterey Bay Aquarium Research Institute (MBARI)
Moss Landing, California, U.S.A.

Abstract— Nowadays, the use of autonomous vehicles for ocean research has increased, since these vehicles have a better cost/performance ratio than crewed vessels or oceanographic ships. For example, autonomous surface vehicles can be used to localize underwater targets. This paper describes a mission to find a crawling robot - Benthic Rover - on the abyssal plain in the north eastern Pacific, using single-beacon localization from onboard a Wave Glider autonomous surface vehicle. While the Wave Glider is moving around the surface in the target zone, it takes ranges between the target and itself using acoustic modems. With these ranges it can compute the target location, as a Long Baseline (LBL) system. The benefit of this approach is the reduction of cost and complexity relative to deployment of a traditional shipboard LBL system. Additionally, this is a mobile system, and can cover long distances, and can geolocate multiple targets over a large area.

Keywords— target localization, underwater, vehicle, acoustic, benthic rover

I. INTRODUCTION

One of the main challenges in oceanographic research is that of underwater positioning. It is well known that GPS signals suffer a large attenuation underwater. Therefore different methods and architectures have been developed using acoustic signals, which have better underwater performance.

This paper presents a range-only target localization method, using a Wave Glider autonomous surface vehicle [1] that acoustically ranges to an underwater target while moving on the surface, using the ranges to compute target position. Therefore, we can consider this method as an LBL system with only one moving transponder on the sea surface.

The method presented in this paper can be used in a wide range of applications using the long-duration, autonomous navigation and computational characteristics of the Wave Glider, to locate stationary or slowly moving targets on the seabed or in the water column. In this work we present results of a mission to find a slowly moving crawling robot on the abyssal plain off the central California coast.

II. MISSION CHARACTERISTICS

The benthic Rover (fig. 1) is a mobile physiology laboratory designed by Dr. Ken Smith at MBARI, which slowly crawls along the seafloor [2]. Typically, it moves about 5 m, stops to

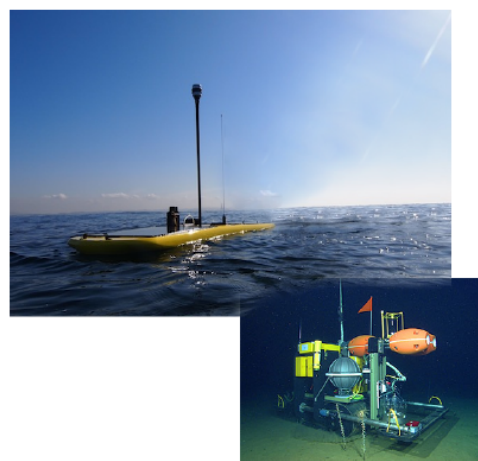


Fig. 1 Mission carried out in Monterey Bay, California, to localize a benthic Rover (down-right picture) using a Wave Glider (up-left picture) as a moving LBL.

take a set of measurements for 3 days, then it moves another 5 meters to the next location. It can stay underwater for six to nine months, therefore it can travel hundreds of meters during this period. Therefore it is necessary to periodically determine its position in order to map the location of the measurement sites, and to eventually recover the vehicle. The Rover is equipped with an acoustic modem, to enable data and command exchange and ranging with a surface vehicle.

The most recent Rover deployment is at "Station M" in the north eastern Pacific, at 34° 50'N, 123° 00'W, 4000 meters depth, 220 km west of the central California coast. This location is approximately known from previous shipboard acoustic measurements.

The Wave Glider is equipped with an acoustic modem compatible with the one installed on the Rover. On April 14, 2016, we sent the Wave Glider to the Rover target zone to test our auto-localization algorithm. In our algorithm, the Wave Glider autonomously swims in a circle of specified radius, centered near the estimated target location. While swimming in the circle, the Wave Glider's onboard acoustic modem periodically measures the range to the target's acoustic modem.

With these ranges and the GPS position of the Wave Glider, our software computes the target location using least squares or iterative minimization algorithms.

Detailed descriptions of the algorithm, mission characteristics such as mission time, maneuvers, initial deployment and Rover movements will be shown in the extended version of this paper.

III. RESULTS

The results obtained are shown in fig. 2, in which the circular path executed by the Wave Glider (round dots) and the computed Rover position (triangle) are shown. Furthermore, we can see range obtained for each Wave Glider position on the color bar. The UTM position for benthic Rover obtained with this algorithm is (500523.820928, 3888509.15227, 3977.3), which is x, y and z in meters.

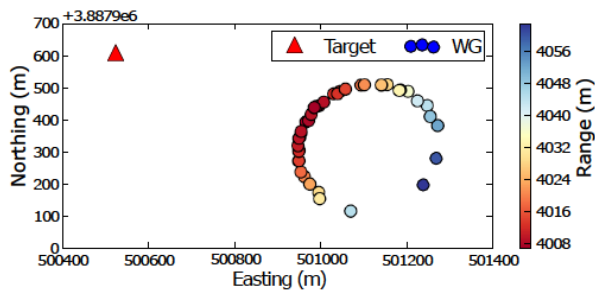


Figure 2. Target localization results. In this picture we can see the circular path executed by the Wave Glider in order to localize a benthic Rover.

IV. CONCLUSIONS

This work describes a field test conducted to acoustically localize a benthic Rover deployed at 4000 m depth from an autonomous surface vehicle. For this purpose a new application using a Wave Glider as a single-beacon LBL has been developed. The work presented in this paper proves the good performance of this method.

ACKNOWLEDGMENT

This work was partially supported by the project NeXOS from the European Union's Seventh Programme for research, technological development and demonstration under grant agreement No 614102. We also had financial support from Spanish Ministerio de Economía y Competitividad under contract CGL2013-42557-R (Interoperabilidad e instrumentación de plataformas autónomas marinas para la monitorización sísmica, INTMARSIS). The main author of this work has a grant (FPI-UPC) from UPC for his PhD research. We gratefully acknowledge the support of MBARI and the David and Lucile Packard foundation.

REFERENCES

- [1] J. Manley and S. Wilcox, "The Wave Glider: a persistent platform for ocean science", *OCEANS 2010*, Sydney, Australia, 2010, pp. 1-5. doi:10.1109/OCEANSSYD.2010.560361410.1109/OCEANSSYD.2010.5603614
- [2] P. R. McGill, A. D. Sherman, B. W. Hobson, R. G. Henthorn, A. C. Chase and K. L. Smith, "Initial deployments of the Rover, an autonomous bottom-transecting instrument platform for long-term measurements in deep benthic environments," *OCEANS 2007*, Vancouver, BC, 2007, pp. 1-7. doi: 10.1109/OCEANS.2007.4449315.