

Technical University of Denmark



## Application of silicone based elastomers for manufacturing of Green Fiber Bottle

**Saxena, Prateek; Bissacco, Giuliano**

*Publication date:*  
2017

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*

Saxena, P., & Bissacco, G. (2017). Application of silicone based elastomers for manufacturing of Green Fiber Bottle. Poster session presented at 11th International Workshop on Silicone Polymers 2017 (ISPO 2017), Snekkersten, Denmark.

### DTU Library

Technical Information Center of Denmark

---

#### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



# Application of silicone based elastomers for manufacturing of Green Fiber Bottle

Prateek Saxena and Giuliano Bissacco

prasax@mek.dtu.dk, gibi@mek.dtu.dk

Department of Mechanical Engineering, Technical University of Denmark,  
Kgs. Lyngby, DK-2800, Denmark

The Green Fiber Bottle Project  
Better World in the Making



## 1. Introduction

Due to ever-increasing demand of sustainable products, eco-friendly packaging solutions are finding their importance in the paper packaging industry. Green Fiber Bottle (GFB) is an alternative to plastic, glass and metal based packaging for beverages. The tool concept for manufacturing of paper bottle uses a silicone based elastomer as the core. The expansion of core in the tool resists shrinkage of paper during drying as well as helps in obtaining good fiber compaction. The feasibility of the tool concept in the production of GFB is discussed in this work.

## 2. Manufacturing Process

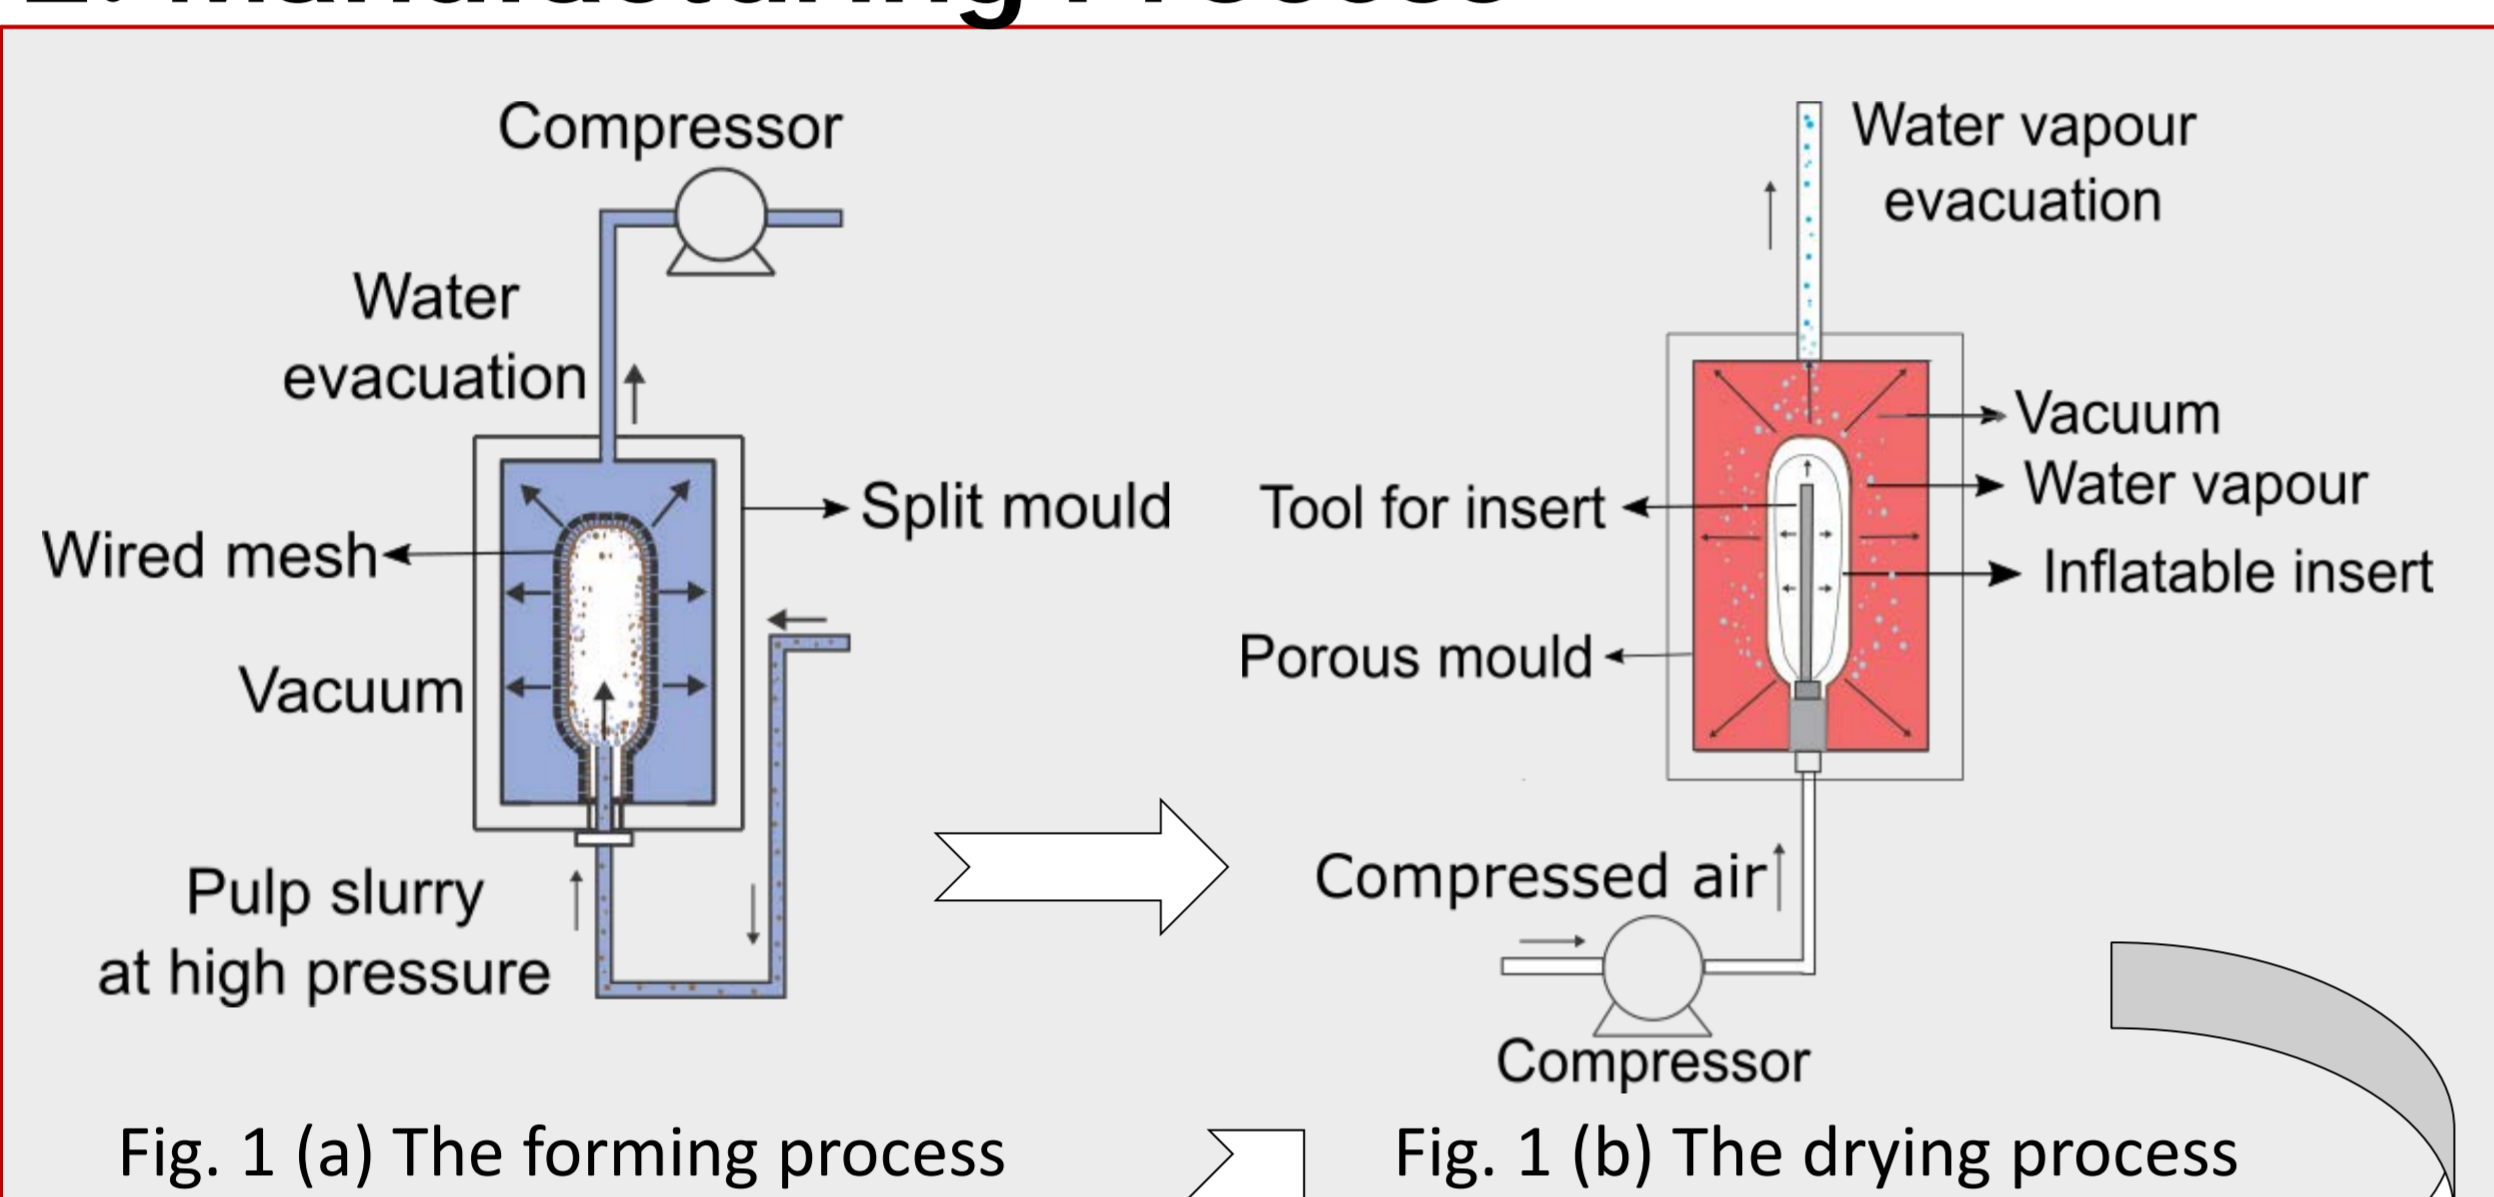


Fig. 1 (a) The forming process

Fig. 1 (b) The drying process



Fig. 2 Manufacturing of silicone core (on left) and a finished GFB (on right)

## 3. Fiber compaction

Wall thickness analysis using Computed Tomography (CT) verified uneven fiber compaction in the GFB.

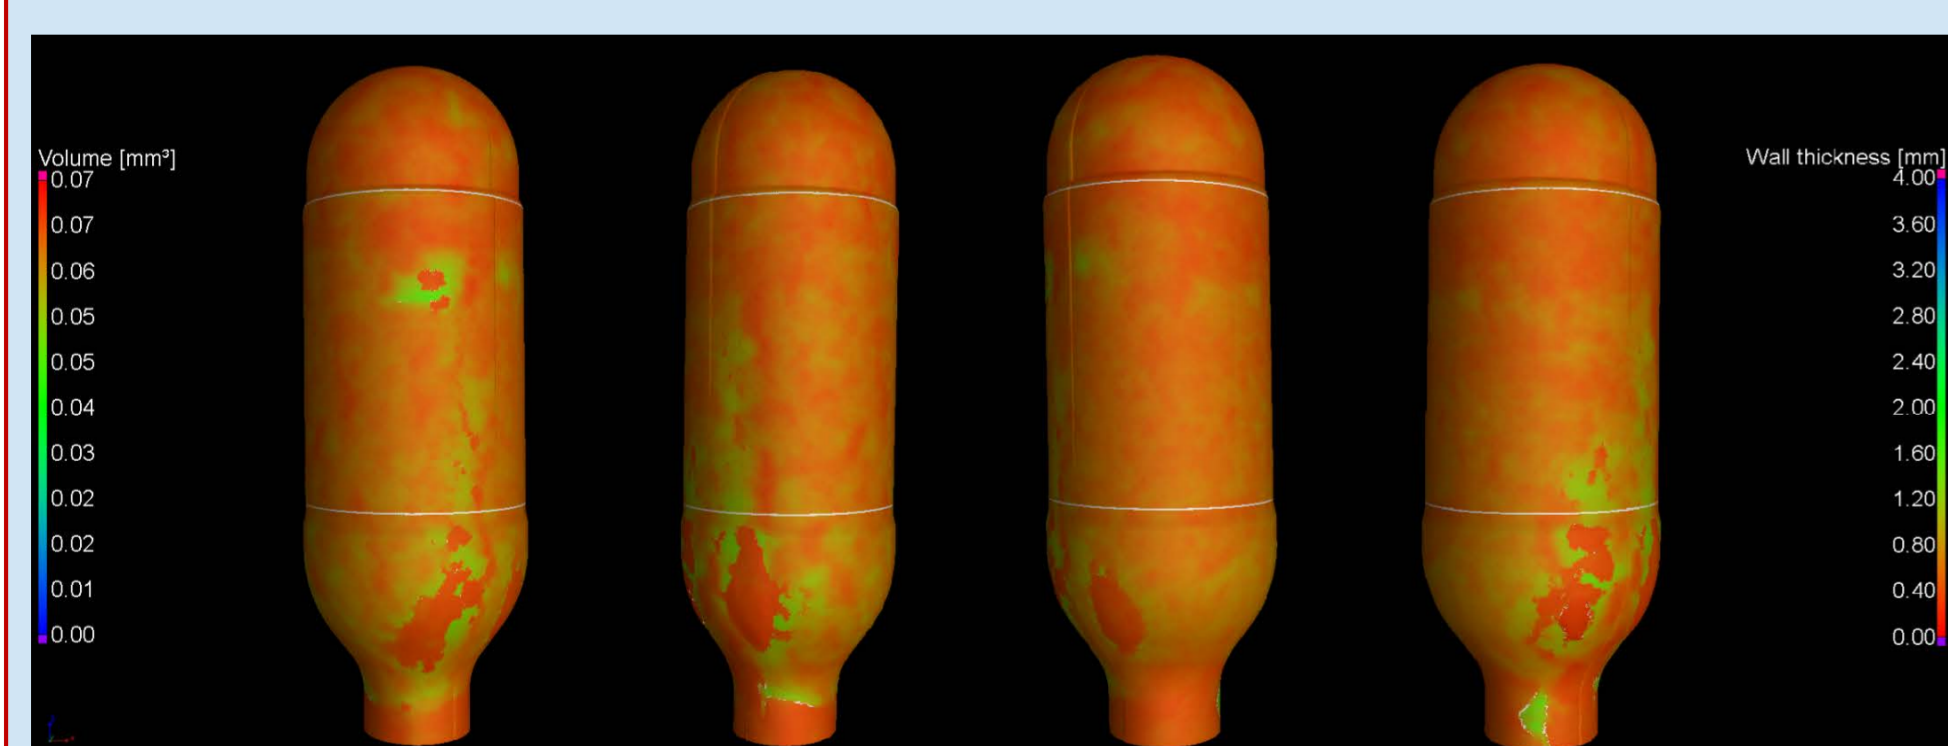


Fig. 3 Wall thickness analysis of GFB (on left) and CT scanned specimen (on right)

## 4. Feasibility of the tool concept

The hyperelastic behaviour of the silicone core is defined by Deformation energy function ( $W$ ). To simulate the inflating action of the core, *Yeoh's model* is used for modelling  $W$ .

**Governing equations**

$$\mathbf{F} = \frac{\partial \mathbf{x}}{\partial \mathbf{X}}; \boldsymbol{\sigma} = 2\mathbf{F} \frac{\partial W}{\partial \mathbf{C}} \mathbf{F}^T$$

$\mathbf{x}$  and  $\mathbf{X}$  = Spatial and material coordinates

$$W = C_{10}(I_1 - 3) + C_{20}(I_1 - 3)^2 + C_{30}(I_1 - 3)^3$$

Where  $I$  = trace of  $\mathbf{C}$ ;  $C_{10}$ ,  $C_{20}$ ,  $C_{30}$  to be determined by curve fitting.





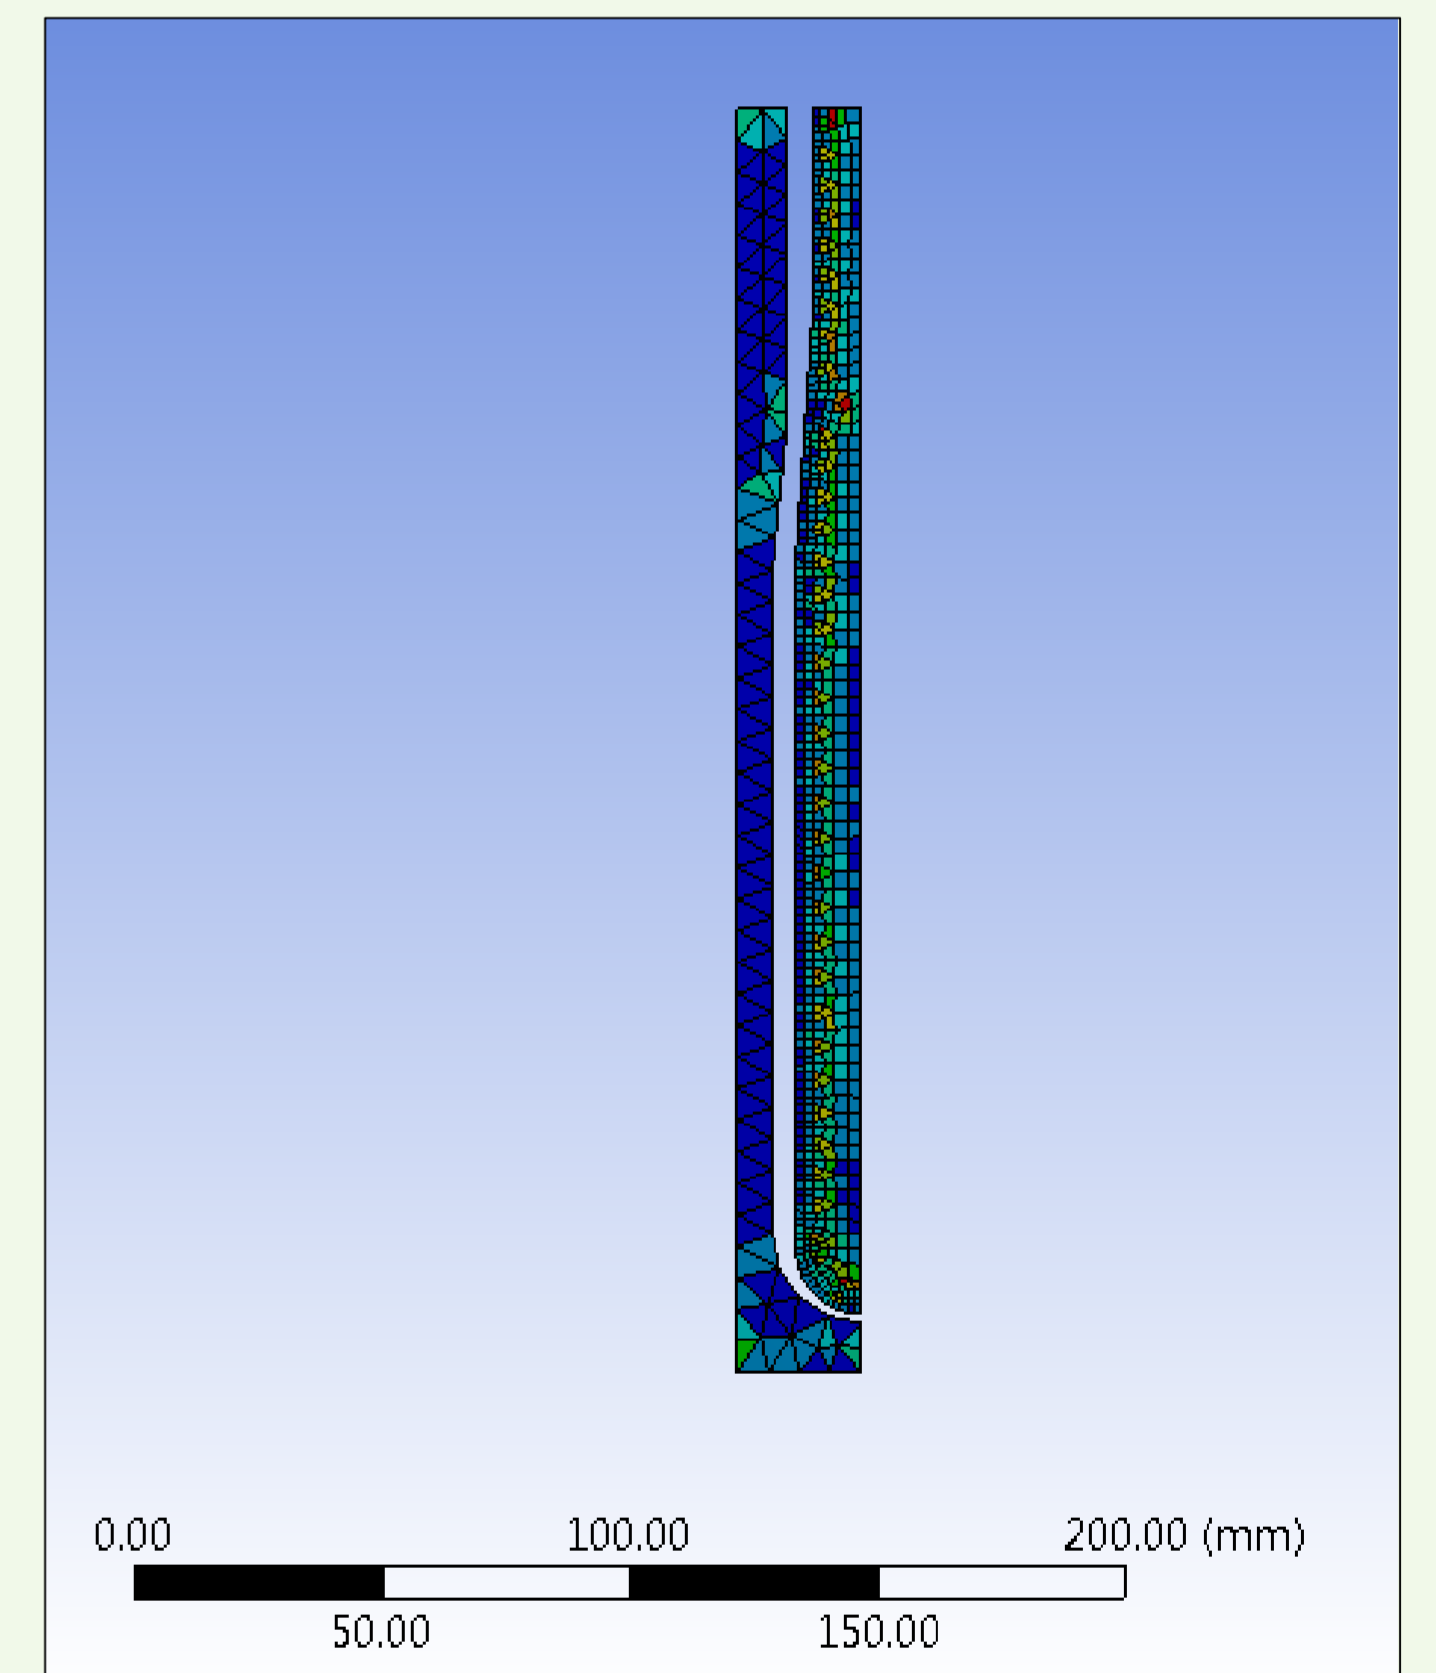


Fig. 4 Finite Element Model (FEM) based analysis of contact pressure (on left) and FEM model (on right)



Fig. 5 Bursting of GFB (on left) and a prototype of GFB (on right)

Bursting of bottle in the non-conformal areas was verified. This is due to non-uniform contact pressure in the tool leading to uneven fiber compaction.

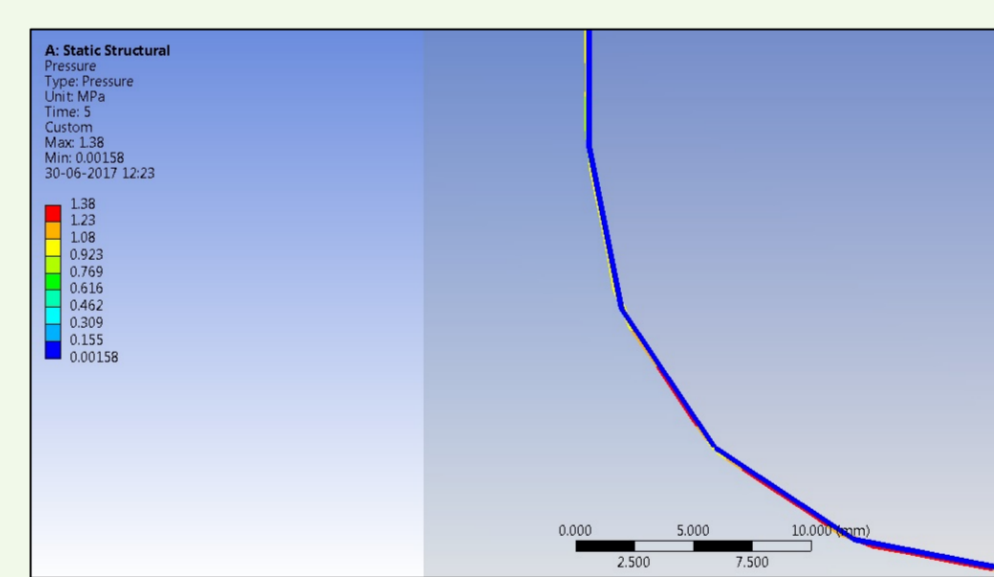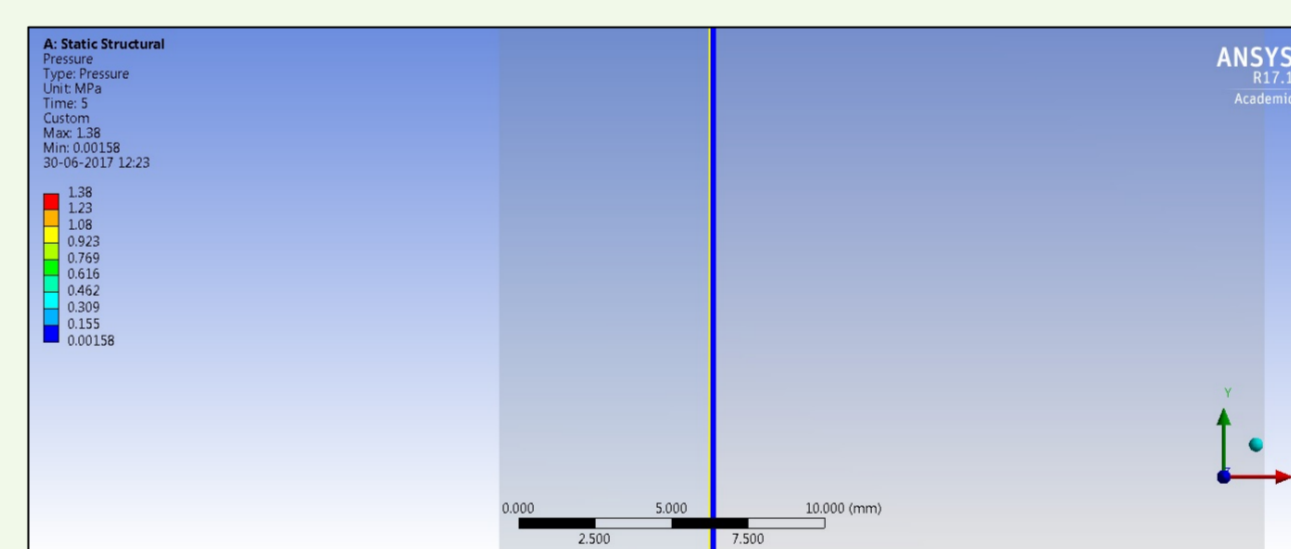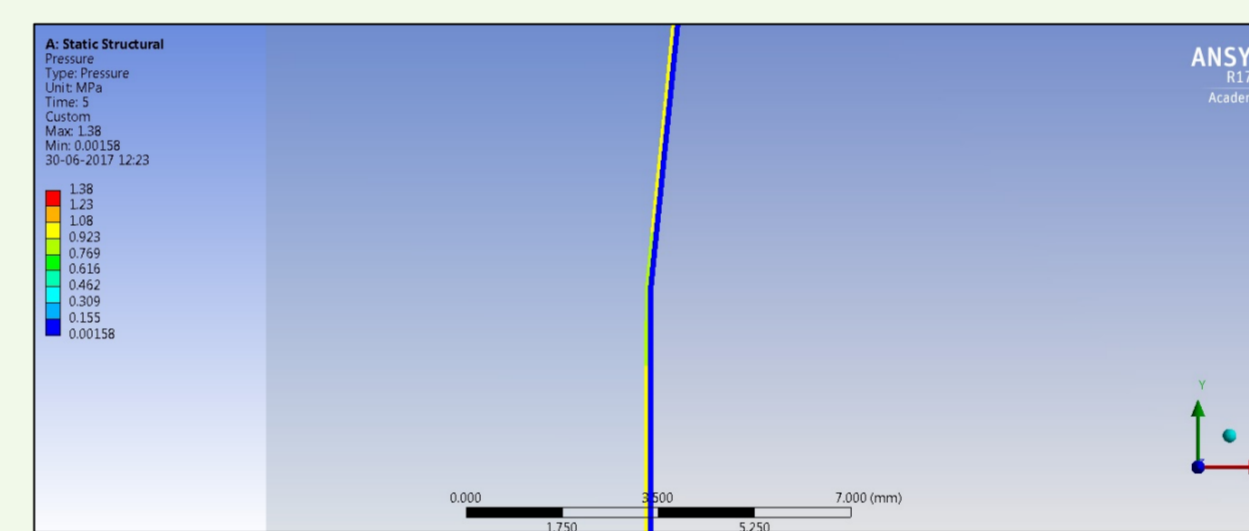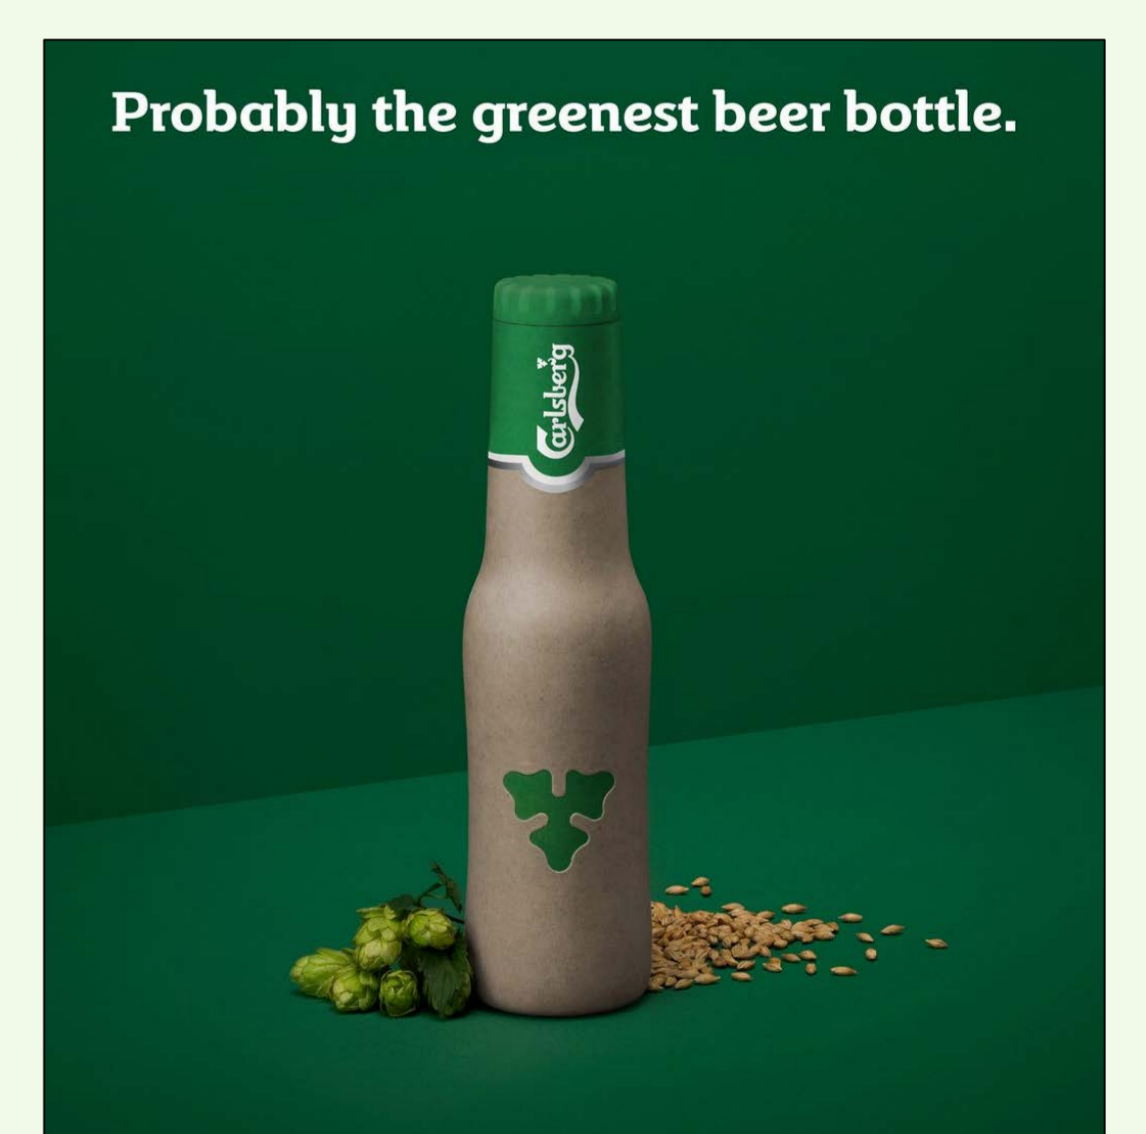

## 5. Conclusions and Future work

The FEM analysis predicts generation of uneven contact pressure on tool from the silicone core. The contact pressure is relatively less in the area of sharp curvature as compared to rest of the bottle geometry. The uneven contact pressure gives rise to uneven wall thickness. Wall thickness analysis using Industrial X-ray CT verifies the occurrence of 'weak zones' in the bottle. The average cut-off pressure that a bottle made of recycled newsprint pulp can withstand is 5 bar. The strength of GFB can be enhanced by optimizing the shape of silicone core, thereby offering uniform wall thickness. Moreover, a stronger pulp material is desirable and is being investigated for the production of GFB.

## 6. Acknowledgement

The work has been carried out as a part of the project titled "Impulse Drying of cardboard moulded 3D structures" with the support from Innovations Fund Denmark (Grant no. 5106-00006B). The authors would also like to acknowledge the help and support from EcoXpac and Carlsberg group for carrying out this work.