

**Sborník vědeckých prací Vysoké školy báňské - Technické univerzity Ostrava**

řada stavební, ročník 15, číslo 2, rok 2015

článek č. 9

**Zdeněk KALA<sup>1</sup>****RELIABILITY ANALYSIS OF THIN-WALLED CYLINDRICAL SHELLS****Abstract**

The subject of the article is the verification of the reliability of thin-walled rotationally symmetric cylindrical shells, using probabilistic approaches. Internal forces and stress of the shell are analysed assuming a membrane action. Material and geometric characteristics of the steel shell are considered as random variables. The reliability index is evaluated using the Latin Hypercube Sampling method. The results of the reliability analysis are derived in a general form, so that they may be useful for assessing the reliability of tanks and pipes.

**Keywords**

Reliability, safety, probability, steel, tank, course, shell, thickness.

**1 INTRODUCTION**

Apparently, rotationally symmetric shells represent the most frequently encountered type in engineering practice. If internal moments are absent and only inner forces are present in the shell, then the shell is said to be in the so-called membrane state. This state is advantageous and desirable in terms of material strain, and it is thus important in design to ensure that this state is compromised minimally by unsuitable design [2]. Vertical cylindrical steel storage tanks represent a typical example of rotationally symmetric shells. A rotationally symmetric tank is loaded by hydrostatic pressure constantly along parallel circles. The solution of this type of shell is relatively simple, and in many cases, it may be applied for the reliability analysis of pressure pipes of power plants.

**2 ROTATIONALLY SYMMETRIC SHELLS IN THE MEMBRANE STATE**

The evaluation of internal forces and stresses in rotationally symmetric tank shapes can be simplified and calculated as rotationally symmetric thin shells, see Fig. 1. The derivation of the computational formulas for determining the internal forces of the shell proceeded particularly from [4].

The rotationally symmetric thin shell depicted in Fig. 1. is characterized by the prescription of its middle surface and thickness  $t$ . If we project a perpendicular (normal)  $n$  to the mid-surface from point  $M$ , we can use this normal to define two mutually perpendicular planes which intersect the mid-surface at the points of maximum and minimum curvatures. These planes are called the principal normal planes.

The first principal plane is determined by the normal  $n$  and axis of rotation  $o$ . The normal  $n$  is at an angle  $\alpha$  with the axis of rotation. The intersection of the first principal plane with the shell mid-surface forms curve  $C_\alpha$  which represents the meridian. Curve  $C_\alpha$  has, in point  $M$ , the centre of curvature  $O_\alpha$ , where the distance between the centre of curvature  $O_\alpha$  and point  $M$  is the principal curvature radius  $r_\alpha$ .

---

<sup>1</sup> Prof. Ing. Zdeněk Kala, Ph.D., Department of Structural Mechanics, Faculty of Civil Engineering, Brno University of Technology, Veveří 331/95, 602 00 Brno, Czech Republic, phone: (+420) 541 147 382, e-mail: [kala.z@fce.vutbr.cz](mailto:kala.z@fce.vutbr.cz).

The second principal plane is perpendicular to the first principal plane, and the second principal curvature radius  $r_\varphi$ , which is determined by the distance between point  $M$  and the centre of curvature  $O_\varphi$  located on the axis of rotation lies here. The task is rotationally symmetric for all points lying on circle  $C_\varphi$  on the shell mid-surface. The distance of each point of the circle  $C_\varphi$  from the centre of curvature  $O_\varphi$  is  $r_\varphi$ . The principal curvature radius  $r_\varphi$  is a cone the base of which is the circle  $C_\varphi$ . The position of points on the circle  $C_\varphi$  is determined by the angle  $\varphi$ . For radius  $r$  of the circle  $C_\varphi$ , it holds that  $r=r_\varphi \sin \alpha$ .

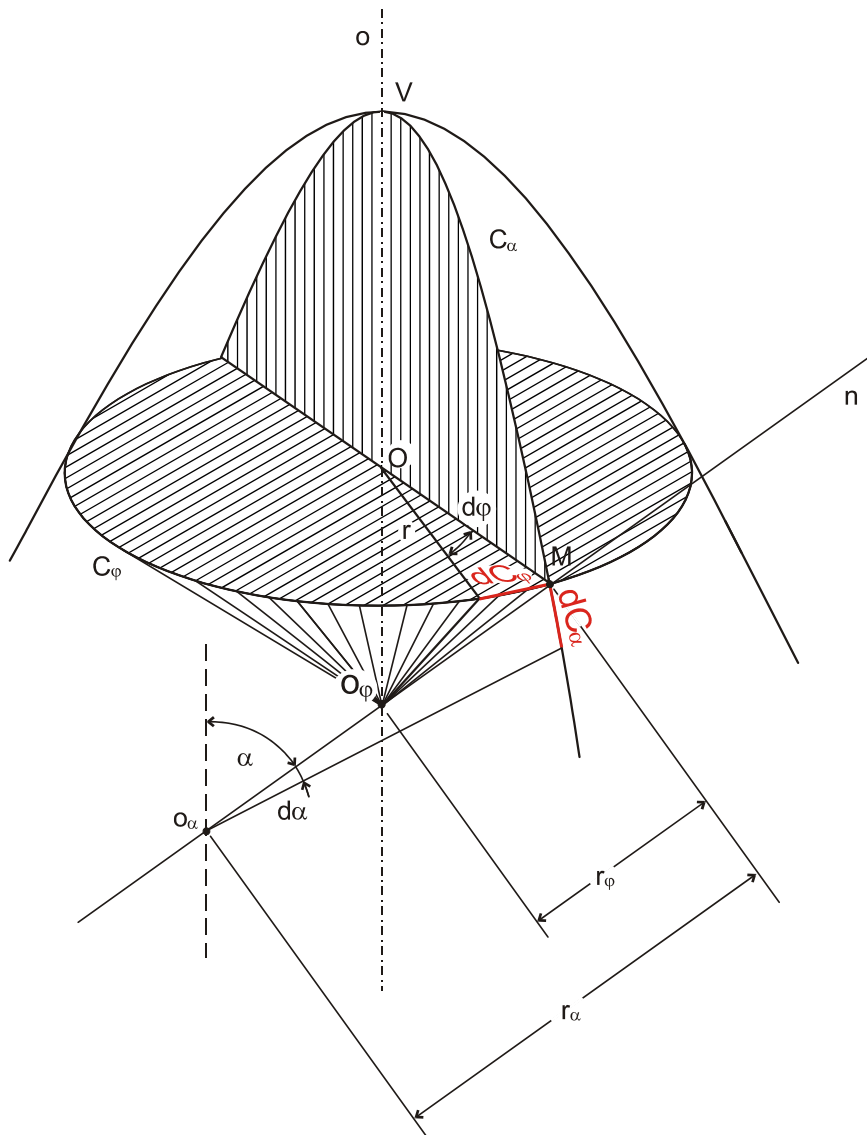


Fig. 1: Rotationally symmetric shell

The principal sections form a network of meridians and parallels on the mid-surface, the intersections of which are determined by angles  $\alpha$  and  $\varphi$ . If we consider hydrostatic pressure as our only load, the internal forces may then be analysed using the equilibrium equations of the membrane state of an axially symmetric shell, see Fig. 2.

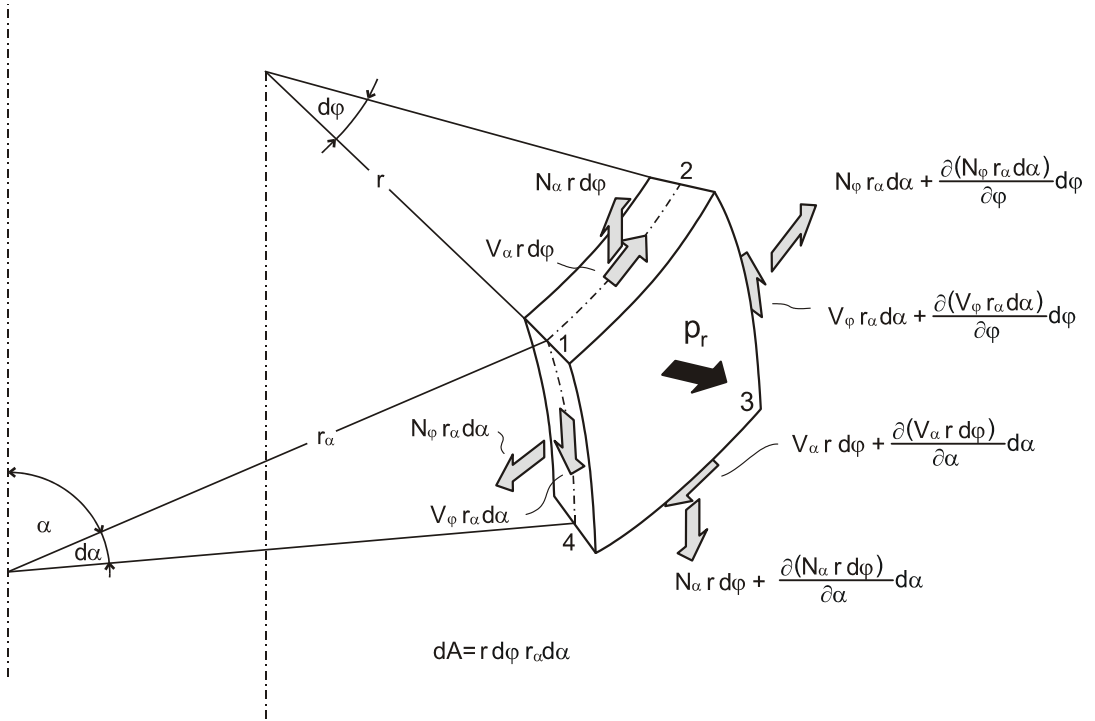


Fig. 2: Internal forces of the shell in membrane state

Hydrostatic pressure from the liquid is represented by the surface load  $p_r$  [ $\text{Nm}^{-2}$ ]. Loading  $p_r$  evokes internal forces, which can be analysed using the conditions of equilibrium. The arrows in Fig. 2. represent internal forces  $N$ ,  $V$ . By multiplying the membrane size ( $N_\alpha$ ,  $N_\phi$ ,  $V_\alpha$ ,  $V_\phi$ ) by the length of the segment on which it acts, we obtain the respective internal force. For example, the normal component  $N_\alpha$ , acts on segment 12, and it corresponds to the force  $N_\alpha \cdot r \cdot d\phi$ . Movement by  $r_\alpha d\alpha$  in the direction of the meridian leads to change of  $N_\alpha$  to the value  $\frac{\partial N_\alpha}{\partial \alpha} d\alpha$ , whereas by multiplying by the length of element 34, we obtain the relation for the normal force in the form

$$\left( N_\alpha + \frac{\partial N_\alpha}{\partial \alpha} d\alpha \right) \left( r \cdot d\phi + \frac{\partial(r \cdot d\phi)}{\partial \alpha} d\alpha \right). \quad (1)$$

Modifying (1) and neglecting small quantities of higher orders, we obtain

$$N_\alpha \cdot r \cdot d\phi + \frac{\partial(N_\alpha \cdot r \cdot d\phi)}{\partial \alpha} d\alpha. \quad (2)$$

From the moment equilibrium condition with regard to the centre of the element, and neglecting the members of the higher orders, we obtain

$$V_\alpha \cdot r \cdot d\phi \cdot r_\alpha \cdot d\alpha - V_\phi \cdot r_\alpha \cdot d\phi \cdot r \cdot d\alpha = 0, \quad (3)$$

from which it follows that  $V_\alpha = V_\phi = V$ . Furthermore, let us express the force equilibrium condition in the direction of the normal. The resultant loading caused by the hydrostatic pressure of oil acting on the thin wall in the direction of its normal is

$$p_r \cdot dA = p_r \cdot r \cdot d\phi \cdot r_\alpha \cdot d\alpha. \quad (4)$$

The resultant of membrane forces  $N_\alpha$  in the direction of the normal upon neglecting the small quantities of higher orders is

$$N_{\alpha} \cdot r \cdot d\varphi \cdot d\alpha, \quad (5)$$

which is shown in Fig. 3, representing the vertical section passing through the axis of the shell.

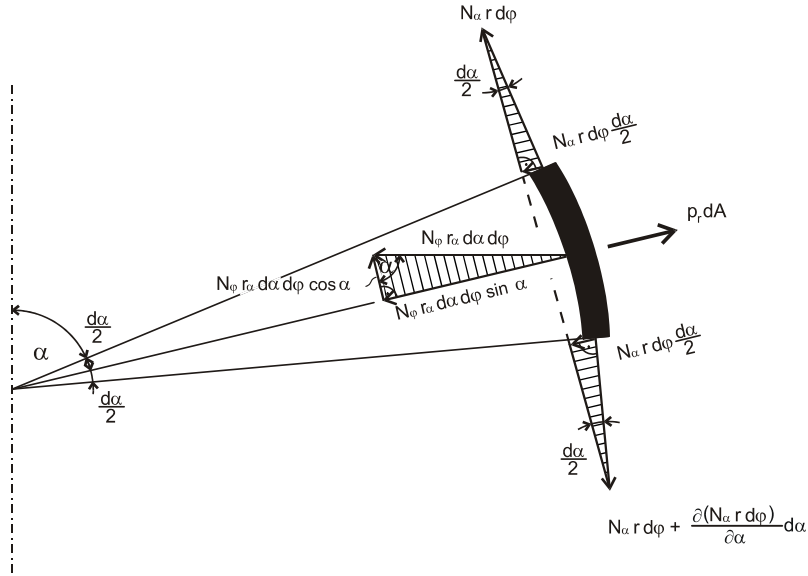


Fig. 3: Force equilibrium condition in the direction of the normal in the vertical section

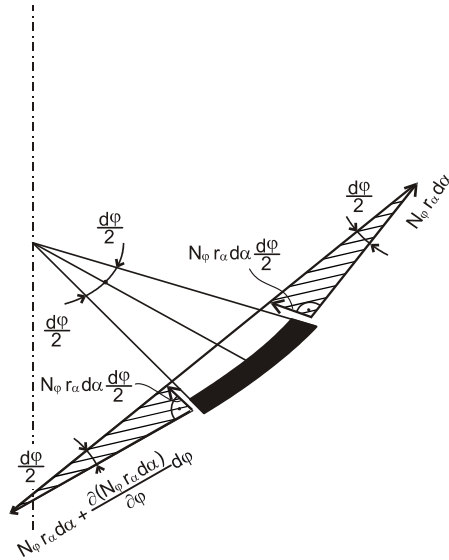


Fig. 4: Force equilibrium condition in the direction of the normal in the horizontal section

The projection of membrane forces  $N_{\varphi}$  in the direction of the normal is displayed using sections perpendicular to the axis of rotation, see Fig. 4. By adding the two normal forces  $N_{\varphi} \cdot r_{\alpha} \cdot d\alpha \cdot \sin(d\varphi/2)$  and substituting  $\sin(d\varphi/2) \approx d\varphi/2$ , we can express the force in the horizontal plane as  $N_{\varphi} \cdot r_{\alpha} \cdot d\alpha \cdot d\varphi$ , see Fig. 4. and Fig. 3. Upon projecting this force in the direction of the normal, see Fig. 3, we obtain

$$N_{\varphi} \cdot r_{\alpha} \cdot d\alpha \cdot d\varphi \cdot \sin(\alpha). \quad (6)$$

Adding (5), (6) and (4), we obtain the force equilibrium condition (7) in the direction of the normal.

$$N_{\alpha} \cdot r \cdot d\varphi \cdot d\alpha + N_{\varphi} \cdot r_{\alpha} \cdot d\alpha \cdot d\varphi \cdot \sin(\alpha) - p_r \cdot r \cdot d\varphi \cdot r_{\alpha} \cdot d\alpha = 0. \quad (7)$$

Substituting  $r=r_{\varphi} \sin(\alpha)$  into equation (7), we obtain (8).

$$N_{\alpha} \cdot r_{\varphi} + N_{\varphi} \cdot r_{\alpha} = p_r \cdot r_{\varphi} \cdot r_{\alpha}. \quad (8)$$

Modifying equation (8), we obtain the final form (9) of the equation.

$$\frac{N_{\alpha}}{r_{\alpha}} + \frac{N_{\varphi}}{r_{\varphi}} = p_r. \quad (9)$$

### 3 THE RELIABILITY CONDITION OF THIN-WALLED CIRCULAR SHELLS

A typical example of vertical cylindrical steel storage shells are tanks for the storage of crude oil, which are made of thin plates. The dominant load case of the cylindrical tank is the load on the inner surface of the shell due to hydrostatic pressure of oil which loads the shell constantly in parallel circles. For thin-walled circular cylindrical tanks, it holds that  $\alpha=90^{\circ}$ ,  $r=r_{\varphi} \cdot \sin 90^{\circ}=r_{\varphi}$ ,  $r_{\alpha}=\infty$ ,  $\varphi \in \langle 0; 180^{\circ} \rangle$ ,  $0 < r_{\varphi} = r < \infty$ , see Fig. 5.

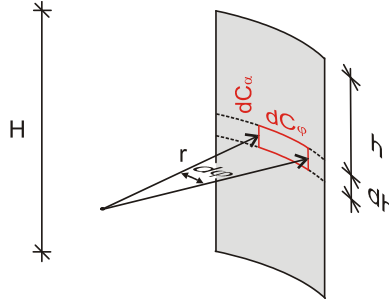


Fig. 5: Thin-walled cylindrical shell

Substituting  $r_{\alpha}=\infty$  and  $r= r_{\varphi}$  into (9), we obtain the equation for a rotationally symmetric circular cylindrical tank as

$$N_{\varphi} = p_r \cdot r, \quad (10)$$

$N_{\varphi}$  is the internal force evoked by the hydrostatic pressure caused by the oil which acts on  $dC_{\alpha}$ , the other internal forces  $N_{\alpha}$ ,  $V_{\alpha}$ ,  $V_{\varphi}$  are equal to zero; it results from the equilibrium conditions. Surface loading  $p_r$  [ $\text{Nm}^{-2}$ ] at the depth  $h$  is due to hydrostatic pressure of oil and is of magnitude:

$$p_r = \rho \cdot g \cdot h, \quad (11)$$

where  $\rho$  is the density of oil at temperature  $20^{\circ}$ , which can be considered as  $880 \text{ kgm}^{-3}$  (globally listed values are in the interval  $730 - 1000 \text{ kgm}^{-3}$ ),  $g$  is acceleration due to gravity, which, in our latitude ( $49^{\circ}$ ), is approximately  $g=9.81 \text{ m}\cdot\text{s}^{-2}$ .

Substituting (11) into (10), we obtain

$$N_{\varphi} = \rho \cdot g \cdot h \cdot r. \quad (12)$$

The resultant force acting perpendicularly to the surface  $t \cdot dC_{\alpha}$  (in the centre of segment 14 or 23) is

$$F = N_{\varphi} \cdot dC_{\alpha}. \quad (13)$$

For reliable design and operation of the tank, the reserve resistance  $G$  must be greater than zero, i.e., the loading force  $F$  (action) is less than or equal to the plate resistance  $R$ :

$$G = R - F > 0, \quad (14)$$

where  $R$  is the resistance which can be calculated as

$$R = f_y \cdot t \cdot dC_\alpha, \quad (15)$$

where  $f_y$  is the yield strength. The condition of reliability (14) can then be written with regard to (13) and (15) as

$$G = f_y \cdot t - \rho \cdot g \cdot h \cdot r \geq 0. \quad (16)$$

Equation (16) represents the equation for assessing the design reliability or service reliability of circular cylindrical tanks according to a number of standards, e.g., EEMUA 159 [5] or API653 [6]. Reliability according to standards is provided mainly by low (safe) values of the permissible stress, however, a non-zero probability that failure will occur always exists, see, e.g., [1, 3].

#### 4 RELIABILITY ANALYSIS

Variables in equation (16) are considered as random in probabilistic assessments of reliability. Failure occurs when inequality (16) is not fulfilled. Reliability of all courses can be evaluated using the reliability index  $\beta$  acc. to Cornell [7], which is defined as the reciprocal of the variation coefficient of the reserve reliability, and is determined assuming normality of distribution of  $G$  acc. to the relation:

$$\beta = \frac{\mu_G}{\sigma_G}, \quad (17)$$

where  $\mu_G$  is the mean value and  $\sigma_G$  is the standard deviation of random variable  $G$ . Reliability index  $\beta$  is related to the failure probability  $P_f$  acc. to the relation  $P_f = \Phi(-\beta)$ , where  $\Phi$  is the cumulative distribution function of the standardized Gaussian probability density function. Due to degradation phenomena, decrease in the thickness of the tank shell takes place during operation. This is frequently caused by corrosion. The effect of changes in plate thicknesses can be studied using (17) provided that random variables  $G$ ,  $F$ ,  $R$  have Gaussian probability density functions. Let us study the relationship between the nominal plate thickness  $t$  and value  $\beta$  (17). In (16)  $h = 22.3 - 0.3 = 22$  m (depth of 0.3 m from the bottom). The distance 0.3 m from the bottom in the reliability condition (16) is taken into account because the calculation of internal forces (9) is inaccurate near the bottom or change in thicknesses in the connection of courses. The value of 0.3 m is listed in standards EEMUA 159 and API 653. Input random values  $f_y$  and  $t$  were considered with Gaussian probability density functions. Yield strength  $f_y$  was considered with mean value  $\mu_{f_y} = 393.5$  MPa and standard deviation  $\sigma_{f_y} = 25.4$  MPa [8]. The thickness of the course  $t$  was introduced with mean value  $\mu_t = t$ , and standard deviation  $\sigma_t = 0.04 \cdot t$  [8]. Random variables  $f_y$  and  $t$  are statistically independent.

The evaluation of  $\beta$  (17) was performed using 100 simulation runs of the Latin Hypercube Sampling method [7, 9]. As an illustrative example, let us consider the tank which is in operation near the village of Nelahozeves. The tank radius is 42.235 m, the fill height is 22.3 m, the tank height is  $H=24.0$  m. The curves of  $\beta$  vs  $t$  for a selected set of values  $\rho \cdot g \cdot h \cdot r$  are presented in Fig. 6. The solid line shows the curve for  $\rho \cdot g \cdot h \cdot r = 9115$  kNm<sup>-1</sup>; corresponding to parameters  $\rho = 1000$  kgm<sup>-3</sup>,  $g = 9.81$  ms<sup>-2</sup>,  $h = 22$  m,  $r = 42.235$  m. It is obvious that the reliability is sufficient for values corresponding to an actual tank of thickness  $t = 39$  mm. The values  $\beta$  for other intermediate factors  $\rho$ ,  $g$ ,  $h$ ,  $r$ ,  $t$  are interpolated from Fig. 6 analogously.

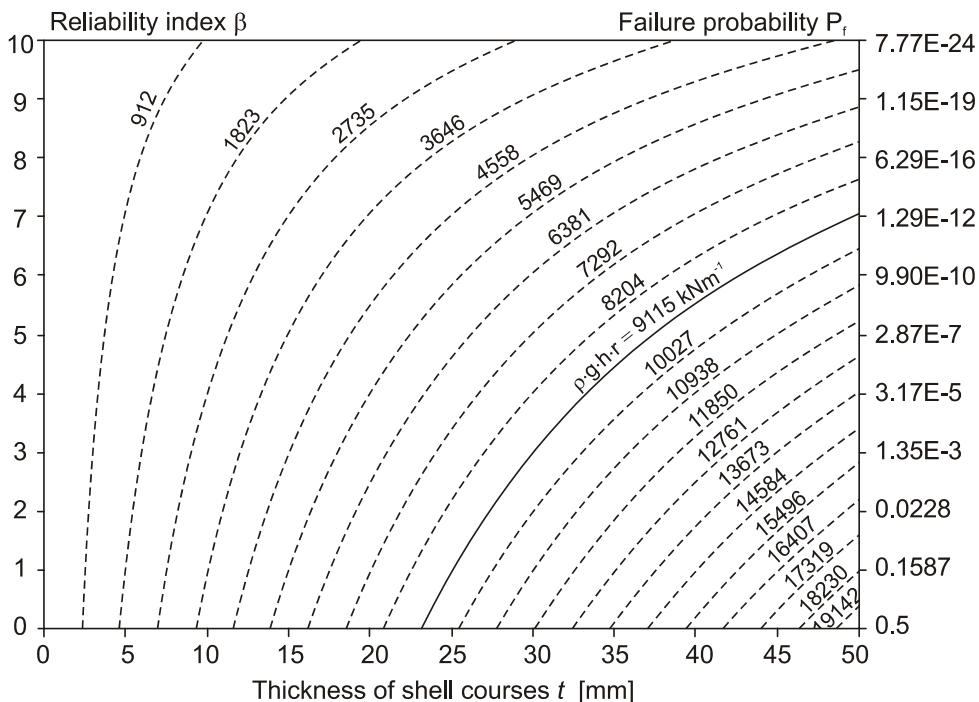


Fig. 6: Reliability index  $\beta$  vs thickness  $t$

## 5 CONCLUSIONS

The methodology for the evaluation of reliability of thin-walled rotational symmetric cylindrical shells was demonstrated in the paper. The reliability was analysed using reliability index  $\beta$ . Fig. 6 shows how the value of  $\beta$  decreases with decreasing  $t$ . Decrease in thickness  $t$  is usually due to corrosion. For safe operation  $\beta > \beta_i$ , where the target value  $\beta_i$  is the normative value ensuring reliable operation of thin-walled structures. The generalization of the analysis of reliability evaluated acc. to  $\rho \cdot g \cdot h \cdot r$  makes it possible to assess the reliability of technologically important facilities of power plants which are modelled as thin-walled rotationally symmetric cylindrical shells loaded along their perimeters by constant pressure perpendicular to the surface of the shell.

## ACKNOWLEDGMENT

The article was elaborated within the framework of the project VG20132015109.

## REFERENCES

- [1] KALA, Z. Reliability and sensitivity analysis of welded shell tanks for crude oil storage. In *Proceeding of International Conference of Numerical Analysis and Applied Mathematics-2014*. Melville, NY, 2014. AIP Conference proceedings, American Institute of Physics, Volume 1648, ISBN 978-0-7354-1287-3.
- [2] KALA, Z., GOTTVALD, J., STONIŠ, J. VEJVODA, S., OMISHORE, A. Sensitivity analysis of stress state of welded tanks. In: *International Conference on New Trends in Statics and Dynamics of Buildings*, Bratislava, Slovak Republic, 2014. ISBN 978-80-227-4259-7.
- [3] KALA, Z. The reliability analysis of welded tanks for oil storage. In *International Conference on European Safety and Reliability Conference - Safety and Reliability: Methodology and Applications*, ESREL 2014, Wroclaw, Poland, 2014, pp. 2249-2254, ISBN: 978-113802681-0.
- [4] KRŮPKA, V., SCHNEIDER, P. *Construction of apparatus (Konstrukce aparátů)*. PC-DIR, Nakladatelství Brno, 1998, p. 290, ISBN 80-214-1124-4.

- [5] EEMUA 159. Users Guide to the Inspection, Maintenance and Repair of Aboveground Vertical Cylindrical Steel Storage Tanks. 2003.
- [6] API Std 653, Tank Inspection, Repair, Alteration, and Reconstruction, Fourth Edition, Includes Addendum 1. 2010.
- [7] McKEY, M., CONOVER, W. & BECKMAN, R. A comparison of the three methods of selecting values of input variables in the analysis of output from a computer code. *Technometrics*. 1979, Volume 21, Issue 2, pp.239-245.
- [8] MELCHER, J., KALA, Z., HOLICKÝ, M., FAJKUS, M. & ROZLÍVKA, L. Design characteristics of structural steels based on statistical analysis of metallurgical products. *Journal of Constructional Steel Research*. 2004, Volume 60, Issue 3-5, pp.795-808, ISSN 0141-0296.
- [9] IMAN, R. & CONOVER, W. Small sample sensitivity analysis techniques for computer models with an application to risk assessment. *Communications in Statistics – Theory and Methods*. 1980, Volume 9, Issue 17, pp.1749-1842.

**Reviewers:**

Doc. Ing. Martin Psočný, PhD., Department of Structural Mechanics, Faculty of Civil Engineering, Slovak University of Technology in Bratislava, Slovak Republic.

Doc. Ing. Peter Koteš, PhD., Department of Structures and Bridges, Faculty of Civil Engineering, University of Žilina, Slovak Republic.