



Aalborg Universitet

AALBORG UNIVERSITY  
DENMARK

## Are dynamic measurements necessary for parameter estimation of the hill model in a subject-specific musculoskeletal model?

de Zee, Mark; Heinen, Frederik; Sørensen, Søren Nørgaard; King, Mark; Lewis, Martin; Lund, Morten; Rasmussen, John

*Publication date:*  
2017

*Document Version*  
Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

### *Citation for published version (APA):*

de Zee, M., Heinen, F., Sørensen, S. N., King, M., Lewis, M., Lund, M., & Rasmussen, J. (2017). *Are dynamic measurements necessary for parameter estimation of the hill model in a subject-specific musculoskeletal model?*. Abstract from XXVI Congress of the International Society of Biomechanics, Brisbane, Australia.

### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- ? Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- ? You may not further distribute the material or use it for any profit-making activity or commercial gain
- ? You may freely distribute the URL identifying the publication in the public portal ?

### **Take down policy**

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.

## ARE DYNAMIC MEASUREMENTS NECESSARY FOR PARAMETER ESTIMATION OF THE HILL MODEL IN A SUBJECT-SPECIFIC MUSCULOSKELETAL MODEL?

<sup>1</sup>Mark de Zee, <sup>1</sup>Frederik Heinen, <sup>1</sup>Søren N. Sørensen, <sup>2</sup>Mark King, <sup>3</sup>Martin Lewis, <sup>1</sup>Morten E. Lund and <sup>1</sup>John Rasmussen  
<sup>1</sup>Aalborg University, Denmark  
<sup>2</sup>Loughborough University, United Kingdom  
<sup>3</sup>Nottingham Trent University, United Kingdom  
 Corresponding author email: mdz@hst.aau.dk

### INTRODUCTION

Musculoskeletal models have now reached a state where we see a transition from more fundamental research towards applications within the clinical field and the industry. In particular models applied within the clinical field, a high level of subject-specific detail is required. Using imaging technology, it is nowadays possible to get a precise model of a specific person's bone geometry. However, it is much more difficult to obtain person-specific parameters of the Hill muscle-tendon model typically used in musculoskeletal models.

Imaging is not sufficient to measure an important parameter like tendon slack length; and even if it were possible, there is no direct relationship between the real anatomy and the parameters in the phenomenological Hill model. Heinen et al. [1] gave an overview of different methods to scale the parameters of the Hill model to an individual person. Using isometric and isovelocit measurements obtained from a dynamometer is one of the few options to get subject-specific parameters of multiple muscles crossing multiple joints, e.g. the muscles of the lower extremity. The disadvantage is that dynamometer experiments require much effort from the subject. This is especially the case for the isovelocit measurements. The aim is therefore to investigate if it is necessary to obtain a full isometric and isovelocit dataset of the joints of the lower extremity.

### METHODS

One male long distance runner (height: 1,85 m, weight: 66,5 kg) was included in this study, which was carried out in accordance with the Loughborough University Ethical Advisory Committee guidelines. The isometric and isovelocit experiments were conducted for the ankle, knee and hip (flexors/extensors) of the dominant leg using a Contrex multi-joint isovelocit dynamometer (CMV AG, Switzerland) using a similar protocol as by Lewis [2]. A total of 21 isometric measurements were performed at different joint angles at the three joints. And a total of 22 isovelocit measurements were performed with different velocities at the three joints.


A lower extremity model was used based upon the TLEMsafe 2.0 model [3] using the AnyBody Modeling System (AnyBody Technology A/S, Denmark). The model was scaled based on anthropometric measurements. Each experimental condition was mimicked in the model to evaluate the joint strength of the model after which two optimization procedures were conducted using the SNOPT optimizer.

The first procedure (Isom-opt) minimized the difference between the experimental and simulated isometric joint strengths. The second procedure (Dyn-opt) minimized the difference between the experimental and simulated isovelocit joint strengths based on the results from the first optimization.

### RESULTS AND DISCUSSION

Firstly, adjusting the Hill parameters using only the Isom-opt on the isometric experimental data resulted in a much better subject-specific model compared to a general scaling algorithm (Ref-model). The average RMS value between the isometric experimental data and the model decreased from 112.4% (Ref-model) to 15.5% (Isom-opt). Moreover, only using isometric data also leads to an improvement of the dynamic muscle characteristics of the subject-specific model. The average RMS percentage difference value between the isovelocit experimental data and the model decreased from 256.2% (Ref-model) to 192.3% (Isom-opt). Using the isovelocit experimental data together with the Dyn-opt procedure, the latter RMS value could be further improved to 157.6%. Figure 1 gives an impression of the effect of the different procedures on the hip extensors in the concentric phase.

The additional improvement using Dyn-opt is relatively small especially if one considers the extra experimental time, the extra computation time and the considerable load on the subject.

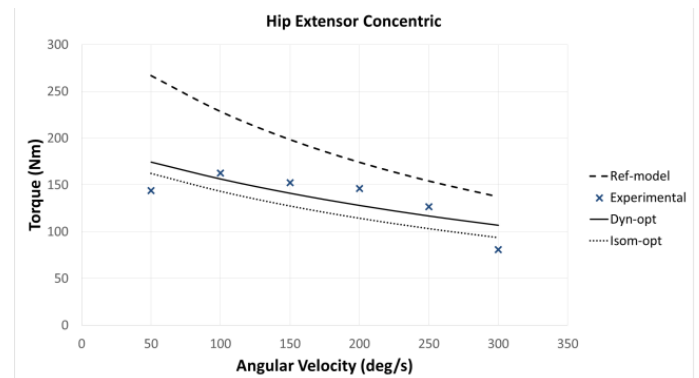

**Figure 1:** Concentric isovelocit joint-torque for the hip extensors experimental, Isom-opt predictions, Dyn-opt predictions and the reference model.

### CONCLUSIONS

For general use, isometric measurements to obtain subject-specific parameters of the Hill model can suffice. This is particularly advantageous when dealing with patients. Highly dynamic applications with subjects who can tolerate the isovelocit experiments would benefit from the use of the Dyn-opt procedure.

### REFERENCES

1. Heinen F, et al. *Proc Inst Mech Eng H*. **230**:976–984, 2016.
2. Lewis MGC, et al. *J Appl Biomech*. **28**:520-529, 2012.
3. Carbone V, et al. *J Biomech*. **48**:734-741, 2011

→Left side margin 1.5cm

↓Margin from the top 2 cm↓

Right side margin1.5.cm ←

↑Margin from the bottom 2 cm↑