

EXPRESS LETTER

Geophysical applicability of atomic clocks: direct continental geoid mapping

Ruxandra Bondarescu,¹ Mihai Bondarescu,^{2,3} György Hetényi,⁴ Lapo Boschi,^{5,1} Philippe Jetzer¹ and Jayashree Balakrishna⁶

¹Institute for Theoretical Physics, University of Zürich, Zürich, Switzerland

²University of Mississippi, Oxford, MS, USA

³Universitatea de Vest, Timisoara, Romania

⁴Swiss Seismological Service, ETH Zürich, Zürich, Switzerland. E-mail: gyorgy.hetenyi@sed.ethz.ch

⁵Department of Earth Sciences, Institute of Geophysics, ETH Zürich, Zürich, Switzerland

⁶Harris-Stowe State University, St. Louis, MO, USA

Accepted 2012 July 30. Received 2012 July 27; in original form 2012 June 27

SUMMARY

The geoid is the true physical figure of the Earth, a particular equipotential surface of the Earth's gravity field that accounts for the effect of all subsurface density variations. Its shape approximates best (in the sense of least squares) the mean level of oceans, but the geoid is more difficult to determine over continents. Satellite missions carry out distance measurements and derive the gravity field to provide geoid maps over the entire globe. However, they require calibration and extensive computations including integration, which is a non-unique operation. Here we propose a direct method and a new tool that directly measures geopotential differences on continents using atomic clocks. General relativity theory predicts constant clock rate at sea level, and faster (slower) clock rate above (below) sea level. The technology of atomic clocks is on the doorstep of reaching an accuracy level in clock rate (frequency ratio inaccuracy of 10^{-18}), which is equivalent to 1 cm in determining equipotential surface (including geoid) height. We discuss the value and future applicability of such measurements including direct geoid mapping on continents, and joint gravity–geopotential surveying to invert for subsurface density anomalies. Our synthetic calculations show that the geoid perturbation caused by a 1.5 km radius sphere with 20 per cent density anomaly buried at 2 km depth in the Earth's crust is already detectable by atomic clocks of achievable accuracy. Therefore atomic clock geopotential surveys, used together with relative gravity data to benefit from their different depth sensitivities, can become a useful tool in mapping density anomalies within the Earth.

Key words: Inverse theory; Space geodetic surveys; Gravity anomalies and Earth structure; Geopotential theory.

1 INTRODUCTION AND RATIONALE

The geopotential U is the potential of the Earth's gravity field. Surfaces of constant geopotential value are called equipotentials, among which the one that most closely reproduces the global mean sea surface is distinguished and is labelled geoid. This definition also provided the first approach to measure the geoid by satellite track altimetry above oceans, and later extending the geoid map over the continents (Marsh & Martin 1982). However, fine-scale observation of the geoid is a challenging geophysical task, especially on continents. On local to regional scales, potential numbers are possible to determine from land gravity measurements and height determination (i.e. spirit levelling); however this technique also uses

the derivative of the potential field. On the global scale, currently applied techniques that provide both high lateral resolution and accuracy are based on indirect approaches. Gravity measurements from several satellites became accessible in the past decade. Co-orbiting GRACE satellites (Gravity Recovery and Climate Experiment; Tapley *et al.* 2004; von Frese *et al.* 2009) provide information on the geoid through an integration of the observed gravity field. Long-term measurements of CHAMP satellite (CHALLENGING Mini-satellite Payload) studied the spatial and temporal variability of the gravity and magnetic field of the Earth over an 8 yr period. However, their spatial resolution is about 400 km (Reigber *et al.* 2006). More recently, gradiometry data from GOCE satellite (Gravity Field and Steady-State Ocean Circulation Explorer) became available.

Results from this mission are beginning to appear in the literature (Pavlis *et al.* 2008; Pail *et al.* 2010, 2011). To obtain the currently most accurate geoid models, twofold integration of gradiometry measurements and calibration based on land measurements is performed (e.g. Biancale *et al.* 2011). In summary: to date, there is no implemented technique able to perform measurement of the geoid or any equipotential surface directly (i.e. without integration).

Here we refresh Bjerhammar's (1986) idea of relativistic geodesy at a time when a suitable tool, namely atomic clocks, are on the doorstep of reaching the necessary accuracy to measure geopotential differences directly and at a scale of interest. This tool is technically achievable in the next years, and therefore it represents a significant methodological advance that is expected to produce a new type of valuable scientific data. To anticipate and to prepare the arrival of such data, this paper's purpose is to reintroduce the theory and concept of atomic clock measurements as a way to measure geopotential differences and to discuss possible applications.

Our proposal is based on Einstein's theory of General Relativity, where massive objects curve space-time and slow down time. As a consequence, clocks beat slower near heavy objects like the Earth (Misner *et al.* 1973). (In more practical terms, the different tick rate of the clocks makes our legs age slower than our head by measurable amounts.) Structures below the Earth's surface with different densities with respect to their environment also affect the clock rate of local observers. A high-precision clock located over significant excess mass below the surface (e.g. large iron ore body) will beat slower than another clock located over a large cavity. In more general terms, sufficiently accurate clock frequency measurements can be directly related to differences in the geopotential of the Earth, which can then be used to infer internal density variations.

The appropriate tools for this approach are portable atomic clocks (e.g. Kleppner 2006; Chou *et al.* 2010a). Experiments conducted by Chou *et al.* (2010a) with two optical atomic clocks connected by a telecommunication fibre wire have measured changes in clock rates due to a change in elevation of 33 cm. In the meantime, the tick rate of high-end atomic clocks is increasingly accurate (e.g. Chou *et al.* 2010b; Campbell *et al.* 2012); hence atomic clocks represent a sensitive way to directly map local changes of the geopotential with an accuracy on the order of 1 cm. Local clock measurements on continents are conceivable in a way similar to relative gravity campaigns: portable clocks will be used for surveying to deduce small-scale internal structure of the Earth. The portable clock will be synchronized via a fibre wire connection to a fixed clock, which could be located at a geophysical observatory or at the mean sea level, for example. The fibre optics links have been shown to work across lengths of 250 km with inaccuracies below 10^{-18} in the frequency ratio (e.g. Newbury *et al.* 2007).

The first benefit of this approach for geophysics is a novel tool to map geopotential differences directly on continents. Compared to existing satellite-derived geoid maps, this local and direct approach will certainly add valuable details on anomalies at local and regional scales, including raw material deposits, fluid reservoirs in the crust and the internal structure of the lithosphere.

Geoid maps could be constructed from clock measurements and the directly determined geopotential differences. We conjecture that, on continents, this procedure using geopotential differences is the most direct possible form of local geoid mapping. The main advantage compared to standard methods of geoid determination from gravity measurements and/or levelling is that no integration of gravitational acceleration g is necessary. Integrals of g , which is a vector field ($g = -\nabla U$), are poorly defined because (1) the direction of g is usually not measured (in the great majority of cases only the

magnitude of its vertical component is measured), and (2) more importantly, the required integration is a non-unique mathematical operation. In practical terms, equipotential surfaces can be constructed by connecting locations with the same clock rates. Then, to obtain the geoid itself, standard height reduction or downward continuation would still need to be performed, although over relatively small altitude differences.

Second, local measurements of changes in the geopotential combine well with gravitational acceleration data at the same points. These two quantities have different dependencies on the distance R to a given inhomogeneity: for example, for a spherical shape (like the Earth) the geopotential U is inversely proportional to R , while the gravity g is inversely proportional to R^2 . The combined use of independent measurements of U and g anomalies provides a new way of exploring structures beneath the Earth's surface. In the case of a buried sphere of constant density anomaly, as shown by a synthetic example later, one can directly find the distance to the sphere by dividing ΔU by Δg . This example is also used to compute the minimum size of objects to which high-end atomic clocks (with an accuracy of 1 cm in equivalent geopotential height) would be sensitive as a function of depth and density anomaly. More realistic cases and surveying strategy will be presented in future work.

2 SENSITIVITY OF ATOMIC CLOCKS

We here discuss future portable atomic clocks that could provide the first direct and local measurements of the geoid. For two identical clocks operating at locations x_1 and x_2 , the ratio of their frequencies f will depend on the geopotential U of the Earth at the location of each clock. For stationary observers,

$$\frac{f(x_1)}{f(x_2)} \approx 1 - \frac{U(x_2) - U(x_1)}{c^2}, \quad (1)$$

where c is the speed of light. With $\Delta U = U(x_2) - U(x_1)$, and $\Delta f = f(x_2) - f(x_1)$, the fractional frequency inaccuracy is $\Delta f/f(x_2) = \Delta U/c^2$. From eq. 1 it can be seen that equipotential surfaces ($\Delta U = 0$) correspond to surfaces of constant clock rate ($\Delta f = 0$). If the clocks are not stationary with respect to each other, higher order corrections need to be included (Blanchet *et al.* 2001).

Some of the first calculations for the relativistic rate shift of clocks in the vicinity of the Earth, including all terms larger than one part in 10^{18} , were performed by Wolf & Petit (1995), who also discussed the synchronization of clocks (Petit & Wolf 1994). However, the frequency ratio inaccuracy of the best atomic clocks of the time was only about 10^{-15} . The most accurate atomic clocks to date have reached a frequency inaccuracy of 8.6×10^{-18} (Chou *et al.* 2010b). Technology that could improve the frequency inaccuracy of atomic clocks to 10^{-19} is currently being tested (Campbell *et al.* 2012). These highly accurate clocks are still laboratory size devices. A compact, but less accurate clock with $\Delta f/f \sim 10^{-16}$ is already built for the Atomic Clock Ensemble in Space mission (Heß *et al.* 2011). Progress is being made towards increasing the accuracy to $\Delta f/f \sim 10^{-18}$, which is the envisioned sensitivity for clocks that are being built for the Space-Time Explorer and Quantum Test of the Equivalence (STE-QUEST; <http://sci.esa.int/science-e/www/area/index.cfm?fareaid=127>), one of the four possible medium size missions to be implemented in European Space Agency (ESA)'s Cosmic Vision program in 2022. The synchronization of portable atomic clocks through space is a possibility, either between a clock on land and a clock on a satellite, or between two clocks on land through a telecommunication satellite. However, the accuracy of such communications can be a

problem as they may be affected by atmospheric turbulences (e.g. Djerroud *et al.* 2010).


In the following calculations we assume a frequency inaccuracy $\Delta f/f$ of $\sim 10^{-18}$. This frequency inaccuracy corresponds to a change in the gravitational potential of $\Delta U = c^2 10^{-18} \approx 0.1 \text{ m}^2 \text{ s}^{-2}$. The corresponding sensitivity in geoid height can be computed by assuming the two clocks are at height $R_E + \Delta h$ and R_E , respectively, leading to

$$\Delta U = \frac{GM_E}{R_E} - \frac{GM_E}{R_E + \Delta h} \approx \frac{GM_E \Delta h}{R_E^2}, \quad (2)$$

where G is Newton's gravitational constant, R_E and M_E are the mean radius and mass of the Earth. For the standard values of $R_E \approx 6371 \text{ km}$ and $M_E \approx 5.97 \times 10^{24} \text{ kg}$ and $\Delta U = 0.1 \text{ m}^2 \text{ s}^{-2}$, one obtains a sensitivity in geoid height of $\Delta h \approx 1 \text{ cm}$.

3 APPLICABILITY TO DIRECT GEOID MEASUREMENTS

The geoid over oceans can be known at relatively high (between minute and degree) spatial resolution. While the oceanic crust is thought to be simpler both in structure and in density variations than the continental crust, the amplitude of geoid anomalies in the ocean due to the underlying mantle structure reach up to a height of 100 m (Marsh & Martin 1982). On continents, a resolution of 1 cm in geoid height with unlimited spatial resolution, which is achievable considering current technological advances, will therefore be largely sufficient to add significant details to existing geoid maps derived from satellite measurements. These direct measurements of geopotential differences, leading to a more direct continental geoid as outlined earlier (Section 1), will not only provide the first, high-resolution geoid map *per se*, but will also reveal density anomalies from large to small, mantle- to crustal-scale sources, including structure of the lithosphere, fluid reservoirs in the crust and dense ore deposits. Moreover, inverse method approaches looking to map structural and/or density variations of the Earth's interior will further benefit from the joint geopotential and gravity surveys.

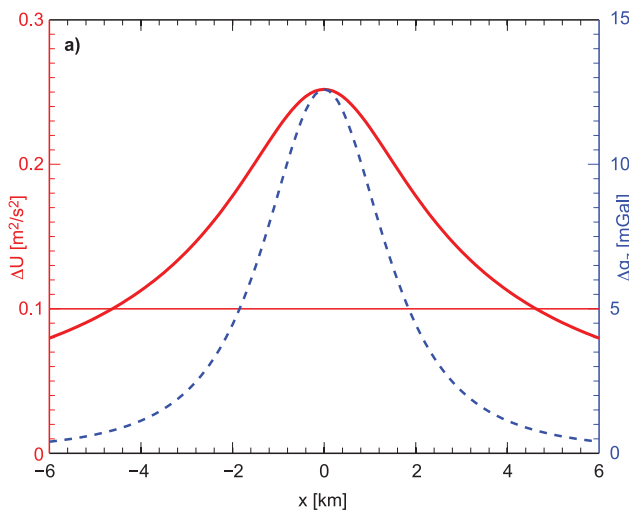

4 GEOPOTENTIAL AND GRAVITY ANOMALIES

While gravimeters (both absolute and relative) have become highly accurate instruments, gravity alone is insufficient to map subsurface structures. This is due to the non-uniqueness of the inverse problem. Combining local gravity with direct, local geopotential measurements reduces some of this degeneracy (i.e. depth determination) and is able to provide meaningful inversion results. In practical terms, using already available relative gravimeters and future portable atomic clocks, joint field surveying becomes a conceivable approach.

In this study, we take two simple synthetic examples for a joint gravity–geopotential survey: a buried sphere (see later) and a buried 3-D rectangular slab (see the Supporting Information), both of constant density anomaly. We then investigate the extent to which the degeneracy of the inverse problem is reduced by having both gravity and geopotential measurements.

4.1 Buried sphere

We assume a spherical body of density ρ_1 buried at a depth h in a medium of density ρ_0 . The corresponding geopotential anomaly (Turcotte & Schubert 2002) is

$$\Delta U(x) = \frac{4\pi G b^3 \Delta \rho}{3(x^2 + h^2)^{3/2}}, \quad (3)$$

where $\Delta \rho = \rho_1 - \rho_0$ is the density anomaly of the sphere compared to its surroundings, b is its radius and x is horizontal distance on the surface measured from the centre of the sphere. The related gravity anomaly in the z -direction is

$$\Delta g_z(x) = \frac{4\pi G h b^3 \Delta \rho}{3(x^2 + h^2)^{3/2}}. \quad (4)$$

As a synthetic example, we consider a spherical (radius $b = 1.5 \text{ km}$) piece of mantle or magma ($\rho_1 \approx 3200 \text{ kg m}^{-3}$) located in the shallow upper crust ($\rho_0 = \rho_{\text{crust}} \approx 2670 \text{ kg m}^{-3}$) at a depth of $h = 2 \text{ km}$, which is a relative density anomaly of $\Delta \rho / \rho_{\text{crust}} = 20$ per cent. Such a scenario (Fig. 1) would easily be detectable with

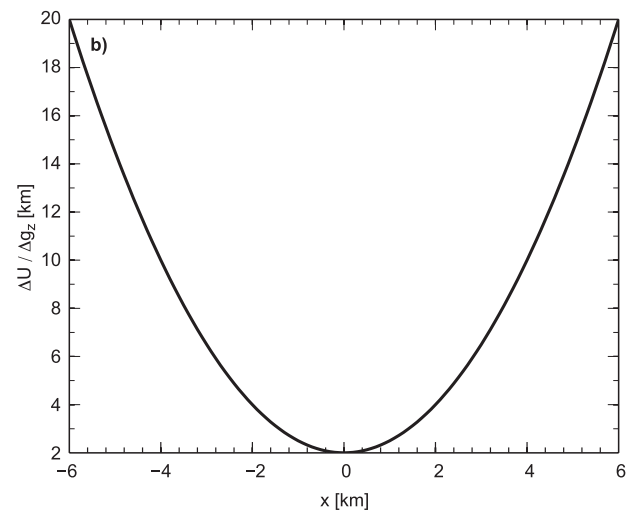


Figure 1. (a) Geopotential anomaly ΔU (solid line) and gravity anomaly Δg (dashed line) as a function of displacement for a sphere of radius $b = 1.5 \text{ km}$ and a density contrast of 20 per cent with respect to the surrounding crust buried with its centre at a depth of $h = 2 \text{ km}$. The thin horizontal line shows the detection threshold of $\Delta U_{\text{max}} = 0.1 \text{ m}^2 \text{ s}^{-2}$ for atomic clocks with frequency inaccuracies of 10^{-18} . (b) To determine the depth to the centre of the sphere, $\Delta U / \Delta g$ is displayed as function of horizontal position. The resulting curve is a parabola with its minimum located at the searched depth h .

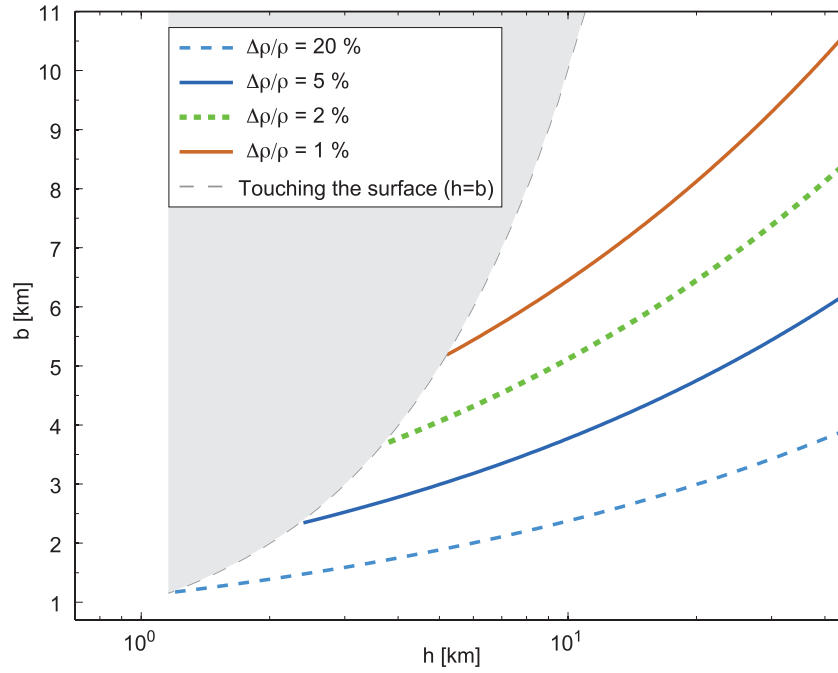


Figure 2. Minimum radius of a buried sphere of radius b that atomic clocks are able to resolve, as a function of depth h and relative density anomaly $\Delta\rho/\rho$ of 1, 2, 5 and 20 per cent. Here we use an accuracy of $\Delta U_{\max} = 0.2 \text{ m}^2 \text{ s}^{-2}$, that is the double of the expected accuracy, to take into account potential measurement errors. The upper left part of the diagram, shaded in brown, corresponds to spheres touching the ground; therefore the detection threshold curves are not calculated for this domain.

both atomic clocks ($\Delta U_{\max} \approx 0.25 \text{ m}^2 \text{ s}^{-2}$) and relative gravimeters ($\Delta g_{z, \max} \approx 12.6 \text{ mGal}$). The primary limitation comes from the atomic clock sensitivity since relative gravimeters have sensitivities in the range of μGal . We then consider the ratio of ΔU and Δg_z as a function of x :

$$\frac{\Delta U}{\Delta g_z} = h + \frac{x^2}{h} \approx h \text{ for } x \ll h. \quad (5)$$

In this simple case, the above ratio can be used to determine the depth h to the centre of the anomaly (see Fig. 1b).

To illustrate the sensitivity of our method, we compute from eq. (3) the radius of the smallest detectable sphere as a function of depth, density contrast and clock sensitivity:

$$b = \left(\frac{3h\Delta U_{\max}}{4\pi G\Delta\rho} \right)^{1/3}, \quad (6)$$

where $\Delta U_{\max} = \Delta U(x=0)$.

Fig. 2 displays b for density contrast ratios $\Delta\rho/\rho_{\text{crust}}$ ranging from 1 to 20 per cent as a function of depth. The amplitude of eventual errors or noise is not yet known, but for safety we use a frequency inaccuracy ratio two times higher than expected ($\Delta U_{\max} \approx 0.2 \text{ m}^2 \text{ s}^{-2}$). Fig. 2 shows the dashed lines above which atomic clocks are able to detect buried objects for each density contrast. Only buried ($h \geq b$) spheres are considered. At large $\Delta\rho/\rho_{\text{crust}}$ of 20 per cent, an $\sim 4 \text{ km}$ radius sphere is detectable down to 45 km depth. For a lower density contrast of 1 per cent, a 10 km sphere can be measured to a depth of $\sim 37 \text{ km}$. For a 3-D example, we refer to the Supporting Information.

For more complex structures or future real surveys, eqs (5) and (6) cannot be expressed analytically, but the different sensitivities of gravity (proportional to $1/R^2$) and geopotential (proportional to $1/R$) measurements will still reduce the degeneracy of the inverse problem compared to the case when only gravity is used. It is also

important to note that eqs (3) and (4) have different physical meanings: due to the relative nature of easily performed gravity measurements in the field, as well as to the inherent properties of integration, the two methods will provide independent measurements and it is their different sensitivity that will allow better determination of subsurface structures.

5 CONCLUSIONS

Mapping the geoid directly and locally with portable atomic clocks is a dramatic application of General Relativity to our everyday life, which is becoming possible with improving technology. State of the art atomic clocks are expected to reach sensitivities of the order of 10^{-18} in frequency ratio inaccuracy within the next decade; this corresponds to a sensitivity of $\Delta h = 1 \text{ cm}$ in geoid height and to a geopotential difference of $\Delta U = 0.1 \text{ m}^2 \text{ s}^{-2}$. It will be soon possible to conduct measurements with a portable atomic clock around the Earth in the same way as with a relative gravimeter, and the spatial resolution of geopotential measurements would become unlimited. Such atomic clocks could be used to add significant details to current geoid maps derived from satellite measurement and extensive computations.

In the temporary lack of real data from high-accuracy atomic clock measurements, we computed synthetic examples to demonstrate the interest and applicability of the approach. Using the simple case of a buried sphere of constant density anomaly, we explored the minimum detection size of spheres to which atomic clocks of achievable accuracy would be sensitive. The radius of the object to detect b is proportional to $h^{1/3} \Delta\rho^{-1/3}$; that is, for example, at 2 km depth and 20 per cent density anomaly, a sphere of 1.5 km radius could be detected; or, a larger object of 4 km radius and the same density contrast is possible to detect down to 45 km depth. At the moment we cannot yet quantify the magnitude of practical errors (as

the current accuracy of portable tools is 100 times larger), but the above mentioned calculations were made by considering a twofold safety margin of the expected accuracy. Thus, the potential for a powerful tool is present, and the approach is to be validated upon completion of the instruments.

We also proposed to combine local gravity measurements with local geopotential measurements from atomic clocks. Since the gravitational acceleration and the potential have different dependencies of the distance to the anomaly, combining these measurements adds information towards imaging density structure at depth. In the case of the buried sphere of constant density, one can find the distance h to the buried structure from $\Delta U/\Delta g_z$, which is parabola with a value of h at its apex. In more realistic examples the shape and the amplitude of the density heterogeneity are unknown. However, having measurements of both ΔU and Δg_z reduces the degeneracy of the inverse problem in mapping underground structures. Practical applications may require area-wise mapping of both geopotential and gravity.

Atomic clocks are becoming compact, portable and stable enough to fly in space. ESA has already built a compact atomic clock with an accuracy of 10^{-16} that will be placed on the International Space Station by 2014 (Heß et al. 2011). Clocks with accuracies more than an order of magnitude higher exist in laboratories, and even more accurate clocks are being developed. We believe that this is the right time to start a discussion in the geophysics community about possible benefits from this new technology. Other potential applications include using successive measurements of geopotential and gravity to understand underground water or magma movements. Such measurements might also be used in post-earthquake analysis to map the related structural changes. Local and direct measurements of the geoid will likely have significant impact on the current mapping of the Earth's structure on continents.

ACKNOWLEDGMENTS

We thank David Hume, Steve Lecomte, Andrew Lundgren, Domenico Giardini and Alain Geiger for useful discussions. We also thank two anonymous reviewers and the Editor for their comments and advices. RB and PJ acknowledge support from the Dr. Tomalla Foundation and the Swiss National Foundation.

REFERENCES

- Biancale, R., Lemoine, J.-M. & Panet, I., 2011. *Le champ de gravité de la Terre*. Poster available at http://grgs.obs-mip.fr/content/download/384/2752/file/poster_gravit e.pdf, accessed 2012 June 27.
- Bjerhammar, A., 1986. Relativistic geodesy. NOAA Technical Rep. NOS 118 NGS 36, Rockville, 45 p. Available at: http://www.ngs.noaa.gov/PUBS_LIB/RelativisticGeodesy_TR_NOS118_NGS36.pdf, accessed 2012 July 26.
- Blanchet, L., Salomon, C., Teysandier, P. & Wolf, P., 2001. Relativistic theory of time and frequency transfer to order c^{-3} , *Astron. Astrophys.*, **370**, 320–329, doi:10.1051/0004-6361:20010233.

- Campbell, C.J. et al., 2012. Single-ion nuclear clock for metrology at the 19th decimal place, *Phys. Rev. Lett.*, **108**, 120802, doi:10.1103/PhysRevLett.108.120802.
- Chou, C.W. et al., 2010a. Optical clocks and relativity, *Science*, **329**, 1630–1633, doi:10.1126/science.1192720.
- Chou, C.W. et al., 2010b. Frequency comparison of two high-accuracy Al^+ optical clocks, *Phys. Rev. Lett.*, **104**, 070802, doi:10.1103/PhysRevLett.104.070802.
- Djerroud, K. et al., 2010. Coherent optical link through the turbulent atmosphere, *Opt. Lett.*, **35**, 1479–1481, doi:10.1364/OL.35.001479.
- von Frese, R.R.B. et al., 2009. GRACE gravity evidence for an impact basin in Wilkes Land, Antarctica, *Geochem. Geophys. Geosyst.*, **10**, Q02014, doi:10.1029/2008GC002149.
- Heß, M.P. et al., 2011. The ACES mission: system development and test status, *Acta Astronaut.*, **69**, 929–938, doi:10.1016/j.actaastro.2011.07.002.
- Kleppner, D., 2006. Time too good to be true, *Phys. Today*, **59**, 10–11, <http://dx.doi.org/10.1063/1.2195297>.
- Marsh, J.G. & Martin, T.V., 1982. The SEASAT altimeter mean sea surface model, *J. geophys. Res.*, **87**, 3269–3280, doi:10.1029/JC087iC05p03269.
- Misner, C.W., Thorne, K.S. & Wheeler, J.A., 1973. *Gravitation*, 1st edn, W. H. Freeman & Co., San Francisco, CA.
- Newbury, N.R., William, P.A. & Swann, W.C., 2007. Coherent transfer of an optical carrier over 251 km, *Opt. Lett.*, **32**, 3056–3058, doi:10.1364/OL.32.003056.
- Pail, R. et al., 2010. Combined satellite gravity field model *GOCO01S* derived from GOCE and GRACE, *Geophys. Res. Lett.*, **37**, L20314, doi:10.1029/2010GL044906.
- Pail, R. et al., 2011. First GOCE gravity field models derived by three different approaches, *J. Geodyn.*, **85**, 819–843, doi:10.1007/s00190-011-0467-x.
- Pavlis, N.K. et al., 2008. An earth gravitational model to degree 2160: EGM2008, *Geophys. Res. Abstr.*, **10**, EGU2008-A-01891.
- Petit, G. & Wolf, P., 1994. Relativistic theory for picosecond time transfer in the vicinity of the Earth, *Astron. Astrophys.*, **286**, 971–977.
- Reigber, C. et al., 2006. CHAMP mission 5 years in orbit, in *Observation of the Earth System from Space*, pp. 3–16, eds Flury, J., Rummel, R., Reigber, C., Rothacher, M., Boedecker, G. & Schreiber, U., Springer, Berlin.
- Tapley, B.D., Bettadpur, S., Watkins, M. & Reigber, C., 2004. The gravity recovery and climate experiment: mission overview and early results, *Geophys. Res. Lett.*, **31**, L09607, doi:10.1029/2004GL019920.
- Turcotte, D.L. & Schubert, G., 2002. *Geodynamics*, 2nd edn, Cambridge Univ. Press, Cambridge.
- Wolf, P. & Petit, G., 1995. Relativistic theory for clock synchronization and the realization of geocentric coordinate times, *Astron. Astrophys.*, **304**, 653–661.

SUPPORTING INFORMATION

Additional Supporting Information may be found in the online version of this article:

Appendix. Similarly to the synthetic example of a buried sphere in Section 4.1, here we present the case of a buried 3-D rectangular body (slab) of constant density.

Please note: Wiley-Blackwell is not responsible for the content or functionality of any supporting materials supplied by the authors. Any queries (other than missing material) should be directed to the corresponding author for the article.