

Strathprints Institutional Repository

Zhang, Y.H. and Reese, J.M. (2003) *The drag force in two-fluid models of gas-solid flows*. Chemical Engineering Science, 58 (8). pp. 1641-1644. ISSN 0009-2509

Strathprints is designed to allow users to access the research output of the University of Strathclyde. Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. You may not engage in further distribution of the material for any profitmaking activities or any commercial gain. You may freely distribute both the url (<http://strathprints.strath.ac.uk/>) and the content of this paper for research or study, educational, or not-for-profit purposes without prior permission or charge.

Any correspondence concerning this service should be sent to Strathprints administrator: <mailto:strathprints@strath.ac.uk>



Zhang, Y.H.* and Reese, J.M. * (2003) The drag force in two-fluid models of gas-solid flows. Chemical Engineering Science, 58 (8). pp. 1641-1644. ISSN 0009-2509

<http://eprints.cdlr.strath.ac.uk/6100/>

This is an author-produced version of a paper published in Chemical Engineering Science, 58 (8). pp. 1641-1644. ISSN 0009-2509. This version has been peer-reviewed, but does not include the final publisher proof corrections, published layout, or pagination.

Strathprints is designed to allow users to access the research output of the University of Strathclyde. Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. You may not engage in further distribution of the material for any profitmaking activities or any commercial gain. You may freely distribute both the url (<http://eprints.cdlr.strath.ac.uk>) and the content of this paper for research or study, educational, or not-for-profit purposes without prior permission or charge. You may freely distribute the url (<http://eprints.cdlr.strath.ac.uk>) of the Strathprints website.

Any correspondence concerning this service should be sent to The Strathprints Administrator: eprints@cis.strath.ac.uk

The drag force in two-fluid models of gas-solid flows

Yonghao Zhang ^a and Jason M. Reese ^b

^a *Department of Computational Science and Engineering, Daresbury Laboratory,
Daresbury, Warrington, WA4 4AD, UK*

^b *Department of Mechanical Engineering, King's College London, London WC2R 2LS, UK*

1. Introduction

Currently, the two most widespread methods for modelling the particulate phase in numerical simulations of gas-solid flows are discrete particle simulation (see, e.g., Mikami, Kamiya and Horio 1998), and the two-fluid approach, e.g. kinetic theory models (see, e.g., Louge, Mastorakos and Jenkins 1991). In both approaches the gas phase is described by a locally-averaged Navier-Stokes equation and the two phases are usually coupled by a drag force. Due to the large density difference between the particles and the gas, inter-phase forces other than the drag force are usually neglected, so it plays a significant role in characterising the gas-solid flow. Yasuna, Moyer, Elliott and Sinclair (1995) have shown that the solution of their model is sensitive to the drag coefficient. In general, the performance of most current models depends critically on the accuracy of the drag force formulation.

2. Problems with the drag force formulation

The drag force experienced by a spherical particle of diameter d moving in an infinite fluid of density ρ_1 is given by

$$f_{drag} = \frac{\pi}{8} C_D d^2 \rho_1 |\bar{\mathbf{V}} - \mathbf{u}| (\bar{\mathbf{V}} - \mathbf{u}), \quad (1)$$

where \mathbf{u} is the velocity of the particle, $\bar{\mathbf{V}}$ is the fluid velocity at infinity, and C_D is the drag coefficient. If the particle is surrounded by many others, and the local particle volume fraction is ε_2 , the drag force volume-averaged over a cell containing only a single particle should be given by

$$\bar{f}_{drag} = \beta (\mathbf{V} - \mathbf{u}) = \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} |\bar{\mathbf{v}} - \mathbf{u}| (\bar{\mathbf{v}} - \mathbf{u}), \quad (2)$$

where the volume of the cell, $\delta V_1 = 1/6\pi d^3/\varepsilon_2$, is the characteristic element of volume of a two-phase mixture containing a single particle and associated fluid; $\bar{\mathbf{v}}$ is the averaged velocity of

this fluid over δV_1 . However, the particle volume fraction has been proven to have a more complex and subtle influence on the drag force (e.g. Wen and Yu 1966; Di Felice 1994). Generally, the momentum transfer coefficient, β , can be expressed as

$$\beta = \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} |\bar{\mathbf{v}} - \mathbf{u}| f(\varepsilon_2), \quad (3)$$

and many forms for the correction factor $f(\varepsilon_2)$ have been proposed. For example, Di Felice (1994) gave

$$f(\varepsilon_2) = \varepsilon_2^{-\chi}, \quad (4)$$

where χ is an empirical coefficient, which depends on the particle Reynolds number Re_p via

$$\chi = 3.7 - 0.65 \exp\left[-\frac{1}{2}(1.5 - \log_{10} \text{Re}_p)^2\right]. \quad (5)$$

In discrete particle simulations, the usual expressions for the momentum transfer coefficient are extended from the work of Ergun and Orning (1949), Ergun (1952) and Wen and Yu (1966), where the influence of solid volume fraction is incorporated:

$$\beta = 150 \frac{\varepsilon_2^2 \mu}{\varepsilon_1 d^2} + 1.75 \frac{\varepsilon_2 \rho_1}{d} |\bar{\mathbf{v}} - \mathbf{u}|, \quad \varepsilon_1 < 0.8, \quad (6)$$

$$\beta = \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} |\bar{\mathbf{v}} - \mathbf{u}| \varepsilon_1^{-2.65}, \quad \varepsilon_1 \geq 0.8, \quad (7)$$

where μ is the fluid viscosity and ε_1 is the local fluid volume fraction such that $\varepsilon_1 + \varepsilon_2 = 1$. Despite the inconsistency at $\varepsilon_1 = 0.8$ for equations (6) and (7), numerical simulations using these formulations show good agreement with experimental data from pneumatic conveyors and fluidised beds (Kawaguchi, Tanaka and Tsuji 1998; Mikami, Kamiya and Horio 1998; Hoomans, Huipers, Briels and van Swaaij 1996).

However, the work of Ergun and Wen and Yu has also been widely adopted within many two-fluid models for gas-solid flows, where the particulate and fluid velocities are averaged over the much larger volume δV_2 which contains statistically many particles (see Figure 1). For example, Neri and Gidaspow (2000) and Nieuwland, van Sint Annaland, Kuipers and van Swaaij (1996) use momentum transfer coefficients of a similar form to those given in equations (6) and (7) above, viz.

$$\beta_1 = 150 \frac{\varepsilon_2^2 \mu}{\varepsilon_1 d^2} + 1.75 \frac{\varepsilon_2 \rho_1}{d} |\mathbf{V} - \mathbf{U}|, \quad \varepsilon_1 < 0.8, \quad (8)$$

$$\beta_1 = \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} |\mathbf{V} - \mathbf{U}| \varepsilon_1^{-2.65}, \quad \varepsilon_1 \geq 0.8. \quad (9)$$

where \mathbf{V} and \mathbf{U} are the gas and particle velocities, respectively, averaged over the element volume δV_2 . If we assume that, at least, \mathbf{V} equals $\bar{\mathbf{v}}$ for the gas, the only difference between equation pairs (6) and (8), and (7) and (9) is whether an instantaneous or an averaged particulate velocity is used.

The original phenomenological Ergun formula is based on observations on a fixed bed where the particles have no relative motion. If it is to be extended to freely moving particles, not only the particle volume fraction but also the random fluctuational velocity of individual particles should be considered. The work of Wen and Yu also only addressed the effect of voidage on the drag force. If we assume the drag force acting on a particle surrounded by others can be expressed by equations (2) and (3), the averaged drag force in a two-fluid model can be re-derived as follows.

3. A new expression for the averaged drag force

Anderson and Jackson's (1967) rigorously-derived two-fluid model for particle-fluid flows required volume-averaging the point equations of motion for the fluid and individual particles. In order to smooth out high frequency fluctuations, the elemental volume chosen for this was δV_2 , rather than δV_1 (see Figure 1). The choice of the requisite volume element is discussed in Anderson and Jackson (1967).

For gas-solid flows, especially with high particle concentration, the inertial energy loss (which is proportional to the relative velocity squared) is mainly due to local flow contraction, expansion and change in flow direction, rather than gas phase turbulence: this inertial loss also occurs when the gas flow is laminar. As Niven (2002) pointed out: "in fully turbulent flow through a packed bed, local losses will very likely dominate the overall pressure loss". Consequently, the gas turbulence may not be the dominant mechanism in particle-gas momentum and energy exchange. In any case, $\bar{\mathbf{v}}$ is also an averaged gas velocity on the element volume of δV_1 . Therefore we assume $\bar{\mathbf{v}} = \mathbf{V}$ in the derivation below and decompose the velocity of a particle as $\mathbf{u} = \mathbf{U} + \mathbf{u}'$, where \mathbf{u}' is the instantaneous fluctuational velocity of the particle. The distribution of particle fluctuational velocity in the elemental volume δV_2 is assumed to be described by the Maxwellian

$$f^{(0)}(\mathbf{u}') = \frac{1}{(2\pi T)^{3/2}} \exp\left[-\frac{\mathbf{u}'^2}{2T}\right], \quad (10)$$

where T is the granular temperature, given by $1/3\langle \mathbf{u}'^2 \rangle$.

The averaged drag force over δV_2 , containing n particles, i.e. n cells each of volume δV_1 , can be given by

$$\mathbf{F}_{drag} = \sum_{i=1}^n \bar{\mathbf{f}}_{drag,i} = \int_{-\infty}^{\infty} \bar{\mathbf{f}}_{drag} f(\mathbf{u}') d(\mathbf{u}'), \quad (11)$$

where $f(\mathbf{u}')$ is particle velocity distribution function. Substituting equations (2) and (3) into this equation, and assuming the gradient of the fluid volume fraction is negligible in the elemental volume δV_2 , we obtain

$$\mathbf{F}_{drag} = \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} f(\varepsilon_2) \int_{-\infty}^{\infty} |\mathbf{V} - \mathbf{U} - \mathbf{u}'| (\mathbf{V} - \mathbf{U} - \mathbf{u}') f(\mathbf{u}') d(\mathbf{u}'), \quad (12)$$

where the drag coefficient, C_D , is treated as an ‘‘averaged value’’ over δV_2 . Under the assumed Maxwellian distribution of the particle fluctuation velocity, we find

$$\int_{-\infty}^{\infty} |\mathbf{u}'| f^{(0)}(\mathbf{u}') d\mathbf{u}' = \sqrt{\frac{8T}{\pi}}. \quad (13)$$

If $\sqrt{8T/\pi} < |\mathbf{U} - \mathbf{V}|$, which is satisfied by most gas-solid flows in pneumatic conveying systems and circulating fluidised beds, equation (12) then becomes

$$\mathbf{F}_{drag} \approx \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} (\mathbf{V} - \mathbf{U}) f(\varepsilon_2) \int_{-\infty}^{\infty} |\mathbf{V} - \mathbf{U} - \mathbf{u}'| f^{(0)}(\mathbf{u}') d(\mathbf{u}'), \quad (14)$$

If \mathbf{F}_{drag} is expressed in the standard form $\beta_0(\mathbf{V} - \mathbf{U})$, then,

$$\begin{aligned} \beta_0 &= \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} f(\varepsilon_2) \int_{-\infty}^{\infty} |\mathbf{V} - \mathbf{U} - \mathbf{u}'| f^{(0)}(\mathbf{u}') d(\mathbf{u}') \\ &\approx \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} \left[(\mathbf{V} - \mathbf{U})^2 + \frac{8T}{\pi} \right]^{1/2} f(\varepsilon_2) \\ &= \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} |U_r| f(\varepsilon_2). \end{aligned} \quad (15)$$

Here, U_r is defined as the mean magnitude of the slip velocity:

$$U_r = \left[(\mathbf{V} - \mathbf{U})^2 + \frac{8T}{\pi} \right]^{1/2}. \quad (16)$$

Because there are many different formulas for the standard C_D , and further uncertainty is inevitably introduced when considering the turbulence effects etc. on this coefficient, in the derivation of equation (12) C_D is treated as a function of U_r , and de-coupled from the integral procedure. Then, the commonly-adopted expression for the drag coefficient is that for a single particle, given experimentally by Kürten, Raasch and Rumpf (1966),

$$C_D = \left(0.28 + \frac{6}{\sqrt{\text{Re}_p}} + \frac{21}{\text{Re}_p} \right), \quad (17)$$

which is valid for particle Reynolds numbers between 0.1 and 4000. The C_D used in equation (15) could be extended from equation (17) by using a particle Reynolds number based on the new U_r , i.e.

$$\text{Re}_p = \frac{\rho_1 U_r d}{\mu}. \quad (18)$$

If the form of $f(\varepsilon_2)$ is that given in equations (6) and (7), the corresponding new expressions for the averaged drag force in a two-fluid model are

$$\beta_0 = 150 \frac{\varepsilon_2^2 \mu}{\varepsilon_1 d^2} + 1.75 \frac{\varepsilon_2 \rho_1}{d} U_r, \quad \varepsilon_1 < 0.8, \quad (19)$$

$$\beta_0 = \frac{3}{4} C_D \frac{\varepsilon_2 \rho_1}{d} U_r \varepsilon_1^{-2.65}, \quad \varepsilon_1 \geq 0.8. \quad (20)$$

Both β_1 of equations (8) and (9), and β_0 of equations (19) and (20) incorporate the influence of solid volume fraction. Additionally, β_0 addresses the influence of the relative random motion of the particles.

4. Discussion

The impact of this new β_0 on predicted mean slip velocities and pressure drops in a gas-solid system is now discussed; the vertical flow of solid particles in a pipe is a common test-case for two-phase flow models. Predicted particulate axial velocity profiles using the previous expression for the inter-phase momentum transfer coefficient, β_1 , as given in equation (9), and the present one, β_0 , as given in equation (20), are shown in Figure 2. The experimental data and system parameters are taken from the work of Maeda, Hishida and Furutani (1980). Details of the numerical simulation are given in Zhang and Reese (2001), and the influence of the particle volume fraction on the drag force is treated in the same way as Wen and Yu (1966). As β_0 takes into account the relative fluctuational motion between the two phases, a

smaller slip velocity is predicted. This then leads to a lower axial pressure drop along the pipe, which can be seen in Figure 3. There is a negligible difference between profiles of normalised gas axial velocity calculated using β_0 and β_1 .

Figure 3 compares the experimental data of Miller and Gidaspow (1992) with the simulation results of the model of Neri and Gidaspow (2000) using β_1 , and the present model using β_0 . In the two simulations, all other model parameters apart from the momentum transfer coefficient are identical. The physical system examined is, again, vertical pipe flow, with a superficial gas velocity of 2.89 ms^{-1} . The most evident impact of using the new β_0 is that the predicted axial pressure gradient becomes smaller. Simulation results using β_0 show better quantitative agreement with the experimental measurements in both Figures 2 and 3. This indicates that the validity and applicability of the new expression for β_0 for the inter-phase momentum transfer coefficient are worth further exploration.

5. Conclusions

In two-fluid models for gas-solid flows, the averaged drag force plays an essential role in coupling the gas and particles. As this drag force has a considerable effect on predicted flow characteristics, it is important to use the most accurate available expressions. The averaged drag force needs not only to incorporate the influence of solid volume fraction but also to address the effect of the random fluctuational motion of the particles.

References

- Anderson, T.B. & Jackson, R. (1967). Fluid mechanical description of fluidized beds: comparison with theory and experiment. *I&EC Fund.* 6, 527.
- Di Felice, R. (1994). The voidage function for fluid-particle interaction systems. *Int. J. Multiphase Flow* 20, 153.
- Ergun, S. (1952). Fluid flow through packed columns. *Chem. Eng. Prog.* 48, 89.
- Ergun, S. & Orning, A.A. (1949). Fluid flow through randomly packed columns and fluidised beds. *Ind. Eng. Chem.* 41(6), 1179.
- Hoomans, B.P.B., Huipers, J.A.M., Briels, W.J. & Van Swaaij, W.P.M. (1996). Discrete particle simulation of bubble and slug formation in a two-dimensional gas-fluidised bed: a hard-sphere approach. *Chem. Eng. Sci.* 51, 99.

- Kawaguchi, T., Tanaka, T. & Tsuji, Y. (1998). Numerical simulation of two-dimensional fluidized beds using the discrete element method (comparison between the two- and three-dimensional models). *Powder Tech.* 96, 129.
- Kürten, H., Raasch, J. & Rumpf, H. (1966) *Chem. Ing. Tech.* 38, 941.
- Louge, M.Y., Mastorakos, E. & Jenkins, J.K. (1991). The role of particle collisions in pneumatic transport. *J. Fluid Mech.* 231, 345.
- Maeda, M., Hishida, K. & Furutani, T. (1980). Optical measurements of local gas and particle velocity in an upward flowing dilute gas-solid suspension. *Polyphase Flow and Transport Technology*, 211. Century 2-ETC, San Francisco.
- Mikami, T., Kamiya, H. & Horio, M. (1998). Numerical simulation of cohesive powder behavior in a fluidized bed. *Chem. Eng. Sci.* 53, 1927.
- Miller, A. & Gidaspow, D. (1992). Dense, vertical gas-solid flow in a pipe. *AIChE J.* 38, 1801.
- Neri, A. & Gidaspow, D. (2000). Riser hydrodynamics: simulation using kinetic theory. *AIChE J.* 46, 52.
- Nieuwland, J.J., van Sint Annaland, M., Kuipers, J.A.M., van Swaaij, W.P.M. (1996) Hydrodynamic modelling of gas/particle flows in riser reactors. *AIChE J.* 42, 1569.
- Niven, R.K. (2002) Physical insight into the Ergun and Wen & Yu equations for fluid flow in packed and fluidised beds. *Chem. Eng. Sci.* 57, 527.
- Wen, C.Y. & Yu, Y.H. (1966). A generalized method for predicting the minimum fluidization velocity. *AIChE J.* 12, 610.
- Yasuna, J.A., Moyer, H. R., Elliott, S. & Sinclair, J.L. (1995). Quantitative predictions of gas-particle flow in a vertical pipe with particle-particle interactions. *Powder Technol.* 84, 23.
- Zhang, Y. & Reese, J.M. (2001). Particle-gas turbulence interactions in a kinetic theory approach to granular flows. *Int. J. Multiphase Flow* 27, 1945.

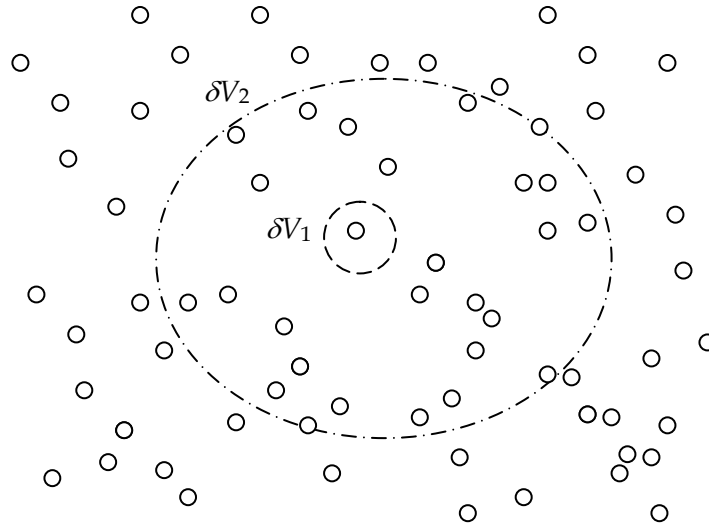


Figure 1 Schematic of the elemental volumes δV_1 and δV_2 in a freely-moving gas-solid flow; solid circles represent particles. The inner broken line represents the boundary of the characteristic volume element δV_1 , containing a single particle with local voidage ε_1 . The outer broken line represents the boundary of δV_2 , the elemental volume which contains statistically many freely-moving particles.

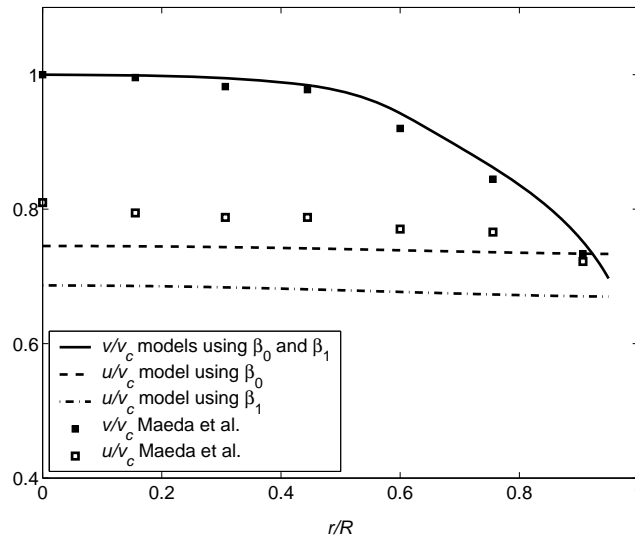


Figure 2 Comparison between numerical predictions (using β_0 and β_1) and experimental data for the radial variations of normalized axial velocity of both phases, v/v_c and u/v_c . The mass loading ratio is 0.3, the Reynolds number 22,000 and the particles are 136 μm diameter. Other parameters as in Maeda et al. (1980), which reports the experimental measurements.

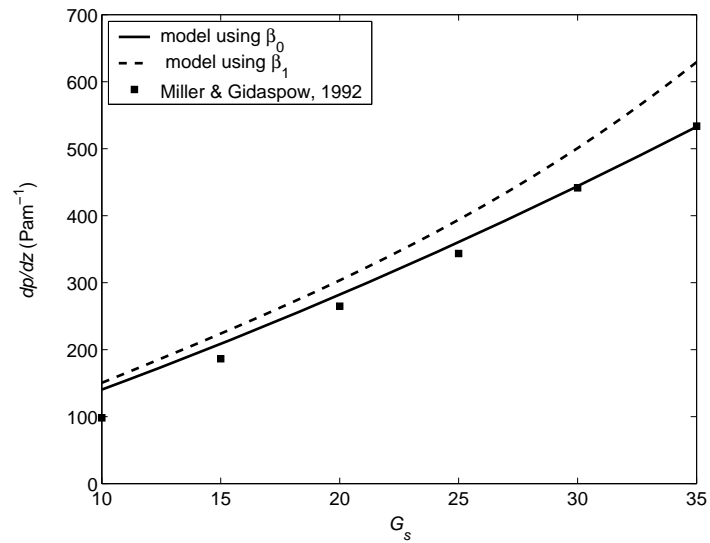


Figure 3 Comparison between numerical predictions (using β_0 and β_1) and experimental data for the variation of axial pressure gradient with solid mass flow rate. The superficial gas velocity is 2.89 ms^{-1} and the particles are $75 \mu\text{m}$ diameter. Other parameters as in Miller and Gidaspow (1992), which reports the experimental measurements.