

1 A fully integrated GIS-based model of particulate waste distribution from marine
2 fish-cage sites.

3

4 R.A. Corner, A.J. Brooker, T.C. Telfer and L.G Ross

5

6 Institute of Aquaculture, Pathfoot Building University of Stirling, Stirling, Scotland,
7 FK9 4LA.

8

9 Keywords: fish waste dispersion; marine fish cages; cage movement; GIS modelling;

10

11 Correspondence Author details:

12 Dr Richard Anthony Corner

13 Research Fellow

14 Address as above

15 Phone +44 (0) 1786 467891

16 Fax +44 (0) 1786 472133

17 e-mail r.a.corner@stir.ac.uk

18

19 **ABSTRACT**

20

21 Modern Geographical Information Systems (GIS) offer a powerful modelling
22 environment capable of handling large databases. They are a very suitable
23 environment in which to develop a suite of tools designed for environmental
24 management of aquaculture sites, including carrying capacity prediction, land-water
25 interactions and multi-site effects. One such tool, presented here, is a fully
26 integrated and validated particulate fish waste dispersion module which uses mass
27 balance to estimate waste input and takes account of variable bathymetry and
28 variable settling velocity for feed and faecal components. The model also incorporates
29 the effect of cage movement on waste dispersion, the first such model to do so.
30 When tidal range was low (1.67m), the maximum movement of a 22m diameter

31 circular cage was 10.1m and 7.7m easting and northing respectively. Highest
32 deposition from particulate fish waste is under the cage and incorporation of cage
33 movement increased the effective area under a cage by 72%. This reduced peak
34 deposition measurements by up to 32% and reduced the average modelled feed and
35 faecal settlement at the cage centre by 23% and 11% respectively. The model was
36 validated by comparing model predictions with observed deposition measured using
37 sediment traps during three 2-week field trips at a fish farm on the west coast of
38 Scotland. The mean ratio of observed to predicted waste deposition at 5 - 25m from
39 the cage centre ranged from 0.9 to 1.06, whilst under the cage the model over-
40 predicts deposition (observed/predicted = 2.21). Although far-field data was seen to
41 be comparable the near-field discrepancies resulted in variable overall accuracy in the
42 model. The overall accuracy based on August 2001 data was $\pm 50.9\%$, on February
43 2002 $\pm 72.8\%$ and on April 2002 $\pm 50.6\%$. Summarizing the data resulted in an overall
44 average predictive accuracy of $\pm 58.1\%$.

45

46 INTRODUCTION

47

48 The effects of waste deposition from fish farm cages have been well studied, in
49 particular for temperate species such as Atlantic salmon (Salmo salar). Studies include
50 changes in sediment chemistry (Gowen and Bradbury, 1987; Weston, 1990; Silvert,
51 1992; Black et al, 1996; Davies et al, 1996; Findlay and Watling, 1997; Kempf et al,
52 2002), oxygen availability (Enell and Löf, 1983; Hall et al, 1990) and changes in the
53 number and diversity of benthic species (Brown et al, 1987; Gowen and Bradbury,
54 1987; Weston, 1990; Henderson and Ross, 1995; Kempf et al, 2002). The extent to
55 which the seabed is affected depends on the type and quantity of particulate material
56 being released from the cage site and the local physical conditions, such as
57 bathymetry and prevailing water currents, both of which can be incorporated into
58 dispersion models.

59

60 Particulate waste dispersion models can give a cost-effective method to evaluate
61 outcomes in site selection and biomass limits in terms of local environmental capacity,
62 to set quality standards and aid decision-making for environmental regulation and
63 management, by testing a variety of pre-production scenarios for given environmental
64 conditions. Across Europe the extent to which such models are used for this purpose
65 varies widely (Henderson et al, 2001). In Scotland, DEPOMOD (Cromey et al, 2002) is
66 now widely used for Environmental Impact Assessments and to estimate the likely
67 seabed deposition of in-feed sea-lice treatments (SEPA, 2001).

68

69 Many deposition models of fish cage waste in use are based on an original concept
70 presented by Gowen et al (1989), who used simple mass balance calculations to
71 estimate waste levels and dispersion equations in combination with hydrographic data
72 to assess the downward and lateral movement of particles. Subsequent dispersion
73 models include fish growth sub-models to more accurately predict waste quantities
74 (Silvert, 1992; 1994), bathymetry variation (Hevia et al, 1996), settling velocities for
75 feed and faecal components (Chen et al, 1999a,b; Cromey et al, 2002) and the use of
76 GIS technology (Perez et al, 2002). The primary purpose of GIS was for the storage,
77 analysis and display of geographic data. Modern GIS goes well beyond this, however,
78 and includes a range of powerful spatial modelling and decision making tools which
79 can be used on a wide range of applications.

80

81 GIS has been established as an excellent tool for facility site selection (Church, 2002)
82 using spatial analytical approaches with the overlay of thematic data layers, relating
83 to land function and use, to form an image or graphical output that identifies
84 appropriate sites. This technology is now widely used in aquaculture site selection
85 (Ross, 1998; Nath et al, 2000) and is equally relevant for the siting of a range of
86 aquaculture products and structures such as fish, bivalves, ponds or cages (Congleton
87 et al 1999; Arnold et al, 2000).

88

89 This paper extends the modelling work of Perez et al (2002), who used a combination
90 of spreadsheet and GIS to estimate the distribution of fish farm derived particulate
91 carbon waste. This paper describes a validated particulate waste distribution model
92 fully integrated into the GIS software by development of a specific programme
93 module. Such integration in to a GIS-based package is important because it ensures
94 there is no data loss when integrating data from various sources and the outputs from
95 the waste dispersion module become one of a number of layers within an integrated
96 Coastal Zone Management (ICZM) approach to aquaculture site management. As part
97 of their fieldwork for model validation Cromey et al (2002) suggest that cage
98 movement may have accounted for some of the variation in their sediment trap
99 collections, although the amount was not quantified. The effects of cage movement
100 are explored and the model is validated by comparison with data collected in the
101 field.

102

103 **MODELLING PROCEDURE**

104

105 The dispersion module was developed in the IDRISI32 GIS environment (Clark Labs,
106 Massachusetts, USA), which has been especially designed to allow user extension of its
107 capabilities. The required code was developed using DELPHI 3 (Borland Software,
108 California, USA) and the resulting executable was integrated into the IDRISI32 software
109 using the IDRISI Application Programming Interface (API). The architecture for the
110 modelling process is shown in Figure 1, which shows the elements developed within
111 the model and the links between model components, with the general logic of the
112 model presented below.

113

114 Data for cage block generation, dispersal parameters and mass balance calculations,
115 are entered into IDRISI32 via two easy to follow dialogue boxes within a waste
116 dispersion module. Cages may be either square or circular, as part of a block or
117 separate within a cage array, with the relative layout identified through distance
118 measures (in m) between cages in a row, between rows and orientation (in degrees)

119 from north; 3 simple characteristics that may be measured at the site(s) of interest.
120 The final layout of the cages, shown to scale, can be verified visually before
121 commencement of the modelling process. Cage movement and hydrographic data are
122 entered by calling spreadsheet files through the dialogue boxes. Settling velocities
123 are calculated by comparing the known pellet size of the feed used against known
124 settling velocity distributions (Chen et al, 1999^b; Cromey et al, 2002). The initial
125 input of carbon waste from the fish farm through uneaten food and faecal waste is
126 calculated using a mass balance. Two methods are used, either from total production
127 biomass and feed conversion rates, or from know feed input. Both methods take into
128 account percentage carbon in the feed, estimates for carbon lost as production (i.e.
129 harvested) and carbon lost through respiration and excretion (after Perez et al, 2002).

130

131 Carbon outputs through feed and faecal wastes were treated independently with the
132 concentrations in each calculated through mass balance. The total quantity of carbon
133 in each were divided equally between the number of cages and then sub-divided
134 between each hydrographic measurement (typically measured every 20 minutes over
135 15-days using an appropriate current meter). This portion is then referred to as a
136 "packet" of waste. Each packet is dispersed in 3-dimensions based on water depth
137 (bathymetry) and time-specific current speed and direction (based on Gowen et al,
138 1989) and random feed and faecal settling velocity. The settling velocities for feed
139 and faecal particles, for the particular type of feed being used, are calculated using a
140 technique that randomly selects a settling velocity for each packet of waste from
141 within the range "mean \pm 1 SD". The effect of varying seabed bathymetry on waste
142 distribution is included by extracting water depths from digital Admiralty Charts
143 covering the 250,000 m² modelled area in a 50 x 50 cell grid (each cell = 10 m²). Half
144 the average annual tidal range for the area is added to the water depth in each grid
145 cell to adjust to mean annual water depth.

146

147 Cage movement is registered by temporarily shifting the position of the cage centre
148 horizontally in X and Y, relative to the cage starting position, by an amount read from

149 the cage movement data file. Initial spatial input of waste is then randomly defined
150 within this temporary cage area. Distribution of particles commences at the net
151 depth, removing the need to correct for differences in water speed inside and outside
152 the cage (Inoue, 1972), the assumption being that the particulate waste is not subject
153 to lateral movement within the cages. During the modelling of settlement through
154 the water column, the waste packet is iteratively dispersed in 1m-depth intervals,
155 based on water flow and particle settling velocity, and stops when packet and water
156 depth are equal. The quantity of feed or faeces being modelled at the time is
157 assigned to this grid cell, before the distribution of the next packet of waste begins.
158 For the next packet of waste the previous cage position is further shifted by reading
159 from the next line in the cage movement spreadsheet and so on until the whole cage
160 movement file is used. Vertical and horizontal resolution of movement in the model is
161 1m.

162

163 Values of waste settled within specific grid cells is then interpolated, filtered and
164 finally corrected using the procedure described by Perez et al (2002), before
165 generation of the final model outputs. The interpolation process assumes that the
166 first carbon packet deposits in grid cell XY_1 , followed by the next packet in grid XY_2
167 and so on, based on the 20 minute intervals between hydrographic measurements. In
168 reality there is a more even distribution between the two points over time, not just at
169 the two end-points. After iterations are complete, interpolation is used within the GIS
170 to smooth the distribution of waste. This results in initial over-estimation of the total
171 deposited wastes, which is finally corrected by the application of a correction factor
172 (CF) (equation 1, after Perez et al, 2002) that ensures the total amount of waste in
173 the raster image is equal to the total generated through the mass balance.

174

$$175 \quad CF = \frac{\text{Total predicted carbon waste (kg)}}{\text{Waste carbon in the image (kg)}} \quad (1)$$

176

177 **MATERIALS AND METHODS**

178

179 The site used for collection of field data and as a basis for the model data was located
180 on the west Coast of Scotland and consisted of 12-off 70m circumference (~ 22m dia.)
181 circular cages in a 2 x 6 arrangement. Relative to magnetic North the cages were
182 orientated at 80°. Each of the cages had a net depth of ~10m. Distance between the
183 cage centres within a row was 40m and distance between rows was 48m.

184

185 **Hydrographic Measurements**

186

187 Two Valeport BFM106 current metres (Valeport, Dartmouth, Devon) were deployed
188 <100m from the cage site for a complete spring/neap tidal cycle (15 days) in August
189 2001. The sampling period was 60 seconds every 20 minutes. Meters were deployed
190 in approximately 26m depth on a u-shaped mooring, 3m below surface at the lowest
191 predicted tide during deployment and 3m above the seabed. The overall settlement
192 vector for each time point during deployment was calculated by averaging flow and
193 direction recorded by surface and seabed current meters at each time point. These
194 data were used in the model. Data was saved as a comma delimited (.csv) ASCII file
195 (current speed, direction) and imported into the model by being called

196

197 **Measurement of cage movement**

198

199 Movement of a single 22m-diameter Polar Circle cage was measured on 4 occasions in
200 2002 (16th October, 23rd October, 29th October and 5th November) at the fish farm. A
201 Wild TC1010 Total Station theodolite equipped with a Leica electronic distance-
202 measuring device (Leica AG, Heerbrugg, Switzerland) was used to take measurements

203 of 2 reflectors, positioned on opposite sides of cage every 20 minutes for 8 hours
204 inclusive of feeding periods.

205

206 The measurements composed of a horizontal and vertical angle and slope distance
207 from a point of origin on the shore. These data were converted into Eastings (Es) and
208 Northings (Ns) values (in metres) using Leica's LISCAD Plus Surveying and Engineering
209 Environment Software version 4.0 (Leica AG, Switzerland and LIStech, Boronia,
210 Victoria, Australia), which gave a resolution of 0.01m. The first reading each day was
211 converted to point (0,0) E and N respectively and each subsequent measurement was
212 relative to this origin. Two reflectors were used to confirm that each side of the cage
213 moved simultaneously and therefore changes in distance were not caused by rotation
214 only. All cages were assumed to move by the same amount. Data were incorporated
215 in the model as a comma delimited (.csv) ASCII file.

216

217 **Model validation**

218

219 *Waste input calculation*

220

221 Feed input to a single but representative cage at the field site was measured to an
222 accuracy of $\pm 0.1 \text{ kg day}^{-1}$ using the feedback mechanism from a CAS adaptive feeding
223 system (Akvasmart UK Limited, Inverness). In keeping with other models (e.g. Cromey
224 et al, 2002; Perez et al, 2002), each of the 12 cages at the site was assumed to have
225 the same feed input.

226

227 The carbon content of 10 feed pellets (% dry weight (DW)) was measured in triplicate
228 (n = 30 in total) using a Perkin Elmer 2400 SeriesII CHNS/O Autoanalyser with
229 integrated AD-4 Autobalance on samples weighing 4 - 6mg. Water content of the feed
230 was calculated as the difference in weight after drying at 90 °C for 24 hours, as a
231 percentage of the original weight (n = 10 for each feed size), being 5% in all cases.
232 Feed settling velocity was based on the relationship developed by Chen et al (1999b)

233 for standard EWOS diets at 10 °C and salinity 33.0. Faecal settling velocity
234 distribution was $0.032 \pm 0.011 \text{ ms}^{-1}$ (after Cromey et al, 2002)

235

236 The level of feed uneaten by fish and lost directly to the environment was set at 3%
237 (after Cromey et al, 2002). It was assumed that 14.3% of the carbon consumed was
238 used for growth (Chen, 2000) and 60% was respired/excreted (Gowen et al, 1991).
239 The remaining carbon was assumed to be incorporated into faeces.

240

241 *Comparison between observed and predicted sedimented carbon*

242

243 Predicted carbon outputs from the GIS-based model were compared against observed
244 sedimentation measured in the field using sediment traps. Each trap had 4 replicate
245 tubes, with an individual area of 0.005m^2 , for sediment collection. Hydrographic data
246 and mass balance data were as specified above. Sediment trap samples were
247 collected from the same positions in August 2001, February 2002 and April 2002, every
248 3 days over 15-days on each occasion. Sediment traps were positioned using a
249 mooring system, as shown in Figure 2, under the cage and at 5m, 15m and 25m from
250 the cage edge, in a direction perpendicular to the main water flow and at a distant (~
251 800m) reference station.

252

253 Sediment trap samples from each tube were analyzed for total carbon (as % DW) as
254 described for fish feed, multiplied by the total DW of the sample and corrected for
255 depositional area to give deposition in $\text{g C m}^{-2} 3\text{d}^{-1}$. The 5 samples collected at each
256 sampling occasion were added together to give total carbon levels in $\text{g C m}^{-2} 15\text{d}^{-1}$,
257 which was used for comparison against the modelled output. Analysis and observation
258 of samples showed no feed pellets were collected in the sediment traps during
259 deployment and it was therefore assumed collected sediments were from faecal and
260 "background" suspended material only. Carbon levels found within each trap were
261 corrected to account for background deposition, which was collected simultaneously
262 from a reference station on the specified dates and calculated as described above.

263 Thus model validation was conducted for faecal material only (after Cromey et al,
264 2002).

265

266 Comparison between observed deposition and modelled deposition was assessed in
267 two ways. Firstly, as a factor indicating comparability, calculated as

268

$$269 \quad \text{Factor} = \frac{\text{Observed}}{\text{Predicted}} \quad (2)$$

270

271 This was used for comparison at each sampling station at each time point. Secondly,
272 overall accuracy of the model combining all data for each time point was calculated as
273 an absolute value using (Cromey et al, 2002)

274

$$275 \quad \text{Overall accuracy} = \frac{\left(\sum \left(\frac{\text{Observed} - \text{predicted}}{\text{Observed}} * 100 \right) \right)}{n} \quad (3)$$

276

277 Where n = number of observation for all stations measured.

278

279 RESULTS

280

281 Measurement of cage movement

282

283 Data collected on the 5th November 2002 was rejected due to poor light resulting in
284 less than 8 hours of data being collected. Plus and minus distances between dates
285 were arbitrary as the position of the measuring device varied slightly between each of
286 the trial dates and the starting position of the cages was arbitrarily set at (0,0).
287 Maximal variation occurred on 29th October at 10.1m and 7.7m, easting and northing
288 respectively, being up to half the cage diameter, when tidal range was low (1.67m).
289 Tidal range on all dates was broadly similar (1.61m and 1.87m on 16th and 23rd
290 respectively) but the wind on the 29th October was stronger and may account for the

291 higher movement during this period, although this was not measured. Wind on other
292 days was negligible. Overall the movement of the cages was limited by the layout of
293 the moorings and depended on the state of the tide.

294

295 Movement of cages resulted in the effective area of deposition directly under cages
296 being increased by 72%, as shown in Figure 3. The spatial starting position and
297 relative settlement position of waste feed and faecal material within the cage would
298 therefore vary with the rise and fall of the tide. This has not been taken into account
299 in available fish farm waste dispersion models used by environmental regulators at
300 present.

301

302 **Model operation and outputs**

303

304 Data input to the model was achieved using the dialogue boxes as a mixture of raw
305 data entry (cage positions, bathymetry, mass balance data) and spreadsheet files
306 (hydrography and cage movement). After data entry the model run time was
307 approximately 10 minutes. Predicted carbon settlement to the seabed was
308 automatically generated within IDRISI as a raster-image, with added legend and
309 bathymetric contours, both of which can be varied to match the specific
310 requirements. Cages could also be added to the output by simply adding a cage layer.

311

312 Mass balance calculations showed 3.84 t of particulate carbon entered the marine
313 environment as waste, 3.06 t as faeces and 0.78 t as uneaten feed. Figure 4 (a) shows
314 the predicted distribution of total carbon waste for a model run that does not
315 incorporate cage movement, where peak deposition occurred under the cages at a
316 rate of 1.55 Kg C m⁻² 15-days⁻¹. The inclusion of cage movement within the model
317 resulted in predicted deposition level directly under cages being reduced (Figure 4
318 (b)) to a peak of 1.07 Kg C m⁻² 15-days⁻¹. The higher predicted deposition in cages 11
319 and 12 resulted from the shallower depth of water present under these cages. There

320 was no change in the overall extent of the predicted footprint between each of the
321 model runs.

322

323 Table 2 shows the average modelled deposition within an area 7m-diameter area
324 around the centre of the cage starting position and 4.5m-diameter around positions
325 equivalent to the location of the sediment traps. This was achieved by applying a
326 mask over the raster-image in IDRISI, which allow data extraction from only the cells
327 of interest, and averaging the data from each cell. Given the 1m cell resolution used,
328 averaging over this number of cells provided a more appropriate measure for
329 comparison than simply choosing a single cell; and also reflected the extent of the
330 movement experienced by cages, identified above.

331

332 Cage movement reduced the average modelled feed and faecal settlement at the cage
333 centre by 23% and 11% respectively. Modelled feed dispersion showed little difference
334 with and without cage movement at distances greater than 5m from the cage edge,
335 due to feeds high settling velocity, which results in the majority of these particulates
336 being deposited under or very near to the cage. The combination of current direction
337 and cage movement resulted in overall deposition increasing slightly in a NNE
338 direction, as shown by the shift in the "blue" area in Figure 5 (b). This explains why
339 the feed component of settlement at 5m distance decreased along the transect (Table
340 2), which was on the opposite side of the cage in a SSE direction. The modelled faecal
341 dispersion increased in concentration at the 5m station and results from the lower
342 settling velocity for faeces, allowing time in the model for the quantity that would
343 have previously been predicted for deposition under the cage to be spread more
344 evenly in all directions despite the cage movement (Figure 6).

345

346 **Validation**

347

348 Validation was carried out for the integrated GIS model including incorporation of
349 cage movement. Table 3 provides a comparison between observed and predicted

350 faecal carbon deposition. Variability in predicted carbon deposition at each sampling
351 station with time was a reflection of variability in production levels giving different
352 mass balance calculations.

353

354 Observed deposition of nutrient material was shown to be high under the cage and
355 reduce with increased distance from the cage edge up to 25m. The deposition model
356 prediction mirrored this high to low gradient. The 'Factor' (observed/predicted)
357 (Table 3) gives a comparison models' prediction against the observed deposition. For
358 the most part, the model predictions were higher than the actual deposition, as
359 indicated by a Factor greater than 1 at the majority of stations. Model predictions for
360 deposition directly under the cage were considerably higher than observed faecal
361 deposition. Model predictions were closer to observed deposition as distance
362 increased from the cage centre (as indicated by the reduction in the factor towards 1
363 at the 25m station). Thus the model over-predicts deposition at near-field stations,
364 with an increase in parity between modelled and observed data at the far-field
365 stations.

366

367 Although far-field data was seen to be comparable the near-field discrepancies
368 resulted in variable overall accuracy in the model. The overall accuracy based on
369 August 2001 data was $\pm 50.9\%$, on February 2002 $\pm 72.8\%$ and on April 2002 $\pm 50.6\%$.
370 Summarizing the data resulted in an overall average predictive accuracy of $\pm 58.1\%$.

371

372 DISCUSSION

373

374 The particulate dispersion model presented here was targeted at predicting the
375 distribution of feed and faecal carbon waste, either annually or over the course of a
376 full production cycle (18 - 24 months), through a wholly integrated GIS-based model.
377 The model outputs generated for this study covered 15-days of production
378 commensurate with both available hydrographic data and sediment trap collections

379 used for validation. Although designed with whole production cycles in mind the
380 model was sufficiently robust to allow variable data and timescales to be simulated.

381

382 Irrespective of their complexity, computer based models are simplified
383 representations of the processes, variables and relationships that function in the
384 natural environment. Since their inception for fish cage culture (Gowen et al, 1989),
385 particulate waste dispersion models have undergone various transformations as the
386 influences on where particulate waste is deposited on the seabed have become better
387 understood and the means of modelling these influences has become available
388 (Silvert, 1992; 1994; McDonald *et al*, 1996; Hevia et al, 1996; Chen et al, 1999a,b;
389 Cromey et al, 2002). Variable bathymetry, random settling velocity, random particle
390 starting position and estimates of waste through mass balance generated by the above
391 work are all included in this GIS-based model. Further, this study has shown that the
392 movement of cages has a small but important influence on the deposition of
393 particulate farm waste.

394

395 **Sensitivity of the model to cage movement**

396

397 Primary sensitivity analysis for this model has been carried out elsewhere (Brooker,
398 2002) and shows that of the many key parameters tested four, - the effect of constant
399 verses variable water depth (bathymetry), constant verses variable settling velocity,
400 changes in percentage feed wastage and changes in FCR, - will have the most effect
401 on predicted deposition. The extent of that effect is specifically influenced by site
402 characteristics, feed characteristics and husbandry practice rather than any
403 underlying universal principle that holds true for all sites.

404

405 In this study the validity of applying cage movement to dispersion models has clearly
406 been demonstrated and resulted in a redefined distribution of carbon settlement,
407 lower predicted peak values and a reduction in the predicted particulate settlement
408 directly under cages. Thus the inclusion of cage movement in waste dispersion models

409 is an important parameter in determining the extent and magnitude of particulate
410 settlement, especially close to a fish cage. Inclusion of cage movement into
411 dispersion models, however, is only appropriate when the model has a spatial scale
412 that can register the movement, which would exclude models using greater than 5m
413 spatial resolution (Dudley et al, 2000; Cromey et al, 2002). Conversely, although any
414 spatial resolution can potentially be used in the GIS model used, here a resolution of
415 1m allowed the extent of the measured movement to be fully integrated and for the
416 effect to be measurable through the data and images generated.

417

418 **Validation of predicted dispersion with observed sedimentation**

419

420 Model validation is an important function within model development, assessing
421 agreement between the predictions from the model with data collected in the field
422 (GESAMP, 1991), whilst at the same time clarifying the assumptions and functional
423 relationships. The GIS model provided a realistic measure of actual deposition at the
424 site, giving an average overall accuracy of $\pm 58.1\%$, which compares favourably with
425 other proprietary models, such as DEPOMOD (Cromey et al, 2002) which has a
426 published accuracy of $\pm 23.1\%$ at a site with similar water dynamics. Overall,
427 predictions and observations were a similar order of magnitude and the degree of
428 accuracy reflected the variability seen at all stations in sediment trap data collections
429 over the 6 weeks of sampling (data was not shown). Model predictions followed a
430 similar pattern to field data, with decreasing deposition at increasing distances from
431 the cage edge and there was no patchiness in the interpolated raster-image.

432

433 The inclusion of a feed loss element in the GIS model was vital for calculating the
434 quantity of faecal material produced, via the mass balance calculations. Had zero
435 feed loss been assumed in the mass balance then faecal loss would have been over-
436 estimated and this is important where validation occurred against the faecal portion
437 of the modelled output. DEPOMOD (Cromey et al, 2002), for example, calculates
438 faeces in a different manner, through water content and digestibility, and 100% of the

439 feed is assumed to be eaten resulting in an over-estimation of predicted faecal
440 carbon, which was not taken in to account during validation. Within the DEPOMOD
441 model 100% feed consumption is required, however, because only a single model
442 output is produced, being either total solids or total carbon. The GIS model therefore
443 has a distinct advantage because feed and faeces are treated independently and
444 separate raster-images generated, which allows feed loss to be used in the model
445 even though validation was for the faecal portion only. Feed loss can therefore
446 correctly be included in the model and allows for a further validation in the future as
447 more detailed data on spatial and temporal losses of feed becomes available.

448

449 Validation of modelled faecal deposition only is not uncommon (Cromeey et al., 2002)
450 and was carried out because a very high proportion of the sediment trap collections,
451 spanning 6 weeks of sampling, contained faecal material only as indicated by the
452 carbon content (data was not shown), with very low feed identified. The use of
453 faeces only for validation affects the robustness of the model to a certain extent,
454 especially near to the cages, but exclusion of feed does not significantly affect
455 predicted deposition at greater distances from the cage because high settling velocity
456 results in the majority of feed depositing directly under the cage. It is only under the
457 cage, therefore, that deposition would be expected to be higher than the model
458 suggests were feed to be included and the sensitivity of the model affected.

459

460 Feed loss is a transient process within cage culture and infinitely depends upon
461 physical, biological and feeding characteristics at a farm site. The quality of staff
462 feeding the fish to satiation, the stress on the fish in any one day, the prevailing
463 weather conditions, tidal speed through the spring-neap cycle, water quality, water
464 temperature variation with season and level of parasite infestation will all influence
465 feed loss over varying temporal scales. The model assumes that feed loss occurs
466 uniformly across all hydrographic measurements, but in reality feed loss is limited to
467 feeding periods only. Subsequently there is a difficulty in assuming that the feed
468 element of any deposition model is an accurate depiction of the actual settlement.

469 The best current estimates, for modelling purposes, assess that 3% direct feed waste is
470 a reasonable assumption based on digestibility data and current husbandry practice at
471 farm sites (Cromeey et al, 2002) with historic estimates (Cho, 1991; Enell and
472 Ackerfors, 1994) now outdated. Feed loss, specifically when using current husbandry
473 practice and new technology, is an area that requires further investigation.

474

475 If it is assumed that no errors were present in field collected data, subsequent
476 measurement of sediment trap contents and model input data then differences
477 between predicted and observed sedimentation may have been due to processes that
478 are not included in the model, such as losses from leaching and post-depositional
479 movement through saltation (Chen, 1999b) and re-suspension (Cromeey et al, 2002).
480 There is also a reliance on 2 dimensional hydrographic data (current speed and
481 direction) that takes no account of shear stresses between water layers, such as
482 before and after slack water, eddies and wind generated movement that adds to
483 turbulent mixing and affects the dispersion.

484

485 There are also elements that are not currently included in any commercially available
486 or research models, which requires further work to be carried out. Hydrographic data
487 is measured within 100m of farm sites to represent current speed and direction
488 through the farm. There is, however, an acknowledged reduction in current speed
489 and alterations in direction as a result of the presence of nets (Inoue, 1972; Black,
490 pers. comm.) and fouling of nets over time. Fish may also play a part in distributing
491 waste, by having a tendency to swim in circles that creates a vortex, giving rise to
492 suction of water through the bottom of the net and movement away through the cage
493 at shallow depths (Beveridge, 2004). Such influences may particularly affect the
494 dispersion directly under cages, the area where the GIS dispersion model predictions
495 are least accurate. Henderson et al, (2001) noted that all of these processes would
496 need to be investigated to provide a comprehensive model, with data tested for
497 sensitivity within the model. Importantly, increasing the validation accuracy under
498 certain conditions and at certain sites may limit the general applicability of the model

499 to represent species specific cage culture as a whole, which must remain the ultimate
500 goal of such a model.

501

502 **General conclusions**

503

504 Modern GIS is a powerful modelling environment with the capability to develop user
505 defined modules as extensions. This was achieved in this work using DELPHI 3 and the
506 IDRISI Application Programming Interface (API). This capability provides the
507 opportunity to develop new applications, which can then be processed within the GIS
508 framework. The output is a set of raster images from which further graphical or
509 statistical information can be generated depending upon the requirements of the
510 particular application. The system can operate at any spatial resolution and the 1m²
511 used in this work is particularly suitable for farm level particulate dispersion modelling
512 and with the potential to use larger scales in an assessment of complex multi-site
513 systems.

514

515 The model presented here provides easy data entry and a requirement for smaller
516 data sets, which IDRISI or other GIS software packages are easily capable of
517 interpolating. Predictive capability in the model enables a range of applications to be
518 addressed. It allows this model to be used as part of an Environmental Impact
519 Assessment decision-making process, in determining whether a site is acceptable for
520 farming, under the banner of site selection (Perez et al, 2003). It is also able to be
521 used during production for monitoring and to assess the impact of proposed
522 increases/decreases in production. Although there is an acknowledged need to more
523 fully understand the nature of fish farm waste settlement and dispersion, the model
524 presented generally over-estimates which provides a safety net under precautionary
525 principles in evaluating new site proposals.

526

527 Although this dispersion model provides the industry with a free-standing tool that can
528 be tested at the farm scale, it has even greater potential when used as part of a suite

529 of tools designed for environmental management of aquaculture sites, including
530 aspects such as carrying capacity prediction, land-water interactions and multi-site
531 effects. This is an area of on-going research. Importantly, the GIS framework used as
532 the basis for this model allows the integration of varying spatial scales within the
533 same framework. This will be particularly important in the future development of
534 Coastal Zone Management Plans (CZMP) in which waste dispersion is one sub-model
535 (See Ross, 1998; Nath et al, 2000) within a framework that could ultimately provide a
536 fully integrated sustainable decision support system for aquaculture site selection and
537 future development.

538

539 ACKNOWLEDGEMENTS

540

541 The authors would like to thank the Management and Staff at the fish farm for use of
542 their site and support during fieldwork. This work was funded via a NERC PhD Case
543 Studentship with Case Partner Akvasmart UK Ltd awarded to Richard Corner and a
544 BBSRC MSc grant award to Adam Brooker.

545

546 REFERENCES

547

548 Beveridge, C.M.C., 2004. *Cage Aquaculture 3rd edition*. Fishing News Books, Oxford.

549 346pp.

550

551 Black, K.D., Kierner, M.C.B. and Ezzi., 1996. The relationship between
552 hydrodynamics, the concentration of hydrogen sulphide produced by polluted
553 sediments and fish health at several marine cage farms in Scotland and Ireland. *J.*
554 *Appl. Ichthyol.* 12: 15-20.

555

556 Brooker, A.J., 2002. Development and integration of waste dispersion models for cage
557 culture within the GIS framework. MSc thesis, University of Stirling.

558

- 559 Brown, J.R., Gowen, R.J. and McLusky, D.S., 1987. The effect of salmon farming on
560 the benthos of a Scottish sea loch. *J. Exp. Mar. Biol. Ecol.* **109**: 39-51.
561
- 562 Chen, Y.S., Beveridge, M.C.M., Telfer, T.C., 1999a. Settling rate characteristics and
563 nutrient content of the faeces of Atlantic salmon (*Salmo salar* L.) and the implications
564 for modelling of solid waste dispersion. *Aquacult. Res.* **30**: 395-398.
565
- 566 Chen, Y. S., Beveridge, M. C. M., & Telfer, T. C., 1999b. Physical characteristics of
567 commercial pelleted Atlantic salmon feeds and consideration of implications for
568 modelling of waste dispersion through sedimentation. *Aquacult. Int.* **7**: 89-100.
569
- 570 Cho, C.Y., 1991. Digestibility of feedstuffs as a major factor in aquaculture waste
571 management. INRA (ed) *Fish Nutrition in Practice*. Proceedings from Biarritz, France
572 June 24-27, 1991. 365-373.
573
- 574 Church R.L., 2002. Geographical information systems and location science. *Comp.*
575 *Operation. Res.*, **29(6)**: 541 - 562.
576
- 577 Cromey, C. J., Nickell, T. D. & Black, K. D., 2002. DEPOMOD - modelling the
578 deposition and biological effects of waste solids from marine cage farms. *Aquacult.*
579 **214**: 211-239.
580
- 581 Davies, I.M., Smith, P., Nickell, T.D. and Provost, P.G., 1996. Interaction of salmon
582 farming and benthic microbiology in sea lochs. In: Black (ed) *Aquaculture and Sea*
583 *Lochs*. Scottish Association for Marine Science, Oban. 33-39.
584
- 585 Dudley, R.W, Panchang, V.G. and Newell, C.R., 2000. Application of a comprehensive
586 modelling strategy for the management of net-pen aquaculture waste transport.
587 *Aquacult.* **187**: 319-349.
588

- 589 Eastman, J.R., 1999. **Guide to GIS and image processing: Volume 1.** Clark labs,
590 Massachusetts
591
- 592 Enell, M. and Löf, J., 1983. Environmental impact of aquaculture sedimentation and
593 nutrient loadings from fish cage culture farming. *Vattan.* **39 (4):** 364-375.
594
- 595 Enell, M. and Ackerfors, H., 1991. Nutrient discharges from aquaculture operations in
596 Nordic countries into adjacent sea areas. ICES Report CM 1991/F:56. ICES
597 Copenhagen.
598
- 599 Findlay, R.H. and Watling, L., 1997. Prediction of benthic impact for salmon net-pens
600 based on the balance of benthic oxygen supply and demand. *Mar. Ecol. Prog. Ser.* **155:**
601 147-157.
602
- 603 GESAMP, 1991. **Monitoring the effects of coastal aquaculture waste.** GESAMP rep.
604 stud. 57. FOA, Rome. 38pp.
605
- 606 Gowen, R.J. and Bradbury, N.B., 1987. The ecological impact of salmonid farming in
607 coastal waters: A review. *Oceanogr. Mar. Bio. Ann. Rev.* **25:** 563-575.
608
- 609 Gowen, R.J., Bradbury, N.B. and Brown, J.R., 1989. The use of simple models in
610 assessing two of the interactions between fish farming and the marine environment.
611 In: N. De Pauw, E. Jaspers and N. Wilkins (eds) **Aquaculture - a biotechnology in**
612 **progress.** European Aquaculture Society, Belgium. p1071-1080.
613
- 614 Gowen, R.J., Weston, D.P. and Ervik, A., 1991. Aquaculture and the benthic
615 environment: A review. In: Cowey, C.B. and Cho, C.Y. (Eds.), **Nutritional strategies**
616 **and aquaculture waste.** Proc. 1st Int. symp. Nutritional Strategies in Management of
617 Aquaculture, U. Guelph, Ontario.
618

619 Hall, P. O., Anderson, L. G., Holby, O., Kollberg, S., Samuelsson, M. A. (1990).
620 Chemical fluxes and mass balance in a marine cage farm. I. Carbon. *Mar. Ecol. Prog.*
621 *Ser.* **61**, 61-73.

622

623 Henderson, A.R. and Ross, D.J., 1995. Use of macrobenthic infaunal communities in
624 the monitoring and control of the impact of marine cage fish farming. *Aquacult. Res.*
625 **26**: 659-678.

626

627 Henderson, A., Gamito, S., Karakassis, I., Pederson, P. and Smaal, A., 2001. Use of
628 hydrodynamic and benthic models for managing environmental impacts of marine
629 aquaculture. *J. Appl. Ichthyol.* **17**: 163 - 172.

630

631 Hevia, M., Rosenthal, H. and Gowen, R.J., 1996. Modelling benthic deposition under
632 fish cages. *J. Appl. Ichthyol.* **12 (2)**: 71-73.

633

634 Inoue, H., 1972. On water exchange in a net cage stocked with the fish Kamachi. *Bull.*
635 *Jap. Soc. Sci. Fish.* **44**: 659 - 664.

636

637 Kempf, M., Merceron, G., Cadour, G., Jeanneret, H., Méar, Y. and Miramand, P.,
638 2002. Environmental impact of a salmonid farm on a well flushed marine site: II.
639 Biosedimentology. *J. Appl. Ichthyol.* **18**: 51-60.

640

641 McDonald, M.E., Tikkanen, C.A., Axler, R.P., Larsen, C.P. and Host, G., 1996. Fish
642 Simulation Culture model (FIS-C): A bioenergetics based model for aquacultural waste
643 application. *Aquacult. Eng.*, **15(4)**: 243 - 259.

644

645 Nath, S.S., Bolte, J.P., Ross, L.G. and Aguilar-Manjarrez, J., 2000. Applications of
646 geographic information systems (GIS) for spatial decision support in aquaculture.
647 *Aquacult. Eng.*, **23**: 233 - 278.

648

649 Pérez, O. M., Telfer, T. C., Beveridge, M. C. M., & Ross, L. G. (2002). Geographical
650 Information Systems as a simple tool to aid modelling of particulate waste distribution
651 at marine fish cage sites. *Estuar. Coast. Shelf Sci.* **54**: 761-768.

652

653 Perez O.M.; Telfer T.C. and Ross L.G., 2003 Use of GIS-Based Models for Integrating
654 and Developing Marine Fish Cages within the Tourism Industry in Tenerife (Canary
655 Islands). *Coast Manag.*, **31(4)**: 355 - 366

656

657 Ross, L.G., 1998. The use of geographic information systems in aquaculture: a review.
658 Invited paper at 1st Congreso de Limnología, Morelia, Mexico. 19pp.

659

660 SEPA, 2001. Regulation and monitoring of marine cage fish farming in Scotland - a
661 manual of procedures.

662

663 Silvert, W., 1992. Assessing environmental impacts of finfish aquaculture in marine
664 waters. *Aquacult.* **107**: 67-79.

665

666 Silvert, W., 1994. Modelling benthic deposition and impacts of organic matter
667 loading. In: Hargrave (Ed) *Modelling Benthic Impacts of Organic Enrichment from*
668 *Marine Aquaculture.* *Can. Tech. Rep. Fish. Aqua. Sci.* **1949**: 1-18.


669

670 Weston, D.P., 1990. Quantitative examination of macrobenthic community changes
671 along an organic enrichment gradient. *Mar. Ecol. Prog. Ser.* **61**: 233-244.

672

673

674

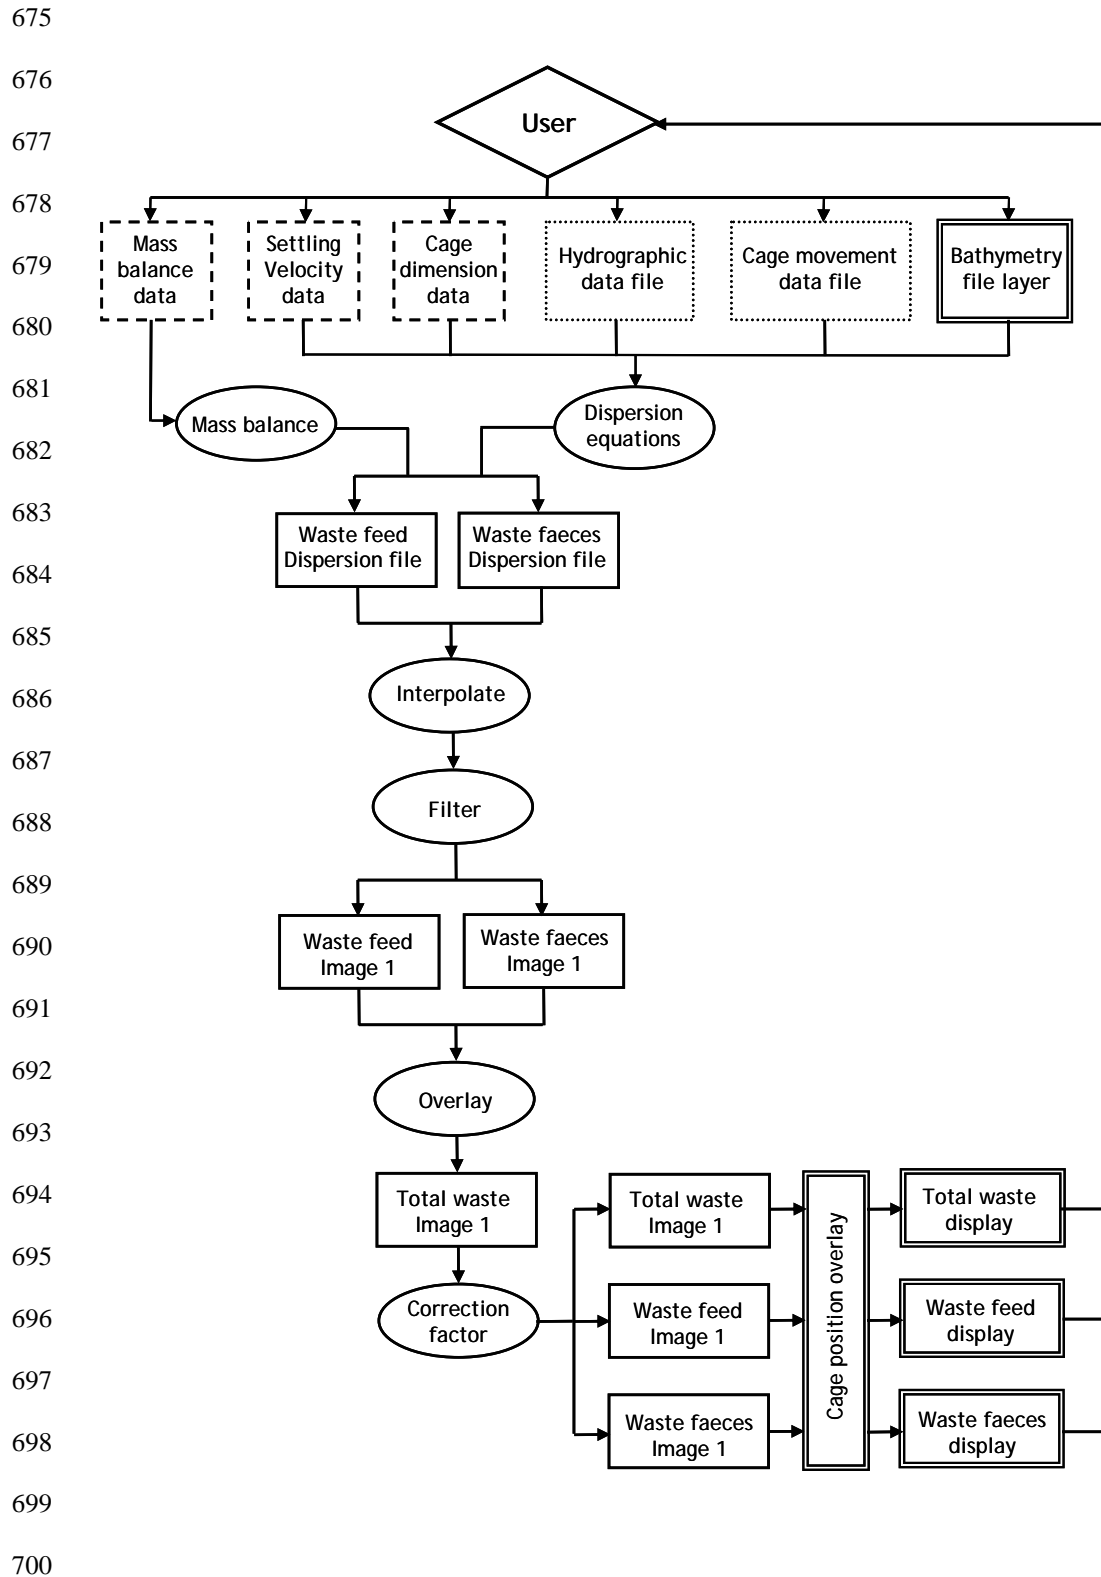

701 Figure 1: Architecture of the integrated model showing the communication links
702 between the module processes within GIS. Boxes = data, as direct input (-----), as
703 spreadsheet file (.....), as GIS data file (———) or as a GIS layer (=). ○ = GIS
704 process.

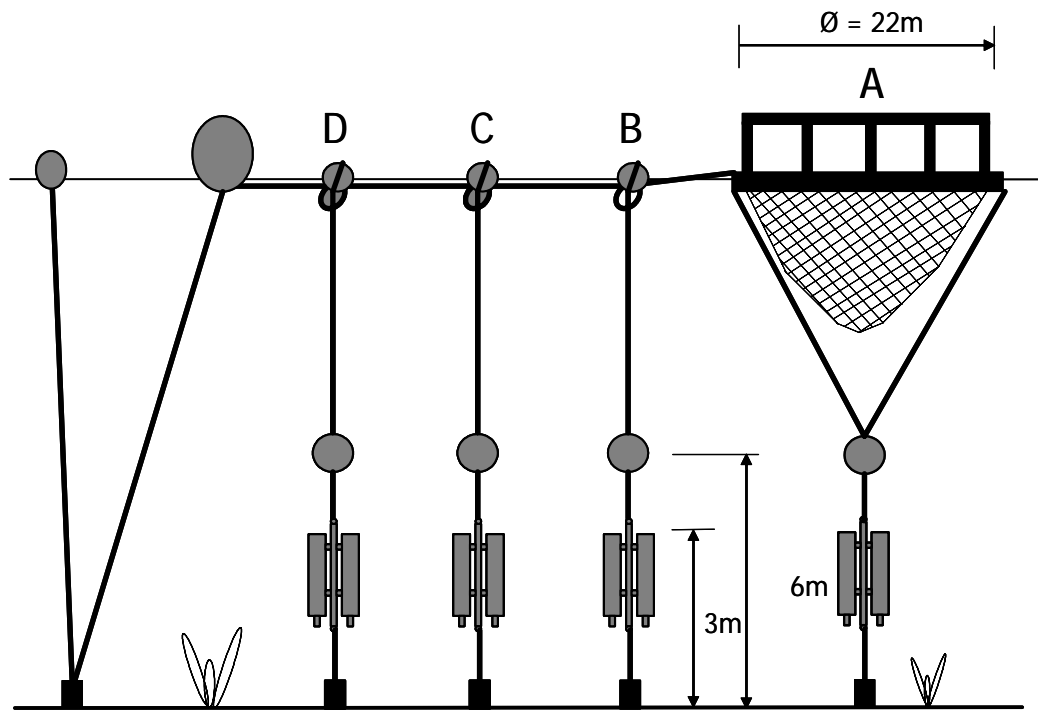


Figure 2: Sediment trap layout on a transect from circular fish farm cage. Traps deployed at distances A = under cage, and B = 5m, C = 15m and D = 25m from cage edge respectively. Not to scale.

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750


751

752

753

754

755

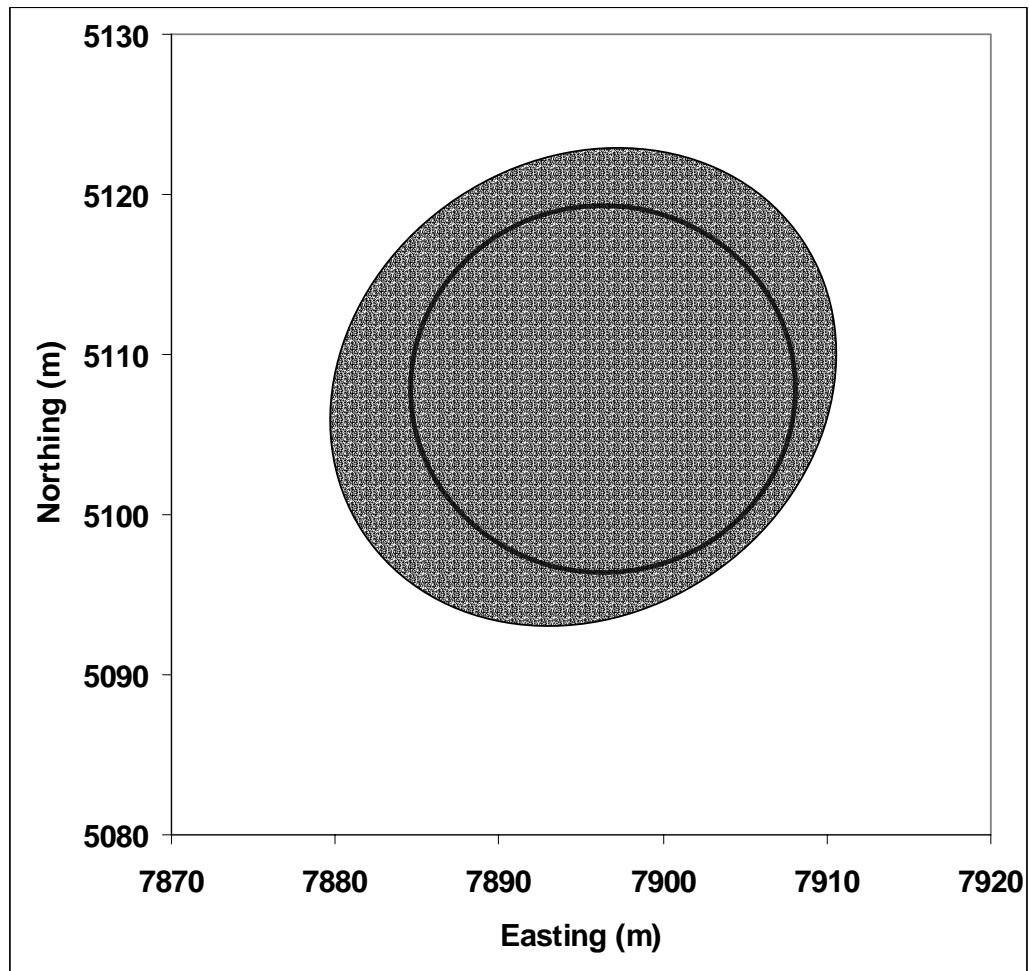

756

Figure 3: Figure 6.3: Representation of the additional area of seabed covered by a 22m-diameter Polar Circle marine cage as a result of measured movement of the cage on 23rd October 2002. Black circle represents cage starting position.

759

760

761

762

763

764

765

766

767

768

769

770

771


772

773

774

775

776

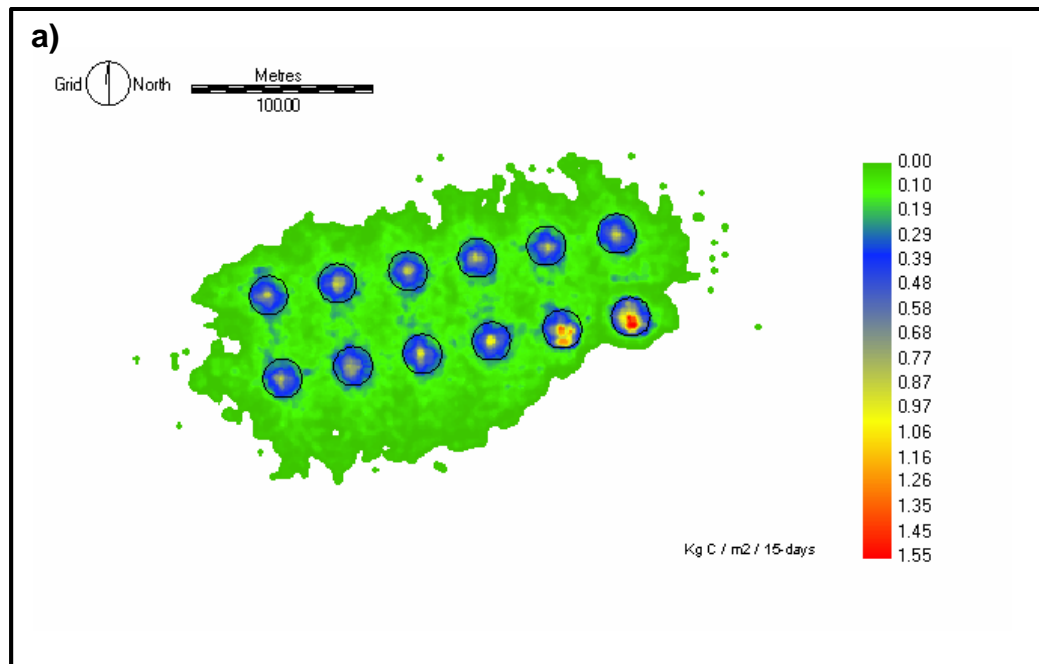

777

778

779

780

781

782


783

784

785

786

787

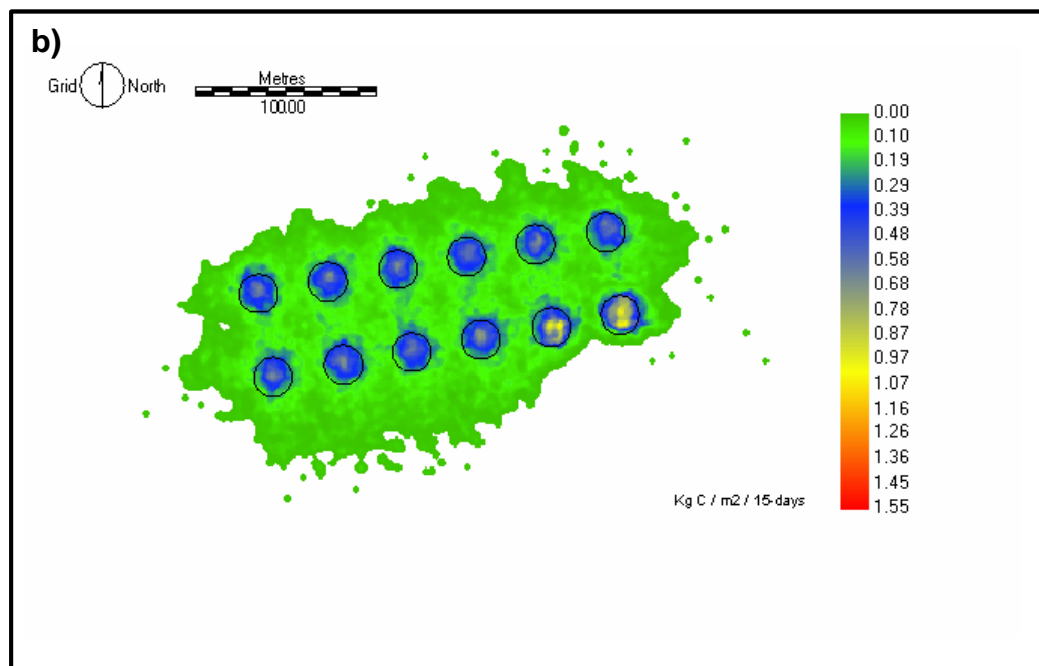

788

789 Figure 4: Contour raster-image for fish farm site showing predicted total carbon

790 settlement to the sediment, using GIS dispersion model. (a) static cages model (b)

791 moving cages model.

792

793

794

795

796

797

798

799

800

801


802

803

804

805

806

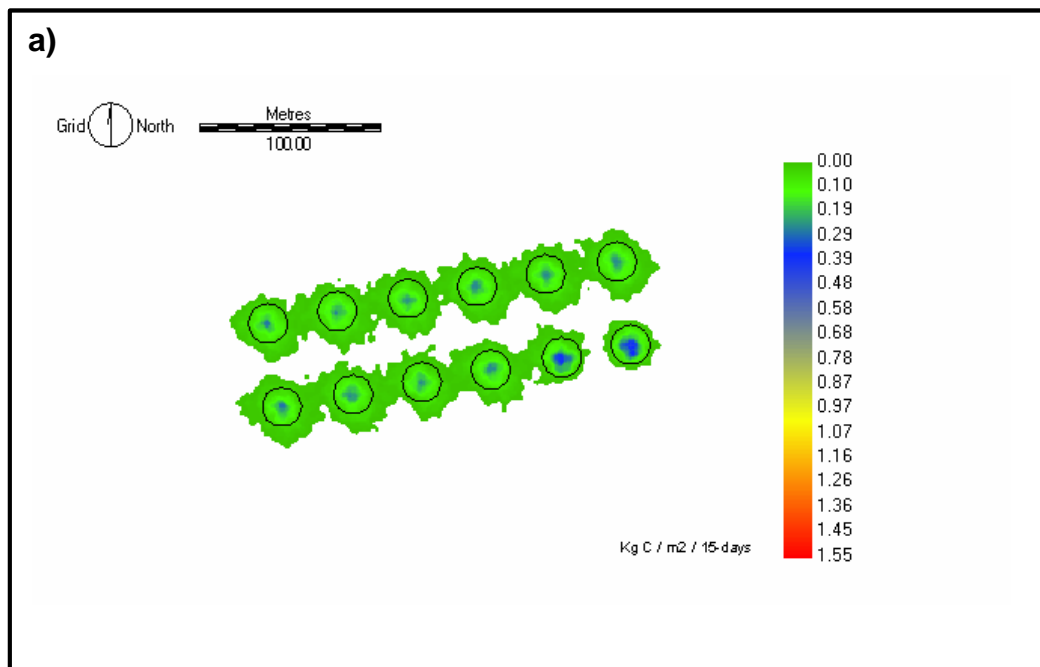

807

808

809

810

811

812


813

814

815

816

817

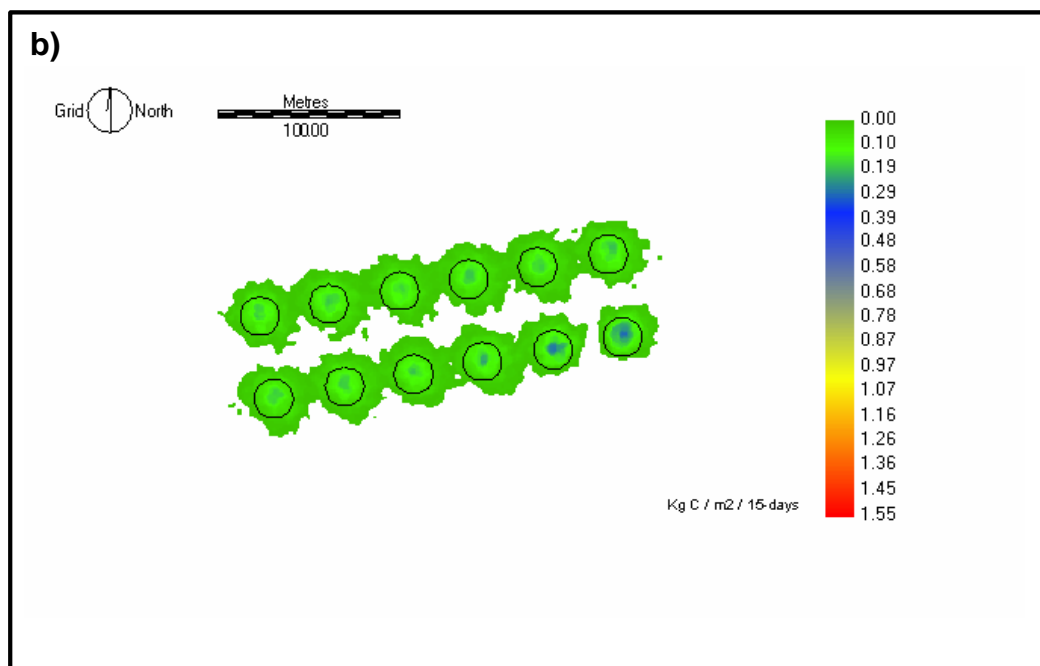

818

819 Figure 5: Contour raster-image for fish farm site showing predicted feed carbon

820 settlement to the sediment, using GIS dispersion model. (a) static cages model (b)

821 moving cages model.

822

823

824

825

826

827

828

829

830

831


832

833

834

835

836

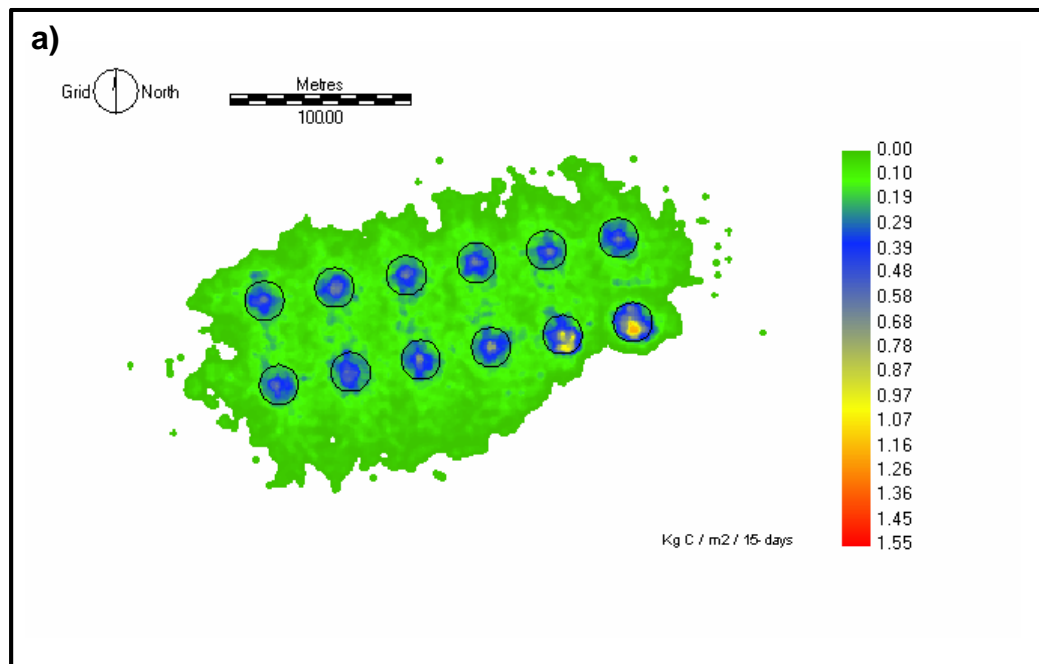

837

838

839

840

841

842

843


844

845

846

847

848

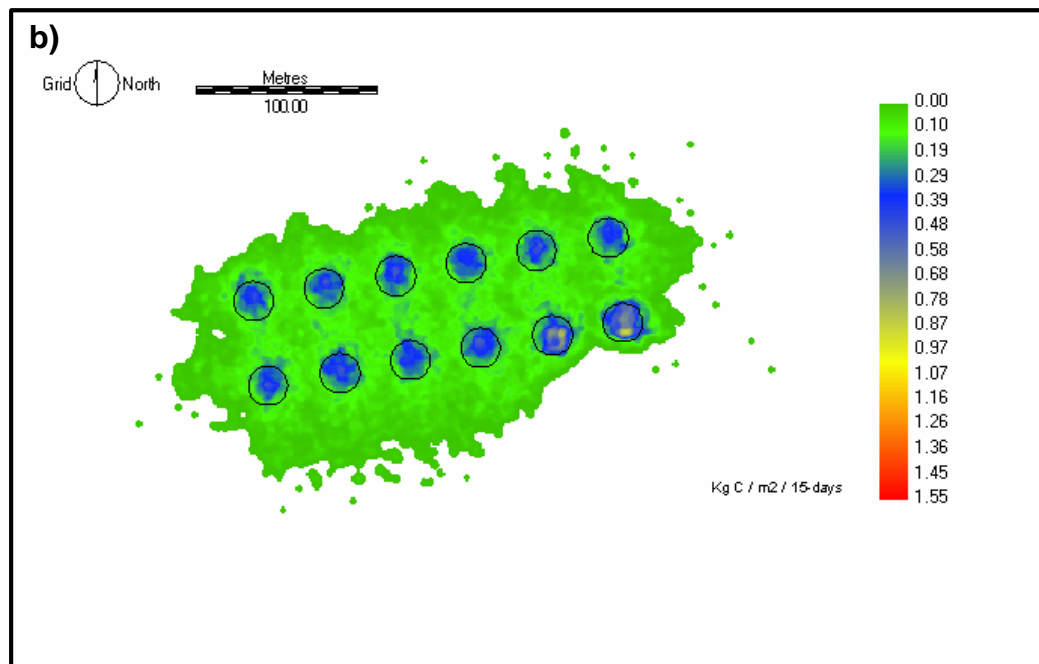

849

850 Figure 6: Contour raster-image for fish farm site showing predicted faecal carbon

851 settlement to the sediment, using GIS dispersion model. (a) static cages model (b)

852 moving cages model.

853

854

855

856 Table 1: Mass balance data used in waste dispersion model for 15-day trial periods at fish farm site.

857

Trial date	Production in trial cage (kg)	Feed input (kg)	FCR	Feed size (mm)	Mean feed settling velocity (cm s^{-1})	Feed carbon content (% DW)
August 2001	3964	4360	1.10	3 and 6	8.26	51.0
February 2002	2983	3460	1.16	9	10.81	49.5
April 2002	2814	3152	1.12	9 and 12	12.92	51.0

858

859 Production = fish growth between start and end of experimental periods from growth curves and feeding algorithms within a CAS Adaptive Feeding System
 860 (Aquasmart UK Limited, Inverness).

861

862

863

864

865 Table 2: Average predicted deposition under and at specified distances from the edge of fish cage. Predictions generated using GIS dispersion model
 866 assuming static and moving cages, based on production and mass balance for the period August 16th - 31st 2001. Units: g C m⁻² 15-days⁻¹.

867

Component	Under cage		5m		15m		25m	
	Static	moving	static	moving	static	moving	static	moving
Faeces	480.71	426.60	115.04	129.04	59.71	58.76	24.01	27.45
Feed	216.81	166.89	38.77	21.81	1.94	1.04	0.23	0.19
Total	679.51	593.50	153.81	150.86	61.65	59.80	24.24	27.65

868

869

870

871

872 Table 3: Comparison of 15-day measured observations verses predicted faecal particulate carbon deposition. Observed deposition measured using
 873 sediment traps. Predictions generated using a GIS dispersion model, incorporating cage movement and based on mass balance for 15-days production in
 874 tonnes. FCR = Feed Conversion Ratio. Station distance = distance from cage edge (m). Factor = observed/predicted. Number of cells averaged under
 875 cage (n) = 38, at remaining stations n = 16. Units: g C m⁻² 15-days⁻¹.

876

Collection	Production (t)	FCR	Under cage			5m station			15m station			25m station		
			Obs.	predicted	Factor	Obs.	predicted	Factor	Obs.	predicted	Factor	Obs.	predicted	Factor
August 2001	3.84	1.10	234.3	426.6	1.82	75.8	129.0	1.70	41.0	58.8	1.43	29.8	27.5	0.92
February 2002	3.06	1.16	85.2	310.7	3.65	120.8	133.8	1.11	55.6	51.0	0.92	22.5	24.3	1.08
April 2002	2.82	1.12	159.6	323.3	2.03	109.5	61.6	0.56	61.7	39.1	0.63	49.5	39.8	0.81
Average			159.7	353.5	2.21	102.0	108.1	1.06	52.8	49.6	0.93	33.9	30.5	0.90

877

878

879

880