

1 This is the pre-reviewed version of the work. Published version in Separation and Purification Technology
2 Volume 186, 2 October 2017, Pages 10–19, <https://doi.org/10.1016/j.seppur.2017.05.035>

3 **Demethanization of aqueous anaerobic effluents using a**
4 **polydimethylsiloxane membrane module: mass transfer,**
5 **fouling and feasibility**

6 M. Henares, M. Izquierdo, P. Marzal, and V. Martínez-Soria*

7 *Research Group G²AM, Department of Chemical Engineering, University of Valencia,*
8 *Avda. Universitat s/n, 46100 Burjassot, Spain*

9 *Corresponding author: E-mail address: vmsoria@uv.es (V. Martínez-Soria)

10

11 **Abstract**

12 The performance, fouling and feasibility of a polydimethylsiloxane hollow fibre
13 membrane module for in situ methane degasification from the effluent of an Expanded
14 Granular Sludge Bed anaerobic reactor has been investigated. Experiments at different
15 operational conditions were carried out (liquid flow, sweep gas flow and vacuum
16 pressure) with maximum removal efficiency (77%) at lowest flow-rate (0.4 L h⁻¹),
17 highest vacuum (800 mbar) and liquid flowing in lumen side. Mass transport analysis
18 denoted a considerably higher methane transfer than that predicted (attributed to liquid
19 oversaturation). An enhancement factor for liquid phase has been proposed to
20 correlate the experimental results. Long-term experiments were also performed in
21 order to determine the possible influence of fouling on the module performance, and it
22 showed that relatively frequent cleaning with water might be carried out to ensure
23 preservation of the membrane efficiency. Although energy balance analysis evidenced
24 that energy production exceeded the system energy requirements, the economic profit
25 of the process does not seem fully-guaranteed. A substantial reduction of CO₂
26 equivalent emissions showed the positive environmental impact of this technology.

27

28 **Keywords**

29 Anaerobic reactor; methane degassing; membrane fouling; membrane contactor; mass
30 transfer

31

32 **1. Introduction**

33 The minimization of the loss of residual methane from aqueous effluents of
34 anaerobically treated wastewater systems has recently attracted growing interest, with
35 an increasing number of studies about it in the last years [1–4]. This interest is based
36 on the fact that the recovery of this residual dissolved methane (or at least its removal)
37 in these effluents presents several potential benefits of a diverse nature: environmental
38 (avoiding the emission of a powerful greenhouse gas), economic (recovering a power
39 source) and safety (reducing the possibility of creating an explosive atmosphere).

40 In addition, it has been frequently described [4–9] that dissolved methane can be found
41 in these effluents in concentrations above the saturation level, which would suggest
42 that the impact of the discharge of this residual methane may be even higher than
43 expected, especially taking into account that more sustainable anaerobic processes
44 should be carried out at relatively low-temperature [8], ambient or psychrophilic
45 conditions (<20 °C), which favours the solubility of methane in water.

46 The development and implementation of a technology to economically recover
47 dissolved methane from process effluents could improve the viability and sustainability
48 of anaerobic wastewater treatment [1,4]. In this sense, the membrane hollow fibre
49 contactor has emerged recently as a promising technology that seems able to
50 demethanize aqueous streams, with benefits with respect to conventional separation
51 technologies. Among such benefits are higher volumetric mass transfer coefficients
52 that lead to compact and smaller systems [9] and avoiding the direct contact of liquid
53 and gas phases that can frequently lead to problems such as foaming, flooding, and
54 emulsions [10,11]. So, Bandara et al. [12–14] demonstrated that degasification using a
55 multi-layered composite hollow fibre degassing module (with porous and non-porous
56 materials) is a promising technology for improving methane recovery from the effluent
57 of a bench-scale Upflow Anaerobic Sludge Blanket (UASB) process for treating low-
58 strength wastewater at low temperature. In a preliminary work, Cookney et al. [6]
59 showed the potential for recovering dissolved methane from low-temperature UASB
60 treating domestic wastewater using a polydimethylsiloxane (PDMS) membrane
61 contactor. This work was continued later by including a polypropylene microporous
62 membrane contactor, and both synthetic and real anaerobic effluents from the UASB
63 and membrane bioreactor [15]. The authors also showed that this application could
64 both be economically practicable and avoid net CO₂ emissions. Luo et al. [16]
65 demonstrated that a degassing membrane coupled UASB reactor was able to achieve
66 in situ biogas upgrading and decrease the dissolved CH₄ concentration in the
67 anaerobic effluent. Unfortunately, studies on the removal of residual dissolved methane
68 from anaerobic effluents are still very scarce, and further research in this field is
69 needed to improve and deepen the knowledge and performance of this technology,
70 especially in that related to membrane fouling and long-term experiments.

71 In this context, research for in situ removal/recovery of methane from the effluent of an
72 Expanded Granular Sludge Bed (EGSB) anaerobic reactor is being carried out in our
73 research group. A comparative study of two different degassing membrane contactors
74 [17], microporous (polypropylene) and non-porous (PDMS), showed that the
75 performance of both contactors was not very unequal, but wetting phenomena were
76 observed for the microporous module, which is one of the major potential bottlenecks

77 of this type of microporous material. In this sense, dense (or non-porous) membrane
 78 materials can offer a solution to prevent wetting and may simultaneously offer
 79 acceptable mass transfer performances [18].

80 In the first part of the present work we have extended our previous study [17] with
 81 different operating conditions on the performance of the PDMS module for methane
 82 degassing. An analysis of the experimental results based on a resistance to mass
 83 transfer study is presented. In addition, and as especial novelty, the incidence of
 84 membrane fouling in long-term experiments has been determined. To the best of our
 85 knowledge, this is the first attempt in the literature to study the membrane fouling in
 86 long term experiments in methane degassing of anaerobic effluents. Finally, a
 87 feasibility study considering energy recovery and demand has been carried out for a
 88 given application of a degassing process using a contactor of nonporous membrane of
 89 PDMS.

90

91 2. MATERIALS AND METHODS

92 2.1 Experimental set-up

93 A commercial hollow fibre membrane contactor module (PDMSXA-250, supplied
 94 by PermSelect®, MedArray Inc., USA) was selected as usual in water degassing
 95 industrial applications. The main properties of the degassing module (DM) are
 96 summarized in Table 1.

97

98 **Table 1.** Characteristics of the non-porous polydimethylsiloxane (PDMS) contactor
 99 module.

Module inner diameter, m	0.016
Module length, m	0.14
Number of fibres	320
Effective fibre length, m	0.083
Inner diameter, μm	190
Outer diameter, μm	300
Fibre wall thickness, μm	55
Inner area (A_i), m^2	0.0159
Outer area (A_o), m^2	0.0250
Shell tube inner diameter, m	0.016
Packing fraction	0.113
Max. liquid flow rate L h^{-1}	12
Typical sweep gas flow rate, L h^{-1}	2.7-27.0
Lumen side volume, m^3	$7.53 \cdot 10^{-7}$
Shell side volume, m^3	$1.48 \cdot 10^{-5}$

Max. shell to lumen TMP*, mbar	1050
Max. lumen to shell TMP*, mbar	3100

100

*TMP: Transmembrane pressure.


101 A laboratory scale EGSB anaerobic reactor was operated at 25 °C for almost 3 years.
 102 The EGSB reactor was initially inoculated with 4 L of granular anaerobic sludge from
 103 the wastewater treatment plant of a local brewery. The bioreactor treated 8 L d⁻¹ of a
 104 synthetic wastewater polluted with ethanol with an organic load rate of 32 kg chemical
 105 oxygen demand (COD) m⁻³ d⁻¹, being a relatively high strength wastewater comparing
 106 with most of conventional anaerobic treatments [4]. A high recirculation flow was
 107 maintained to expand the sludge bed with an up-flow velocity of 10.7 m h⁻¹. A liquid–
 108 gas separator device was placed at the top of the reactor, and the biogas was collected
 109 through a sodium hydroxide solution. The methane flow rate and biogas composition
 110 were monitored with a flow meter (MGC-10 PMMA, Ritter, Germany) and a biogas
 111 analyser (Combimass GA-m, Binder, Germany), respectively. Water characteristics
 112 based on pH, conductivity, alkalinity, volatile fatty acids, COD, solids and nutrients
 113 concentrations were periodically checked. A detailed description of the biological
 114 system and procedure can be found elsewhere [19].

115 A diagram of the EGSB reactor and the DM contactor is shown in Fig. 1. The
 116 membrane module was coupled to the EGSB reactor and fed with a fraction of flow
 117 from the recirculation stream, in which the concentration of the dissolved methane (D-
 118 CH₄) was similar to that in the effluent stream. The stream was flowed and then
 119 through the contactor, using a peristaltic pump (Watson-Marlow, USA), resulting in flow
 120 rates from 0.4 to 10.8 L h⁻¹. A stainless-steel filter of 40 µm was set-up prior to
 121 membrane module to avoid DM contactor clogging by the solid particulates from the
 122 anaerobic reactor. This filter was periodically cleaned and no biofilm development was
 123 observed on it. The liquid pressure drop at the inlet and outlet of the membrane was
 124 measured using a portable manometer MP 112 (Kimo, Spain). For vacuum pressure
 125 experiments, a vacuum pump N026.3.AT.18 (KNF Neuberger, Germany) was used for
 126 vacuum operation, getting vacuum pressures (P_{vac}) of 140, 500 and 800 mbar. For
 127 countercurrent sweep gas experiments, nitrogen gas with a high purity (> 99.8%)
 128 supplied by Carbueros Metálicos S.A. (Spain) was introduced into the contactor with
 129 flow rates ranging between 2.7 and 27.0 L h⁻¹ (STP) using a mass flow controller
 130 (Bronkhorst Hi-Tec, The Netherlands).

131 The DM contactor was operated both in lumen side mode (LS), where experiments
 132 were carried out with the liquid flowing in the lumen side and vacuum pressure or
 133 sweep gas applied in the shell side, and in shell side mode (SS) where the fluids were
 134 swapped.

135 The selection between vacuum or sweep gas mode operations depends basically on
 136 the aim of the process. Vacuum operation is the most feasible solution when the
 137 recovery of degassing components is desired, since sweep gas operation would
 138 involve subsequent costly separation/purification operations. If the process is carried
 139 out only for liquid degassing, sweep gas mode can be selected since it usually needs
 140 low energy consumption [20]. A combination mode (modest sweep with moderate
 141 vacuum) could be used to enhance the degassing performance by increasing the gas

142 transfer driving force [21], but this intermediate situation induces an increase in
143 energetic costs [20].

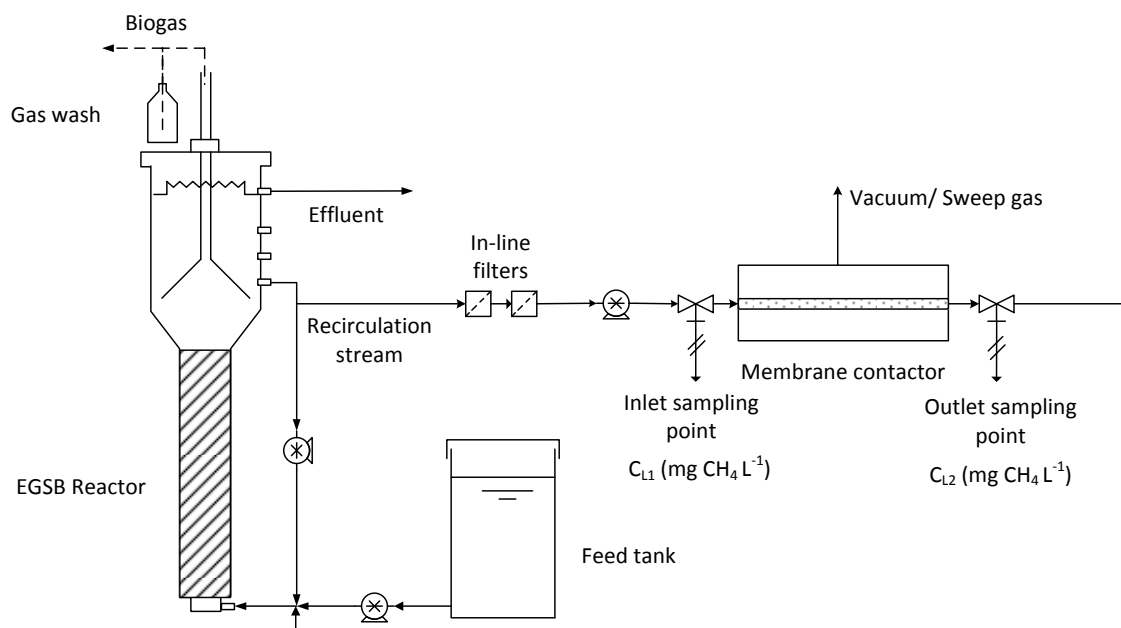

144
145 **Fig. 1.** Scheme of the set-up of the EGSB reactor and degassing membrane module
146

147 Cleaning of the DM module with deionised water at countercurrent flow during 30
148 minutes was done every day after experiments. A control experiment was repeated
149 every month to ensure that the DM module was operating without fouling and the
150 performance was not altered. Every short-term experiment was performed until stable
151 dissolved methane concentration in the outlet of the DM module was observed, usually
152 after 60-90 minutes of operation [17]. Discussion of results has been based on the
153 values obtained at this pseudo steady-state.

154 Finally, long-term experiments (> 30 hours without cleaning) were carried out to study
155 the effect of operation time on contactor fouling and performance, and to determine the
156 cleaning strategy for the application. Sweep gas mode configuration was selected for
157 these experiments for safety and practical aspects, since long-term operation with the
158 vacuum pump caused problems of stability and malfunction, as well as noise and
159 odours in the laboratory.

160 Two different cleaning protocols were used: conventional soft cleaning where only
161 deionised water was flowed in countercurrent for 30 min, and a chemical cleaning,
162 suggested by the DM supplier [21]: sequentially flowed in countercurrent 5% wt/wt of
163 sodium hydroxide aqueous solution (30 min), deionised water (5 min), 5% wt/wt of citric
164 acid aqueous solution (30 min) and deionised water (5 min).

165

166 2.2 Determination of concentration of dissolved gases

167 The headspace method was used in the analysis of D-CH₄. Liquid samples of 50 mL
168 were collected at the inlet and the outlet of the DM module and were injected in sealed

169 vials of 125 mL prefilled with helium. Vials were shaken vigorously for 30 seconds and
 170 left at 25 °C for 3 hours in an orbital shaker, to allow the gases to equilibrate. After
 171 equilibration, 0.5 mL of the headspace gas was injected into a gas chromatograph
 172 (Agilent GC 7820A, Spain), equipped with Agilent HP-PLOT/Q and Agilent HP-
 173 MOLESIEVE columns. The D-CH₄ in liquid phase was calculated as:

$$C_L = \frac{C_{GH} (V_{GH} + H V_L)}{V_L} \quad (1)$$

174 where C_L is the concentration of dissolved methane in liquid phase (mg L⁻¹), C_{GH} the
 175 methane gas concentration in headspace after equilibration (mg L⁻¹), V_L and V_{GH} are
 176 volumes of liquid and gas space in the vial respectively (mL), and H the dimensionless
 177 Henry's law constant for methane (29.55) at 25 °C [22]. The performance of the
 178 degassing module was evaluated with the removal efficiency (RE, %) of the
 179 membrane, defined as:

$$RE = \frac{C_{L1} - C_{L2}}{C_{L1}} \cdot 100 \quad (2)$$

180 where C_{L1} and C_{L2} are the concentrations of dissolved methane in liquid phase (mg L⁻¹)
 181 at the inlet and outlet of the DM module, respectively. Samples from the inlet and outlet
 182 were taken in duplicate and were analyzed in triplicate.

183

184 2.3 Mass transfer evaluation

185 Analysis of mass transfer is important both to assess the performance of the DM
 186 contactor and to design/scale up a 'real' membrane unit. In our system, the
 187 experimental overall mass transfer coefficient (K_{Lexp} , m s⁻¹) of CH₄ can be determined
 188 from the mass balance applied at the liquid phase in the contactor by the following
 189 differential expression:

$$Q_L \frac{dC}{dA} = - K_{Lexp} (C_L - C_L^*) \quad (3)$$

190 where Q_L is the liquid flow rate (m³ s⁻¹), A is the interfacial area (m²), C_L is the
 191 concentration of D-CH₄ in the liquid phase (mg L⁻¹) and C_L^* is the concentration in liquid
 192 phase (mg L⁻¹) in equilibrium with the gas phase, which can be calculated from:

$$C_L^* = H \cdot C_G \quad (4)$$

193 where C_G is the concentration of CH₄ in the gas phase (mg L⁻¹). Integrating expression
 194 (3) through the DM contactor yields:

$$\frac{K_{Lexp} A}{Q_L} = - \ln \left(\frac{C_{L2} - C_L^*}{C_{L1} - C_L^*} \right) \quad (5)$$

195

196 The mass transfer process in the membrane contactor can be more easily visualized
 197 and interpreted using the film theory approach. The overall mass transfer process
 198 consists of three resistances in series: the liquid phase boundary layer (R_L), the
 199 membrane (R_m), and the gaseous phase boundary layer (R_G). The overall mass
 200 transfer coefficient (K_L) can be obtained by summing the partial resistances in series.
 201 So, in a cylindrical geometry like in the hollow fibre contactor, the overall resistance
 202 R_{total} (= 1/overall mass transfer) can be described by means of the equation:

$$R_{total} = \frac{1}{K_L A_L} = \frac{1}{H k_G A_G} + \frac{1}{H k_m A_{ml}} + \frac{1}{k_L A_L} = R_G + R_m + R_L \quad (6)$$

203

204 where k_G , k_m and k_L stand for the mass transfer coefficients in the gas, membrane and
 205 liquid, respectively, A_G and A_L are the membrane surfaces in contact with gas and
 206 liquid respectively, A_{ml} is the logarithmic mean membrane surface, and H is the
 207 equilibrium partition coefficient of the solute gas in between the gas and liquid phases
 208 (Henry coefficient). Resistance into the gas phase can usually be assumed as
 209 negligible, $R_G \ll R_m + R_L$, so in this case Eq. (6) can be reduced to:

$$R_{total} = \frac{1}{K_{Lexp} A_L} = \frac{1}{H k_m A_{ml}} + \frac{1}{k_L A_L} = R_m + R_L \quad (7)$$

210

211 3. RESULTS AND DISCUSSION

212

213 3.1 Characterization of the EGSB anaerobic effluent

214 The EGSB reactor achieved a removal rate of around 31.4 kg COD $m^{-3} d^{-1}$ resulting in
 215 an organic removal efficiency > 95%. The biogas composition was 77% (v/v) CH_4 and
 216 23% (v/v) CO_2 and the methane flow rate was 1.65 L h^{-1} (STP). The average dissolved
 217 methane (D- CH_4) measured in the water effluent of the reactor was usually around 30 ±
 218 5 mg L^{-1} . This indicates an oversaturation of the anaerobic effluent by a factor of 2 with
 219 respect to the equilibrium D- CH_4 concentration of 15 mg L^{-1} at experimental conditions
 220 [22]. D- CH_4 oversaturation is commonly observed in anaerobic reactors with
 221 oversaturation factors ranging from 1.3 to 6.9 [5–7,12,23]. Solids concentrations were
 222 measured before and after the filter sited previous membrane module. No appreciable
 223 differences were observed, indicating that water quality was not altered. Values of total
 224 and volatile solids were 3850 ±75 and 250 ±25 mg L^{-1} , respectively.

225 At these operational conditions, the amount of methane lost in aqueous effluent
226 represents around 1% of the total methane produced in the EGSB anaerobic reactor.
227 Quite disparate values of percentage of methane lost in anaerobic effluents can be
228 found in the literature [1,3,4,16]. This disparity of percentage of methane lost can be
229 explained taking into account that the amount of methane ($L h^{-1}$) lost in aqueous
230 effluent depends on water flow and temperature, which affect to equilibrium
231 concentration of solved methane, but it is almost independent on organic load and
232 reactor efficiency. So, high values of percentage of methane lost should be obtained for
233 low strength wastewater treatments and low values for high strength wastewater
234 treatments. Luo et al. [16] obtained similar values to those reported in this study,
235 ranging from 1.6 to 5.6%, using a degassing membrane coupled to an upflow
236 anaerobic sludge blanket (UASB) reactor, using similar organic load ($20 kg COD m^{-3} d^{-1}$)
237 1), and higher percentages ($> 11%$) have frequently been reported [1,3,4] for different
238 low strength wastewater treatments ($1.1-0.2 kg COD m^{-3} d^{-1}$). In any case, the feasibility
239 of the membrane process will depend on ability of the contactor module to recover the
240 amount of methane ($L h^{-1}$) lost in aqueous effluent but not on methane production of
241 anaerobic reactor.

242


243 3.2 Degassing membrane performance

244 Regarding the removal of $D-CH_4$ in the DM module, Fig. 2 shows the effect of the liquid
245 flow rate on the removal efficiency. Some of the results presented have been
246 previously reported in a former work [17] where a comparison of membrane modules
247 (porous and non-porous) was carried out, but the conjunction of the results in this study
248 (reported and not previously reported) provides a more deep knowledge of the
249 operation conditions. For sake of clarity previous reported experiments have been
250 plotted in grey filled symbols in Fig. 2 and 3. As can be observed in Fig. 2a,
251 independently of the vacuum/permeate pressure or of the mode of operation (LS or
252 SS), methane recovery decreases with increasing liquid flow rate. A similar trend has
253 previously been reported for membrane degassing of methane [15] or similar
254 applications [9,24].

255 The maximum removal efficiencies obtained in our experiments at vacuum operation
256 mode were of around 77% for experiments at the highest vacuum (800 mbar) and the
257 lowest liquid flow rate ($\sim 0.4 L h^{-1}$), and operated with the liquid in the lumen side.
258 Regarding the influence of the transmembrane pressure on the recovery/removal
259 efficiency of dissolved gases, it has been reported [9,25] that it would depend on both
260 the nature of the degassed compound and the rest of the operational conditions, such
261 as the liquid flow rate or sweep gas introduction. The positive influence of the vacuum
262 pressure on the removal efficiency could also denote that membrane resistance had a
263 considerable role in the overall resistance of the process [17,26], as will be discussed
264 later.

265 According to the DM supplier, the most efficient mode of operation of this type of
266 module for air liquid degassing is with the liquid on the shell side (outside the hollow
267 fibres) [21]. However, this mode of operation typically has a lower trans-membrane
268 pressure (TMP) limitation compared to operating with the liquid on the lumen side

269 (Table 1). The reason for the lower pressure limit from shell to lumen is because the
 270 hollow fibres may collapse and be damaged if the pressure from the outside of the
 271 hollow fibre to the lumen side of the hollow fibre exceeds 1050 mbar. On the other
 272 hand, if the pressure from the lumen side to the outside of the hollow fibre exceeds
 273 3100 mbar, the hollow fibres may over-distend and potentially be damaged [21].
 274 Nevertheless, it has been frequently reported that the best performance of different
 275 modules for liquid degassing is achieved when the liquid flows on the lumen side
 276 [24,27]. The best or worst performance of the operation mode can usually be related to
 277 the flow settings (e.g. Reynolds number or dead zones), which condition the mass
 278 transfer resistance.

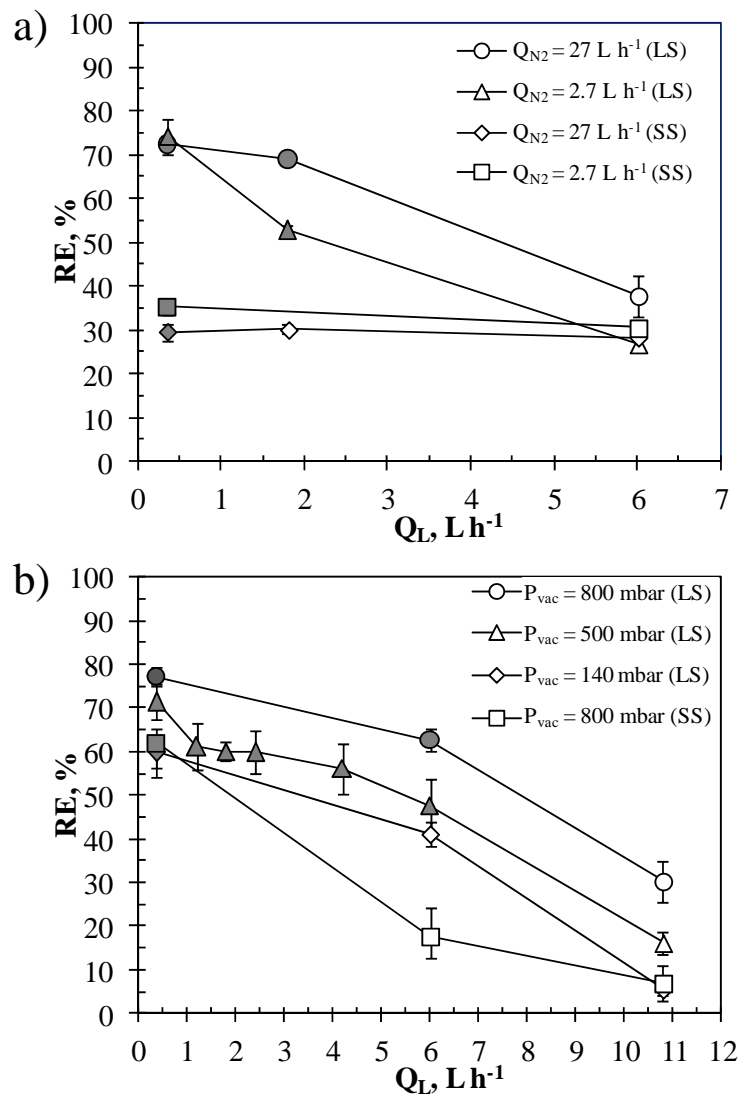

279
 280 Fig. 2. Effect of liquid flow rate on the removal efficiency of D-CH₄ for a) vacuum
 281 experiments and b) sweep gas experiments. LS: Liquid in lumen side. SS: Liquid in
 282 shell side. Filled grey symbols data from [17].

283

284 In our experiments, the membrane performance in shell and lumen side modes was
 285 also compared at the highest vacuum pressure (800 mbar, Fig. 2a). As can be seen,

286 and in contrast to what was indicated by the DM supplier [21], the shell side mode
287 showed usually 20-25% lower removal efficiency than the lumen side mode at the
288 same operational conditions, which could be attributed to a higher cross-section in the
289 shell part of the module, which means a lower liquid velocity and a higher probability of
290 channelling.

291 Thus it is important to know the influence of the fluid operational conditions on each
292 hollow fibre membrane before selecting the mode of operation and, depending on the
293 operating conditions of the system, the maximum allowable trans-membrane pressure
294 (TMP) may limit the way a module should be used [21].

295 The results of experiments operating with N₂ as sweep gas can be seen in Fig. 2b
296 under configurations of lumen and shell side modes. For lumen side operation (LS) the
297 trends were similar to that described at vacuum operation: RE decreased with the liquid
298 flow rate, and increased with the sweep gas flow rate (15–20% of difference at Q_{N₂} of
299 2.7 and 27.0 L h⁻¹), except for the experiments at the minimum liquid flow rate 0.4 L h⁻¹,
300 where the results were practically the same at both Q_{N₂} tested. By contrast,
301 experiments carried out in shell side mode (SS) showed a different behaviour. In this
302 mode of operation no significant influence of gas or liquid flow rate on methane RE was
303 observed, with values of RE around 30–35% at all the flows tested. This ‘plateau’
304 performance may indicate that when the module is operated in shell side mode,
305 transport through the PDMS membrane is the predominant resistance to overall mass
306 transfer. Besides, the fact that the RE of the experiments in LS with higher liquid flow
307 rates and gas is substantially the same as that obtained with the SS experiments could
308 corroborate this hypothesis, since in these conditions less resistance to mass transfer
309 would exist in the liquid phase and gas.

310 When the performance of vacuum and sweep gas type operation is compared (Figs. 2
311 and 3), different influences of the liquid flow rate were observed. For the lowest liquid
312 flow rate tested (0.5 L h⁻¹), vacuum operation performs better only for experiments
313 carried out at the maximum vacuum operation (800 mbar), but a sharper decline in RE
314 with the liquid flow rate was observed for sweep gas operation, and at medium and
315 high liquid flow, even operating at the minimum vacuum tested (140 mbar), the vacuum
316 operation experiments show better RE than the sweep gas experiments.

317

318 *3.3 Mass transfer study*


319 As has been introduced previously, the overall mass transfer coefficient K_{Lexp} can be
320 obtained experimentally from the unit membrane degassing mass balance at the liquid
321 phase (Eq. (5)). Variation with the liquid flow rate at different operation modes and
322 vacuum pressures can be found in Fig. 3a.

323 According to Eqs. (6) and (7), if the resistance of the liquid phase is not negligible, an
324 increase in liquid flow rate must promote higher values of the overall coefficient. As can
325 be seen in Fig. 3a, a positive dependence was obtained for liquid flow rate below 6 L h⁻¹
326 ¹, especially in LS mode operation, indicating that the liquid mass transfer resistance
327 can have a predominant role. Nevertheless, when the flow rate was increased until

328 near the liquid flow rate limit of the unit (12.0 L h^{-1} , Table 1), the mass transfer
 329 coefficient drastically decreased.

330 This unusual behaviour, the decrease of the mass transfer coefficient with the liquid
 331 flow rate, could denote that the membrane unit has an operational flow rate limit from
 332 which the fibres may suffer overpressure that can deform or compress them, which
 333 would reduce its permeability, and increase the membrane resistance.

334

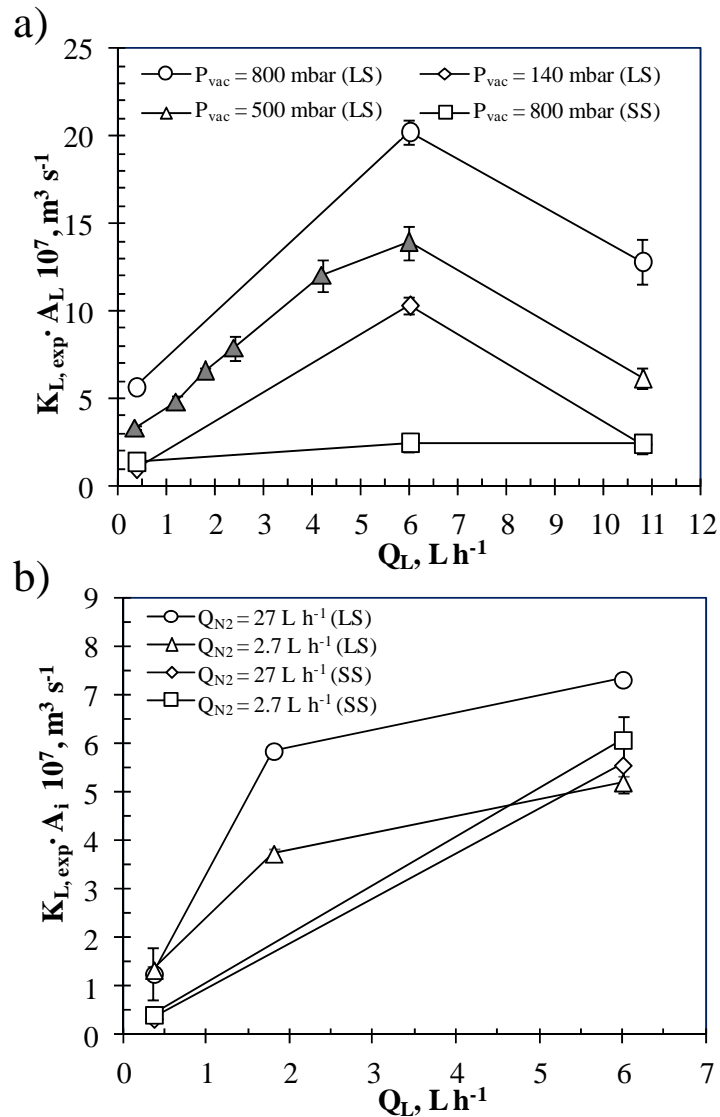

335

336 Fig. 3. Experimental mass transfer coefficient ($K_{L,exp} \cdot A_L$) for a) vacuum experiments
 337 and b) sweep gas experiments. LS: Liquid in lumen side. SS: Liquid in shell side. Filled
 338 grey symbols data from [17]

339

340 As has usually been reported for similar operations [6], the methane mass transfer was
 341 improved by increasing the transmembrane pressure, and the experiment carried out at
 342 800 mbar of vacuum pressure showed the highest overall mass transfer coefficients

343 (Fig. 3a). These results could suggest that the membrane resistance was non-
 344 negligible at the operational conditions studied and, as has been previously reported
 345 [26,28], the membrane mass transfer coefficient (k_m) can be positively influenced by
 346 the vacuum pressure of the permeate. In this sense, the membrane resistance
 347 coefficient for dense membranes has been related to the membrane thickness, partial
 348 pressure of the permeate compound, and permeability coefficient [29], which depends
 349 on the properties of both the membrane and compound (barrer = $7.5005 \times 10^{-18} \text{ m}^2\text{s}^{-1}$
 350 Pa^{-1} – STP). For PDMS membranes, values of the methane permeability coefficient at
 351 ambient conditions are usually reported from 850 to 1600 barrer [30–32], with a value
 352 of 950 barrer [33] suggested by the module supplier.

353

354 As expected from the removal efficiency results, comparison of the shell and lumen
 355 side operations mode (800 mbar) showed lower overall mass transfer coefficients for
 356 the shell side at vacuum experiments, probably due to their lower liquid velocity.

357 The values of the mass transfer coefficient for sweep gas experiments can be found in
 358 Fig. 3b. K_L increased with the liquid and gas flow rate, except for the shell side mode
 359 (gas into the fibres), where the influence of the gas flow rate on the K_L was minimal.
 360 The fact that at the highest liquid flow rate the overall mass transfer coefficients are
 361 quite similar, independently of the operation mode, seems to confirm the importance of
 362 membrane resistance at these operational conditions also in the sweep gas
 363 experiments. Assuming that the membrane mass resistance was predominant at the
 364 highest flow rate in the shell side mode (Fig. 3b), the membrane mass transfer
 365 coefficient, k_m , can be obtained from Eq. (7) with a value near the range (10^{-5} - 10^{-6} m s^{-1})
 366 of that reported for dense materials of polymer with the same thickness and
 367 permeability characteristics [18,29].

368 In Fig. 4a modified Wilson plot is presented, where the different transport resistances
 369 ($R_j = 1 / k_j A_j$) for experiments at 500 mbar vacuum are shown. As assumed, the gas
 370 phase resistance can be considered as negligible (<0.5% of overall resistance),
 371 independent of the estimation equation [34,35], and it has not been taken into
 372 consideration for simplification purposes. The white point corresponds to the highest
 373 tested liquid flow rate ($Q_L = 11 \text{ L h}^{-1}$), where, as discussed previously, an unusual
 374 behaviour was observed. This point has not been considered for correlations or further
 375 discussion. The solid line stands for the theoretical liquid resistance ($R_L = 1/k_L A_i$) where
 376 the liquid mass transfer coefficient, k_L , has been estimated from the Leveque equation
 377 [36]:

$$\frac{k_L d_i}{D} = 1.62 \left[\frac{d_i^2 v_L}{LD} \right]^{0.333} \quad (8)$$

378 where d_i (m) is the fibre inner diameter, L (m) the length, v_L (m s^{-1}) the liquid velocity,
 379 and D the molecular diffusivity of methane in water, reported as $1.76 \times 10^{-9} \text{ m}^2 \text{ s}^{-1}$ [37].
 380 This equation has been demonstrated extensively as correlating the mass transfer in
 381 the lumen side under laminar flow [10,11].


382 As we can see in Fig. 4, the experimental overall resistance was significantly lower
 383 than the estimation of the liquid phase resistance, indicating that the mass transfer
 384 resistance in the liquid phase is much lower than that predicted by the theoretical
 385 correlations. This enhancement of component mass transfer has been described
 386 previously when oversaturation conditions of degassed component exist in the liquid
 387 phase [15] and it should be taken into account in design considerations, to avoid
 388 excessive oversizing of units. In this sense, to include in the mass transfer resistance
 389 model the effect of methane oversaturation, this study proposes the introduction of an
 390 enhancement factor for driving the mass transfer (E) in liquid phase transfer associated
 391 with oversaturation, analogous to that used when chemical reactions take place in the
 392 liquid phase. So, the mass transfer resistance Eq. (7) can be expressed as:

$$\frac{1}{K_{Lexp}A_L} = \frac{1}{Hk_m A_{ml}} + \frac{1}{E k_L A_i} \quad (9)$$

393

394 The dotted line in Fig. 4 represents the linear correlation of the experimental overall
 395 resistance (black square points) with Eq. (9) considering the Leveque equation for k_L .
 396 As can be seen, a relatively good correlation ($r^2 = 0.9$) with a value for the
 397 enhancement factor (E) of 1.6 from the slope of the linear correlation was obtained.
 398 The dashed line shows the membrane resistance obtained from the intercept ($R_m =$
 399 $1/Hk_m A_{ml} = 1.64 \cdot 10^5 \text{ s m}^{-3}$) of the linear correlation. This value is quite similar to that
 400 reported previously [18,29] for this compound, and material permeability and thickness.
 401 As can be seen (Fig. 4), the membrane resistance seemed non-negligible, ranging
 402 from 7 to 20% of overall resistance, especially for high liquid velocities.

403

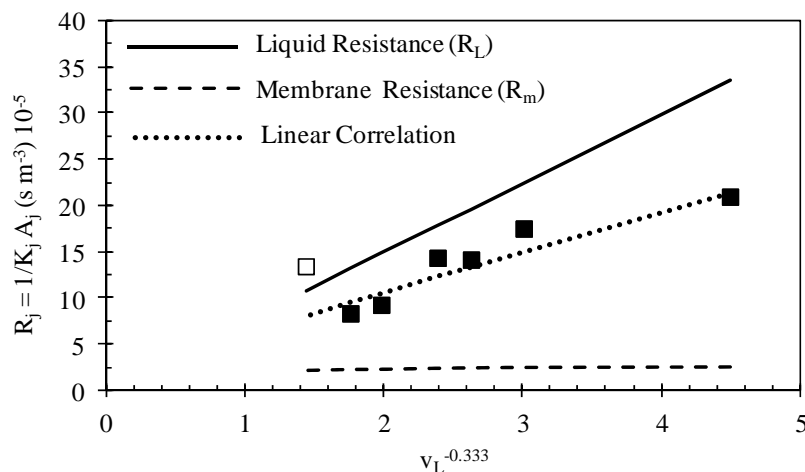

404

405 Fig. 4. Modified Wilson plot of results in lumen side mode at 500 mbar of vacuum
 406 pressure. Points: experimental overall resistance ($R_{total} = 1/K_{Lexp}A_i$). Solid line: liquid
 407 resistance ($R_L = 1/k_L A_i$) estimated from Leveque equation [36]. Dotted line: linear
 408 correlation of experimental points with Eq. (9). Dashed line: membrane resistance (R_m).

409

410

411 3.4 Long-term performance: fouling


412 The period from which membrane fouling considerably affects the DM performance and
413 when it must be cleaned is especially important in real industrial continuous treatments,
414 where cleaning stages must be planned and taken into account for economic
415 considerations. The appearance of the fouling phenomenon in DMs for methane
416 recovery in effluents of anaerobic treatments has not been studied in the specific
417 literature and most previous studies [4,15,17] have been carried out at a relatively short
418 time-on-stream (<1 hour), without fouling interference. Only the studies developed by
419 Bandara et al. [12,13] indicated that membrane fouling of the DM was insignificant for
420 their long-term experiments (>30 days).

421 As explained earlier, long-term experiments were performed in order to determine both
422 the possible influence of fouling on the contactor performance and the frequency of
423 cleaning that should be used to maintain the desired methane recovery/removal
424 capability. These experiments were carried out in the sweep gas mode configuration.
425 Initially, a lumen side mode experiment was carried out, as shown in Fig. 5a. As can be
426 seen in this figure, the performance in this experiment was kept almost stable/constant
427 (RE around 60–65%) for approximately 120 hours of operation, but after this period an
428 appreciable and continuous decrease in efficiency was observed. This decrease was
429 attributed to fouling phenomena on the membrane, which was corroborated, since,
430 after conventional cleaning with deionised water, the initial activity was completely
431 recovered (around 65% of RE). Despite the use of a filter that prevented the passage
432 of particles > 40 microns, the appearance of fouling was relatively early, but seemed
433 reversible with a soft cleaning. Natural organic matter related to microbial and
434 extracellular polymer substances has been described as the major type of foulant in
435 biological wastewater treatment units [38] and most of them can present a size lower
436 than 40 microns. Biofouling has been described as a major concern in anaerobic
437 membrane bioreactors, limiting more widespread application of this system in
438 wastewater treatments [39].

439 As can be seen in Fig. 5b, the results for shell side mode operation at the same liquid
440 operational conditions were quite different. The duration of the initial period of stable
441 performance (RE around 35%) was considerably lower than that observed in lumen
442 operation (< 50 hours). This faster deactivation may be related to the lower velocity of
443 the liquid in the SS operation, which may favour the deposition of particles from the
444 biological process and therefore the fouling effect. Moreover, with conventional
445 cleaning (water cleaning 1 in Fig. 5), RE recovered only partially (around 20%) but did
446 not reach the initial performance and after a period of almost 50 hours the performance
447 decreased again. As the RE did not completely recover, it was assumed that a residual
448 fouling, that was difficult to remove with water, increased the resistance to methane
449 mass transfer, so a chemical cleaning protocol was used to try to remove this fouling
450 and restore the initial performance. Two consecutive chemical cleanings (chemical
451 cleanings 1 and 2 in Fig. 5b) were needed to restore the RE to values similar to the
452 initial ones, but a decrease of performance appeared only 20 hours later. Further water
453 or chemical cleaning protocols did not restore the initial performance and a
454 performance decrease appeared almost immediately (1–2 hours). This behaviour could

455 be attributed to an irreversible/recalcitrant biofouling promoted by the growth of
 456 biologically active microorganisms to form biofilms. A less probable damage to the
 457 membrane from the use of the chemical cleaning protocol could also provoke the same
 458 effect. In any case, this DM unit was discarded for the rest of the experiments.

459

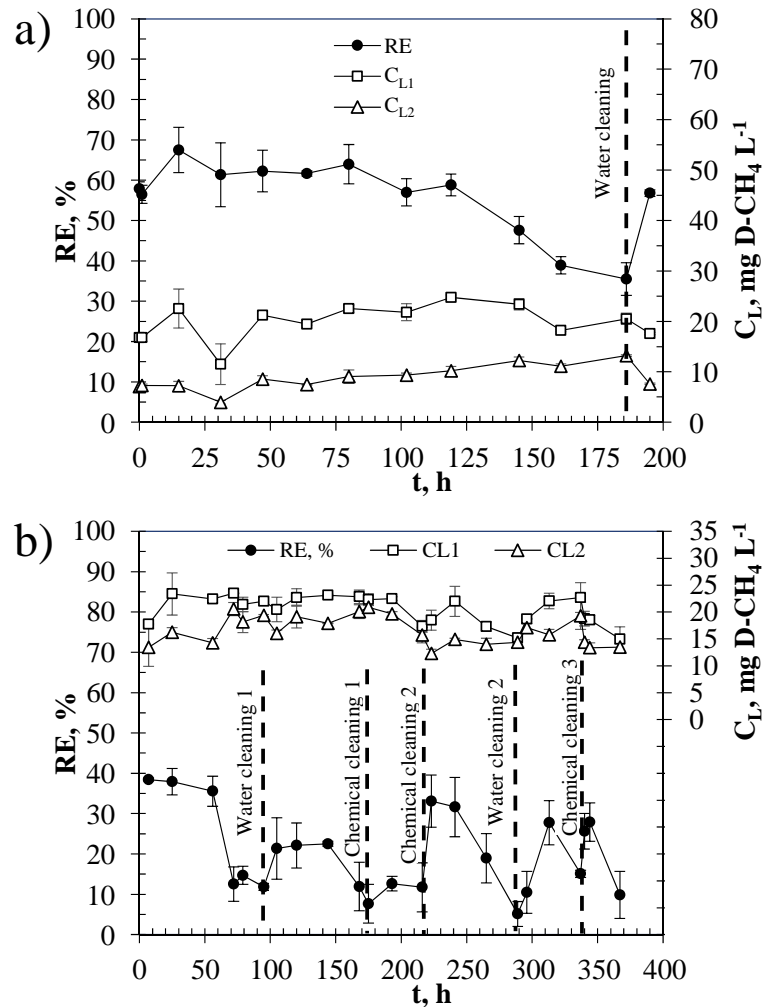

460

461 Fig. 5. Effect of long-term operation on RE. a) Lumen side mode: $Q_L=1.8 \text{ L h}^{-1}$. $Q_{N2}= 12$
 462 L h^{-1} . b) Shell side mode: $Q_L=1.8 \text{ L h}^{-1}$. $Q_{N2}= 2.7 \text{ L h}^{-1}$.

463

464 These results highlight the importance of choosing an appropriate strategy for
 465 membrane fouling control and membrane cleaning [40], especially in biological
 466 treatments where, additionally, a complex chemistry is involved and different
 467 mechanisms and synergistic effects can promote the appearance of fouling [38]. So,
 468 taking into account that during the short-term experiment phase, the occurrence of
 469 fouling was not observed, despite the more than 5000 hours of accumulated operation
 470 (3000 h in LS and 2250 h in SS), a similar cleaning strategy to that used in that phase,
 471 based on a daily water backwashing of about 30 minutes, could be proposed for this
 472 process.

473

474 *3.5 Feasibility: energy and economic considerations*

475 As was argued formerly, vacuum operation offers the potential to deliver much higher
476 recovered gas purities, since it minimises gas-side dilution by avoiding the addition of
477 dilutive sweep gas, and an elevated concentration of methane can be obtained [20].
478 Therefore, only this operation mode has been evaluated for the energy and cost
479 efficiency.

480 In order to determine the efficiency of the recovery of methane, a comparison between
481 energy recovered as methane and the energy demand of the operation must be carried
482 out. In this case, the power demand of vacuum (blower) and liquid flow (pump)
483 operations will be considered. Blower/compressor power consumption (W) can be
484 calculated for an isentropic process from the following expression [4]:

$$W(\text{J kg}^{-1}) = \frac{\gamma}{\gamma - 1} \frac{R T_a}{M} \left[\left(\frac{P_D}{P_A} \right)^{\frac{\gamma-1}{\gamma}} - 1 \right] \quad (10)$$

485 P_D and P_A are discharge and suction pressure, respectively, γ is the isentropic
486 expansion coefficient of gas, R is the constant of ideal gases, M is the molecular weight
487 of the gas, and T_a is the temperature of the suction. Assuming a vacuum pump
488 efficiency of 0.65, the power demand can be calculated. For liquid flow, the power
489 consumption in the membrane can be estimated from:


$$W(\text{J kg}^{-1}) = \frac{P_i - P_o}{\rho} + \sum F \quad (11)$$

490 where P_i and P_o are the inlet and outlet pressure, $\sum F$ is the friction loss (estimated as
491 20% of the total power demand) and ρ is the liquid density. A pump efficiency of 0.65
492 was also assumed in this study.

493 Assuming an electrical conversion efficiency of methane of 35%, the energy required in
494 vacuum operation ranged from 0.2% to 3% of the recovered energy as methane in the
495 membrane for 140 mbar and 800 mbar of vacuum pressures, respectively. The pump
496 operation was always lower than 0.01% of the recovered energy and therefore it can
497 be considered as negligible. As the amount of methane recovered increased with
498 vacuum pressure and RE, to compare different operational conditions the parameter
499 Saved Energy has been defined as the difference between the recovered electrical
500 energy and demand of vacuum operation energy per cubic meter of treated effluent.

501 Fig. 6 shows the variation of the recovered energy per cubic meter of effluent versus
502 the anaerobic effluent flow rate. As observed, the saved energy was positive in all
503 cases, and showed an optimum value for liquid flow rate of around 2–6 L h⁻¹ for lumen
504 side operation. These results show that, even when using conservative values for the
505 process included in the energy balance, a net energy production can be obtained from
506 the recovery of methane in anaerobic effluents. Similar conclusions have been recently
507 reported [4, 15].

508 In addition, the renewable energy that can be produced from the recovered methane
 509 can offset the carbon footprint of D-CH₄ in anaerobic effluents, which indicates that
 510 integrating this technology in the anaerobic treatment of wastewater can even become
 511 carbon-positive. The environmental interest of this technology is clearly demonstrated
 512 when the emission to the atmosphere of around 0.20 kg CO₂ equivalent m⁻³ effluent is
 513 avoided with every 25% of removal/recovery efficiency (RE) of the process. In an
 514 anaerobic treatment of 100 m³ effluent h⁻¹ and for a RE of 60–70%, it would be possible
 515 to avoid the emission of 400–500 tons of CO₂ equivalent per year.

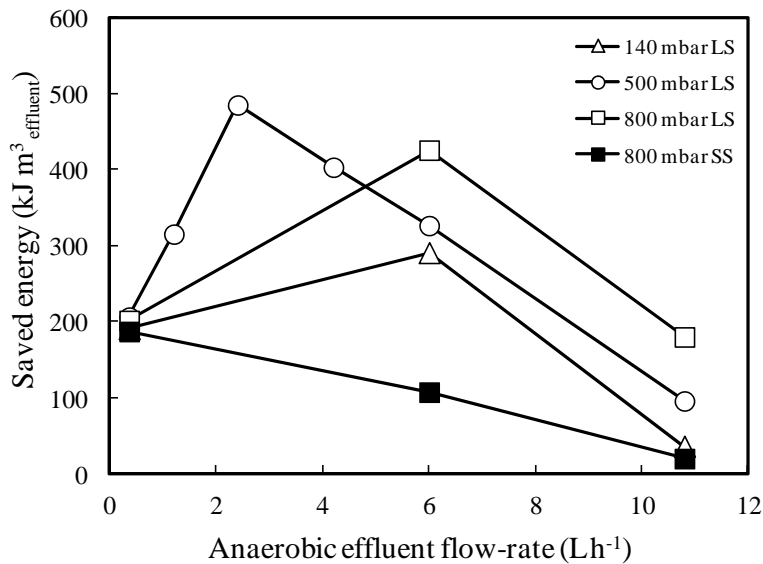

516
 517 Fig. 6. Saved energy at different operational conditions. LS: lumen side, SS: shell side.

518
 519 From an economic point of view, the energy saved seems relatively low: for example,
 520 500 kJ m⁻³ effluent (near the maximum value in Fig. 6) means that approximately 0.140
 521 kWh m⁻³ effluent can be saved. These values are in agreement with those recently
 522 reported [4,6,15]. Assuming an electricity cost of 0.100 € kWh⁻¹, around 0.014 € per
 523 cubic meter of treated effluent could be obtained in the methane recovery operation. In
 524 these conditions, for an anaerobic treatment of 100 m³ effluent h⁻¹, the economic saving
 525 from the produced electricity would be of only around 10 000–12 500 € per year.
 526 Taking into account that capital cost of membrane process was reported to be in the
 527 range of 1 000-1 200 € per m³ h⁻¹ [41], that annual saving could serve to fund at least
 528 partially investment and/or operational costs (personnel, cleaning and others), but does
 529 not seem sufficient to fully assure the financial viability of the process. Further
 530 reduction in capital cost of membranes seems still necessary to guarantee the
 531 economic yield of the process.

532

533 4. Conclusions

534 The performance and viability of the use of a polydimethylsiloxane hollow fibre
 535 membrane module for in situ methane recovery/removal from the effluent of an

536 Expanded Granular Sludge Bed (EGSB) anaerobic reactor has been studied. The
537 methane concentration in the biological reactor effluent was around two times higher
538 than saturation equilibrium. The maximum removal efficiencies obtained in our
539 experiments at vacuum operation mode were of around 77% for experiments at the
540 highest vacuum (800 mbar) and the lowest liquid flow rate ($\sim 0.4 \text{ L h}^{-1}$), when operated
541 with the liquid in the lumen side. Independent of the operational conditions, shell side
542 mode showed lower removal efficiency than lumen side mode, which was attributed to
543 the lower liquid velocity and a higher probability of channelling of the shell part of the
544 module. The comparative performance of vacuum and sweep gas type operations
545 depended on the liquid flow rate and vacuum pressure.

546 Mass transport analysis denoted that the methane transfer was enhanced by liquid
547 oversaturation and the overall mass transfer coefficients were considerably higher than
548 predicted by theoretical models. An enhancement factor for liquid phase has been
549 proposed to correlate the experimental results, with a value of 1.6 for 500 mbar
550 vacuum pressure operation in LS mode. Additionally, the membrane resistance
551 seemed non-negligible, ranging from 10 to 30% of overall resistance, especially for low
552 liquid velocities.

553 In the first attempt in the literature to study the long-term behaviour of a DM module for
554 methane degassing, a faster deactivation in the SS mode operation was observed,
555 related to the lower velocity of the liquid in this mode that can favour the fouling effect.
556 Fouling seemed to depend little on the mode and operational conditions, and a
557 relatively frequent cleaning with water might be carried out to ensure preservation of
558 the membrane efficiency during long periods.

559 The energy balance analysis showed that energy production exceeded the system
560 energy requirements for all the operation conditions, although it does not seem enough
561 to guarantee the economic yield of the process. A considerable reduction of CO_2
562 equivalent emissions showed the positive environmental impact of this technology.

563

564 **Acknowledgements**

565 Financial support was obtained from the Ministerio de Economía y Competitividad
566 (Spain, project CTM-2014-54517-R, co-financed by FEDER funds); and from
567 Generalitat Valenciana (Spain, Prometeo project 2013/53). M. Henares acknowledges
568 Generalitat Valenciana for financial support for her PhD.

569

570 **References**

- 571 [1] F.Y. Cakir, M.K. Stenstrom, Greenhouse gas production: a comparison between
572 aerobic and anaerobic wastewater treatment technology., *Water Res.* 39 (2005)
573 4197–203. doi:10.1016/j.watres.2005.07.042.
- 574 [2] A.L. Smith, L.B. Stadler, N.G. Love, S.J. Skerlos, L. Raskin, Perspectives on
575 anaerobic membrane bioreactor treatment of domestic wastewater: a critical
576 review., *Bioresour. Technol.* 122 (2012) 149–59.
577 doi:10.1016/j.biortech.2012.04.055.

- 578 [3] Z. Alshboul, J. Encinas-Fernández, H. Hofmann, A. Lorke, Export of dissolved
579 methane and carbon dioxide with effluents from municipal wastewater treatment
580 plants, *Environ. Sci. Technol.* 0 (2016). doi:10.1021/acs.est.5b04923.
- 581 [4] B.C. Crone, J.L. Garland, G.A. Sorial, L.M. Vane, Significance of dissolved
582 methane in effluents of anaerobically treated low strength wastewater and
583 potential for recovery as an energy product: A review, *Water Res.* 104 (2016)
584 520–531. doi:10.1016/j.watres.2016.08.019.
- 585 [5] C.L. Souza, C.A.L. Chernicharo, S.F. Aquino, Quantification of dissolved
586 methane in UASB reactors treating domestic wastewater under different
587 operating conditions, *Water Sci. Technol.* 64 (2011) 2259–2264.
588 doi:10.2166/wst.2011.695.
- 589 [6] J. Cookney, E. Cartmell, B. Jefferson, E.J. McAdam, Recovery of methane from
590 anaerobic process effluent using poly-di-methyl-siloxane membrane contactors.,
591 *Water Sci. Technol.* 65 (2012) 604–10. doi:10.2166/wst.2012.897.
- 592 [7] H. Yeo, J. An, R. Reid, B.E. Rittmann, H.S. Lee, Contribution of Liquid/Gas
593 Mass-Transfer Limitations to Dissolved Methane Oversaturation in Anaerobic
594 Treatment of Dilute Wastewater, *Environ. Sci. Technol.* 49 (2015) 10366–10372.
595 doi:10.1021/acs.est.5b02560.
- 596 [8] M. Bani Shahabadi, L. Yerushalmi, F. Haghghat, Impact of process design on
597 greenhouse gas (GHG) generation by wastewater treatment plants, *Water Res.*
598 43 (2009) 2679–2687. doi:10.1016/j.watres.2009.02.040.
- 599 [9] A. Sengupta, P.A. Peterson, B.D. Miller, J. Schneider, C.W. Fulk, Large-scale
600 application of membrane contactors for gas transfer from or to ultrapure water,
601 *Sep. Purif. Technol.* 14 (1998) 189–200. doi:10.1016/S1383-5866(98)00074-4.
- 602 [10] M. Stanojević, B. Lazarević, D. Radić, Review of membrane contactors designs
603 and applications of different modules in industry, *FME Trans.* 31 (2003) 91–98.
- 604 [11] A. Gabelman, S.-T. Hwang, Hollow fiber membrane contactors, *J. Memb. Sci.*
605 159 (1999) 61–106. doi:10.1016/S0376-7388(99)00040-X.
- 606 [12] W.M.K.R.T.W. Bandara, H. Satoh, M. Sasakawa, Y. Nakahara, M. Takahashi, S.
607 Okabe, Removal of residual dissolved methane gas in an upflow anaerobic
608 sludge blanket reactor treating low-strength wastewater at low temperature with
609 degassing membrane., *Water Res.* 45 (2011) 3533–40.
610 doi:10.1016/j.watres.2011.04.030.
- 611 [13] W.M.K.R.T.W. Bandara, T. Kindaichi, H. Satoh, M. Sasakawa, Y. Nakahara, M.
612 Takahashi, et al., Anaerobic treatment of municipal wastewater at ambient
613 temperature: Analysis of archaeal community structure and recovery of
614 dissolved methane., *Water Res.* 46 (2012) 5756–64.
615 doi:10.1016/j.watres.2012.07.061.
- 616 [14] W.M.K.R.T.W. Bandara, M. Ikeda, H. Satoh, M. Sasakawa, Y. Nakahara, M.
617 Takahashi, et al., Introduction of a Degassing Membrane Technology into
618 Anaerobic Wastewater Treatment, *Water Environ. Res.* 85 (2013) 387–390.
619 doi:10.2175/106143013X13596524516707.
- 620 [15] J. Cookney, A. Mcleod, V. Mathioudakis, P. Ncube, A. Soares, B. Jefferson, et
621 al., Dissolved methane recovery from anaerobic effluents using hollow fibre
622 membrane contactors, *J. Memb. Sci.* 502 (2016) 141–150.

- 623 doi:10.1016/j.memsci.2015.12.037 doi:10.1016/j.memsci.2015.12.037.
- 624 [16] G. Luo, W. Wang, I. Angelidaki, A new degassing membrane coupled upflow
625 anaerobic sludge blanket (UASB) reactor to achieve in-situ biogas upgrading
626 and recovery of dissolved CH₄ from the anaerobic effluent, *Appl. Energy*. 132
627 (2014) 536–542. doi:10.1016/j.apenergy.2014.07.059.
- 628 [17] M. Henares, M. Izquierdo, J.M. Peña-Roja, V. Martínez-Soria, Comparative
629 study of degassing membrane modules for the removal of methane from
630 Expanded Granular Sludge Bed anaerobic reactor effluent, *Sep. Purif. Technol.*
631 170 (2016) 22–29. doi:http://dx.doi.org/10.1016/j.seppur.2016.06.024.
- 632 [18] E. Chabanon, B. Belaissaoui, E. Favre, Gas–liquid separation processes based
633 on physical solvents: opportunities for membranes, *J. Memb. Sci.* 459 (2014)
634 52–61. doi:10.1016/j.memsci.2014.02.010.
- 635 [19] C. Lafita, J.M. Peña-roja, C. Gabaldón, Anaerobic removal of 1-methoxy-2-
636 propanol under ambient temperature in an EGSB reactor, *Bioprocess Biosyst.*
637 *Eng.* (2015) 2137–2146. doi:10.1007/s00449-015-1453-0.
- 638 [20] C. Vallieres, E. Favre, Vacuum versus sweeping gas operation for binary
639 mixtures separation by dense membrane processes, *J. Memb. Sci.* 244 (2004)
640 17–23. doi:10.1016/j.memsci.2004.04.023.
- 641 [21] PermSelect, Operating Guidelines for PermSelect® Modules Liquid Contacting,
642 (2016). [http://permselect.com/files/PermSelect Operating Instructions - Liquid](http://permselect.com/files/PermSelect%20Operating%20Instructions%20-%20Liquid%20Contacting.pdf)
643 [Contacting.pdf](http://permselect.com/files/PermSelect%20Operating%20Instructions%20-%20Liquid%20Contacting.pdf) (accessed April 1, 2017).
- 644 [22] R. Sander, Compilation of Henry 's Law Constants for Inorganic and Organic
645 Species of Potential Importance in Environmental Chemistry, Database. 20
646 (1999) 107.
- 647 [23] A.L. Smith, S.J. Skerlos, L. Raskin, Psychrophilic anaerobic membrane
648 bioreactor treatment of domestic wastewater, *Water Res.* 47 (2013) 1655–1665.
649 doi:10.1016/j.watres.2012.12.028.
- 650 [24] Z.-G. Peng, S.-H. Lee, T. Zhou, J.-J. Shieh, T.-S. Chung, A study on pilot-scale
651 degassing by polypropylene (PP) hollow fiber membrane contactors,
652 *Desalination*. 234 (2008) 316–322. doi:10.1016/j.desal.2007.09.100.
- 653 [25] C.I. McDermott, S.A. Tarafder, O. Kolditz, C. Schüth, Vacuum assisted removal
654 of volatile to semi volatile organic contaminants from water using hollow fiber
655 membrane contactors. II: A hybrid numerical-analytical modeling approach, *J.*
656 *Memb. Sci.* 292 (2007) 17–28. doi:10.1016/j.memsci.2007.01.009.
- 657 [26] J. Li, L.-P. Zhu, Y.-Y. Xu, B.-K. Zhu, Oxygen transfer characteristics of
658 hydrophilic treated polypropylene hollow fiber membranes for bubbleless
659 aeration, *J. Memb. Sci.* 362 (2010) 47–57. doi:10.1016/j.memsci.2010.06.013.
- 660 [27] X. Tan, G. Capar, K. Li, Analysis of dissolved oxygen removal in hollow fibre
661 membrane modules: effect of water vapour, *J. Memb. Sci.* 251 (2005) 111–119.
662 doi:10.1016/j.memsci.2004.11.005.
- 663 [28] T. Ahmed, M.J. Semmens, M.A. Voss, Oxygen transfer characteristics of hollow-
664 fiber, composite membranes, *Adv. Environ. Res.* 8 (2004) 637–646.
665 doi:10.1016/S1093-0191(03)00036-4.
- 666 [29] P.T. Nguyen, E. Lasseguette, Y. Medina-Gonzalez, J.C. Remigy, D. Roizard, E.

- 667 Favre, A dense membrane contactor for intensified CO₂ gas/liquid absorption in
668 post-combustion capture, *J. Memb. Sci.* 377 (2011) 261–272.
669 doi:10.1016/j.memsci.2011.05.003.
- 670 [30] S. Heile, S. Rosenberger, A. Parker, B. Jefferson, E.J. McAdam, Establishing
671 the suitability of symmetric ultrathin wall polydimethylsiloxane hollow-fibre
672 membrane contactors for enhanced CO₂ separation during biogas upgrading, *J.*
673 *Memb. Sci.* 452 (2014) 37–45. doi:10.1016/j.memsci.2013.10.007.
- 674 [31] D.C. Nymeijer, B. Folkers, I. Breebaart, M.H. V Mulder, M. Wessling, Selection
675 of Top Layer Materials for Gas-Liquid Membrane Contactors, *J. Appl. Polym.*
676 *Sci.* 92 (2004) 323–334. doi: 10.1002/app.20006.
- 677 [32] T.C. Merkel, V.I. Bondar, K. Nagai, B.D. Freeman, I. Pinnau, Gas sorption,
678 diffusion, and permeation in poly(dimethylsiloxane), *J. Polym. Sci. Part B Polym.*
679 *Phys.* 38 (2000) 415–434. doi:10.1002/(SICI)1099-
680 0488(20000201)38:3<415::AID-POLB8>3.0.CO;2-Z.
- 681 [33] J.P. Montoya, Membrane Gas Exchange: Using Hollow Fiber Membranes to
682 Separate Gases from Liquid and Gaseous Streams, MedArray, Inc. (2010).
683 https://permselect.com/files/Using_Membranes_for_Gas_Exchange.pdf
684 (accessed April 1, 2017).
- 685 [34] R. Prasad, K. Sirkar, Dispersion-free solvent extraction with microporous hollow
686 fiber modules, *AIChE J.* 34 (1988) 177–188.
- 687 [35] L. Dahuron, L. Cussler, Protein Extractions with Hollow Fibers, *AIChE J.* 34
688 (1988) 131–136. doi:10.1002/aic.690340115.
- 689 [36] E. Drioli, A. Criscuoli, E. Curcio, Membrane contactors: Fundamentals,
690 applications and potentialities., in: *Membr. Sci. Technol. Ser. vol.11*, Amsterdam,
691 2006.
- 692 [37] Y. Cengel, M. Boles, *Thermodynamics: An Engineering Approach*, 6th ed.,
693 McGraw-Hill, New York, 2008.
- 694 [38] X. Shi, G. Tal, N.P. Hankins, V. Gitis, Fouling and cleaning of ultrafiltration
695 membranes: A review, *J. Water Process Eng.* 1 (2014) 121–138.
696 doi:10.1016/j.jwpe.2014.04.003.
- 697 [39] H. Lin, W. Peng, M. Zhang, J. Chen, H. Hong, Y. Zhang, A review on anaerobic
698 membrane bioreactors: Applications, membrane fouling and future perspectives,
699 *Desalination.* 314 (2013) 169–188. doi:10.1016/j.desal.2013.01.019.
- 700 [40] J. Zhang, S.I. Padmasiri, M. Fitch, B. Norddahl, L. Raskin, E. Morgenroth,
701 Influence of cleaning frequency and membrane history on fouling in an
702 anaerobic membrane bioreactor, *Desalination.* 207 (2007) 153–166.
703 doi:10.1016/j.desal.2006.07.009.
- 704 [41] M.H. Al-Malack, M.M. Rahman, Treatment of refinery wastewater using mebrane
705 processes, in: K. Mohanty and M.K. Purkait (Eds.), *Membrane technologies and*
706 *applications*, CRC Press, Boca Raton, USA, 2012, pp 121–132.