

**UCC Library and UCC researchers have made this item openly available.
Please [let us know](#) how this has helped you. Thanks!**

Title	Cascading biomethane energy systems for sustainable green gas production in a circular economy
Author(s)	Wall, David M.; McDonagh, Shane; Murphy, Jerry D.
Publication date	2017-07-23
Original citation	Wall, D. M., McDonagh, S., Murphy, J. D. (2017) 'Cascading biomethane energy systems for sustainable green gas production in a circular economy', <i>Bioresource Technology</i> , 243, pp. 1207-1215. doi:10.1016/j.biortech.2017.07.115
Type of publication	Article (peer-reviewed)
Link to publisher's version	http://dx.doi.org/10.1016/j.biortech.2017.07.115 Access to the full text of the published version may require a subscription.
Rights	© 2017, Elsevier Ltd. All rights reserved. This manuscript version is made available under the CC-BY-NC-ND 4.0 license. http://creativecommons.org/licenses/by-nc-nd/4.0
Embargo information	Access to this article is restricted until 24 months after publication by request of the publisher.
Embargo lift date	2019-07-23
Item downloaded from	http://hdl.handle.net/10468/4637

Downloaded on 2021-11-27T04:37:12Z

Accepted Manuscript

Review

Cascading biomethane energy systems for sustainable green gas production in a circular economy

David M. Wall, Shane McDonagh, Jerry D. Murphy

PII: S0960-8524(17)31231-2

DOI: <http://dx.doi.org/10.1016/j.biortech.2017.07.115>

Reference: BITE 18535

To appear in: *Bioresource Technology*

Received Date: 23 June 2017

Revised Date: 19 July 2017

Accepted Date: 21 July 2017

Please cite this article as: Wall, D.M., McDonagh, S., Murphy, J.D., Cascading biomethane energy systems for sustainable green gas production in a circular economy, *Bioresource Technology* (2017), doi: <http://dx.doi.org/10.1016/j.biortech.2017.07.115>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.



Cascading biomethane energy systems for sustainable green gas production in a circular economy

David M. Wall^{1,2}, Shane McDonagh^{1,2}, Jerry D. Murphy^{1,2,3}

¹MaREI Centre, Environmental Research Institute (ERI), University College Cork (UCC), Ireland

²School of Engineering, University College Cork (UCC), Ireland

³International Energy Agency Bioenergy Task 37 “Energy from Biogas”

Abstract

Biomethane is a flexible energy vector that can be used as a renewable fuel for both the heat and transport sectors. Recent EU legislation encourages the production and use of advanced, third generation biofuels with improved sustainability for future energy systems. The integration of technologies such as anaerobic digestion, gasification, and power to gas, along with advanced feedstocks such as algae will be at the forefront in meeting future sustainability criteria and achieving a green gas supply for the gas grid. This paper explores the relevant pathways in which an integrated biomethane industry could potentially materialise and identifies and discusses the latest biotechnological advances in the production of renewable gas. Three scenarios of cascading biomethane systems are developed.

Keywords: Anaerobic digestion; macro-algae; microalgae; power to gas; biomethane

1. Introduction

It is evident that future EU legislation will become more focused on the use of advanced biofuels to further the reduction of greenhouse gas (GHG) emissions in the energy sector. The most recent EU directive proposals have suggested a progressive reduction in first generation (food based) biofuels by 2030; with an increasing share in renewable, low-carbon transport fuels (including electric vehicles) from 1.5% in 2021 to 6.8% by 2030, with advanced biofuels to make up at least 3.6% by that time (EC, 2016). This will require a significant overhaul of the current energy system which is predominantly fossil fuel based. Sustainability will become a more significant issue in terms of biofuels contributing towards set EU renewable energy supply (RES) targets. At present, on a whole life cycle analysis basis, GHG emissions must be reduced by 60% compared to the fossil fuel displaced to count as a renewable transport fuel, with a further increase to 70% scheduled for 2021 (EC, 2016). Thus, biofuels must not only be a renewable energy source but must also be truly sustainable in future energy systems.

Biogas and biomethane have repeatedly been highlighted as renewable fuels of significant merit. Biogas (consisting of 50-70% methane and 30-50% carbon dioxide) generated from anaerobic digestion (AD) can be used directly for the production of electricity and heat in a CHP plant. Biogas can also be upgraded to biomethane (>97% methane), and in turn provide a substitute for fossil-natural gas. Biogas and biomethane systems are predominantly focused on second generation biofuel substrates (such as non-edible crops, agricultural biomass and waste residues) and include for many wider benefits including; a form of waste treatment; a method of utilizing the existing grid infrastructure sustainably; and an alternative source of revenue for farmers.

Reductions in emissions in electricity and large industry are covered by The EU Emissions Trading Scheme (ETS) with obligations imposed on companies. Emissions reductions in the transport, agriculture and heat sectors are known as Non-ETS sectors. Here the obligations are imposed on member states. Increased production of green electricity has no impact on emissions reductions for

member states. Thus biomethane systems can contribute to emissions reductions in non-ETS or ETS sectors depending on end use. From a policy perspective this is extremely significant.

The preferred end-use of biomethane typically varies by country, dependent on the set framework conditions of that country. For instance, Sweden utilises biomethane primarily as a transport fuel – as a consequence of the financial incentives available and limited natural gas grid coverage (IEA Bioenergy Task 40 and Task 37, 2014). Besides providing a potential gaseous transport fuel for bus fleets and heavy goods vehicles (HGVs), biomethane can supply renewable heat to large industry energy users and feed high efficiency combined heat and power (CHP) units. To date, biogas for electricity has been the predominant energy output from AD; by the end of 2015 there were 17,376 biogas plants in Europe producing 60.6TWh (European Biogas Association, 2016). However, as biomethane can be injected to the gas grid and/or used as a transport fuel, it can be viewed as a more flexible energy carrier than biogas-CHP achieving higher final energy output efficiencies (SEAI, 2017). As of 2015, there were 459 biomethane plants in Europe, with significant growth in the UK in particular where 43 new plants built were built (European Biogas Association, 2016).

However, the onus to provide a renewable source of energy and decarbonise our future energy systems through such methods could put a significant constraint on both arable and agricultural land; currently there is 0.2 ha of arable land per person on the planet (Murphy & Thamsiroj, 2011).

In 2050, the world's population is expected to grow to 9.4 billion, with an energy demand three times larger than the energy demand of 2001 (Tabassum et al., 2017). Increases in population will increase demand for food and use of land for bioenergy will ultimately drive up the price of food production. As a consequence, identified technologies such as digestion of maize silage may become less favourable pathways for the production of biomethane. Nonetheless biomethane can play a key role in the integration of future energy systems. Advanced, third generation biofuels such as macro-algae (seaweeds) and micro-algae are gaining more traction as potential feedstocks. Generating gaseous fuel from non-biological origin through power to gas (PtG) systems is also seen as a pathway with significant potential (Persson et al., 2014). In providing for a decarbonised future energy

system, there is significant potential for cascading bioenergy systems, whereby various biomethane technologies can be integrated with the majority of by-products valorised.

The aim of this paper is to identify the latest biotechnological advances for the production of renewable gas (biomethane) and to illustrate how these technologies could potentially be integrated in future cascading bioenergy systems in the transition to a low carbon economy. Three specific illustrative examples are developed.

2. Macro-algae in future gaseous fuel production

2.1 Sourcing seaweeds for digestion

The possibility of exacerbating the food v. fuel debate has meant that alternative feedstocks, away from land based production, must be sourced for future biofuels. Advanced biofuels will play increasingly important roles in provision of transport fuel up to 2050. Third generation biofuel sources, such as macro-algae (seaweed), can be farm cultivated at sea and achieve higher growth rates than traditional biomass crops (Dave et al., 2013). This seaweed can be digested for biomethane, offering a more sustainable alternative to second generation biofuels sources (Czyrnek-Delêtre et al., 2017). The initiation of a seaweed biofuel industry will likely focus on seaweeds of natural stocks, however harvesting this particular resource on beaches may be laborious, expensive and potentially have implications on biodiversity (Stagnol et al., 2013). Cultivation of seaweeds for biomethane production will become the preferential method however the economic feasibility, practicality, environmental impact, and governance and regulation for such cultivation projects must be explored (Roberts & Upham, 2012). One method of interest is combining seaweed cultivation with existing fish farms, known as integrated multi-trophic aquaculture (IMTA). The advantage of IMTA is that a form of bioremediation occurs, in that the seaweed absorbs the nutrient-rich waste produced from the fish in their growth, whilst increasing the growth productivity of the seaweed (Jacob et al., 2016). From a life cycle assessment (LCA) perspective, offshore cultivation of seaweed for energy production can be environmentally advantageous and play a significant role in mitigating

climate change (Seghetta et al., 2017). However, previous studies have shown that sizable resources of seaweed are required to have an impact on overall energy; in order to achieve 1.25% of energy in transport in the EU from seaweed, a resource of 168Mt of seaweed would need to be coupled with 13Mt of farmed salmon (Jacob et al., 2016). Nonetheless, the harvest and reuse of excess nutrients in seaweed cultivation associated with fish farms not only provides a regenerative economy, but also redirects emitted carbon to a closed loop bioenergy system that can moderate eutrophication (Czyrnek-Delêtre et al., 2017). Future methods for cultivation may involve the coupling of facilities with off-shore wind farms. The structures of the wind turbines can act as a framing system for seaweed cultivation; further research is required prior to development of such an application (Roberts & Upham, 2012).

2.2 Varied composition of seaweeds

Seaweeds are typically rich in carbohydrates and have low lignin content, thus can be a particularly suitable as a feedstock for AD. Green, red and brown algae have different carbohydrate composition; typically 25–60%, 30–60%, and 30–50% dry weight, respectively (Sambusiti et al., 2015). However, the exact composition of different seaweed species ultimately depends on the time of its harvest and this will be an essential component in the logistics of future seaweed biomethane systems. Seasonal variation necessitates a specific harvest time for different seaweeds as the total biomethane production can vary by up to 30% (Adams et al., 2011). Seasonal variation in the growth conditions, for example, temperature, nutrient availability and sunlight not only alter the carbohydrate content of seaweeds but also the concentrations of ash and protein (Tabassum et al., 2016b). A study, pertaining to the seaweed *L. digitata* in Ireland, indicated that the specific methane yields (SMY) expressed per unit volatile solid (VS) obtainable from an August harvest could be 40% higher than a December harvest. This is due to a higher carbohydrate content, a more suitable C/N ratio, a lower ash content and an lower associated salt content (Tabassum et al., 2016b). The study

also indicated a higher VS content per unit wet weight in August. When it is considered that in August a higher wet weight resource of seaweed is available as compared to that in December, the increase in total energy yield per unit wet weight is significantly more substantial than would be expressed by the SMY (Tabassum et al., 2016b). In contrast, the recommended harvest of *L. digitata* in the neighbouring island of Britain was reported as a month earlier, with optimal biomethane yields in July (Adams et al., 2011). The concentration of polyphenols in seaweed can also have a considerable impact on the SMY as they can inhibit the enzymatic processes undertaken in digestion. This was illustrated in a study on the species *A. nodosum*, whereby high concentrations of polyphenols had more of a detrimental effect on the SMY than the ash content (Tabassum et al., 2016c). In such cases, harvesting should occur at a time of year when the polyphenol levels are lower in the seaweed; early spring and late autumn (Tabassum et al., 2016c).

Ultimately, different seaweed species can have very different characteristics, thus each must be investigated on its own merits with regards to carbohydrate content, polyphenol concentrations, sulphur content, C/N ratio and the presence of heavy metals (McKennedy & Sherlock, 2015). Not all seaweeds will be applicable to AD and gaseous fuel production. For instance *A. nodosum*, a brown seaweed, has been described as having higher polyphenol content and being more difficult to degrade (Allen et al., 2015). Other species such as *F. serratus* and *H. elongate* have low density and sparse growth on rocky coastlines which could make scaling up to a commercially viable system more difficult to achieve. Thus, the full logistics of a specific seaweed biofuel system in a specific geographic and climatic zone must be determined prior to deployment.

2.3 Preservation of seaweed

Another logistical issue in achieving a seaweed biomethane industry is supplying a secure supply of feedstock for the digester year round. Drying seaweeds to preserve them is energy intensive and if reliant on fossil resources will affect the sustainability of such methods. In temperate oceanic

climates (such as Britain and Ireland) sun-drying may not be suitable due to precipitation levels. A novel approach involves the ensiling of seaweed, similar to methods in the ensiling of crops on farms. A study by Herrmann et al. (2015) showed promising results for the ensiling of five seaweed species (*U. lactuca*, *A. nodosum*, *L. digitata*, *S. polyschides*, *S. latissima*) that were macerated (particle size 2-4cm) and stored in glass jars at 20°C for up to 90 days. Despite low initial lactic acid bacteria numbers, ensiling of seaweeds, for the majority of species investigated, increased the available biomethane yield available from the biomass. It was noted that the use of the silage effluent generated was important for methane production. The SMY on a VS basis for the five seaweed species both fresh and ensiled ranged from 186 - 423 L CH₄ kg⁻¹ VS. A more recent study investigated three seaweeds (*Gracilaria vermiculophylla*, *Ulva rigida* and *S. latissima*) cultivated from an IMTA system for their ensiling properties (Cabrita et al., 2017). The results again suggested that different seaweeds would present different fermentation patterns when ensiled. *S. latissima* was shown to present a homo-lactic fermentation and could be preserved effectively. Ensiling in essence can act as both a storage mechanism and as a pre-treatment process. The combined preservation and storage of seaweed feedstocks is an essential step towards a sustainable seaweed based biofuel industry.

2.4 Risk of chloride and heavy metal accumulation

As indicated, seaweeds are a potential future feedstock for digestion, however by their nature, they possess higher salt (sodium chloride) concentrations than more traditional AD feedstocks. Small additions of seaweed in co-digestion have previously been shown to inhibit methanogens and result in the build-up of volatile fatty acids (VFAs) (Akunna & Hierholtzer, 2016). To overcome such difficulties the operational conditions of the digester, in terms of organic loading rate (OLR) and hydraulic retention time (HRT), must be carefully selected. Providing an acclimatised inoculum is also very beneficial. Previous studies have indicated that the chloride salt tolerance can be increased

from 10g L^{-1} to over 30g L^{-1} by adapting the inoculum (Roberts et al., 2016). This is of significance in that there may not be a need for a pre-washing step for seaweed prior to digestion. Evidence from continuous digestion trials have reported that increasing the OLR for seaweed reactors can increase the rate at which chloride will accumulate, and despite the possibility of tolerance at high chloride levels ($>17\text{g L}^{-1}$) the system must be continuously monitored (Tabassum et al., 2016a). Seaweeds may also bioaccumulate heavy metals which can inhibit the digestion process and affect the digestate quality, making it unsuitable for land spreading if heavy metal concentrations are too high (Cogan & Antizar-Ladislao, 2016). The accumulation of heavy metals in seaweeds occurs due to the significant metal sorption capacity of the algal cells (associated with alginate) and the presence of chemical groups susceptible to metal binding such as the carboxyl and sulphonate groups (Lodeiro et al., 2005). Previous literature has investigated the enhancement of seaweed digestion in a leach bed reactor coupled with an alkaline/autoclave treatment of leachate in a two phase system to reduce the influence of heavy metals (Nkemka & Murto, 2012); methane yields were enhanced as compared to the digestion of raw seaweed and improved heavy metal mobilisation was achieved. An imminodiacetic acid (IDA) cryogel has also been previously analysed for the removal of heavy metals (cadmium, copper, nickel, zinc) in leachate derived from seaweed hydrolysis with removal efficiencies ranging from 41% to 79% for zinc and cadmium respectively (Nkemka & Murto, 2010).

2.5 Opportunities in digestion

To initiate the deployment of seaweed as an AD feedstock, it may be beneficial to explore the role of certain species as co-feedstock in the short term. Often this may be at low volumes, however, co-digestion of seaweed and other feedstocks (such as food waste or slurry) can provide a mutual synergy by improving the nutrient balance in digestion (Oliveira et al., 2014). One such example in literature is the digestion of *Ulva Lactuca* (a green seaweed commonly referred to as sea lettuce that washes up in bays and estuaries as a result of eutrophication) with dairy slurry. *Ulva Lactuca*

contains high concentrations of hydrogen sulphide (H_2S), the same toxic gas present in slurry storage pits on farms. As an environmental risk and a hindrance to the amenity of a bay, the green seaweed must be removed. Digestion of green seaweeds may become the preferable waste management option as a viable energy resource can be extracted. Yields of $250\text{ L CH}_4\text{ kg}^{-1}\text{ VS}$ have been reported previously in literature, equivalent to $100\text{ m}^3\text{ CH}_4\text{ t}^{-1}$ of dried seaweed (Allen et al., 2013). In rural, coastal communities, the addition of other feedstocks such as grass silage and slurry from farmers may improve the potential biomethane yield by optimising the C/N ratio in digestion. Previous literature has demonstrated that both natural stock seaweed and farm cultivated seaweed can also be co-digested successfully with slurry. The co-digestion of *L. digitata* and *S. Latissima*, in the ratio 66% single species seaweed VS with 33% farm slurry VS, was previously shown to operate successfully at an OLR of $4\text{ kg VS m}^{-3}\text{ d}^{-1}$, achieving SMYs of $261\text{ L CH}_4\text{ kg}^{-1}\text{ VS}$ and $252\text{ L CH}_4\text{ kg}^{-1}\text{ VS}$, respectively (Tabassum et al., 2016a). This can be considered a high OLR for mesophilic anaerobic digestion and outperformed the mono-digestion of slurry at an OLR of $4\text{ kg VS m}^{-3}\text{ d}^{-1}$ which achieved SMYs of $55\text{ L CH}_4\text{ kg}^{-1}\text{ VS}$. As such, this study gives a promising outlook for the future application of seaweed biomethane systems. The SMY achievable from particular species of seaweeds are particularly variable depending on the method of cultivation, time of harvest, method of preservation, preparation and digestion conditions; SMYs in the range of ca. $100\text{-}500\text{ LCH}_4\text{ kg}^{-1}\text{ VS}$ have been reported in previous literature reviews (McKennedy & Sherlock, 2015). The main barrier with respect to commercialising seaweed biomethane systems in the future will most likely involve the high costs of seaweed cultivation (Tabassum et al., 2017).

3. Micro-algae and the circular economy

3.1 Micro-algal biomass

Microalgae can play a significant circular economy role in biomethane systems. The unicellular algae species is not only a potential AD feedstock, but also can serve as a means of biogas upgrading and a method of removing excess nutrients from digestate (Xia et al., 2015; Xia and Murphy, 2016). From a biofuels perspective, microalgae have been primarily used for the transesterification of lipids for biodiesel production (Zhu et al., 2017). However, use of microalgae as a feedstock for biogas production may be more favourable than for biodiesel for a number of reasons: the low dry solids content are suitable for digestion systems negating the need for drying as would be the case with biodiesel production; the lack of need for a particular species, nor singularity of species; and the level of contamination with higher trophic life forms as would be found in open algal ponds is not of issue for anaerobic digestion (Murphy et al., 2015). Even if microalgae are used for biodiesel production, the remaining residues post lipid extraction can still be utilised in a biohydrogen and biomethane system (Jankowska et al., 2017), improving the energy balance of the overall biorefinery process (Neves et al., 2016). Microalgae, as a biofuel source, possess a number of advantages over more traditional biofuel sources including higher growth productivity, cultivation without land requirement and potential CO₂ mitigation through sequestration (Passos et al., 2014).

3.2 Cultivation and availability of nutrients

From a sustainability perspective, the cultivation system, nutrient source and cultivation location are the key factors in generating microalgae biofuels (Chia et al., 2017). Two types of system have been proposed for autotrophic microalgae cultivation; open raceway ponds and closed photobioreactors (Zhan et al., 2017). The advantages and disadvantages of the various growth systems for micro-algae have previously been outlined in literature (Moreno-Garcia et al., 2017). From a commercial

viewpoint, open raceway ponds are most commonly utilised as there are relatively inexpensive (as compared to photobioreactors) but are only suitable for certain microalgae species and have lower growth productivity (Chia et al., 2017). Photobioreactors are closed systems that avoid culture contamination and have a variety of configurations (e.g. tubular, flat plate).

Previous literature has indicated that cultivation at site specific locations can reduce the overall microalgae production costs; however, the location of the microalgae must be strategically favourable so that nutrients and a suitable source of light are readily available and the energy can be also exploited locally (Moreno-Garcia et al., 2017). The nutrient source for microalgae cultivation can potentially be provided by digestate, an important by-product of the AD process, most commonly used as a bio-fertiliser by farmers. In essence, the typical biogas systems using crops for biogas and utilising the digestate for fertilisation is a circular economy. However, combining digestate with microalgae cultivation may be opportunistic for farmers and AD developers to broaden the circular economy into a cascading bioenergy system. Microalgae need the nutrients to grow; the digestate may need nutrient removal or reduction for safer land application to avoid eutrophication.

Microalgae cultivation on digestate has been demonstrated in previous literature for the variety of different digestion feedstocks with successful results (Ayre et al., 2017; Massa et al., 2017). Using the nutrients provided from digestate significantly reduces the cost of microalgae cultivation, as these nutrients would otherwise need to have been purchased externally (Xia & Murphy, 2016). Factors of consideration in cultivating microalgae in digestate are the turbidity and ammonia nitrogen levels, as if either is high, microalgae growth can be inhibited; while other features such as the phosphorus and carbon limitations, bacterial contamination and pollutants must also be monitored (Xia & Murphy, 2016). Pretreatments for the liquid portion of digestate, such as ammonia stripping and activated carbon adsorption, have shown some positive results in reducing optical density and promoting microalgal growth, negating the need for water dilution (Marazzi et al., 2017).

3.3 Digestion of microalgae


Numerous strains of microalgae have been reported in terms of their cultivation conditions, harvesting technique and subsequent SMYs generated from digestion. The recorded range of SMY is wide from ca. 100-550 L CH₄ kg⁻¹VS (Jankowska et al., 2017). Microalgae are not regarded as a straightforward feedstock for digestion and the SMY will depend on the macromolecular composition and cell wall characteristics (González-Fernández et al., 2012; Passos et al., 2014). With high protein content, the digestion of microalgae can lead to inhibiting levels of ammonia which can affect the productivity of methanogens (Passos et al., 2014). However, microalgae will most likely be co-digested to improve the nutrient balance. High carbon co-feedstocks such as barley straw, beet silage or brown seaweed have been investigated for such purposes (Herrmann et al., 2016). For instance, the co-digestion of *Arthrospira platensis* and *Laminaria digitata* was reported to operate successfully at a high OLR of 4 kg VS m⁻³ d⁻¹ as opposed to mono-digestion of the microalgae which could not be operated above 1 kg VS m⁻³ d⁻¹ (Herrmann et al., 2016).

Besides a low C/N, microalgae can often have alginate and laminarin in the cell walls which are not easily degradable and thus pre-treatments may be required (Moreno-Garcia et al., 2017). Extensive literature reviews have been made for the different pre-treatments available for microalgae and the effect said pre-treatments have on the SMY (Jankowska et al., 2017; Neves et al., 2016). Pre-treatment methods have been investigated to increase biomass solubilisation generally in biomethane potential assay (BMP) tests and include for thermal (solubilisation of microalgae by high temperature treatment), mechanical (physically disruption of the cell walls), chemical (acid or alkali reagent addition to solubilise microalgae) and biological (addition of enzymes to promote hydrolysis) methods; with all methods designed to attack the cell walls (Passos et al., 2014). Ideally the pre-treatment should have a low energy requirement. Enzymatic methods potentially have the most scope as a pre-treatment with low energy input. Recent studies have shown up to 15% increase in methane yield was achievable when microalgae were pre-treated with a particular enzyme mix (cellulase, glucohydrolase and xylanase) as compared to a control (Passos et al., 2016).

3.4 Novel biogas upgrading method

Microalgae need, in addition to nutrients and light, a source of CO₂ for growth. Previous literature has looked at sources of CO₂ such as coal power plants. For a 1GWe coal power plant producing 6.77 Mt CO₂ per annum it was calculated that 2.69 Mt VS of microalgae could be produced in a closed cultivation system (tubular or flat plate photobioreactor) (Jacob et al., 2015). Alternatively, with a lower CO₂ capture efficiency it was estimated that 1.68 Mt VS of microalgae could be produced from an open raceway pond system. Such methods may provide an intermediate CO₂ source for microalgae in the transition to renewables.

In a future energy system where AD is widely deployed, the CO₂ for microalgae can come from biogas (ca. 30-50% CO₂), which is ultimately a by-product of upgrading. However, for every mol of CO₂ captured by the microalgae, 1 mol of oxygen (O₂) is released through oxygenic photosynthesis (Meier et al., 2017). This can have an adverse effect in relation to the biomethane quality produced; specifications for biomethane injection to the gas grid will have a low O₂ tolerance level (less than 1% (molar) in the UK)(GreenGas Certification Scheme, 2013). Nonetheless biogas upgrading via microalgae cultivation should be capable of producing sufficient biomethane gas grid quality with the right technology. Previous studies have highlighted the use of external absorption columns with high rate algal ponds in successfully upgrading biogas to biomethane as illustrated in Figure 1. Bahr et al. (2014) illustrated a system that recirculated liquid from an algal pond to an external adsorption column using an alkaliphilic bacterial consortium which could completely remove H₂S and 90% of the CO₂, while limiting the concentration of O₂ in the upgraded biogas to 0.2% sufficient for natural gas grid injection. This type of photosynthetic biogas upgrading is achieved by microalgae fixing the CO₂ using light energy and sulphur-oxidizing bacteria using the resultant O₂ to oxidise H₂S to sulphate (Toledo-Cervantes et al., 2017).

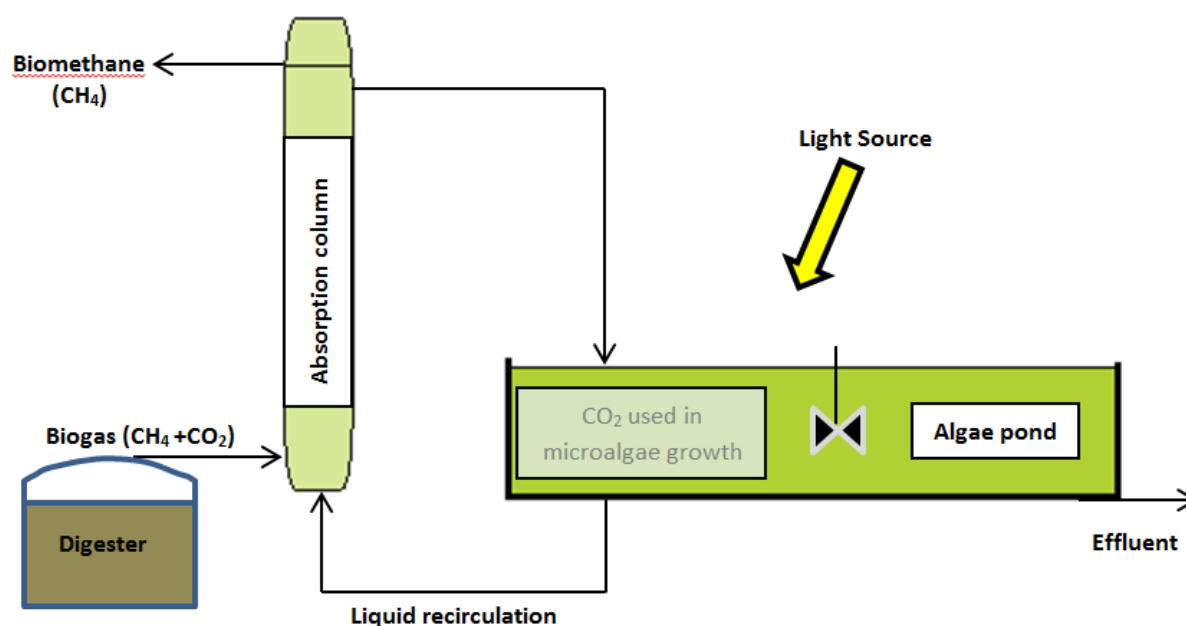

Adapted from Franco-Morgado et al. (2017)

Figure 1. Microalgae biogas upgrading system

Xia et al. (2015) previously outlined a CO₂ biofixation method by microalgae, using a bicarbonate/carbonate cycle that offered energy and cost savings over traditional upgrading systems. Recent studies have indicated that despite microalgae not performing photosynthesis in darkness (at night), high levels of CO₂ could still be removed in such upgrading processes (removal efficiencies between 89 and 93%) (Meier et al., 2017). This would potentially allow for continuous 24 hour operation of indirect biogas upgrading.

Upgrading biogas through microalgae cultivation in digestate is an exemplary case of the circular economy in action. However, application at full scale will involve further challenges such as controlling the microalgae species to maintain high growth rates, negating the inhibitive effects of microalgae on the AD process, assessing the geographical and seasonal constraints of microalgae growth and technology costs (Zhu et al., 2016).

4. Gaseous fuel from non-biological origin – Power to gas

4.1 Electrolysis for power to hydrogen

Power to Gas (PtG) is an emerging smart grid concept whereby surplus renewable electricity is converted into gaseous form for storage purposes. In changing the energy vector, the output gas from PtG can be hydrogen (PtH) or methane (PtM). The technology in its simplest form involves electrolysis to split water into its components: hydrogen (H_2) and O_2 . This route is technically less complex than PtM and has been studied in detail in previous literature (Gahleitner, 2013).

Three main technologies are reported for electrolysis: the alkaline electrolyser, the polymer electrolyte membrane (PEM) and the solid oxide electrolysis cell (SOEC). Alkaline electrolysis is at a higher technology readiness level (TRL) than PEM or SOEC and thus is currently cheapest to deploy (Götz et al., 2016) and is commercially available with modules up to $2.5MW_e$ (Schiebahn et al., 2015). However, higher process efficiencies may be potentially viable in PEM and SOEC in the future. When evaluating electrolysis units, the most important features from a PtG perspective include efficiency of conversion to H_2 , flexibility for a cold start up, and operational lifetime (Götz et al., 2016). Alkaline and PEM are considered low temperature technologies; SOEC is a high temperature process at the lowest TRL of the three and is expected to improve the efficiency considerably (Parra & Patel, 2016). PtG requires a quick start up time from the perspective that the system will potentially only operate when the price of electricity is sufficiently cheap to produce financially sustainable gas. PEM is a faster technology than alkaline but the cost is a big factor as the technology require noble catalysts (Pt, Ir, Ru) (Schiebahn et al., 2015). Any future enhancements in electrolysis will depend on the SOEC technology which is currently at a low TRL. Since SOEC operates at a much higher temperature range the operation should be continuous if possible; since start up and shut down at such high temperatures could lead to thermal stress in the system (Schiebahn et al., 2015). Table 1 gives an overview of the different electrolyser technologies available for PtG.

Table 1. Comparison of electrolyser technologies for PtG^A

	Alkaline	PEM	SOEC
Technology readiness level (TRL)	High (commercial)	High (commercial)	Low (laboratory)
H ₂ production (m ³ /h)	<760	<450	-
Charge carrier	OH-	H ₃ O ⁺ /H ⁺	O ₂ ⁻
Cell temperature (°C)	40-90	20-100	800-1000
Cold start time	Minutes to hours	Seconds to minutes	-
Potential efficiency (% LHV)	<70%	<74%	>90%
Potential costs ^B (€/kWhe)	500-1000	500-2000	-

^AAdapted from (Götz et al., 2016), (Schiebahn et al., 2015) and (Vo et al., 2017a)

^BAllowing for now and potential reductions in the future


In essence, the limitation with the PtH pathway in future energy systems is the lack of current infrastructure to carry and store H₂ gas; and subsequently the high cost of construction required with such a development. Natural gas grid infrastructure is prevalent in countries such as France, the UK, Ireland, Germany, Italy and the Netherlands. However, the input of H₂ into the EU grids is regulated, reported as low as 2% in some cases (Persson et al., 2014). This is primarily due to; the difference in volumetric energy content at standard temperature and pressure between H₂ and methane (12 MJ/m³ v. 36 MJ/m³), the higher losses associated with H₂ leakage due to its low molecular weight, and the tendency of H₂ to cause embrittlement in existing pipelines (Qadrdan et al., 2015). Thus, storing vast amounts of H₂ is logistically challenging at present.

4.2 Methanation for power to methane

PtM has the advantage of providing a means to maximise the use of existing infrastructure, by increasing the share of renewable gas in the natural gas grid. For the PtM pathway to be deployed, a source of CO₂ and a methanation phase are necessary in addition to electrolysis. The methanation step can be catalytic or biological; both methods adhere to the Sabatier process of combining H₂ and

CO₂ (at a ratio of 4:1) to produce methane and water. The Sabatier reaction is described in Equation 1 (Persson et al., 2014).

For catalytic methanation, a form of catalyst, typically nickel-based is used (Rönsch et al., 2016). Catalytic is deemed less robust than biological methanation as it is more susceptible to contaminants; it operates in the temperature range of 200-500°C with pressures of 1-100 bar (Götz et al., 2016).



For biological methanation, hydrogenotrophic methanogenic archaea (as opposed to catalysts) are used for the conversion of H₂ and CO₂ to methane, and the process can be “in-situ” or “ex-situ”. For in-situ methanation systems the conversion of H₂ and CO₂ to methane can be accomplished within the digester. H₂ is injected directly into the digester and combines with the CO₂ in the biogas. The in-situ method provides a means of increasing the methane concentration in the biogas from the digester but not to a standard high enough for direct natural gas grid injection, thus a biogas upgrading step is still required post methanation (Luo et al., 2012). However, ex-situ systems rely on an external reactor where both H₂ and CO₂ are introduced. With efficient transfer of H₂ to the liquid medium; a sufficiently high standard biomethane can be achieved for gas grid injection (Ahern et al., 2015). The gas-liquid solubility of H₂ is often the bottleneck for such systems and is currently overcome by high rate agitation, making the process energy intensive (Götz et al., 2016).

The source of CO₂ for PtM can be provided by traditional biogas plants, large CO₂ emitters in industry (such as distilleries), or sludge digesters in wastewater treatment plants (WWTPs). Ideally the CO₂ source should be concentrated and of low cost. Biogas typically contains 30-50% CO₂. As biomethane facilities become more prevalent in the EU, the scrubbed CO₂ from the upgrading process can be utilised directly in the methanation phase. Current literature is now focused on maximising the future potential for PtM by identifying suitable geographical locations through modelling. Factors considered include for CO₂ source, the location of the gas grid, existing biogas sites and construction

constraints (Schneider & Kötter, 2015). For instance, in Ireland, PtG was found to be limited by the amount of curtailed electricity as opposed to the quantity of CO₂ potentially available from biogas production (Vo et al., 2017b). Future PtM systems will most likely operate on biogenic CO₂ sources, however the transition to decarbonisation should include for CO₂ derived from fossil fuels as an intermediate process, since emissions savings will still be possible (Meylan et al., 2017).

4.3 PtG demonstration and key technology components

Currently, PtG technologies are being demonstrated for proof of concept. Laboratory studies of ex-situ biological methanation reported that a methane content of 90% could be achieved at 65°C, with a production rate of 0.45 LCH₄/L_{reactor}/day and with the methanothermobacter species dominant for thermophilic biogas upgrading (Guneratnam et al., 2017). On a larger scale, two projects aiming for commercial viability with regards to PtG with biological methanation are the Electrochaea – BioCat project (Denmark) and MicrobEnergy – BioPower2Gas project (Germany); both utilise biogas systems as the source of CO₂ (Bailera et al., 2017).

PtG systems are still considered to be at a relatively low TRL despite some recent uptake in Germany. However, its future potential is considered significant particularly as a control function for the electrical grid. The capability to utilise curtailed electricity in real time and produce gaseous fuel is an appealing feature. The technology costs, particularly electrolysis and methanation, must become more defined while the levels of curtailed electricity become apparent in future years. Some costs studies have already been undertaken (Benjaminsson et al., 2013). As PtG systems contain many inputs and outputs, it is suggested that the technology needs to utilise the full value chain in order to make it financially viable (Breyer et al., 2015). For instance, oxygen generated through the electrolysis process can be a valuable monetary by-product if integrated with a gasification plant for example. Alternatively the oxygen could be used at a WWTP for aeration. The end use for oxygen will be site specific but should integrate with other technologies where possible. Previous literature

from Germany has indicated that the introduction of PtG systems can potentially transition to a 100% renewable energy system for specific regions at lower cost (Kötter et al., 2016). It can also contribute to the decarbonisation of energy. There is a viewpoint that more renewable energy in the heat and transport sectors needs to be provided – this can be facilitated by PtG. A study looking at excess solar energy in Germany indicated that 370 MWe of PtG capacity could utilise 30% of the excess available resource in 2015; this PtG capacity would equate to ca. five hundred 300 kW electrolyzers and three hundred 700 kW electrolyzers coupled with anaerobic digesters distributed in the region (Estermann et al., 2016).

5. Integration of bioenergy systems

5.1 Cascading second and third generation biomethane systems

Integration of bioenergy technologies is fundamental to the decarbonisation of the future energy sector. Greater than 70% GHG emissions savings for transport biofuels will be required by 2021; this may be further increased after this time. This paper has focused on the advanced pathways available for generating renewable gas from AD including for – seaweeds, micro-algae and PtG, all third generation biofuels free from direct or indirect land use. Even for advanced systems such as seaweed biomethane, the future GHG emissions targets may be difficult to meet. Thus cascading systems will be required. By-products that result from the advanced bioenergy systems must be further integrated, ensuring the use of the full supply chain and circular economy concepts including for cascading bioenergy. For instance, gasification (with the methanation of syngas) is an additional technology that can be used to generate biomethane and is typically applied at a much larger (MW) scale than AD. Although such a process is considered a second generation biofuel, in terms of generating the quantities of renewable gas required for future energy systems, gasification of woody crops or wood chips may play a significant role. Well-to-wheel analysis of gasification-methanation for use as a transport fuel in heavy duty engines has indicated that emissions savings of up to 67%

were possible as compared to diesel (Alamia et al., 2016). Recent studies have focused on potentially reducing the capital investment and operating costs of gasification-methanation facilities such as the Gothenburg Biomass Gasification (GoBiGas) project (Haro et al., 2016). The concept of combining AD and gasification has also been considered in prior work. Li et al. (2015) investigated separating H_2 from syngas produced from gasification as a method of upgrading biogas from AD (via a Sabatier process) to generate additional biomethane. Alternatively, by-products of the AD process such as solid digestate can provide a source of feedstock for gasification, along with woody crops such as short rotation coppice (SRC) willow grown on marginal lands. The liquid portion of the digestate can be used as a biofertiliser for the SRC willow. In a bioenergy system with PtG, the O_2 produced from electrolysis may be utilised in the gasification process to increase the energy value of the syngas, whilst negating the need to purchase an external O_2 supply. There are potential limitations to this as the scale of a biogas facility is typically much smaller than a gasification facility; however it may be such that a number of biogas systems with PtG serve one larger gasification/methanation facility. Three scenarios of cascading biomethane systems are illustrated below.

5.2 Integrated algae biomethane production system

Figure 2 shows an integrated biomethane energy system that utilises both macro- and micro-algae. The concept revolves round an IMTA system that provides a sufficient seaweed biomass feedstock for digestion. Micro-algae is cultivated in an outdoor raceway pond with liquid digestate effluent (collection post digestion process) used as a nutrient medium for cultivation. The carbon source (CO_2) for the microalgae is taken from the biogas generated by the digester, and thus indirectly upgrades the biogas to biomethane through the use of an absorption column as outlined in literature (see detail in Figure 1). The micro-algae biomass in this scenario would be co-digested with the IMTA-derived seaweed. The effluent wastewater from the raceway pond could potentially be applied to SRC willow as a fertiliser whilst the willow provides a remediation step removing impurities in the wastewater and protecting ground water or aquifers from pollution. The SRC willow

is suitable for a gasification plant (gasification with methanation of syngas) to further increase the biomethane output from this scenario. The solids portion of the digestate separated from the digester may also be gasified. The biomethane produced can be injected into the natural gas grid and used as a renewable gaseous transport fuel.

5.3 Integrated community biomethane production system with power to gas

Figure 3 shows an integrated biomethane energy system that utilises PtG technologies from surplus renewable electricity. In this scenario, it is assumed the digester is community based with feedstocks such as energy crops, food waste and slurries from the surrounding region. This may be representative of a seasonal shift in available feedstocks for digestion. Biogas produced from the digester is sent to an ex-situ biological methanation reactor where it is combined with the H_2 produced from electrolysis. The electrolysis unit is fed with electricity from renewable devices such as wind turbines, solar and/or tidal devices. The H_2 reacts with the CO_2 in the biogas (Sabatier reaction) in the methanation reactor and produces biomethane removing the need for the costs of a traditional biogas-upgrading unit. In this scenario the solid and liquid portions of the digestate are also separated, however, the liquid is now used as a biofertiliser for the energy crops by the farmer. The solids are sent to a gasification plant for further energy conversion along with woody crops. Additional integration is provided by rerouting of the O_2 stream, available from electrolysis, to the gasification process. The biomethane produced can again be used as a renewable gaseous transport fuel.

5.4 Cascading biomethane production system with algae and power to gas

A further integrated scenario can combine the previous two scenarios. The digester can incorporate the algae feedstock associated with IMTA along with food waste and slurries from the surrounding region. By day, biogas may be upgraded by the micro-algae system. By night, biogas may be sent to

an ex-situ biological methanation reactor where it is combined with the H₂ produced from electrolysis. This has the serendipitous advantage in that micro-algae grow by day where typically electricity is more likely to be surplus by night when demand for electricity is low as the populace sleep.

ACCEPTED MANUSCRIPT

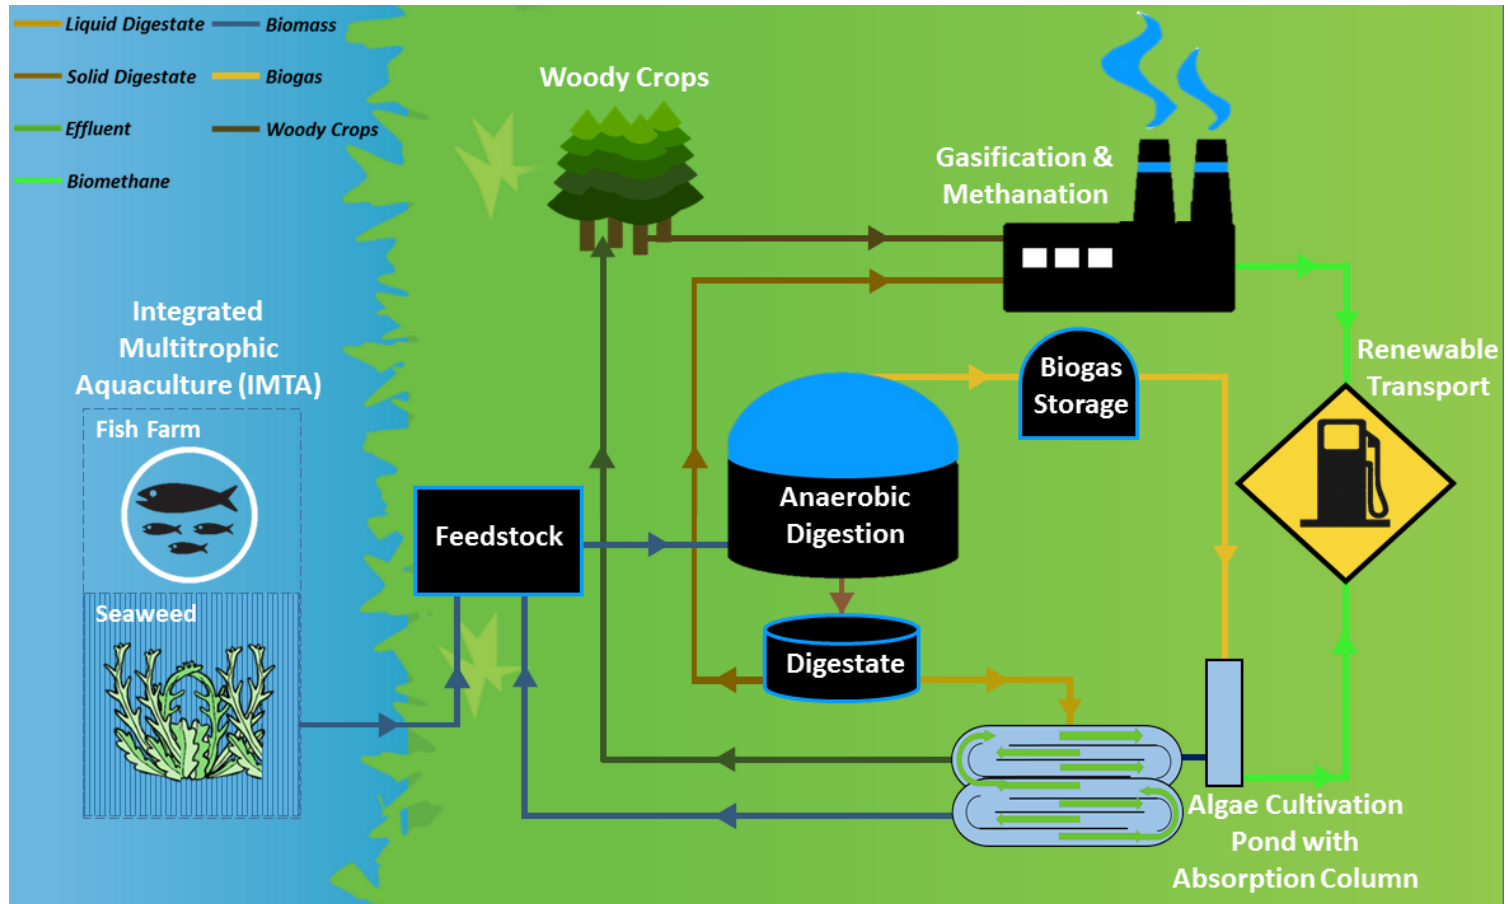


Figure 2. Integrated biomethane energy system that utilises both macro- and micro-algae

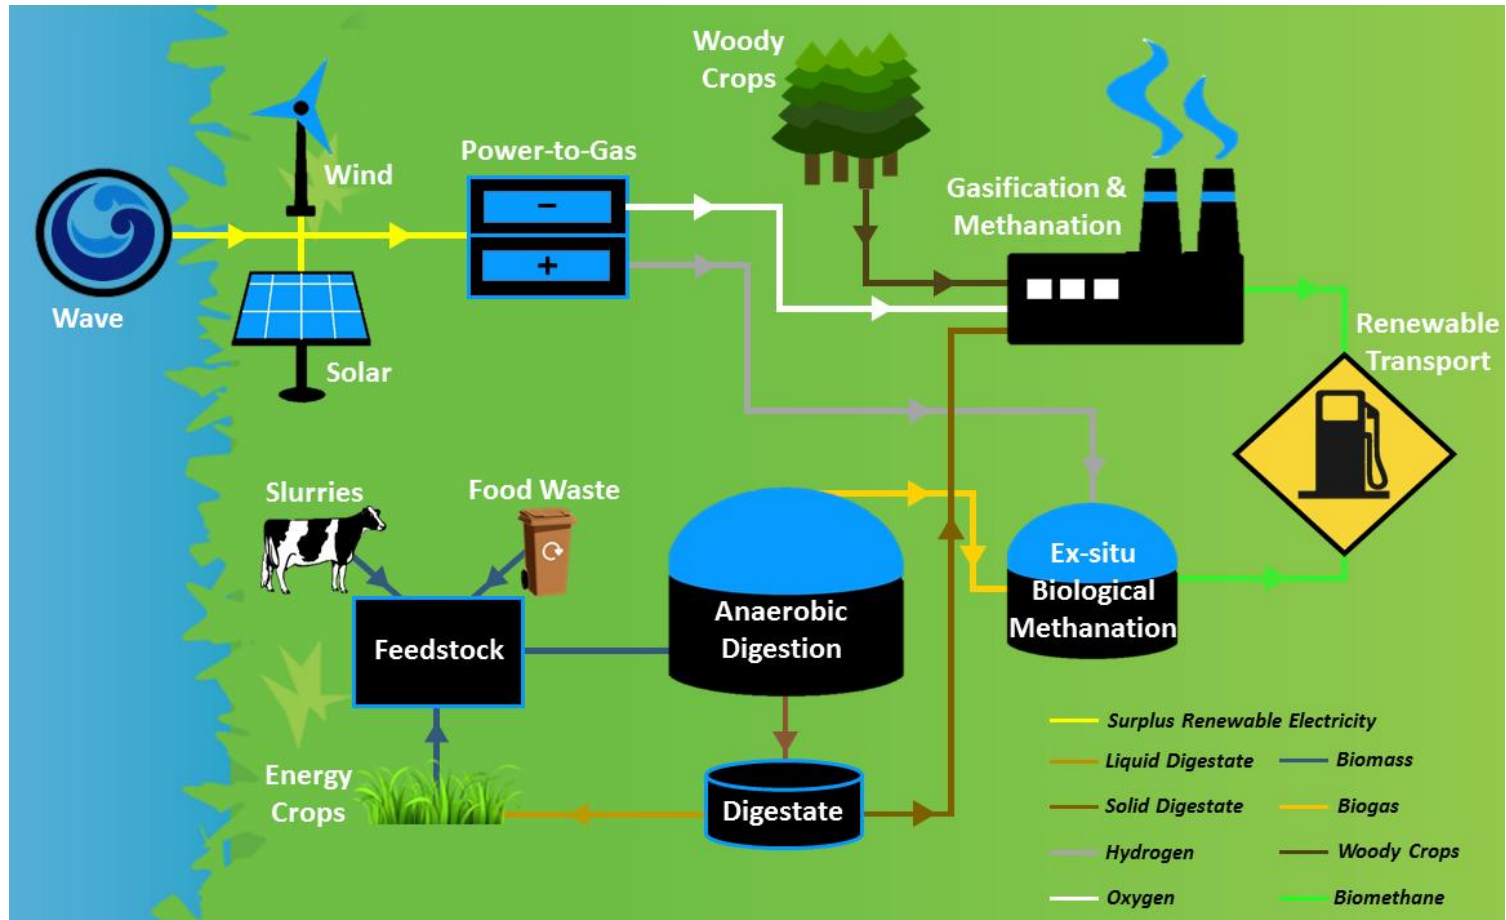


Figure 3. Integrated biomethane energy system that utilises PtG technologies from surplus renewable electricity

6. Conclusions

Three integrated biomethane scenarios were developed. Scenario 1 considered seaweed digestion, with biogas upgrading via microalgae (which also acted as a co-feedstock) and gasification of solid digestate, with the liquor digestate applied to woody crops (for gasification) completing the circular economy approach. Scenario 2 illustrated that power to gas could be coupled with gasification through use of oxygen from electrolysis, whilst hydrogen from electrolysis could be used to upgrade biogas via ex-situ biological methanation. A third scenario could combine the two allowing for natural growth of algae by day and the tendency for electricity to be surplus by night.

Acknowledgements

This work was funded by Science Foundation Ireland (SFI) through the Centre for Marine and Renewable Energy (MaREI) under Grant No. 12/RC/2302. The work was also co-funded by Gas Networks Ireland (GNI) through the Gas Innovation Group and by ERVIA and the International Energy Agency Bioenergy Task 37 "Energy from Biogas"

References

1. Adams, J.M.M., Toop, T.A., Donnison, I.S., Gallagher, J.A. 2011. Seasonal variation in *Laminaria digitata* and its impact on biochemical conversion routes to biofuels. *Bioresource Technology*, **102**(21), 9976-9984.
2. Ahern, E.P., Deane, P., Persson, T., Ó Gallachóir, B., Murphy, J.D. 2015. A perspective on the potential role of renewable gas in a smart energy island system. *Renewable Energy*, **78**, 648-656.
3. Akunna, J.C., Hierholtzer, A. 2016. Co-digestion of terrestrial plant biomass with marine macro-algae for biogas production. *Biomass and Bioenergy*, **93**, 137-143.
4. Alamia, A., Magnusson, I., Johnsson, F., Thunman, H. 2016. Well-to-wheel analysis of biomethane via gasification, in heavy duty engines within the transport sector of the European Union. *Applied Energy*, **170**, 445-454.
5. Allen, E., Browne, J., Hynes, S., Murphy, J.D. 2013. The potential of algae blooms to produce renewable gaseous fuel. *Waste Management*, **33**(11), 2425-2433.
6. Allen, E., Wall, D.M., Herrmann, C., Xia, A., Murphy, J.D. 2015. What is the gross energy yield of third generation gaseous biofuel sourced from seaweed? *Energy*, **81**, 352-360.
7. Ayre, J.M., Moheimani, N.R., Borowitzka, M.A. 2017. Growth of microalgae on undiluted anaerobic digestate of piggery effluent with high ammonium concentrations. *Algal Research*, **24, Part A**, 218-226.
8. Bahr, M., Díaz, I., Dominguez, A., González Sánchez, A., Muñoz, R. 2014. Microalgal-Biotechnology As a Platform for an Integral Biogas Upgrading and Nutrient Removal from Anaerobic Effluents. *Environmental Science & Technology*, **48**(1), 573-581.
9. Bailera, M., Lisbona, P., Romeo, L.M., Espatolero, S. 2017. Power to Gas projects review: Lab, pilot and demo plants for storing renewable energy and CO₂. *Renewable and Sustainable Energy Reviews*, **69**, 292-312.
10. Benjaminsson, G., Benjaminsson, J., Boogh Rudberg, R. 2013. Power to gas - a technical review. Available from: http://www.sgc.se/ckfinder/userfiles/files/SGC284_eng.pdf [accessed 23.02.17].
11. Breyer, C., Tsupari, E., Tikka, V., Vainikka, P. 2015. Power-to-Gas as an Emerging Profitable Business Through Creating an Integrated Value Chain. *Energy Procedia*, **73**, 182-189.
12. Cabrita, A.R.J., Maia, M.R.G., Sousa-Pinto, I., Fonseca, A.J.M. 2017. Ensilage of seaweeds from an integrated multi-trophic aquaculture system. *Algal Research*, **24, Part A**, 290-298.
13. Chia, S.R., Ong, H.C., Chew, K.W., Show, P.L., Phang, S.-M., Ling, T.C., Nagarajan, D., Lee, D.-J., Chang, J.-S. 2017. Sustainable approaches for algae utilisation in bioenergy production. *Renewable Energy*.
14. Cogan, M., Antizar-Ladislao, B. 2016. The ability of macroalgae to stabilise and optimise the anaerobic digestion of household food waste. *Biomass and Bioenergy*, **86**, 146-155.
15. Czynnek-Delêtre, M.M., Rocca, S., Agostini, A., Giuntoli, J., Murphy, J.D. 2017. Life cycle assessment of seaweed biomethane, generated from seaweed sourced from integrated multi-trophic aquaculture in temperate oceanic climates. *Applied Energy*, **196**, 34-50.
16. Dave, A., Huang, Y., Rezvani, S., McIlveen-Wright, D., Novaes, M., Hewitt, N. 2013. Techno-economic assessment of biofuel development by anaerobic digestion of European marine cold-water seaweeds. *Bioresource Technology*, **135**, 120-127.
17. EC. 2016. DIRECTIVE OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on the promotion of the use of energy from renewable sources. http://eur-lex.europa.eu/resource.html?uri=cellar:3eb9ae57-faa6-11e6-8a35-01aa75ed71a1.0007.02/DOC_1&format=PDF.
18. Estermann, T., Newborough, M., Sterner, M. 2016. Power-to-gas systems for absorbing excess solar power in electricity distribution networks. *International Journal of Hydrogen Energy*, **41**(32), 13950-13959.

19. European Biogas Association. 2016. 6th edition of the Statistical Report on European anaerobic digestion industry and markets.
20. Franco-Morgado, M., Alcántara, C., Noyola, A., Muñoz, R., González-Sánchez, A. 2017. A study of photosynthetic biogas upgrading based on a high rate algal pond under alkaline conditions: Influence of the illumination regime. *Science of The Total Environment*, **592**, 419-425.
21. Gahleitner, G. 2013. Hydrogen from renewable electricity: An international review of power-to-gas pilot plants for stationary applications. *International Journal of Hydrogen Energy*, **38**(5), 2039-2061.
22. González-Fernández, C., Sialve, B., Bernet, N., Steyer, J.-P. 2012. Impact of microalgae characteristics on their conversion to biofuel. Part II: Focus on biomethane production. *Biofuels, Bioproducts and Biorefining*, **6**(2), 205-218.
23. Götz, M., Lefebvre, J., Mörs, F., McDaniel Koch, A., Graf, F., Bajohr, S., Reimert, R., Kolb, T. 2016. Renewable Power-to-Gas: A technological and economic review. *Renewable Energy*, **85**, 1371-1390.
24. GreenGas Certification Scheme. 2013. Available July 2017: <https://www.greengas.org.uk/news/1-oxygen-limit-for-biomethane-injection-agreed-by-hse>.
25. Guneratnam, A.J., Ahern, E., FitzGerald, J.A., Jackson, S.A., Xia, A., Dobson, A.D.W., Murphy, J.D. 2017. Study of the performance of a thermophilic biological methanation system. *Bioresource Technology*, **225**, 308-315.
26. Haro, P., Johnsson, F., Thunman, H. 2016. Improved syngas processing for enhanced Bio-SNG production: A techno-economic assessment. *Energy*, **101**, 380-389.
27. Herrmann, C., FitzGerald, J., O'Shea, R., Xia, A., O'Kiely, P., Murphy, J.D. 2015. Ensiling of seaweed for a seaweed biofuel industry. *Bioresource Technology*, **196**, 301-313.
28. Herrmann, C., Kalita, N., Wall, D., Xia, A., Murphy, J.D. 2016. Optimised biogas production from microalgae through co-digestion with carbon-rich co-substrates. *Bioresource Technology*, **214**, 328-337.
29. IEA Bioenergy Task 40 and Task 37. 2014. Biomethane Status and Factors Affecting Market Development and Trade. *IEA Bioenergy*.
30. Jacob, A., Xia, A., Gunning, D., Burnell, G., Murphy, J.D. 2016. Seaweed Biofuel Derived from Integrated Multi-trophic Aquaculture. *International Journal of Environmental Science and Development*, **Vol. 7, No. 11**.
31. Jacob, A., Xia, A., Murphy, J.D. 2015. A perspective on gaseous biofuel production from micro-algae generated from CO₂ from a coal-fired power plant. *Applied Energy*, **148**, 396-402.
32. Jankowska, E., Sahu, A.K., Oleskowicz-Popiel, P. 2017. Biogas from microalgae: Review on microalgae's cultivation, harvesting and pretreatment for anaerobic digestion. *Renewable and Sustainable Energy Reviews*, **75**, 692-709.
33. Kötter, E., Schneider, L., Sehne, F., Ohnmeiss, K., Schröer, R. 2016. The future electric power system: Impact of Power-to-Gas by interacting with other renewable energy components. *Journal of Energy Storage*, **5**, 113-119.
34. Li, H., Larsson, E., Thorin, E., Dahlquist, E., Yu, X. 2015. Feasibility study on combining anaerobic digestion and biomass gasification to increase the production of biomethane. *Energy Conversion and Management*, **100**, 212-219.
35. Lodeiro, P., Cordero, B., Barriada, J.L., Herrero, R., Sastre de Vicente, M.E. 2005. Biosorption of cadmium by biomass of brown marine macroalgae. *Bioresource Technology*, **96**(16), 1796-1803.
36. Luo, G., Johansson, S., Boe, K., Xie, L., Zhou, Q., Angelidaki, I. 2012. Simultaneous hydrogen utilization and in situ biogas upgrading in an anaerobic reactor. *Biotechnology and Bioengineering*, **109**(4), 1088-1094.

37. Marazzi, F., Sambusiti, C., Monlau, F., Cecere, S.E., Scaglione, D., Barakat, A., Mezzanotte, V., Ficara, E. 2017. A novel option for reducing the optical density of liquid digestate to achieve a more productive microalgal culturing. *Algal Research*, **24, Part A**, 19-28.
38. Massa, M., Buono, S., Langelotti, A.L., Castaldo, L., Martello, A., Paduano, A., Sacchi, R., Fogliano, V. 2017. Evaluation of anaerobic digestates from different feedstocks as growth media for *Tetrademus obliquus*, *Botryococcus braunii*, *Phaeodactylum tricornutum* and *Arthrospira maxima*. *New Biotechnology*, **36**, 8-16.
39. McKennedy, J., Sherlock, O. 2015. Anaerobic digestion of marine macroalgae: A review. *Renewable and Sustainable Energy Reviews*, **52**, 1781-1790.
40. Meier, L., Barros, P., Torres, A., Vilchez, C., Jeison, D. 2017. Photosynthetic biogas upgrading using microalgae: Effect of light/dark photoperiod. *Renewable Energy*, **106**, 17-23.
41. Meylan, F.D., Piguët, F.-P., Erkman, S. 2017. Power-to-gas through CO₂ methanation: Assessment of the carbon balance regarding EU directives. *Journal of Energy Storage*, **11**, 16-24.
42. Moreno-Garcia, L., Adjallé, K., Barnabé, S., Raghavan, G.S.V. 2017. Microalgae biomass production for a biorefinery system: Recent advances and the way towards sustainability. *Renewable and Sustainable Energy Reviews*, **76**, 493-506.
43. Murphy, J.D., Drosig, B., Allen, E., Jerney, J., Xia, A., Herrmann, C. 2015. A perspective on algal biogas. *IEA Bioenergy*.
44. Murphy, J.D., Thamsiroj, T. 2011. What will fuel transport systems of the future? *Materials Today*, **14**(11), 518-524.
45. Neves, V.T.d.C., Sales, E.A., Perelo, L.W. 2016. Influence of lipid extraction methods as pre-treatment of microalgal biomass for biogas production. *Renewable and Sustainable Energy Reviews*, **59**, 160-165.
46. Nkemka, V.N., Murto, M. 2010. Evaluation of biogas production from seaweed in batch tests and in UASB reactors combined with the removal of heavy metals. *Journal of Environmental Management*, **91**(7), 1573-1579.
47. Nkemka, V.N., Murto, M. 2012. Exploring strategies for seaweed hydrolysis: Effect on methane potential and heavy metal mobilisation. *Process Biochemistry*, **47**(12), 2523-2526.
48. Oliveira, J.V., Alves, M.M., Costa, J.C. 2014. Design of experiments to assess pre-treatment and co-digestion strategies that optimize biogas production from macroalgae *Gracilaria vermiculophylla*. *Bioresource Technology*, **162**, 323-330.
49. Parra, D., Patel, M.K. 2016. Techno-economic implications of the electrolyser technology and size for power-to-gas systems. *International Journal of Hydrogen Energy*, **41**(6), 3748-3761.
50. Passos, F., Hom-Díaz, A., Blanquez, P., Vicent, T., Ferrer, I. 2016. Improving biogas production from microalgae by enzymatic pretreatment. *Bioresource Technology*, **199**, 347-351.
51. Passos, F., Uggetti, E., Carrère, H., Ferrer, I. 2014. Pretreatment of microalgae to improve biogas production: A review. *Bioresource Technology*, **172**, 403-412.
52. Persson, T., Murphy, J.D., Jannasch, A.K., Ahern, E., Liebetrau, J., Trommler, M., Toyama, J. 2014. A perspective on the potential role of biogas in smart energy grids. *IEA Bioenergy, Task 37*.
53. Qadrdan, M., Abeysekera, M., Chaudry, M., Wu, J., Jenkins, N. 2015. Role of power-to-gas in an integrated gas and electricity system in Great Britain. *International Journal of Hydrogen Energy*, **40**(17), 5763-5775.
54. Roberts, K.P., Heaven, S., Banks, C.J. 2016. Quantification of methane losses from the acclimatisation of anaerobic digestion to marine salt concentrations. *Renewable Energy*, **86**, 497-506.
55. Roberts, T., Upham, P. 2012. Prospects for the use of macro-algae for fuel in Ireland and the UK: An overview of marine management issues. *Marine Policy*, **36**(5), 1047-1053.

56. Rönsch, S., Schneider, J., Matthischke, S., Schlüter, M., Götz, M., Lefebvre, J., Prabhakaran, P., Bajohr, S. 2016. Review on methanation – From fundamentals to current projects. *Fuel*, **166**, 276-296.
57. Sambusiti, C., Bellucci, M., Zabaniotou, A., Beneduce, L., Monlau, F. 2015. Algae as promising feedstocks for fermentative biohydrogen production according to a biorefinery approach: A comprehensive review. *Renewable and Sustainable Energy Reviews*, **44**, 20-36.
58. Schiebahn, S., Grube, T., Robinius, M., Tietze, V., Kumar, B., Stolten, D. 2015. Power to gas: Technological overview, systems analysis and economic assessment for a case study in Germany. *International Journal of Hydrogen Energy*, **40**(12), 4285-4294.
59. Schneider, L., Kötter, E. 2015. The geographic potential of Power-to-Gas in a German model region - Trier-Amprion 5. *Journal of Energy Storage*, **1**, 1-6.
60. SEAI. 2017. Upgrading Biogas to Biomethane Factsheet. *Sustainable Energy Authority of Ireland*, http://www.seai.ie/Publications/Renewables_Publications/Bioenergy/Upgrading_Biogas_to_Biomethane.pdf.
61. Seghetta, M., Romeo, D., D'Este, M., Alvarado-Morales, M., Angelidaki, I., Bastianoni, S., Thomsen, M. 2017. Seaweed as innovative feedstock for energy and feed – Evaluating the impacts through a Life Cycle Assessment. *Journal of Cleaner Production*, **150**, 1-15.
62. Stagnol, D., Renaud, M., Davoult, D. 2013. Effects of commercial harvesting of intertidal macroalgae on ecosystem biodiversity and functioning. *Estuarine, Coastal and Shelf Science*, **130**, 99-110.
63. Tabassum, M.R., Wall, D.M., Murphy, J.D. 2016a. Biogas production generated through continuous digestion of natural and cultivated seaweeds with dairy slurry. *Bioresource Technology*, **219**, 228-238.
64. Tabassum, M.R., Xia, A., Murphy, J.D. 2016b. The effect of seasonal variation on biomethane production from seaweed and on application as a gaseous transport biofuel. *Bioresource Technology*, **209**, 213-219.
65. Tabassum, M.R., Xia, A., Murphy, J.D. 2017. Potential of seaweed as a feedstock for renewable gaseous fuel production in Ireland. *Renewable and Sustainable Energy Reviews*, **68**, Part 1, 136-146.
66. Tabassum, M.R., Xia, A., Murphy, J.D. 2016c. Seasonal variation of chemical composition and biomethane production from the brown seaweed *Ascophyllum nodosum*. *Bioresource Technology*, **216**, 219-226.
67. Toledo-Cervantes, A., Madrid-Chirinos, C., Cantera, S., Lebrero, R., Muñoz, R. 2017. Influence of the gas-liquid flow configuration in the absorption column on photosynthetic biogas upgrading in algal-bacterial photobioreactors. *Bioresource Technology*, **225**, 336-342.
68. Vo, T.T.Q., Xia, A., Rogan, F., Wall, D.M., Murphy, J.D. 2017a. Sustainability assessment of large-scale storage technologies for surplus electricity using group multi-criteria decision analysis. *Clean Technologies and Environmental Policy*, **19**(3), 689-703.
69. Vo, T.T.Q., Xia, A., Wall, D.M., Murphy, J.D. 2017b. Use of surplus wind electricity in Ireland to produce compressed renewable gaseous transport fuel through biological power to gas systems. *Renewable Energy*, **105**, 495-504.
70. Xia, A., Herrmann, C., Murphy, J.D. 2015. How do we optimize third-generation algal biofuels? *Biofuels, Bioproducts and Biorefining*, **9**(4), 358-367.
71. Xia, A., Murphy, J.D. 2016. Microalgal Cultivation in Treating Liquid Digestate from Biogas Systems. *Trends in Biotechnology*, **34**(4), 264-275.
72. Zhan, J., Rong, J., Wang, Q. 2017. Mixotrophic cultivation, a preferable microalgae cultivation mode for biomass/bioenergy production, and bioremediation, advances and prospect. *International Journal of Hydrogen Energy*, **42**(12), 8505-8517.

73. Zhu, L., Nugroho, Y.K., Shakeel, S.R., Li, Z., Martinkauppi, B., Hiltunen, E. 2017. Using microalgae to produce liquid transportation biodiesel: What is next? *Renewable and Sustainable Energy Reviews*, **78**, 391-400.
74. Zhu, L., Yan, C., Li, Z. 2016. Microalgal cultivation with biogas slurry for biofuel production. *Bioresource Technology*, **220**, 629-636.

ACCEPTED MANUSCRIPT

- Cascading biomethane systems capture carbon and improve sustainability
- Micro-algae may be used to upgrade biogas and as a substrate for digestion
- Power to gas allows for hydrogen to upgrade biogas and oxygen for gasification
- Cascading systems allow algae upgrading by day and biomethanation by night

ACCEPTED MANUSCRIPT