
March 1965 Brief 65-10084

## NASA TECH BRIEF



NASA Tech Briefs are issued by the Technology Utilization Division to summarize specific technical innovations derived from the space program. Copies are available to the public from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia, 22151.

## Modified Contour Projector Makes Excellent Contour Densitometer

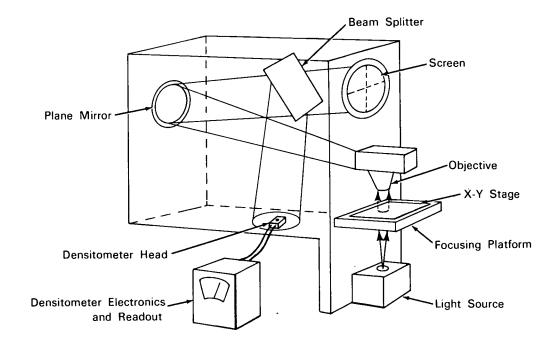

The problem: A means is needed to render the density contour or profile of a photographic film image. It is desired to read the density of small areas with respect to their positions relative to some reference image point on the film.

**The solution:** A modification is made to a standard, commercially available contour projector and density contours are rendered of film images.

How it's done: A thin, glass beam splitter, a densitometer head, and densitometer electronics with readout are incorporated in a standard contour

projector. The beam splitter images part of the projected light beam onto the densitometer head. The densitometer head and viewing screen reticle are aligned to be coincident with respect to any given point on the film image. The x-y stage includes a film transport mechanism for frame-by-frame viewing plus fine positioning and distance measuring devices. The densities of all points of interest in the contour are examined using the same identical light path, thus avoiding any spatial inhomogeneities in the beam. Magnification change is readily accomplished by simply changing the power of the objective.

(continued overleaf)

This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither the United States Government, nor NASA, nor any person acting on behalf of NASA: A. Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in

this document, or that the use of any information, apparatus, method, or process disclosed in this document may not infringe privately-owned rights; or B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of, any information, apparatus, method, or process disclosed in this document.

## Notes:

- 1. Density contours for different wavelengths can also be obtained by placing a wedge interference filter at the densitometer head. The desired wavelength is selected by varying the position of the filter with respect to the densitometer aperture.
- 2. This device should be a welcome research tool in process engineering.
- 3. Inquiries concerning this invention may be directed

Technology Utilization Officer Langley Research Center Langley Station Hampton, Virginia, 23365 Reference: B65-10084

Patent status: NASA encourages the immediate commercial use of this invention. Inquiries about obtaining rights for its commercial use may be made to NASA, Code AGP, Washington, D.C., 20546.

Source: Reginald J. Exton

(Langley-93)

Brief 65-10084 Category No. 02