October 1966


brought to you by CORE

Brief 66-10484

NASA TECH BRIEF

NASA Tech Briefs are issued to summarize specific innovations derived from the U. S. space program and to encourage their commercial application. Copies are available to the public from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Braking Mechanism Is Self Actuating and Bidirectional

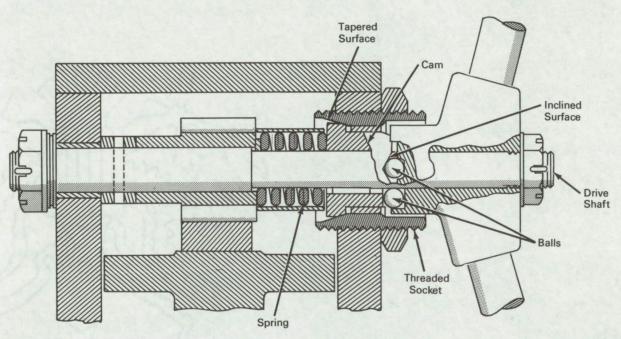

The problem:

It is desired to effect a braking action on a moving item of equipment, in either direction of motion, immediately upon removal of the driving force and with no human operator involvement.

The solution:

A mechanism that automatically applies braking force, regardless of the driving force direction, and permits no coasting.

How it's done:

In operation, driving torque is applied in either direction of rotation to the drive shaft. Rotation of the drive shaft causes the balls that are seated against the cam to ride slightly up the cam surface, depressing the spring and thus forcing the tapered surface of the cam away from the mating surface of the threaded socket. The shaft is now free to turn so long as a constant driving force is applied to it. Upon removal of the driving force, the balls return to their original seats against the cam and release the spring which causes the mating surfaces of the cam and threaded socket to re-engage, thereby producing immediate braking action.

Notes:

 This device would be useful wherever free movement is undesirable after an object has been guided into a precise position. It could be used for precise control of the raising and lowering of objects on a chain hoist.

(continued overleaf)

This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither the United States Government nor any person acting on behalf of the United States Government assumes any liability resulting from the use of the information contained in this document, or warrants that such use will be free from privately owned rights.

- 2. The automatic brake could be used on wheeled equipment operating on slopes in circumstances that can not tolerate slippage.
- 3. Inquiries concerning this innovation may be directed to:
 - Technology Utilization Officer Marshall Space Flight Center Huntsville, Alabama 35812 Reference: B66-10484

.

Patent status:

No patent action is contemplated by NASA. Source: Joseph Pizzo of North American Aviation, Inc. under contract to Marshall Space Flight Center (M-FS-1299)