https://ntrs.nasa.gov/search.jsp?R=19660000602 2020-03-11T17:45:03+00:00Z

December 1966


Brief 66-10604

NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Hole Saw Drill Attachment Has Zero Force Reaction

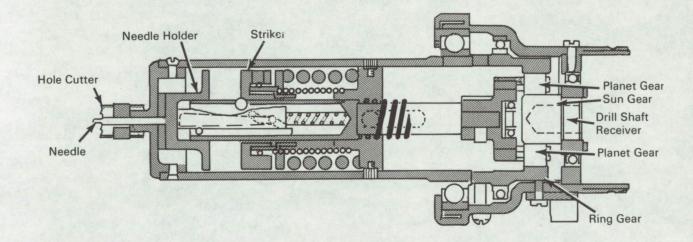

The problem:

Workers in space, being weightless, will propel themselves away from any workpiece that they are trying to drill, cut, or machine by application of force against a surface. In practice, physical restraint systems have been found less than ideal solutions to this problem because of their restrictive impositions on free movement by the worker.

The solution:

Zero reaction tools that require no force application by the worker. The subject tool accomplishes hole cutting by holding the workpiece and feeding the cutting blade into and through it by forces entirely absorbed within the tool.

How it's done:

The drill attachment is connected to the output shaft of a standard electric drill. A "needle" at the forward end of the attachment is forced into the workpiece by a spring loaded striker that is released by the operator. With the "needle" imbedded in the workpiece, the drill is turned on and spring tension within the attachment draws the hole saw blade and imbedded "needle" together, resulting in the hole saw cutting a circular path through the workpiece. When the hole is made, the drill and attachment are retracted and the resultant slug is removed from the "needle". Torque forces within the attachment operate in opposite directions by means of springs, detent balls, and a planetary gear arrangement in such a manner that they cancel out and the result is a zero reaction tool.

Note:

Inquiries concerning this invention may be made to: Technology Utilization Officer Manned Spacecraft Center Houston, Texas 77058 Reference: B66-10604

(continued overleaf)

This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither the United States Government nor any person acting on behalf of the United States Government assumes any liability resulting from the use of the information contained in this document, or warrants that such use will be free from privately owned rights.

Patent status:

Title to this invention has been waived under the provisions of the National Aeronautics and Space Act [42 U.S.C. 2457 (f)], to the Black and Decker Mfg.; Co., Towson, Maryland.

Source: R. H. Riley, Jr. of Black and Decker Mfg., Co. and A. E. Holmes of Martin-Marietta Corp. under contract to Manned Spacecraft Center (MSC-543)