May 1967


Brief 67-10123

# NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

# Lock-Disconnect Mechanism Gives Positive Release to Joined Bodies

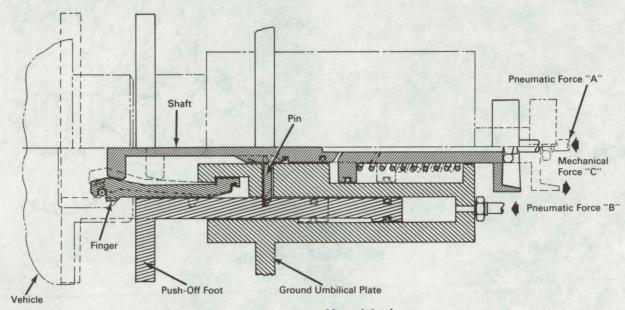

# The problem:

In most conventional umbilical systems, the locking and releasing devices involve multiple pawls or balls in a complex series of mechanical linkages. The magnitude of parts, plus the requirement that all smoothly operate simultaneously to achieve the desired separation, comprise a system often unreliable.

#### The solution:

A mechanism that locks and unlocks through an internal collet device that is locked and released by the action of a single reciprocating shaft. The appreciable reduction in the number of parts required to operate the mechanism results in a level of reliability higher than in previous systems.

### How it's done:

The mechanism, in the locked position, joins the vehicle and the ground umbilical plate. Prior to disconnect, a pneumatic force "B" is applied to preload the push-off foot, which preload is withheld from the vehicle by a series of pins that engage the foot shaft. Upon command to unlock, either a pneumatic force "A" or a mechanical force "C" is applied to the actuator shaft. As the shaft is forced to the right, the fingers collapse toward the centerline of the mechanism, allowing the ground umbilical plate to be unlocked from the vehicle. Upon completion of the unlocking function, the pins begin to ride down the ramp of the actuator shaft. When they reach a predetermined point, the push-off foot is released and its preload forces it against the vehicle, thus separating vehicle and ground umbilical plate.

(continued overleaf)

This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither the United States Government nor any person acting on behalf of the United States

Government assumes any liability resulting from the use of the information contained in this document, or warrants that such use will be free from privately owned rights.

# Note:

Inquiries concerning this invention may be directed to:

Technology Utilization Officer Marshall Space Flight Center Huntsville, Alabama 35812 Reference: B67-10123

# Patent status:

Inquiries about obtaining rights for the commercial use of this invention may be made to NASA, Code GP, Washington, D.C. 20546.

Source: Charles E. Beaver of The Boeing Company under contract to Marshall Space Flight Center (M-FS-2147)

NB RIOG KSC HQS. ATTN. THOMAS