November 1967


brought to you by T CORE

Brief 67-10466

NASA TECH BRIEF

NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Hand-Operated Plug Insertion Valve

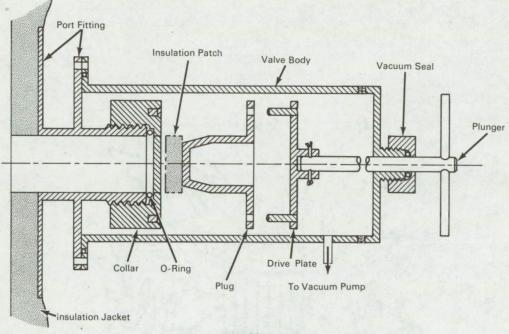

The problem:

An evacuated insulation system for upper stage liquid hydrogen tanks requires an extensive vacuum plumbing system for ground hold (prelaunch) conditions. If the system can be sealed on the launch pad there is no reason to fly the bulky plumbing system. Conventional vacuum valves can be used to seal the system but these are very heavy and require support brackets which involve additional weight.

The solution:

A hand-operated plug insertion valve that is light in weight, demountable, and permits evacuation of the system plus sealing after evacuation.

How it's done:

A port fitting is bonded to the insulation jacket during fabrication of the upper stage tank. The valve body collar is assembled to the port fitting and has an internal O-ring. A vacuum source is used to evacuate the insulation jacket to the desired pressure level and the port is sealed by pushing on the valve plunger. The drive plate pins engage holes in the plug and, through the plug flange, holes in the collar. Twisting the plunger tightens the plug-to-collar interface thus compressing the O-ring to make a vacuum-tight connection. The drive plate is withdrawn and the valve body with associated vacuum plumbing is removed from the insulation jacket port fitting.

(continued overleaf)

This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither the United States Government nor any person acting on behalf of the United States Government assumes any liability resulting from the use of the information contained in this document, or warrants that such use will be free from privately owned rights.

Notes:

- 1. This port fitting and plug weigh only 1/7th as much as a conventional vacuum valve.
- 2. The plug can be fitted with a patch of insulation to provide a barrier to radiation heat transfer.
- 3. Inquiries concerning this innovation may be directed to:

Technology Utilization Officer Marshall Space Flight Center Huntsville, Alabama 38512 Reference: B67-10466

Patent status:

No patent action is contemplated by NASA.

Source: Robert G. Jones of Marshall Space Flight Center and James A. Roney of Hayes International Corporation under contract to Marshall Space Flight Center (MFS-12019)