
brought to you by CORE



AEC-NASA Tech Briefs describe innovations resulting from the research and development program of the U.S. AEC or from AEC-NASA interagency efforts. They are issued to encourage commercial application. Tech Briefs are published by NASA and may be purchased, at 15 cents each, from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Automatic Transducer Switching Provides Accurate Wide Range Measurement of Pressure Differential

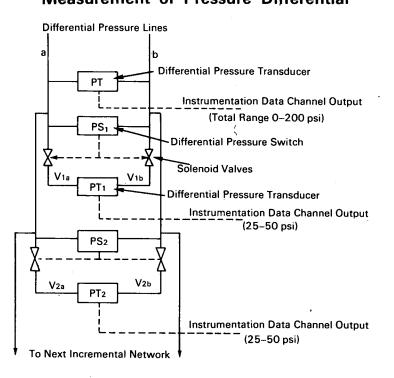

The problem:

To measure differential gas pressure over a wide range (0-200 psi) but with great accuracy at any point in the scale. High precision transducers usually are limited in the range of measurement and can be easily damaged if the pressure limits are exceeded.

The solution:

An automatic pressure transducer switching network which sequentially selects any one of a number of limited-range transducers as the pressure rises or falls.

How it's done:

In operation, where no differential pressure exists across lines a and b, the two normally open solenoid valves V_{1a} and V_{1b} are open. As the a-b differential pressure rises, it is measured by transducer PT_1 (shown as 0-25 psi) until the 25 psi limit is reached. At this point, as detected by pressure switch PS_1 , PS_1 closes valves V_{1a} and V_{1b} to prevent further gas flow to PT_1 . The pressure is still applied to the next ramp (PS_2 , V_{2a} , V_{2b} , and PT_2) which is set for the 25-50 psi range. Additional networks are added to the (continued overleaf)

This document was prepared under the sponsorship of the Atomic Energy Commission and/or the National Aeronautics and Space Administration. Neither the United States Government nor any person acting on behalf of the United States Government assumes any liability resulting from the use of the information contained in this document, or warrants that the use of any information, apparatus, method, or process disclosed in this document may not infringe privately owned rights.

system to complete the total incremental coverage. Transducer PT provides full range, but less accurate, monitoring of the pressure activity.

Notes:

- 1. The 0-200 psi range and 25 psi incremental steps were selected only for discussion purposes. Greater ranges and more or less precise incremental steps are entirely feasible.
- 2. Inquiries concerning this innovation may be directed to:

Technology Utilization Officer AEC-NASA Space Nuclear Propulsion Office U.S. Atomic Energy Commission Washington, D.C. 20545 Reference: B67-10540

Patent status:

.

No patent action is contemplated by AEC or. NASA.

Source: S. K. Yoder of Aerojet-General Corp.

under contract to

AEC-NASA Space Nuclear Propulsion Office (NUC-10001)

Category 01

.

1.2.2

· · ·

.

. . . .

en en en part per a transmission en en

e de la companya de l

.

Brief 67-10540