December 1967


Brief 67-10563

# NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

## Instrument Accurately Measures Weld Angle and Offset

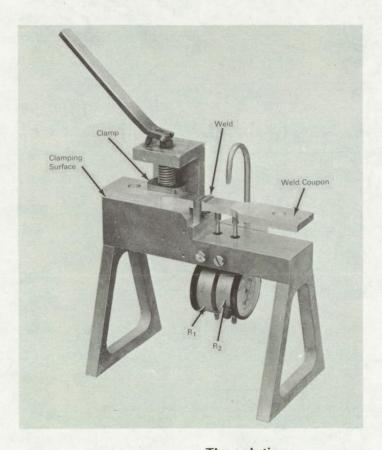

## The problem:

In welding, misalignment can result from one member being welded to the other at an angle, with an offset, or both at an angle and with an offset. To correlate the effect of this angle and offset on the tensile strength of welded structures, it is necessary to be able to accurately measure these variables. In the past they have been either estimated or only roughly measured.

## The solution:

An instrument designed to measure offset from a reference plane at two locations on a test coupon. These measurements are then used to determine weld angles to the nearest arc minute and weld offset to the nearest one thousandth of an inch. Dial indicators R<sub>1</sub> and R<sub>2</sub> are set to zero with reference to the instrument's clamping surface.

(continued overleaf)

This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither the United States Government nor any person acting on behalf of the United States

Government assumes any liability resulting from the use of the information contained in this document, or warrants that such use will be free from privately owned rights.

### How it's done:

A welded tensile coupon is positioned on the instrument as shown with the center of the weld at the center of the instrument and positioned so that the reading of  $R_1$  is equal to or less than the reading of  $R_2$ . Readings of  $R_1$  and  $R_2$  are noted and recorded. The angle and offset of the weld is then computed trigonometrically.

### Notes:

1. To simplify the computation of angle and offset data, a special table has been prepared for use with the instrument.

2. Inquiries concerning this invention may be directed to:

Technology Utilization Officer Marshall Space Flight Center Huntsville, Alabama 35812 Reference: B67-10563

### Patent status:

Inquiries about obtaining rights for the commercial use of this invention may be made to NASA, Code GP, Washington, D.C. 20546.

Source: W. G. Boyd et al of North American Aviation, Inc. under contract to Marshall Space Flight Center (MFS-12849)