December 1967


Brief 67-10587

NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Laser Communication System Is Insensitive to Atmospherically Induced Noise

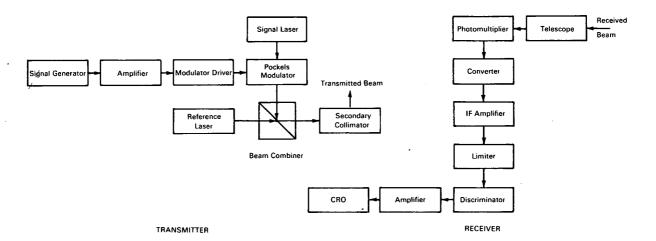

The problem:

To develop an optical communication system that is insensitive to atmospherically induced amplitude noise fluctuations and phase distortions.

The solution:

An angle modulated transmitted reference heterodyne laser communication system. The block diagram shows an implementation of the system for singlefrequency subcarrier modulation.

How it's done:

The modulation waveform (intelligence) derived from the signal generator, is amplified and applied to a Pockels cell modulator (using a 45° Y-cut ADP crystal) that phase modulates the signal laser beam in synchronism with the modulation waveform. The signal beam laser and reference beam laser are tuned,

servo-locked, and stabilized to a difference frequency of 300 MHz. The beams are collimated, combined, and transmitted through the atmosphere to the receiver. At the receiver, the beam through the telescope is focused on a photomultiplier detector and the difference frequency is generated. The 300 MHz difference signal is amplified, converted to a 60 MHz second IF, amplified, limited, and discriminated to recover the modulation waveform which is amplified and displayed on a cathode ray oscilloscope.

Note:

Inquiries concerning the design and characteristics of this system may be directed to:

Technology Utilization Officer Goddard Space Flight Center Greenbelt, Maryland 20771 Reference: B67-10587

(continued overleaf)

This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither the United States Government nor any person acting on behalf of the United States Government assumes any liability resulting from the use of the information contained in this document, or warrants that such use will be free from privately owned rights.

Patent status:

Inquiries about obtaining rights for the commercial use of this invention may be made to NASA, Code GP, Washington, D.C. 20546.

Source: John N. Packard of Aircraft Armaments, Inc. under contract to Goddard Space Flight Center (XGS-10396)