https://ntrs.nasa.gov/search.jsp?R=19670000637 2020-03-11T21:33:15+00:00Z

April

December 1967


Brief 67-10638

NASA

NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

TEC

NASA

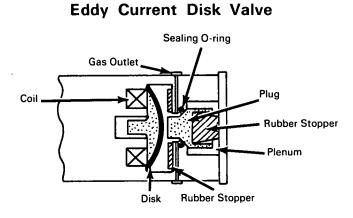

## A quick-opening, intermittent flow valve which requires a small amount of electrical energy to open and which closes by the restoring action of a rubber stop has been developed. The valve opens in less than 100 microseconds, takes only 10 joules of energy, and has survived 50,000 operations without damage. The basic losses are ohmic heating in the coil and in the disk. The design should be applicable to many quickopening, intermittent flow requirements in fluid systems. By varying the strength of the electrical coil and the restoring force of the rubber stopper, this design can also be adapted to maintain the valve in an open position as long as energy is applied to the coil.

This valve is operated by discharging an energy storage capacitor into the coil. Eddy currents induced in the disk cause it to be accelerated into the plug. The plug is driven off the sealing O-rings and compresses the rubber stopper. This permits gas to flow from the plenum chamber to the gas outlets. The compressed rubber stopper restores itself and the plug to their original positions, shutting off the gas flow.

In this design, the disk is allowed to accelerate to its terminal velocity before impacting the sealing plug. This is in contrast to similar valves in which the disk itself opens a seal during its initial movement. The described arrangement allows a longer time for the magnetic forces to act and, thus, a relatively higher impedance for the force coil which can be matched to the energy storage capacitor.

## Note:

Inquiries concerning this innovation may be directed to:

Technology Utilization Officer Lewis Research Center 21000 Brookpark Road Cleveland, Ohio 44135 Reference: B67-10638

(continued overleaf)

This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither the United States Government nor any person acting on behalf of the United States

Government assumes any liability resulting from the use of the information contained in this document, or warrants that such use will be free from privately owned rights.

## or to:

New Technology Representative General Dynamics/Convair Division Mail Zone 103-19 5001 Kearny Villa Road San Diego, California 92112 Reference: B67-10638

## Patent status:

No patent action is contemplated by NASA. Source: A. V. Larson, L. Liebing, and R. Dethletsen of General Dynamics/Convair Division under contract to Lewis Research Center (LEW-10123)