

August 1969


Brief 69-10296

NASA TECH BRIEF



NASA Tech Briefs are issued to summarize specific innovations derived from the U.S. space program, to encourage their commercial application. Copies are available to the public at 15 cents each from the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Electrothermal Linear Actuator

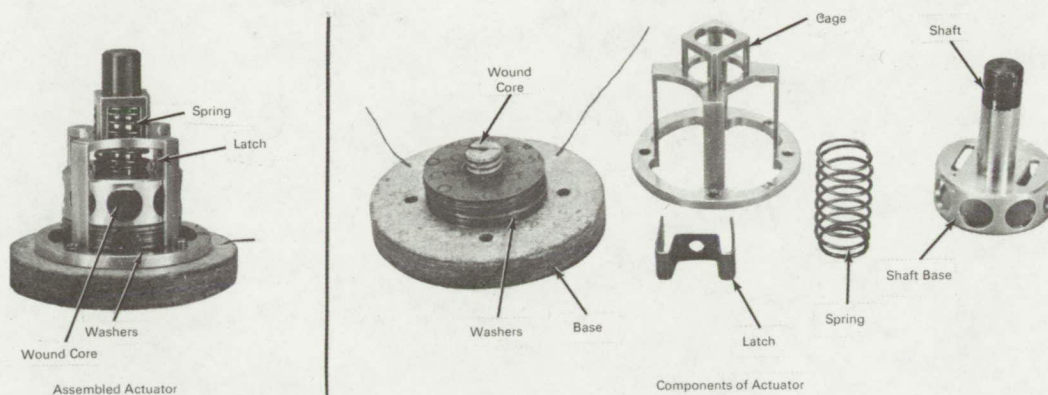

The problem:

Development of a device for converting electric power into powerful linear thrust without generation of magnetic fields.

The solution:

An actuator in which, when heated by an energized filament, a stack of bimetallic washers expands and drives upward the end of a shaft. The shaft does not move before it is freed by expansion of a heated bimetallic latch.

How it's done:

A cylindrical core of nonconductive material, wound with a heating filament of tungsten wire, is screwed to a base of similar material through which the leads to the filament are threaded. The bottom of a gage also is screwed to the base, concentrically with the core. Through a reduced bore atop the cage

fits a metallic shaft having an expanded base; the base sits on a stack of bimetallic washers that is concentric with the core.

Compressed between the reduced bore of the cage and the expanded base of the shaft is a coil spring that keeps the shaft in contact with the washers; also between this bore and the expanded base is a bimetallic latch that, when cold and contracted, prevents upward movement of the shaft.

When the energized filament heats the washers they tend to force the shaft upward, but cannot do so before the latch (also heated) expands radially until its two legs slip through slots in the expanded base of the shaft.

The actuator withstands vibration, creates no appreciable magnetic field, is compatible with vacuum, and exerts substantial force that is proportional to the height of the stack of washers. It has many potential applications, especially for switching; it may interest electrical, mechanical, or chemical engineers.

(continued overleaf)

Note:

Documentation is available from:
Clearinghouse for Federal Scientific
and Technical Information
Springfield, Virginia 22151
Price \$3.00
Reference: TSP69-10296

Patent status:

This invention is owned by NASA, and a patent application has been filed. Royalty-free, nonexclusive licenses for its commercial use will be granted by NASA. Inquiries concerning license rights should be made to NASA, Code GP, Washington, D.C. 20546.

Source: L. J. Derr and R. A. Tobias
NASA Pasadena Office
(NPO-10637)