January 1971

Brief 71-10026

NASA TECH BRIEF

NASA Headquarters




NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

Ultraviolet Interferometer

The problem:

To obtain high resolution spectroscopic data from the ultraviolet region of the spectrum. final reflection from surface A. A similar set of rays, "-1", "-2", etc., undergo final reflection from surface B. The resultant total intensity produced by the

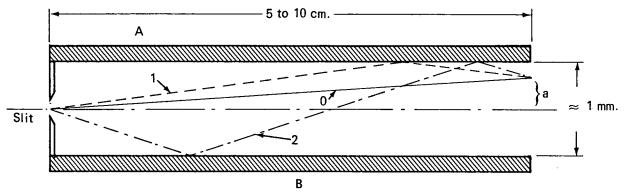

The solution:

A grazing-incidence multi-beam interferometer (GIMBI) which requires the use of neither concave diffraction gratings nor partially reflecting coatings, and produces an interference pattern whose fringes may be sharper than those produced by a Fabry-Perot interferometer.

How it's done:

The figure shows a simplified diagram of the GIMBI. A and B are two parallel planar mirrors with a length of about 5 to 10 cm and a separation of about 1 mm. The plates are illuminated through a slit or pinhole at the left. Rays following multiple transmission paths intersect at the exit plane to form an interference pattern. Three low-order rays are shown on the figure: "0" is the directly transmitted ray, and "1" and "2" are the rays which are reflected once and twice respectively, with the

interference of these rays at a general distance "a" from the centerline is strongly dependent on wavelength.

The GIMBI eliminates many of the most critical problems associated with existing ultraviolet interferometers: it does not require materials transparent to ultraviolet wavelengths, and the predominant reflections take place at a low angle of incidence, thus ensuring high reflectivity.

Note:

Requests for further information may be directed to:

Technology Utilization Officer Headquarters National Aeronautics and Space Administration Washington, D. C. 20546 Reference: TSP71-10026

(continued overleaf)

Patent status:

No patent action is contemplated by NASA.

Source: R. A. Day of The University of Oklahoma under grant from NASA Headquarters (HQN-10546)