


December 1972

B72-10372



AEC-NASA TECH BRIEF



AEC-NASA Tech Briefs announce new technology derived from the research and development program of the U.S. AEC or from AEC-NASA interagency efforts. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

Automatic Lightning Location System

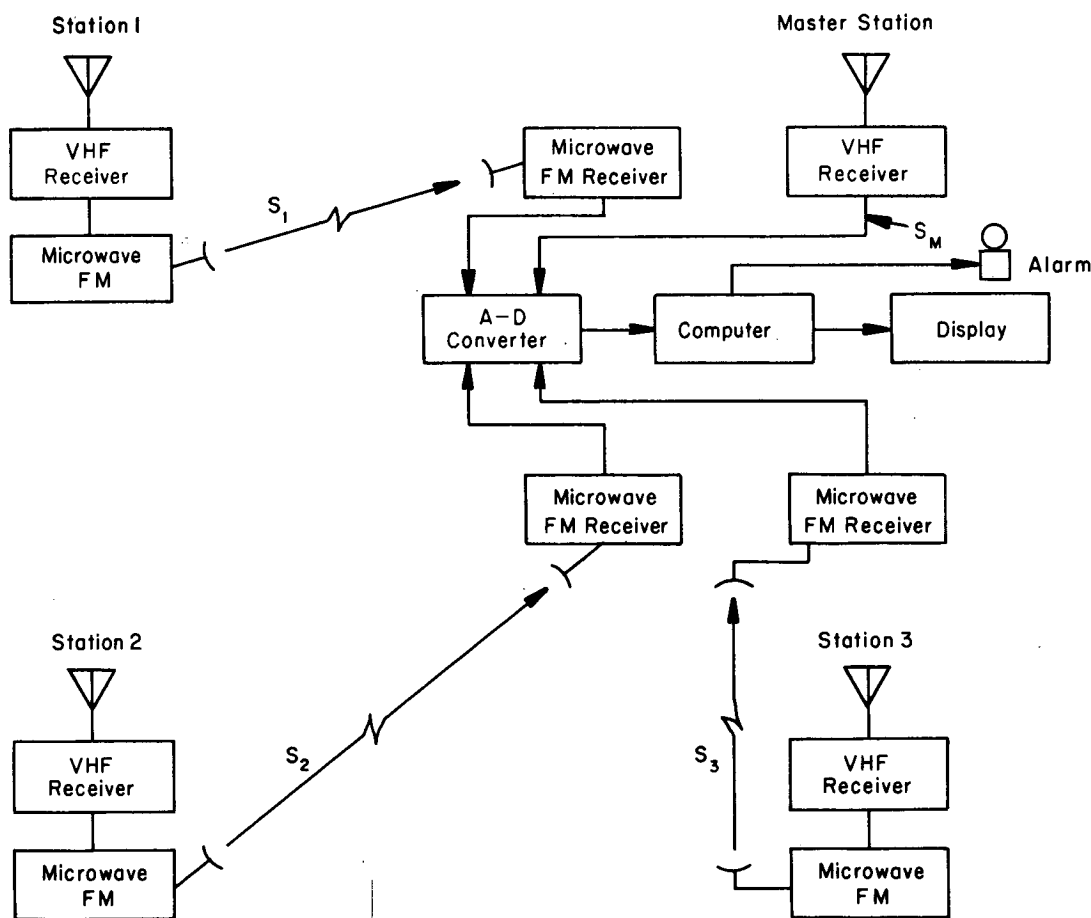


Figure 1. Block Diagram of ALLS

Hyperbolic triangulation of the vhf radiation emitted by a lightning discharge indicates the position and path of lightning storms. Three remote stations and one master station detect the signal to unambiguously

locate the point of discharge. Figure 1 is a block diagram of the system.

The three remote stations transmit their received signals to the master station by FM microwave link. The

(continued overleaf)

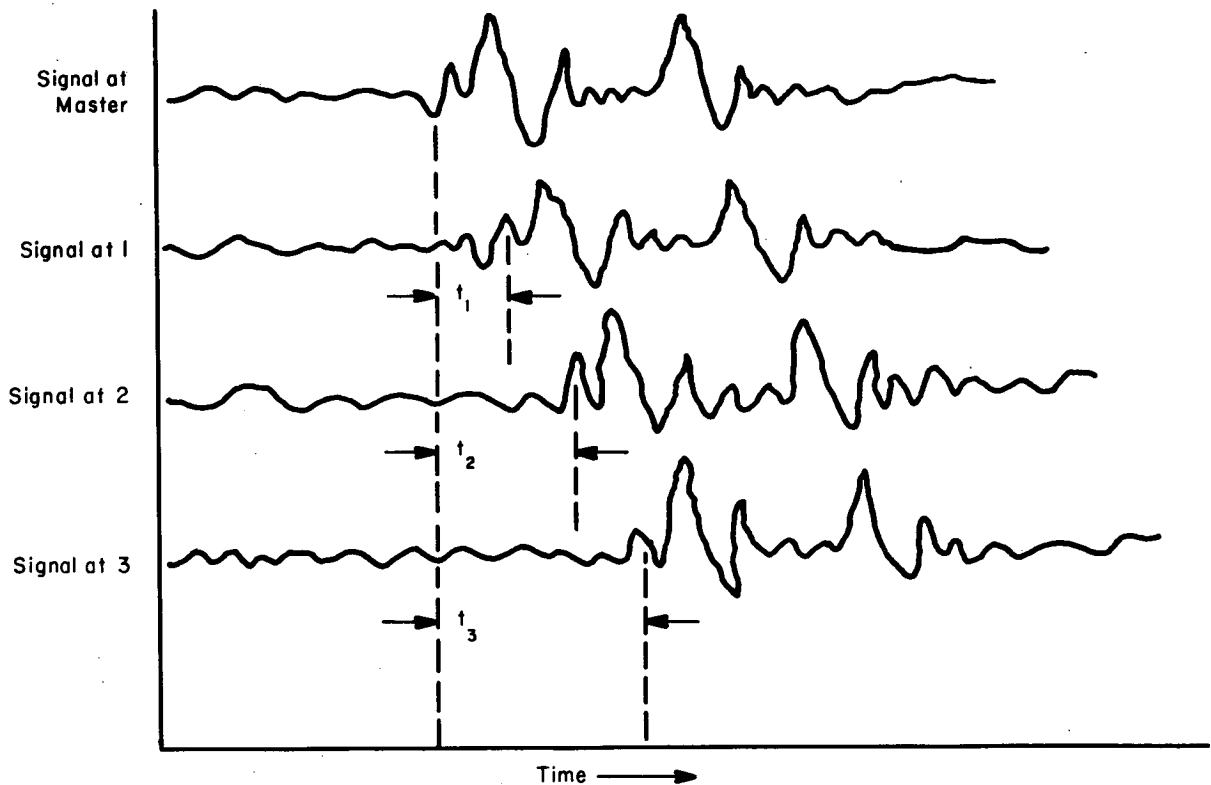


Figure 2. Waveform Matching for Time Difference Measurement

signals are digitized in an analog-to-digital converter, fed into a computer and cross-correlated with the signal received at the master station. Waveforms are matched by positioning the signals along the time axis until they are most nearly superimposed with that received at the master (Figure 2). All signal arrival times are related to the arrival time at the master station, eliminating precise clock synchronization at each station. The computer processing compensates for the data transmittal times between the remote stations and the master so the time delays in the signals are due only to the difference in distance from the lightning discharge.

Since a hyperbola is the locus of all points whose difference in distance from two fixed points is constant, three hyperbolas can be drawn using the master station and each of the remote stations as foci. The difference in arrival times between the master and individual stations is the constant. The point of discharge must lie on each of the hyperbolas simultaneously; i.e., at the intersection.

This innovation may be of interest to large electric power companies, pipeline companies, forest fire lookout centers, and airports.

Note:

Requests for further information may be directed to:

Mr. Glenn K. Ellis
 Technology Utilization Officer
 Division of Technical Information
 U.S. Atomic Energy Commission
 Washington, D.C. 20545
 Reference: TSP72-10372

Patent status:

Inquiries concerning rights for commercial use of this information may be made to:

Mr. George H. Lee, Chief
 Chicago Patent Group
 U.S. Atomic Energy Commission
 Chicago Operations Office
 9800 South Cass Avenue
 Argonne, Illinois 60439

Source: D.N. March and T. Holdsworth
 Lawrence Radiation Laboratory
 under contract to
 Atomic Energy Commission
 (AEC-10077)