

# NASA TECH BRIEF

## NASA Pasadena Office



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

### Phased-Array Antenna Phase Control Circuit Using Frequency Multiplication

**The problem:**

Phase control of a phased-array antenna is normally accomplished by an antenna coupling circuit. Thus a transmitter or a receiver, depending on whether the system is transmitting or receiving, is coupled to the antenna elements of the phased array through a power-dividing chain which has phase-shifting elements connected at some point or points in it. For instance, some previous phase controllers employ phase shifters connected at the ends of the power-dividing chains just prior to their connections with the antenna elements. Others have the phase shifters connected in series along the power divider chains. The major problem with such phase control circuits is that they are not accurate enough. More-sophisticated phase control circuits are capable of relatively-accurate phase control; however, in general they require expensive and nonstandard components.

**The solution:**

A new phase control coupling circuit uses frequency multipliers. The circuit separates out, from these multiplied signals, antenna element signals which have desirable phase angles and feeds them to the appropriate antenna elements of the phased array. The system may be used in either a transmitting or a receiving mode.

**How it's done:**

A frequency-doubling phase control circuit is illustrated in the figure. A signal supplied by the transmitter passes through the two-way power divider and the phase shifter to terminals 0 and  $\Theta$ . Thus a signal ( $2S_1$ ) which has zero relative phase shift appears at terminal 0, and a signal ( $2S_2$ ) with a relative phase shift of  $\Theta^0$  appears at terminal  $\Theta$ . Assuming a pure sine wave signal, these signals are given by


$$2S_1 = 2 \cos \omega t$$

and

$$2S_2 = 2 \cos (\omega t + \Theta)$$

where  $t$  denotes time in seconds,  $\omega$  is the angular velocity of the signals, and  $\Theta$  is the angle by which  $S_2$  leads  $S_1$ .

Each signal is fed to a four-way power divider having input-to-output amplitude ratios of 2. Thus the outputs of these dividers are  $S_1$  and  $S_2$ , respectively. One four-way power divider connects signals  $S_1$  to the first and second inputs of a combining  $180^\circ$  hybrid sum-and-difference network and to the first input of a second such network. Signals  $S_2$  are connected similarly to the second input of the second network and to the first and second inputs of a third  $180^\circ$  hybrid (see figure). The fourth output of each power divider is connected to other hybrids which, for simplicity, are not shown.

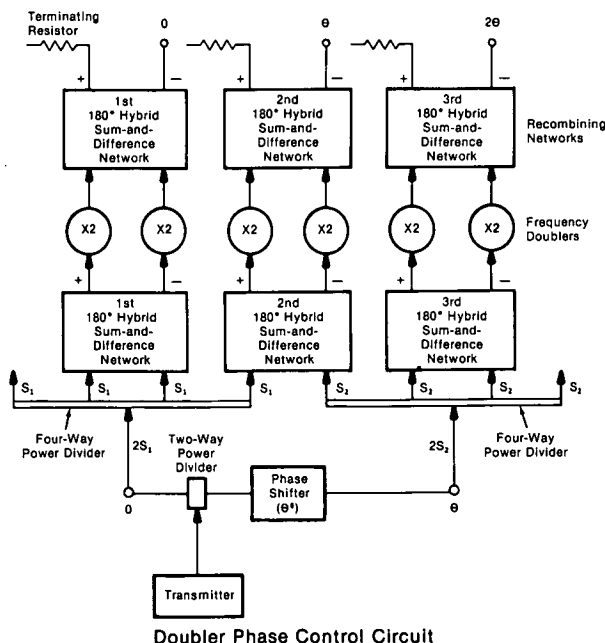

Doublor Phase Control Circuit

(continued overleaf)

The combining hybrids each have a sum port and a difference port. Thus the sum signal from the second 180° hybrid is given by  $(S_1+S_2)/\sqrt{2}$ , and the difference signal is given by  $(S_1-S_2)/\sqrt{2}$ .

The sum-and-difference ports of each hybrid are connected to frequency doublers, the outputs of which are proportional to the square of their inputs. The doublers connected to the second hybrid, for example, have the outputs  $(S_1+S_2)^2/2$  and  $(S_1-S_2)^2/2$ . Finally, the sum-and-difference frequency doublers of the first 180° hybrid are connected to the first and second inputs of the first recombining 180° hybrid network, those of the second hybrid are connected to the inputs of a second recombining network, and those of the third hybrid are connected to the inputs of a third recombining network.

The difference ports of the three recombining networks feed active antenna elements, while the sum ports are applied to terminating resistors. The outputs at the difference ports of the three recombining networks are proportional to

$$\begin{aligned} \sqrt{2} S_1 S_1, & \quad (1\text{st}) \\ \sqrt{2} S_1 S_2, & \quad (2\text{nd}), \text{ and} \\ \sqrt{2} S_2 S_2; & \quad (3\text{rd}) \end{aligned}$$

corresponding to signals given by

$$\begin{aligned} (1/\sqrt{2}) \cos (2\omega t), \\ (1/\sqrt{2}) \cos (2\omega t + \Theta), \text{ and} \\ (1/\sqrt{2}) \cos (2\omega t + 2\Theta). \end{aligned}$$

Thus the doubler phase control coupler circuit provides three outputs, each having a frequency of  $2\omega t$ , which is double the frequency of the input signals  $S_1$  and  $S_2$ . The first output signal has a zero relative phase shift, the second has a relative phase shift of  $\Theta$ , and the third has a relative phase shift of  $2\Theta$ .

A unique feature of the doubler phase control circuit is that it may be used even when the frequency doubler conversion loss is a variable function of the power input. Thus the doubler phase control circuit yields phase-shifted signals which are shifted one from the other by highly accurate increments. Moreover, the circuit employs standard, interchangeable components and is relatively uncomplicated. Finally, the principle of the doubler phase control circuit may also be used for more generalized phase control circuits which use higher orders of multiplication to produce a greater number of phase-shifted output signals.

**Note:**

Requests for further information may be directed to:

Technology Utilization Officer  
NASA Pasadena Office  
4800 Oak Grove Drive  
Pasadena, California 91103  
Reference: TSP74-10251

**Patent status:**

This invention has been patented by NASA (U.S. Patent No. 3,710,329). Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to:

Patent Counsel  
NASA Pasadena Office  
4800 Oak Grove Drive  
Pasadena, California 91103

Source: Robert J. Mailloux and  
Paul R. Caron  
Electronics Research Center  
(ERC-10285)