

NASA TECH BRIEF

Ames Research Center




NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

Laser Velocimeter Measurements of High-Speed Compressible Flows

The laser velocimeter appears to be especially well suited for the measurement of turbulence transport properties in compressible flows because of its non-disturbing characteristic, sole velocity sensitivity, and instantaneous velocity capability. However, there has been some question as to whether the velocimeter can provide accurate turbulence measurements in the compressible boundary layers of a high-velocity gas stream. Results of a study of a turbulent boundary layer in a supersonic wind tunnel have demonstrated that the streamwise mean velocity, the turbulence intensity in the streamwise direction, and the velocity

stream unit Reynolds number of $5.7 \times 10^7/m$. The region of interest was the turbulent unseeded boundary layer on the nearly adiabatic upper nozzle wall for which a detailed flow-field survey had previously been made by pitot and static pressure measurements.

A schematic representation of the laser velocimeter system employed in the study is shown in the diagram. The optical arrangement was of the standard "dual scatter" or "fringe mode" type with forward-scatter light collection. The velocity component that is sensed with this system lies in the plane formed by the two

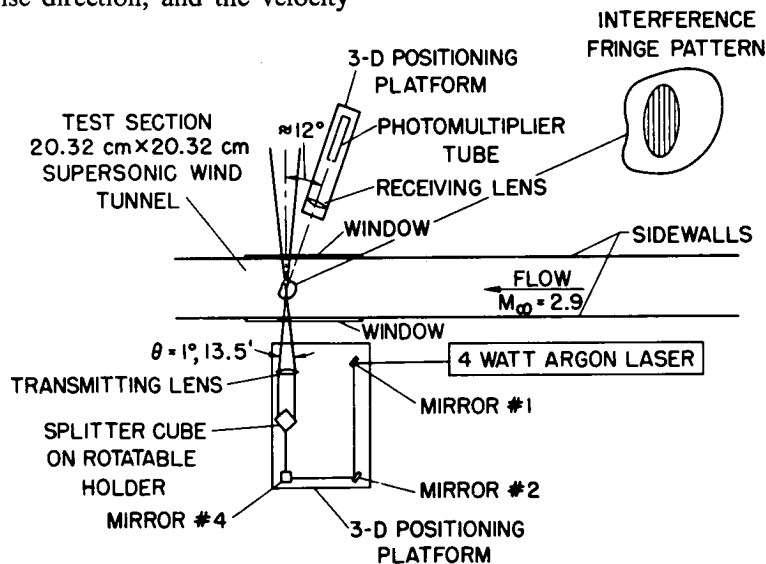

correlation $\overline{u'v'}$ can be measured in high-speed compressible flows by laser velocimetry.

The study was conducted in a 20- x 20-cm supersonic blowdown wind tunnel at a free-stream Mach number of 2.9, a stagnation pressure and temperature of 6.8 atm and 291°K, respectively, and a free-

incident laser beams and is perpendicular to their bisector. Thus, by simply rotating the splitter cube, various sensitivities to u and v with the attendant insensitivity to the w components can be obtained (u =velocity component parallel to free stream velocity, v =velocity component normal to upper wind

(continued overleaf)

tunnel wall, w =transverse velocity component). The Reynolds stress term, $\overline{u'v'}$, was determined by taking measurements with the laser beams oriented at $+45^\circ$ and -45° with respect to the streamwise direction.

Single-particle, time-domain signal processing was employed which enabled the measurements to be made at the very low particle concentrations naturally present in the flow (estimated to be submicron in size). For each measurement station and laser beam orientation, several hundred instantaneous velocity measurements were obtained from which the turbulence quantities of interest were calculated by statistical methods.

The laser velocimeter results were compared and found to be consistent with those obtained with conventional measurement techniques and existing compressible boundary layer theory. Hence, for the first time, turbulence information at supersonic speeds, including the $\overline{u'v'}$ correlation, has been successfully obtained in a compressible boundary layer with a laser system.

Reference:

Johnson, D. A.: Laser Velocimeter Mean and Fluctuation Velocity Measurements of a Mach 2.9 Wind Tunnel Wall Turbulent Boundary Layer. A.I.A.A Journal, vol. 12, no. 5, May 1974.

Note:

No additional documentation is available. Specific questions, however, may be directed to:

Technology Utilization Officer
Ames Research Center
Moffett Field, California 94035
Reference B75-10141

Patent status:

NASA has decided not to apply for a patent.

Source: Dennis A. Johnson
Ames Research Center
(ARC-10781)