

# Index to 1981 NASA Tech Briefs

Volume 6, Numbers 1-4

July 1986

N92-70022

Unclass  
0048095

Z9/85

(NASA-TM-89328) INDEX TO 1981 NASA TECH  
BRIEFS, VOLUME 6, NUMBERS 1-4 (NASA) 121 P



Electronic Components and Circuits



Electronic Systems



Physical Sciences



Materials



Computer Programs



Mechanics



Machinery



Fabrication Technology



Mathematics and Information Sciences



Life Sciences

7N-85-TM

NMF-NDNTIS

AVAIL: ISS. ACT. ONLY

SAP \$10.00

48095

P-121

This document was prepared by the NASA Scientific and Technical Information Facility operated for the National Aeronautics and Space Administration by RMS Associates. It is available from the NASA Scientific and Technical Information Facility, P.O. Box 8757, Baltimore, Maryland 21240, at \$10.00 per copy. Make checks payable to "RMS Associates."

# INTRODUCTION

Tech Briefs are short announcements of new technology derived from the research and development activities of the National Aeronautics and Space Administration. These briefs emphasize information considered likely to be transferrable across industrial, regional, or disciplinary lines and are issued to encourage commercial application.

This *Index to NASA Tech Briefs* contains abstracts and four indexes — subject, personal author, originating Center, and Tech Brief number — for 1981 Tech Briefs.

## Availability of NASA Tech Briefs

Distribution of *NASA Tech Briefs*, a bi-monthly free publication, is limited to engineers in U.S. Industry and to other domestic technology transfer agents.

Requests for individual Tech Briefs or for copies of the bi-monthly publication should be addressed to the Manager, Technology Transfer Office, P.O. Box 8757, Baltimore/Washington International Airport, Maryland 21240.

If you are seeking any information on NASA's Technology Utilization Program, its documents and services, please call (301) 859-5300, Ext. 241 or 243.

The January 1976 edition of the *NASA Thesaurus* (NASA SP-7050) is used as the authority for the indexing vocabulary that appears in the subject index. The *NASA Thesaurus* should be consulted in examining the current indexing vocabulary, including associated cross-reference structure. Only the subject terms that have been selected to describe the documents abstracted in this issue appear in the subject index. Copies of the *NASA Thesaurus* may be obtained from the National Technical Information Service at \$35.00 for Volume 1 and \$20.00 for Volume 2.



## Originating Center Prefixes

ARC	Ames Research Center
GSC	Goddard Space Flight Center
HQN	NASA Headquarters
KSC	Kennedy Space Center
LAR	Langley Research Center
LEW	Lewis Research Center
MFS	Marshall Space Flight Center
MSC	Johnson Space Center (formerly Manned Spacecraft Center)
NPO	Jet Propulsion Laboratory/NASA Pasadena Office

# TABLE OF CONTENTS


## Abstract Section

Category 01	Electronic Components and Circuits .....	1
02	Electronic Systems .....	4
03	Physical Sciences .....	6
04	Materials .....	11
05	Life Sciences .....	15
06	Mechanics .....	16
07	Machinery .....	23
08	Fabrication Technology .....	27
09	Mathematics and Information Sciences .....	35

## Indexes

Subject .....	I-1
Personal Author .....	I-27
Originating Center/Tech Brief Number .....	I-37
Tech Brief/Organizing Center Number .....	I-39

# TYPICAL ABSTRACT ENTRY

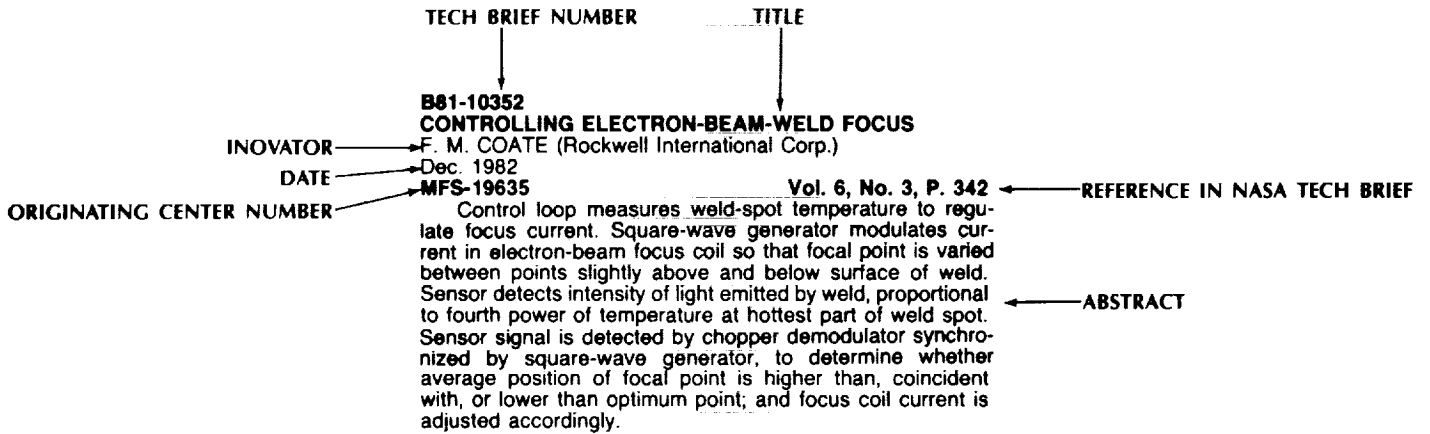







# Index to 1981 NASA Tech Briefs

## July 1986

### Abstract Section

## 01 ELECTRONIC COMPONENTS AND CIRCUITS

**B81-10001**  
**THREE-PHASE POWER FACTOR CONTROLLER**  
F. J. NOLA  
Sep. 1982  
**MFS-25535**

**Vol. 6, No. 1, P. 3**

Three-Phase Power-Factor Controller develops a control signal for each motor winding. As motor loading decreases, rms value of applied voltage is decreased by feedback-control circuit. Power consumption is therefore lower than in unregulated operation. Controller employs phase detector for each of three phases of delta-connected induction motor. Phase-difference sum is basis for control.

**B81-10002**  
**LOAD-RESPONSIVE MOTOR CONTROLLER**  
T. M. EDGE  
Sep. 1982  
**MFS-25560**

**Vol. 6, No. 1, P. 4**

New circuit controls voltage applied to a three-phase induction motor in response to magnitude of current, so as to reduce power consumption when the motor is idling or operating at less than full load. Control circuit decreases rms applied voltage to match decreases in motor load over entire torque range. This considerably decreases power consumption in motors operating at a fraction of their rated torques.

**B81-10003**  
**POWER-FACTOR CONTROLLER WITH REGENERATIVE BRAKING**  
F. J. NOLA  
Sep. 1982  
**MFS-25477**

**Vol. 6, No. 1, P. 5**

Modified power-factor motor-control circuit operates motor as a phase-controlled generator when load attempts to turn at higher than synchronous speed. An induction motor is required to act at times as a brake. Circuit modification allows power-factor controller to save energy in motoring mode and convert automatically to an induction-generator controller in generating, or braking, mode.

**B81-10004**  
**COMPACT DUAL-MODE MICROWAVE ANTENNA**  
K. L. CARR (Microwave Associates, Inc.)  
Sep. 1982  
**LAR-12784**

**Vol. 6, No. 1, P. 6**

Compact dual-mode antenna, 3.66 cm wide by 1.83 cm thick is used both for heating and thermographic detection of tumors in cancer research. Temperature sensor

operates independently or simultaneously with heater. Antenna includes 1.6-GHz transmitter and 4.76-GHz receiver. Strip heater between antennas controls temperature of device. Maximum power output is 25 W.

**B81-10005**  
**RESISTORS IMPROVE RAMP LINEARITY**  
L. L. KLEINBERG  
Sep. 1982  
**GSC-12635**

**Vol. 6, No. 1, P. 7**

Simple modification to bootstrap ramp generator gives more linear output over longer sweep times. New circuit adds just two resistors, one of which is adjustable. Modification cancels nonlinearities due to variations in load on charging capacitor and due to changes in charging current as the voltage across capacitor increases.

**B81-10006**  
**SPIKE-FREE AUTOMATIC LEVEL CONTROL**  
P. C. TOOLE and D. MCCARTHY (Planning Research Corp.)  
Sep. 1982  
**KSC-11170**

**Vol. 6, No. 1, P. 8**

New automatic-level-control circuit protects against signal 'overshoot.' Zener diodes and series capacitors prevent voltage spikes (caused by sudden increase in input level) from appearing at output. When spike voltage drops below breakdown voltage of Zener diodes, they turn off. Initial output level is determined by Zener breakdown voltage and capacitance of series capacitor.

**B81-10007**  
**IMPROVED MODEL FOR MOS BREAKDOWN**  
S. P. LI (CALTECH) and J. MASERJIAN (CALTECH)  
Sep. 1982  
**NPO-14850**

**Vol. 6, No. 1, P. 8**

With an improved model, accelerated high-field tests can be used to predict gate-oxide breakdown in metal-oxide-semiconductor (MOS) structures. Principal mechanism in MOS breakdown is mobile-ion emission from metal/oxide interface, which occurs during application of positive gate-bias field. Breakdown is related to clustering of emitted ions at localized defect sites in oxide/silicon interface. Using new model to interpret data, tests that normally take several weeks at low fields to accumulate sufficient statistics can be completed in only a few hours at high fields.

**B81-10008**  
**ROTARY TRANSFORMER SEALS POWER IN**  
P. A. STUDER and J. PAULKOVICH  
Sep. 1982  
**GSC-12595**

**Vol. 6, No. 1, P. 9**

Rotary transformer originally developed for spacecraft transfers electrical power from stationary primary winding to rotating secondary without sliding contacts and very little leakage of electromagnetic radiation. Transformer has two

## 01 ELECTRONIC COMPONENTS AND CIRCUITS

stationary primary windings connected in parallel. Secondary, mounted on a shaft that extends out of housing, rotates between two windings of primary. Shaft of secondary is composed of electrically conducting inner and outer parts separated by an insulator. Electrical contact is made from secondary winding, through shaft, to external leads.

### **B81-10009 MULTILAYER, FRONT-CONTACT GRID FOR SOLAR CELLS**

A. G. MILNES (Carnegie Mellon Univ.) and A. FLAT (Carnegie Mellon Univ.)  
Sep. 1982

**LAR-12613** Vol. 6, No. 1, P. 10

Proposed multilayer, front-contact grid structure for solar cells optimizes collection of photogenerated current with minimum power losses. It is constructed of several layers of conducting grids. With multilayer concept, peak efficiency can occur at higher output-power levels. Because of this, higher solar concentrations can be applied to solar-cell arrays.

### **B81-10010 LOG-OUTPUT SIGNAL PROCESSOR SCANS EIGHT DECADES**

J. L. HAYDEN (Martin Marietta Corp.)  
Sep. 1982

**ARC-11293** Vol. 6, No. 1, P. 11

Processor has automatic range switching and continuous readout over eight decades. Comparator output switches logarithmic converter to detector of interest and enables blinder grid to protect more-sensitive detector when operating in high-input range. Could be used to process any wide-varying signal that is to be read on a limited-range recording device such as a strip-chart recorder.

### **B81-10011 HIGH-FREQUENCY GATED OSCILLATOR**

C. A. BERARD (RCA Corp.)  
Sep. 1982

**MSC-18634** Vol. 6, No. 1, p. 12

New gated oscillator generates bursts of high-frequency sine waves, square waves, and triangular waves in response to control signals. Each burst starts at zero phase, with tight tolerances on signal amplitude and frequency. Frequencies in megahertz range are made possible by using high-speed comparators and high-speed flip-flop as fast-response threshold detector.

### **B81-10119 SOLAR-ARRAY SIMULATOR**

M. C. WRIGHT (Lockheed Corp.)  
Nov. 1982

**MSC-18864** Vol. 6, No. 2, P. 123

A convenient solar-array simulator has been built for testing systems powered by solar cells. Built for evaluating power extension package in Space Shuttle, the circuit produces the V/I curves of photocell sources; even duplicating transient behavior under partial illumination associated with morning and evening penumbra.

### **B81-10120 HIGH-EFFICIENCY DC/DC CONVERTER**

J. STURMAN  
Nov. 1982

**LEW-13486** Vol. 6, No. 2, P. 124

High-efficiency dc/dc converter has been developed that provides commonly used voltages of plus or minus 12 Volts from an unregulated dc source of from 14 to 40 Volts. Unique features of converter are its high efficiency at low power level and ability to provide output either larger or smaller than input voltage.

### **B81-10121 WIRE-WRAP CHATTER DETECTOR**

G. Z. FISCH (CALTECH) and T. J. BORDEN (CALTECH)

Nov. 1982  
**NPO-15290**

Vol. 6, No. 2, P. 125

Monitoring circuit responds to changes in resistance as little as 0.1 ohm. Has been used to detect defective wire-wrap connections during thermal and vibration tests. Defect is indicated to operator by light-emitting diode and by increase in count on a two-digit display.

### **B81-10122 ELECTRONICALLY CALIBRATABLE CLOCK**

J. R. DAVIDSON and J. S. HEYMAN  
Nov. 1982

**LAR-12654** Vol. 6, No. 2, P. 126

Calibration circuit corrects apparent clock rate (ACR) of digital clock without altering oscillator frequency. Calibration circuit does not require iterative adjustments to reference frequency or rate, and correction to ACR is controlled by pushbuttons. Technique is applicable to any timer or counter that counts up to predetermined number then outputs a pulse to a readout register or to control another device.

### **B81-10123 LOAD PULSER IS SPARKLESS**

F. D. WASHBURN (Boeing Services International, Inc.)  
Nov. 1982

**KSC-11199** Vol. 6, No. 2, P. 127

Electronic load pulser uses silicon-controlled rectifier (SCR) and timer to open and close circuit periodically. It replaces a motor-driven mechanical switch, which causes sparks and is unsafe in hazardous environments. Device should find applications in chemical petroleum, and transportation industries.

### **B81-10124 ALTERNATING-CURRENT MOTOR DRIVE FOR ELECTRIC VEHICLES**

S. KRAUTHAMER (CALTECH) and W. E. RIPPEL (CALTECH)

Nov. 1982

**NPO-14768 AND NPO-14830** Vol. 6, No. 2, P. 128

New electric drive controls speed of a polyphase as motor by varying frequency of inverter output. Closed-loop current-sensing circuit automatically adjusts frequency of voltage-controlled oscillator that controls inverter frequency, to limit starting and accelerating surges. Efficient inverter and ac motor would give electric vehicles extra miles per battery charge.

### **B81-10125 TWO-STAGE LINEARIZATION CIRCUIT**

G. C. WALDECK (Sperry Flight Systems) and J. B. DENDY (Sperry Flight Systems)

Nov. 1982

**LAR-12577** Vol. 6, No. 2, P. 129

High accuracy is obtained by combining analog and digital corrections. Proximity-sensor linearization circuit has two stages. First-stage linearization is accurate to about 3 percent; accuracy of final output is better than 0.5 percent. By modifying contents of the Programmable Read-Only Memory (PROM), circuit can also be used to derive a nonlinear output.

### **B81-10126 LIGHTWEIGHT, LOW-LOSS DC TRANSDUCER**

S. NAGANO (CALTECH), T. KOERNER (CALTECH), P. BRISENDINE (CALTECH), H. WEINER (CALTECH), and R. DETWILER (CALTECH)

Nov. 1982

**NPO-14618** Vol. 6, No. 2, P. 130

Direct current is measured by lightweight, magnetically coupled transducer that weighs only 4 grams, without actually being wired into circuit under test. Miniature dc transducer has five windings: 2 for ac excitation inputs, 2 for dc control inputs, and 1 for feedback. Wire gages are selected for minimum size and weight. Size and number of

turns of dc windings are selected according to dc current range to be measured.

**B81-10248  
WIDEBAND AMPLIFIER WITH SUBPICOSECOND STABILITY**

V. S. REINHARDT and W. A. ADAMS

Dec. 1982

**GSC-12646**

**Vol. 6, No. 3, P. 247**

RF circuit offers high isolation as well as phase stability. For temperature stability, all circuit components are contained in closed metal housing; packages of active circuit elements are embedded in common heat sink. Provisions not only slow down effect of ambient temperature changes on individual devices but also reduce temperature differences across devices so that differential temperature effects vanish.

**B81-10249  
BOLTLESS SEAL FOR ELECTRONIC HOUSINGS**

R. H. DAWE (CALTECH) and J. T. EVANS (CALTECH)

Dec. 1982

**NPO-14818**

**Vol. 6, No. 3, P. 248**

Spring clips seal housings for electronic circuitry, preventing electromagnetic interference from entering or leaving housings. Clips also keep dust out of housing. Since no bolts are used, housing can be opened quickly; unlike bolts, clips can be used on thin-walled housing. Seal was developed for an X-band array amplifier.

**B81-10250  
UNEQUAL-SPLIT STRIP-LINE POWER DIVIDER**

M. C. BAILEY

Dec. 1982 NASA TM-81870(N80-31684/NSP)

**LAR-12797**

**Vol. 6, No. 3, P. 249**

Simple technique for designing strip-line or microstrip power dividers can be used for unequal, but inphase power split. Technique allows power splits ranging from equal to as large as required, with advantage of using same line impedances and line spacings for all splits. Output power ratio is determined by selecting location of input port in manner analogous to tap point for electric-power transformer.

**B81-10251  
HIGH-DENSITY TERMINAL BOX FOR TESTING WIRE HARNESS**

W. B. PIERCE (CALTECH) and W. G. COLLINS (CALTECH)

Dec. 1982

**NPO-15147**

**Vol. 6, No. 3, P. 250**

Compact terminal box provides access to complex wiring harnesses for testing. Box accommodates more than twice as many wires as previous boxes. Box takes in wires via cable connectors and distributes them to contacts on box face. Instead of separate insulated jacks in metal face panel, box uses pairs of small military-standard metal sockets in precision-drilled plastic panel. Shorting plug provides continuity for wires when not being tested.

**B81-10252  
FAILURE DETECTOR FOR POWER-FACTOR CONTROLLER**

F. J. NOLA

Dec. 1982

**MFS-25607**

**Vol. 6, No. 3, P. 251**

New protective circuits have been developed for power-factor ac motor controllers. Circuits prevent direct current and consequent motor heating that would normally result from failure of solid-state switch in controller. Single-phase power-factor controller with short detector compensates for short-circuit failure in either direction by applying full power to motor. Controller with open detector compensates for open-circuit failure in either direction by turning off power to motor.

**B81-10253  
PRECISE PHASE COMPARATOR FOR NEARLY EQUAL FREQUENCIES**

V. S. REINHARDT and W. A. ADAMS

Dec. 1982

**GSC-12645**

**Vol. 6, No. 3, P. 252**

New circuit precisely compares phases of two RF signals nearly equal in frequency, such as two hydrogen-maser frequency standards. Measuring circuit minimizes interactions between two sources. Also stabilized against thermal effects and against noise that could produce erroneous readings. Heat sinking, buffer amplifiers, and low-noise zero-crossing detector make picosecond precision possible.

**B81-10254  
FLASHLAMP DRIVER FOR QUASI-CW LASER PUMPING**

K. E. LOGAN (International Laser Systems, Inc.)

Dec. 1982

**GSC-12566**

**Vol. 6, No. 3, P. 253**

Circuit maintains constant high-current level through lamp while lighted and a low simmer current through lamp while not lighted. Lamp current is switched between these two modes by transistor; transistor is therefore called current-mode switch. Stable light pulses are emitted from flashlamp when monostable multivibrator goes high, in part because unsaturated transistor switch has negative feedback control that keeps lamp current constant.

**B81-10255  
LOW-NOISE BAND-PASS AMPLIFIER**

L. KLEINBERG

Dec. 1982

**GSC-12567**

**Vol. 6, No. 3, P. 254**

Circuit uses standard components to overcome common limitation of JFET amplifiers. Low-noise band-pass amplifier employs JFET and operational amplifier. High gain and band-pass characteristics are achieved with suitable choice of resistances and capacitances. Circuit should find use as low-noise amplifier, for example as first stage instrumentation systems.

**B81-10256  
ARC-FREE HIGH-POWER DC SWITCH**

W. N. MILLER (Rockwell International Corp.) and O. E. GRAY (Rockwell International Corp.)

Dec. 1982

**MSC-20091**

**Vol. 6, No. 3, P. 255**

Hybrid switch allows high-power direct current to be turned on and off without arcing or erosion. Switch consists of bank of transistors in parallel with mechanical contacts. Transistor bank makes and breaks switched circuit; contacts carry current only during steady-state 'on' condition. Designed for Space Shuttle orbiter, hybrid switch can be used also in high-power control circuits in aircraft, electric autos, industrial furnaces, and solar-cell arrays.

**B81-10257  
POWER-MOSFET VOLTAGE REGULATOR**

W. N. MILLER (Rockwell International Corp.) and O. E. GRAY (Rockwell International Corp.)

Nov. 1982

**MSC-20059**

**Vol. 6, No. 3, P. 256**

Ninety-six parallel MOSFET devices with two-stage feedback circuit form a high-current dc voltage regulator that also acts as fully-on solid-state switch when fuel-cell output falls below regulated voltage. Ripple voltage is less than 20 mV, transient recovery time is less than 50 ms. Parallel MOSFET's act as high-current dc regulator and switch. Regulator can be used wherever large direct currents must be controlled. Can be applied to inverters, industrial furnaces photovoltaic solar generators, dc motors, and electric autos.

**B81-10258  
MODULAR AMPLIFIER/ANTENNA ARRAYS**

E. F. BELOHOUBEK (RCA Corp.)

## 02 ELECTRONIC SYSTEMS

Dec. 1982  
MSC-18981

Vol. 6, No. 3, P. 257

Two proposed solar-powered microwave transmitter modules would include amplifiers in direct contact with antenna dipoles so that metalization of dipoles serves as heat-dissipation areas for amplifiers. In integrated energy converter (solar radiation to microwaves), solar cells feed dc power directly to microwave amplifier/antenna modules. Antenna elements also serve as heat sinks for amplifiers.

## 02 ELECTRONIC SYSTEMS

B81-10012

OPTICAL MEMORY STORES 10 12SUP. BITS

Innovator Not Given(Harris Corp.) Sep. 1982

MFS-25456

Vol. 6, No. 1, P. 15

Optical Mass Memory has separate recorder (write) and reproducer (read) modules. Data are recorded on fiches and stored in a carousel. Fiche is retrieved from carousel by transporter in under 10 seconds. Input to optical memory is standard TV camera. TV monitor at memory output displays stored video images when they are retrieved from fiches. Input to the optical memory can also be taken from pseudorandom sequence generator.

B81-10013

NEW ALGORITHMS MANAGE FOURFOLD REDUNDANCY

H. C. GELDERLOOS (Honeywell, Inc.)

Sep. 1982

MSC-18498

Vol. 6, No. 1, P. 16

Redundant sensors, actuators, and computers improve reliability of complex control systems, such as those in nuclear powerplants and aircraft. If one or more redundant elements fail, another takes over so that normal operation is not interrupted. Quad selection filter rejects data from null-failed and hardover-failed and hardover-failed units.

B81-10014

GRAPHICS-SYSTEM COLOR-CODE INTERFACE

J. S. TULPPO (Sperry Rand Corp.)

Sep. 1982

LAR-12646

Vol. 6, No. 1, P. 17

Circuit originally developed for a flight simulator interfaces a computer graphics system with color monitor. Subsystem is intended for particular display computer (AGT-130, ADAGE Graphics Terminal) and specific color monitor (beam penetration tube--Penetron). Store-and-transmit channel is one of five in graphics/color-monitor interface. Adding 5-bit color code to existing graphics programs requires minimal programing effort.

B81-10015

SOLAR-POWERED SUPPLY IS LIGHT AND RELIABLE

A. E. WILLIS, H. GARRETT, and J. MATHENEY

Sep. 1982

MFS-25430

Vol. 6, No. 1, P. 18

DC supply originally intended for use in solar-powered spacecraft propulsion is lightweight and very reliable. Operates from 100-200 volt output of solar panels to produce 11 different dc voltages, with total demand of 3,138 watts. With exception of specially wound inductors and transformers, system uses readily available components.

B81-10016

IMPROVED PHASE-LOCK DETECTOR

L. M. BRONSTEIN

Sep. 1982

MSC-18797

Vol. 6, No. 1, P. 19

Single detection channel is used alternately by in-phase (I) and quadrature (Q) signals, under control of a dither switch. By eliminating errors caused by unbalance of the I and Q channels, this dither-balanced detector reduces false locking. Can be used to improve detection probability and reduce false alarm probability for any loop that must acquire signal with low signal-to-noise ratio.

B81-10017

ADVANCED TECHNOLOGIES FOR COMMERCIAL AIRPLANES

Innovator Not Given(Lockheed Aircraft Co. Airsearch Manufacturing Co. Honeywell, Inc.) Sep. 1982 SEE ALSO NASA CR-163576(N80-32375/NSP)

MSC-18982

Vol. 6, No. 1, P. 20

263-page report addresses what advanced electrical and electronic spacecraft technologies can be applied in commercial airplanes. Report discusses a study in which technologies used in the Space Shuttle were evaluated for their potential in commercial transports. Describes new technologies, airplanes, tradeoffs and methods of evaluation. Concludes that major beneficiary would be an advanced wide-body transport (500 passenger).

B81-10018

SHORT-CIRCUITED POWER NETWORKS

T. S. OEPOMO (Rockwell International Corp.)

Sep. 1982

MSC-18977

Vol. 6, No. 1, P. 20

NASA computer program automatically analyzes power-system networks under faulted conditions. Program is general enough to calculate single-line to ground faults and three-phase-to-ground faults. Several novel programing techniques automate analysis while reducing computing time and storage requirements. Program is written in FORTRAN IV for batch execution.

B81-10127

IMPACT-ENERGIZED TRANSMITTER

P. H. J. BROUSSARD

Nov. 1982

MFS-25379

Vol. 6, No. 2, P. 131

Impact-induced strain in piezoelectric ceramic could power a short-range transmitter. Proposed impact-energized radio transmission would eliminate the need for external power sources for batteries, which are often short lived and impractical to replace under operating conditions. Piezoelectric ceramic attached to impact head supplies energy to drive resonant circuit and antenna. Receiver tuned to resonant frequency receives short pulse.

B81-10128

STUDY OF TWO DIGITAL CHARGE-COUPLED DEVICES

D. D. WILSON (Martin Marietta Corp.) and V. F. YOUNG (Martin Marietta Corp.)

Nov. 1982 See Also NASA CR-161630(N81-15193/NSP)

MFS-25606

Vol. 6, No. 2, P. 131

Recent report describes reliability study of two charge-coupled-device (CCD) shift registers. Major objective of study was to establish methodology for selecting, testing, screening, derating and applying CCD's. Includes a discussion of CCD structures and operating principles. Characteristics of SCCD and BCCD types are compared.

B81-10129

TESTING PATCHBOARD CONNECTIONS AUTOMATICALLY

J. W. BRUNSON (IN-TEL-12)

Nov. 1982

KSC-11065

Vol. 6, No. 2, P. 135

Computer controlled patchboard verifier sequentially scans each pin on patchboard and notes its connection, if any, to all of other pins. Connection pattern is automatically compared with one known to be correct. Entire

patchboard of 1,632 connections can be verified in about a minute.

**B81-10130**  
**ARRAY PROCESSOR HAS POWER AND FLEXIBILITY**  
 G. H. BARNES (Burroughs Corp.), S. F. LUNDSTROM (Burroughs Corp.), and P. E. SHAFFER (Burroughs Corp.)  
 Nov. 1982

**ARC-11292** Vol. 6, No. 2, P. 136  
 Proposed processor architecture would have flexibility of a multi-processor and computational power of a lockstep array. Using an efficient interconnection network, it accommodates a large number of individual processors and memory modules. Array architecture would be suitable for very large scientific simulation problems and other applications.

**B81-10131**  
**AUTOMATICALLY RECONFIGURABLE COMPUTER**  
 Innovator Not Given (Hughes Aircraft Co.) Nov. 1982  
**MFS-25455** Vol. 6, No. 2, P. 137

Modular system changes its architecture to maximize either reliability or capacity. Reconfigurable computer is assembled from four kinds of modules: organizer/scheduler, memory, input/output processor, and central processor. Reconfiguration is initiated by a signal from a control panel or by fault interrupt from one of the modules.

**B81-10132**  
**FAST HOLOGRAPHIC COMPARATOR**  
 D. W. VAHEY (Batelle Columbus Laboratories)  
 Nov. 1982 See Also NASA CR-3151(N79-30010/NSP)  
**LAR-12509** Vol. 6, No. 2, P. 138

Comparator is integrated-optical system constructed on a LiNbO<sub>3</sub> sub. waveguide chip. Only the laser, lens and detector are external to chip. Aluminized surface gratings serve as input coupler and beam splitter. Light beams striking edges are returned by ordinary total internal reflection. Three operating modes are possible: A 'screening' mode, an 'identification' mode and a novel 'self-subtraction' mode.

**B81-10133**  
**CONTROLLER REGULATES AUXILIARY SOURCE FOR SOLAR POWER**  
 F. J. NOLA  
 Nov. 1982  
**MFS-25637** Vol. 6, No. 2, P. 139

Load driven by two motors continuously draws power from a varying source (solar cells) and steady auxiliary source (utility company). Power-factor controller apportions electrical load between two sources to maintain motor speed. This novel application of power-factor controller would regulate input of auxiliary energy to a solar-powered system in response to availability of Sunlight.

**B81-10134**  
**IMPROVED PARALLEL-ACCESS ALINEMENT NETWORK**  
 G. H. BARNES (Burroughs Corp.)  
 Nov. 1982

**ARC-11155** Vol. 6, No. 2, P. 140  
 Network channels elements of data array from memory ports to processor ports using a hardware-generated binary control work. Depending on control work selected, data may be shifted in increments or transposed in each of three levels to reach appropriate processing ports. A similar arrangement with reversed wiring is used to return data from processing ports to respective memory modules. Selection gate used in network incorporates two AND gates feeding an OR gate. In some logic families the OR gate may be fabricated as a 'wired OR'.

**B81-10135**  
**PARALLEL-ACCESS ALINEMENT NETWORK USING BARREL SWITCHES**  
 G. H. BARNES (Burroughs Corp.)  
 Nov. 1982

**ARC-11162** Vol. 6, No. 2, P. 141  
 Practical version of parallel-access alignment network utilizes two barrel switches for interfacing N parallel memory modules with N parallel processing elements. Switches are interconnected where 17 memory ports (MP's) are connected to 17 processor ports (PP's). Network uses two electronic barrel switches to direct data flow in parallel data-processing system. Each switch can shift a multibit parallel input a predetermined number of places to left or right, end off, or end around in one clock-pulse.

**B81-10259**  
**LINE REPLACEABLE UNIT ANALYSIS**  
 T. OEPOMO (Rockwell International Corp.) and T. V. PROUTY (Rockwell International Corp.)  
 Dec. 1982

**MSC-20183** Vol. 6, No. 3, P. 257  
 Shuttle LRU (Line Replaceable Unit) Analysis Program (SLAP) aids in evaluation of LRU interface voltages in Shuttle orbiter electrical system. Slap includes reduced model of Shuttle LRU circuit. Although primarily intended for analysis of Shuttle LRU's SLAP could be adapted for voltage analysis in other situations.

**B81-10260**  
**METHOD FOR CANCELING IONOSPHERIC DOPPLER EFFECT**  
 R. F. C. VESSOT (Smithsonian Institution)  
 Dec. 1982

**MFS-25599** Vol. 6, No. 3, P. 261  
 Unified transponder system with hydrogen-maser oscillators at both stations can compensate for both motional and ionospheric components of Doppler shift. Appropriate choices of frequency shift in output of mixer m3. System exploits proportionality between dispersive component of frequency shift and reciprocal of frequency to achieve cancellation of dispersive component at output.

**B81-10261**  
**PROGRAMABLE INTERFACE HANDLES MANY PERIPHERALS**  
 M. JASINSKI (IBM Corp.)  
 Dec. 1982  
**KSC-11132** Vol. 6, No. 3, P. 262

Microprocessor-based interface simplifies interconnection of peripheral device with common memory of network of minicomputers. Interface consists of microprocessor, bidirectional port that connects to common memory, bidirectional port that connects to user-selected peripheral, and asynchronous serial communications port. Programmable interface is based around 6800 microprocessor. It is assembled from 90 integrated circuits.

**B81-10262**  
**PROCESSING PCM DATA IN REAL TIME**  
 T. L. WISSINK (IBM Corp.)  
 Dec. 1982

**KSC-11131** Vol. 6, No. 3, P. 263  
 Novel hardware configuration makes it possible for Space Shuttle launch processing system to monitor pulse-code-modulated data in real time. Using two microprogrammable 'option planes,' incoming PCM data are monitored for changes at rate of one frame of data (80 16-bit words) every 10 milliseconds. Real-time PCM processor utilizes CPU in mini-computer and CPU's in two option planes.

**B81-10263**  
**ONE WAY OF TESTING A DISTRIBUTED PROCESSOR**  
 R. EDSTROM (IBM Corp.) and D. KLECKNER (IBM Corp.)  
 Dec. 1982  
**KSC-11123** Vol. 6, No. 3, P. 263

Launch processing for Space Shuttle is checked out, controlled, and monitored with new system. Entire system can be exercised by two computer programs—one in master console and other in each of operations consoles. Control program in each operations console detects change in status

## 02 ELECTRONIC SYSTEMS

and begins task initiation. All of front-end processors are exercised from consoles through common data buffer, and all data are logged to processed-data recorder for posttest analysis.

### **B81-10264 ANALYZING MULTIRATE-SAMPLED SYSTEMS**

N. HENDRIX  
Dec. 1982

**MFS-25541** Vol. 6, No. 3, P. 264

New method available for monitoring stability of system on basis of data sampled at multiple rates--in particular, at two rates, one of which is twice frequency of other. Method is called Multirate Matrix Frequency Response (MMFR) analysis. MMFR was used in Space Shuttle to evaluate effect of decreasing sample rate of error loop in ascent-phase digital autopilot. Should also be useful to designers of other control systems and to structural, civil, and mechanical engineers for structure and vibration analysis.

## 03 PHYSICAL SCIENCES

### **B81-10019 BEAM SPLITTER INTENSITIES ARE PRESELECTED**

W. CAMPBELL and R. B. OWEN  
Sep. 1982

**MFS-25312** Vol. 6, No. 1, P. 23

New beam splitter is a block of optically clear material with two parallel polish faces. Some of area of one surface is coated with totally reflecting layer, which may be metal or dielectric. On opposite surface, a metal coating of stepped thickness offers a different reflectivity at each step. Width and spacing of reflecting zones are chosen to accommodate angle of spacing of incidence of input beam and desired spacing of output beams.

### **B81-10020 SEQUENTIAL-IMPULSE GENERATOR USES FIBER-OPTICS**

L. C. YANG (CALTECH)  
Sep. 1982

**NPO-14939** Vol. 6, No. 1, P. 24

Light pulse from a ruby or neodymium-glass laser enters miniature optics of repetitive-detonation apparatus. Traveling along a bundle of optical fibers, light strikes laser-sensitive microdetonator and charge explodes. Apparatus then advances next charge in train into position. Possible applications of sequential-impulse generator are in creating shock waves for aerodynamics research and in generating electrical power by magnetohydrodynamics.

### **B81-10021 NEW ENERGY-SAVING TECHNOLOGIES USE INDUCTION GENERATORS**

F. NOLA  
Sep. 1982

**MFS-25513** Vol. 6, No. 1, P. 25

Two energy-saving technologies tested recently at Marshall Space Flight Center use an induction motor operated in reverse (as an induction generator). In the first, energy ordinarily dissipated during load testing of machinery is recovered and returned to powerline. In the second, efficiency of wind-driven induction generator is improved, and useful range of windspeed is broadened. Both technologies take advantage of ac voltage developed across terminals of an induction motor when rotated at higher than-synchronous speed in the direction it normally turns when power is applied.

### **B81-10022 TEMPERATURE CONTROLLER FOR A SOLAR FURNACE**

R. R. HALE (CALTECH) and A. R. MCDUGAL (CALTECH)  
Sep. 1982

**NPO-15388** Vol. 6, No. 1, P. 26

Relatively-simple movable shield has been suggested for controlling temperature of solar furnace. Temperature modulator can be set to have collected solar energy fully 'on', fully 'off' or any intermediate level. Parabolic mirror concentrates Sunlight into receiver. Shade plate that blocks insolation at back of receiver produces shade zone in center of collector. No radiation is returned to receiver from shade zone; only rays falling on other areas of reflecting surface are directed back toward receiver.

### **B81-10023 BATTLE KEEPS SOLAR ENERGY IN RECEIVER**

A. R. MCDUGAL (CALTECH) and R. R. HALE (CALTECH)  
Sep. 1982

**NPO-15387** Vol. 6, No. 1, P. 27

Mirror structure in solar concentrator reduces heat loss by reflection and reradiation. Baffle reflects entering rays back and forth in solar-concentrator receiver until they reach heat exchanger. Similarly, infrared energy reradiated by heat exchanger is prevented from leaving receiver. Surfaces of baffle and inside wall of receiver are polished and highly reflective at solar and infrared wavelengths.

### **B81-10024 PYRAMIDAL-REFLECTOR SOLAR HEATER**

Innovator Not Given(Wormser Scientific Corp.) Sep. 1982 See also DOE/NASA CR-161202(N80-33865/NSP)

**MFS-25571** Vol. 6, No. 1, P. 27

Motor-driven reflector compensates for seasonal changes in Sun's altitude. System has flat-plate absorbers mounted on north side of attic interior. Skylight window on south-facing roof admits Sunlight into attic, lined with mirrors that reflect light to absorbers. Reflectors are inner surfaces of a pyramid lying on its side with window at its base and absorber plates in a cross-sectional plane near its apex.

### **B81-10025 SOLAR WATER HEATER INSTALLATION PACKAGE**

Innovator Not Given(Elcam, Inc.) Sep. 1982 See Also DOE/NASA CR-161562(N80-33866/NSP)

**MFS-25573** Vol. 6, No. 1, P. 28

A 48-page report describes water-heating system, installation (covering collector orientation, mounting, plumbing and wiring), operating instructions and maintenance procedures. Commercial solar-powered water heater system consists of a solar collector, solar-heated-water tank, electrically heated water tank and controls. Analysis of possible hazards from pressure, electricity, toxicity, flammability, gas, hot water and steam are also included.

### **B81-10026 MOTEL DHW RETROFIT--DALLAS, TEXAS**

Innovator Not Given(Day's Inn of America, Inc.) Sep. 1982 See Also DOE/NASA CR-161569(N81-10524/NSP)

**MFS-25580** Vol. 6, No. 1, P. 28

Solar-energy system designed to provide 65% of total domestic-hot-water (DHW) demands for 100-room motel in Dallas, Texas is subject of a report now available. System is retrofit, and storage-tank size was limited to 1,000 gallons (3,785 l) by size of room where it is located.

### **B81-10027 SOLAR HOT WATER FOR MOTOR INN--TEXAS CITY, TEXAS**

Innovator Not given(LaQuinta Motor Inns, Inc.) Sep. 1982 See Also DOE/NASA CR-261605(N81-15460/NSP)

**MFS-25614** Vol. 6, No. 1, P. 29

Final report describes solar domestic-hot-water heater installation at LaQuinta Motor Inn, Texas City, Texas which furnished 63% of total hot-water load of new 98-unit inn.

Report presents a description of system, drawings and photographs of collectors, operations and maintenance instructions, manufacturers' specifications for pumps, and an engineer's report on performance.

**B81-10028  
SOLAR-ENERGY SYSTEM FOR A COMMERCIAL BUILDING--TOPEKA, KANSAS**

Innovator Not Given(Kaw Valley State Bank and Trust Co.) Sep. 1982 See Also DOE/NASA CR-161595(N81-14393/NSP)

**MFS-25609** Vol. 6, No. 1, P. 29

Report describes a solar-energy system for space heating, cooling and domestic hot water at a 5,600 square-foot (520-square-meter) Topeka, Kansas, commercial building. System is expected to provide 74% of annual cooling load, 47% of heating load, and 95% of domestic hot-water load. System was included in building design to maximize energy conservation.

**B81-10029  
SOLAR-HEATED WATER AT A MOTEL--MOBILE, ALABAMA**

Innovator Not Given(LaQuinta Motors Inns, Inc.) Sep. 1982 See also DOE/NASA CR-161587(N81-13461/NSP)

**MFS-25603** Vol. 6, No. 1, P. 29

Solar-assisted hot-water system for a new 122-unit motor inn in Mobile, Alabama, generates more than half the energy needed for hot-water heating at motel each year. System consists of 93 flat-plate collectors, 2,500 gallon (9,500 l) insulated storage tank located outdoors, heat exchangers and controls. Electronic thermometers, measuring the temperatures at 22 locations monitor system performance.

**B81-10030  
SOLAR-HEATED PUBLIC LIBRARY--TROY, OHIO**

Innovator Not Given(Troy-Miami County Public Library Sep. 1982 See Also DOE/NASA CR-161588(N81-12545/NSP)

**MFS-25601** Vol. 6, No. 1, P. 30

Report on installation, operation and performance of a solar-heating system installed at the Troy-Miami County Public Library in Troy, Ohio. Solar retrofit system complements passive solar-energy system and interfaces with existing heat, ventilation and air-conditioning systems.

**B81-10031  
SOLAR-COOLED CLASSROOM BUILDING--COLUMBUS, OHIO**

Innovator Not Given(Columbus Technical Inst.) Sep. 1982 See Also DOE/NASA CR-161589(N81-12544/NSP)

**MFS-25597** Vol. 6, No. 1, P. 30

Advanced, evacuated tubular collectors supply energy for heating and cooling of a university building. Report includes site files, specification references, drawings, and installation, operation and maintenance instructions.

**B81-10032  
SOLAR-HEATED AND COOLED OFFICE BUILDING--COLUMBUS, OHIO**

Innovator Not Given(Columbia Gas System Service Corp.) Sep. 1982 See Also DOE/NASA CR-161603(N81-14394/NSP)

**MFS-25608** Vol. 6, No. 1, P. 30

Final report documents solar-energy system installed in office building to provide space heating, space cooling and domestic hot water. Collectors mounted on roof track Sun and concentrate rays on fluid-circulating tubes. Collected energy is distributed to hot-water-fired absorption chiller and space-heating and domestic-hot-water preheating systems.

**B81-10033  
SOLAR HOT WATER FOR AN INDUSTRIAL LAUNDRY--FRESNO, CALIFORNIA**

Innovator Not Given(ARATEX Services, Inc.) Sep.

1982 See Also DOE/NASA CR-161537(N80-32851/NSP)  
**MFS-25550** Vol. 6, No. 1, P. 31

Final report describes an integrated wastewater-heat recovery system and solar preheating system to supply part of hot-water requirements of an industrial laundry. Large retrofit solar-water-heating system uses lightweight collectors.

**B81-10034  
SOLAR WATER-HEATER DESIGN PACKAGE**

Innovator Not Given(Elcam, Inc.) Sep. 1982 See Also DOE/NASA CR-161558(N80-33867/NSP)

**MFS-25574** Vol. 6, No. 1, P. 31

Information on a solar domestic-hot water heater is contained in 146 page design package. System consists of solar collector, storage tanks, automatic control circuitry and auxiliary heater. Data-acquisition equipment at sites monitors day-by-day performance. Includes performance specifications, schematics, solar-collector drawings and drawings of control parts.

**B81-10035  
ENERGY-SYSTEMS ECONOMIC ANALYSIS**

J. DOANE (Solar Energy Research Institute), M. L. SLONSKI (CALTECH), and C. S. BORDEN (CALTECH)

Sep. 1982

**NPO-15097** Vol. 6, No. 1, P. 32

Energy Systems Economic Analysis (ESEA) program is flexible analytical tool for rank ordering of alternative energy systems. Basic ESEA approach derives an estimate of those costs incurred as result of purchasing, installing and operating an energy system. These costs, suitably aggregated into yearly costs over lifetime of system, are divided by expected yearly energy output to determine busbar energy costs. ESEA, developed in 1979, is written in FORTRAN IV for batch execution.

**B81-10136  
COMPACT ION SOURCE FOR MASS SPECTROMETERS**

V. G. ANICICH (CALTECH) and W. T. J. HUNTRESS (CALTECH)

Nov. 1982

**NPO-14324** Vol. 6, No. 2, P. 145

Cyclotron-resonance device uses miniature components and permanent magnet for small size, low weight, and low cost. Gas molecules are ionized by electrons from hot filament. Magnetic field, acting with electrostatic drift field, causes ions to move in circles with a superimposed drift perpendicular to both fields, toward the exit. Compact source can be used for studying ion-molecule reactions by ion cyclotron-resonance methods in conventional mass spectrometer with either magnetic sector or quadrupole sector.

**B81-10137  
3-D MANIPULATOR FOR MASS SPECTROMETER**

J. C. CIRNER, I. HARDING-BARLOW, and K. G. SNETSINGER

1982

**ARC-11323** Vol. 6, No. 2, P. 146

Small mass-spectrometer specimens are positioned in three dimensions by manipulator that employs two bellows to provide vacuum seal and accommodate movement of specimen holder. Inner bellows and outer bellows accommodate vertical and horizontal motion, respectively. Y-axis movement is in and out of plane of page. Specimen-holder column is hollow so electrical wires can pass through it to specimen.

**B81-10138  
EFFICIENT ENERGY-STORAGE CONCEPT**

L. W. J. BRANTLEY and C. RUPP

Nov. 1982

**MFS-25331** Vol. 6, No. 2, P. 147

Space-platform energy-storage and attitude-stabilization system utilizes variable moment of inertia of two masses attached to ends of retractable cable. System would be

### 03 PHYSICAL SCIENCES

brought to its initial operating speed by gravity-gradient pumping. When fully developed, concept could be part of an orbiting solar-energy collection system. Energy would be temporarily stored in system then transmitted to Earth by microwaves or other method.

**B81-10139**  
**EMR GAGE WOULD MEASURE COAL THICKNESS ACCURATELY**

J. D. KING (Southwest Research Institute) and W. L. ROLLWITZ (Southwest Research Institute)  
Nov. 1982

**MFS-25555** Vol. 6, No. 2, P. 148  
Laboratory tests indicate electron magnetic resonance (EMR) would be effective in measuring thickness of coal overlying rock substrate. In prototype dual-frequency EMR system, Sample is irradiated by two radio frequencies. Signals are mixed, producing sum and difference output frequencies that are detected by receiver. Magnetic field is varied to scan resonant spot through sample. In system designed for field use, electromagnet is U-shaped, so that sample can be adjacent to, rather than inside the probe. Same coil is used for transmitting and receiving.

**B81-10140**  
**SENSORS FOR PRECISE TRACKING**

T. F. ZEHNPFENNING (Visidyne)

Nov. 1982

**MFS-25579** Vol. 6, No. 2, P. 149

Sun-sensor optical system uses four pairs of pentaprisms to simplify alignment and reduce mechanical-stability requirements. Cross-shaped windows in field stop enhance sensitivity of signal detectors to changes in angular position. Two virtual images viewed by telescopes mark position and orientation of occulter panel. Reflector vertex, point source and corresponding virtual image are all equally spaced along a straight line.

**B81-10141**  
**SOLAR CONCENTRATOR IS GAS-FILLED**

R. R. HALE (CALTECH)

Nov. 1982

**NPO-15416** Vol. 6, No. 2, P. 150

Proposed reflector for concentrating solar rays is made of two flexible polymer films with pressurized gas between them. First film is clear, serving as a protective cover and pressure envelope; second film is metalized to serve as concentrating mirror. Focal length of mirror is adjusted by changing gas pressure.

**B81-10142**  
**POWERPLANT THERMAL-POLLUTION MODELS**

S. S. LEE (University of Miami) and S. SENGUPTA (University of Miami)

Nov. 1982

**KSC-11210** Vol. 6, No. 2, P. 150

Three models predict nature of thermal plumes from powerplant discharge into water. Free-surface model accommodates major changes in ocean currents. Rigid-model accurately predicts changes in thermal plume caused by other inputs and outputs, such as pumped-water storage and hydroelectric-plant discharges. One-dimensional model predicts approximate stratification in lake with such inputs and outputs over a long period.

**B81-10143**  
**PROPOSED INTEGRATED RADIO-TELESCOPE NETWORK**

M. H. COHEN (CALTECH), M. S. EWING (CALTECH), G. S. LEVY (CALTECH), R. K. MALLIS (CALTECH), A. C. S. READHEAD (CALTECH), J. R. SMITH (CALTECH), and D. C. BACKER (University of California, Berkeley)

Nov. 1982

**NPO-15417** Vol. 6, No. 2, P. 151

Proposed network of radio telescopes, controlled by a central computer and managed by a single organization,

offer potential for research on a scale that could not be matched by present privately and publicly-owned radio telescopes. With 10 antenna sites, network would establish base lines thousands of miles long. Antennas will be linked to computer center by telephone circuits.

**B81-10144**  
**COMBUSTION OF COAL/OIL/WATER SLURRIES**

R. O. KUSHIDA (CALTECH)

Nov. 1982

**NPO-15462** Vol. 6, No. 2, P. 152

Proposed test setup would measure combustion performance of new fuels by rapidly heating a droplet of coal/oil/water mixture and recording resulting explosion. Such mixtures are being considered as petroleum substitutes in oil-fired furnaces.

**B81-10145**  
**ENERGY-STORAGE MODULES FOR ACTIVE SOLAR HEATING AND COOLING**

J. C. PARKER

Nov. 1982 See Also DOE/NASA TM-82415(N81-23604/NSP)

**MFS-25681** Vol. 6, No. 2, P. 153

34 page report describes a melting salt hydrate that stores 12 times as much heat as rocks and other heavy materials. Energy is stored mostly as latent heat; that is, heat that can be stored and recovered without any significant change in temperature. Report also describes development, evaluation and testing of permanently sealed modules containing salt hydrate mixture.

**B81-10146**  
**SOLAR WATER-HEATER DESIGN AND INSTALLATION**

P. HARLAMERT, J. KENNARD, and J. CIRIUNAS

Nov. 1982

**LEW-13665** Vol. 6, No. 2, P. 153

Solar/Water heater system works as follows: Solar-heated air is pumped from collectors through rock bin from top to bottom. Air handler circulates heated air through an air-to-water heat exchanger, which transfers heat to incoming well water. In one application, it may reduce oil use by 40 percent.

**B81-10147**  
**HEAT-TRANSFER FLUIDS FOR SOLAR-ENERGY SYSTEMS**

J. C. PARKER

Nov. 1982

**MFS-25629** Vol. 6, No. 2, P. 154

43-page report investigates noncorrosive heat-transport fluids compatible with both metallic and nonmetallic solar collectors and plumbing systems. Report includes tables and figures of X-ray inspections for corrosion and schematics of solar-heat transport systems and heat rejection systems.

**B81-10148**  
**EFFECTS OF HIGH TEMPERATURE ON COLLECTOR COATINGS**

J. R. LOWERY

Nov. 1982

**MFS-25651** Vol. 6, No. 2, P. 154

Report reveals electroplated black chrome is good coating for concentrating collectors in which temperatures are in the 650 degrees-800 degrees F (340 degrees - 430 degrees C) range. Black chrome thermal emittance is low and solar-absorption properties are not seriously degraded at high temperatures. Black coatings are used to increase absorption of solar energy by base metal while decreasing emission of infrared energy. Coatings are intended to improve efficiency of solar collectors.

**B81-10149**  
**SOLAR HEATING AND COOLING FOR A CONTROLS MANUFACTURING PLANT LUMBERTON, NEW JERSEY**

Innovator Not Given(RKL Controls Co.) Nov. 1982 See



Also DOE/NASA CR-161679(N81-23597/NSP)

**MFS-25665** Vol. 6, No. 2, P. 154

Comprehensive report documents computer-controlled system which has separate solar-collector and cooling-tower areas located away from building and is completely computer controlled. System description, test data, major problems and resolution, performance, operation and maintenance, manufacturer's literature and drawing comprise part of 257-page report.

**B81-10150  
SOLAR SPACE AND WATER HEATING FOR HOSPITAL  
--CHARLOTTESVILLE, VIRGINIA**

Innovator Not Given(David C. Wilson Neuropsychiatric Hospital) Nov. 1982 See Also DOE/NASA CR-161675 (N81-22471/NSP)

**MFS-25666** Vol. 6, No. 2, P. 155

Solar heating system described in an 86-page report consists of 88 single-glazed selectively-coated baseplate collector modules, hot-water coils in air ducts, domestic-hot-water preheat tank, 3,000 Gallon (11,350-l) concrete urethane-insulated storage tank and other components.

**B81-10151  
SOLAR HOT WATER FOR A MOTOR INN -- LAS VEGAS,  
NEVADA**

Innovator Not Given(LaQuinta Motor Inns) Nov. 1982 See Also DOE/NASA CR-161642(N81-21535/NSP)

**MFS-25646** Vol. 6, No. 2, P. 155

Solar hot-water installation at motor inn in Las Vegas, Nevada is described in report containing descriptions of design, philosophy, operation of system and problems and solutions. Provides drawings of solar roof plan, operator's instructions, manufacturers' brochures and copy of acceptance report.

**B81-10152  
SOLAR HEATING FOR A BOTTLING PLANT -- JACKSON,  
TENNESSEE**

Innovator Not Given(Energy Solutions, Inc.) Nov. 1982 See Also DOE/NASA CR-161586(N81-73511/NSP)

**MFS-25595** Vol. 6, No. 2, P. 156

Report describes retrofit solar-heating system designed for and installed in bottle works in Tennessee. System consists of 9,480 square feet (880 Square meters) of evacuated-tube solar collectors with attached specular cylindrical reflectors. Tubular collectors are expected to supply 55 percent of total thermal load.

**B81-10153  
ECONOMIC EVALUATION OF OBSERVATORY SOLAR-  
ENERGY SYSTEM**

Innovator Not Given(Federal Systems Division of IBM Corp.) Nov. 1982 See Also DOE/NASA CR-161724(N81-25510/NSP)

**MFS-25682** Vol. 6, No. 2, P. 156

Long-term economic performance of a commercial solar-energy system was analyzed and used to predict economic performance at four additional sites. Analysis described in report was done to demonstrate viability of design over a broad range of environmental/economic conditions. Topics covered are system description, study approach, economic analysis and system optimization.

**B81-10154  
ECONOMIC EVALUATION OF SINGLE-FAMILY-  
RESIDENCE SOLAR-ENERGY INSTALLATION**

Innovator Not Given(Federal Systems Division of IBM Corp.) Nov. 1982 See Also DOE/NASA CR-161723(N81-24532/NSP)

**MFS-25683** Vol. 6, No. 2, P. 156

Long-term economic performance of a commercial solar-energy system was analyzed and used to predict economic performance at four additional sites. Analysis described in report was done to demonstrate viability of design over a broad range of environmental/economic

conditions. Report contains graphs and tables that present evaluation procedure and results. Also contains appendices that aid in understanding methods used.

**B81-10155  
ECONOMIC EVALUATION OF TOWNHOUSE SOLAR  
ENERGY SYSTEM**

Innovator Not Given(Federal Systems Division of IBM Corp.) Nov. 1982 See Also DOE/NASA CR-161722(N81-23605/NSP)

**MFS-25684** Vol. 6, No. 2, P. 156

Solar-energy site in Columbia, South Carolina, is comprised of four townhouse apartments. Report summarizes economic evaluation of solar-energy system and projected performance of similar systems in four other selected cities. System is designed to supply 65 percent of heating and 75 percent of hot water.

**B81-10156  
ECONOMIC EVALUATION OF OFFICE SOLAR-HEATING  
SYSTEM**

Innovator Not Given(Federal Systems Division of IBM Corp.) Nov. 1982 See Also DOE/NASA CR-161725(N81-23607/NSP)

**MFS-25685** Vol. 6, No. 2, P. 157

Solar-energy system at U.S. Department of Transportation Test Center at Pueblo, Colorado and five similar installations around the country is the subject of 109-page report. Objective of economic analysis is to report long-term economic performance of system at installation site and to extrapolate results to four other locations and an alternate site.

**B81-10157  
DORMITORY SOLAR-ENERGY-SYSTEM ECONOMICS**

Innovator Not Given(Federal Systems Division of IBM Corp.) Nov. 1982 DOE/NASA CR-161726(N81-24531/NSP)

**MFS-25693** Vol. 6, No. 2, P. 158

102-page report analyzes long-term economic performance of a prepackaged solar energy assembly system at a dormitory installation and extrapolates to four additional sites about the U.S. Method of evaluation is f-chart procedure for solar-heating and domestic hotwater systems.

**B81-10158  
TWO-STORY-DWELLING SOLAR INSTALLATION**

Innovator Not Given(Federal Systems Division of IBM Corp.) Nov. 1982 See Also DOE/NASA CR-161727(N81-24585/NSP)

**MFS-25697** Vol. 6, No. 2, P. 158

Report covers system description of a roof mounted solar energy system in Georgia. Includes study approach, economic analysis, results of analysis and economic uncertainty analysis. Elaboration on some of equations, procedures, and parameters used in analysis is found in report appendixes.

**B81-10159  
RANGER STATION SOLAR-ENERGY SYSTEM RECEIVES  
ECONOMIC EVALUATION**

Innovator Not Given(Federal Systems Division of IBM Corp.) Nov. 1982 See Also DOE/NASA CR-161728(N81-24541/NSP)

**MFS-25699** Vol. 6, No. 2, P. 158

Economic performance of Glendo Reservoir Ranger Station solar-energy system in Wyoming and extrapolated performance in four other locations around the U.S. is reviewed in report. System is a passive drain-down system using water as heat-transfer medium for space and hot-water heating.

**B81-10160  
ECONOMIC EVALUATION OF DUAL-LEVEL-RESIDENCE  
SOLAR-ENERGY SYSTEM**

Innovator Not Given(Federal Systems Division of IBM

### 03 PHYSICAL SCIENCES

Corp.) Nov. 1982 See Also DOE/NASA CR-161729(N81-25541/NSP)

**MFS-25700** Vol. 6, No. 2, P. 159

105-page report is one in a series of economic evaluations of different solar-energy installations. Using study results, an optimal collector area is chosen that minimizes life-cycle costs. From this optimal size thermal and economic performance is evaluated.

**B81-10161  
ECONOMIC EVALUATION OF SINGLE-FAMILY-  
RESIDENCE SOLAR-ENERGY SYSTEM**

Innovator Not Given(Federal Systems Division of IBM Corp.) Nov. 1982 See Also DOE/NASA CR-161730(N81-25542/NSP)

**MFS-25701** Vol. 6, No. 2, P. 159

Report concludes that where solar-energy system investment costs are presently high, future promise of savings due to increased conventional energy costs is not optimistic. This is because cost of system tends to increase at a rate not significantly less than the cost of conventional energy.

**B81-10265  
ROTATING THE PLANE OF PARALLEL LIGHT BEAMS**  
K. L. ORLOFF and H. YANAGITA

Dec. 1982

**ARC-11311** Vol. 6, No. 3, P. 267

Rhomboid prism laterally displaces beam of light. Pairs of rhomboid prisms can rotate plane of two parallel beams of light and change spacing of beams. If each element of pair is mounted on independent motor-driven disk, angle of rotation of plane of beams can be varied over wide range. Among other uses, prism configurations can rotate plane of parallel laser beams used in laser velocimeter.

**B81-10266  
SOLAR-DRIVEN LIQUID-METAL MHD GENERATOR**

F. HOHL and J. H. LEE (Vanderbilt University)

Dec. 1982 NASA TM-81965(N81-27926/NSP)

**LAR-12495** Vol. 6, No. 3, P. 268

Liquid-metal magnetohydrodynamic (MHD) power generator with solar oven as its heat source has potential to produce electric power in space and on Earth at high efficiency. Generator focuses radiation from Sun to heat driving gas that pushes liquid metal past magnetic coil. Power is extracted directly from electric currents set up in conducting liquid. Using solar energy as fuel can save considerable costs and payload weight, compared to previous systems.

**B81-10267  
IMPROVED LIXISCOPE**

L. I. YIN

Dec. 1982

**GSC-12587** Vol. 6, No. 3, P. 269

Improved lixiscopes utilize fast-decay scintillators and multiple or curved microchannels to achieve high energy and spatial resolution as well as single-photon counting. New unit, with higher energy resolution, is intended for X-ray astronomy, although it could be applied terrestrially wherever a sensitive portable radiation spectrometer is required for 20-to-200-keV range.

**B81-10268  
TEST-BED AIRCRAFT SCANNER**

D. J. JOBSON, S. J. KATZBERG, R. B. SPIERS, C. A. HARDESTY, E. E. BURCHER, and S. H. IRWIN

Dec. 1982

**LAR-12796** Vol. 6, No. 3, P. 270

Test-bed aircraft multispectral scanner (TBAMS) is line-scanning multispectral imaging system with eight visible/near-infrared channels and one thermal-infrared channel. Key design features of TBAMS are its large size and modular subsystem mounted on horizontal baseplate. This unique layout allows easy access to and replacement

of subsystems and their subcomponents. System designed around existing inexpensive parts, sacrifices compactness for ease of modification.

**B81-10269  
SOLAR SIMULATOR AT MARSHALL SPACE FLIGHT  
CENTER**

Innovator Not Given(Wyle Laboratories) Dec. 1982 See Also DOE/NASA CR-161825(N81-30523/NSP)

**MFS-25742** Vol. 6, No. 3, P. 271

Solar Simulator is subject of 73-page report. Simulator can establish a variety of conditions that can be set at constant levels over a broad range. Conditions include solar-radiation intensity, spectrum and collimation; solar attitude; and wind speed and direction. Report describes Sun simulator, solar-collector system simulator, overall simulation setup, and instrumentation.

**B81-10270  
EVALUATION OF A LINE-CONCENTRATING SOLAR  
COLLECTOR**

Innovator Not Given(Wyle Laboratories) Dec. 1982 See Also NASA CR-161856(N82-10502/NSP)

**MFS-25778** Vol. 6, No. 3, P. 271

45-page report contains results of performance evaluation of line-concentrating solar collector. Collector employs parabolic trough to direct Sunlight to line along its focal axis, along which lies a black-chrome plated receiver tube covered by a glass tube containing still air. Reflective trough has aluminum-mirror surface covered with metallized acrylic film. Array of four collectors, positioned end to end was used for evaluation. Array was driven by single drive mechanism which was controlled by electronic tracking device.

**B81-10271  
MANIFOLD INSULATION FOR SOLAR COLLECTORS**

Innovator Not Given(Wyle Laboratories) Dec. 1982 See Also NASA CR-161852(N82-10501/NSP)

**MFS-25779** Vol. 6, No. 3, P. 271

Results of computer analysis of effects of various manifold insulation detailed in 23-page report show that if fluid is distributed to and gathered from array of solar collectors by external rather than internal manifold, effectiveness of manifold insulation has major influence on efficiency. Report describes required input data and presents equations that govern computer model. Provides graphs comparing collector efficiencies for representative manifold sizes and insulations.

**B81-10272  
SOLAR HEATER IN A WEST VIRGINIA COLLEGE**

Innovator Not Given(J. E. Sturm, Inc.) Dec. 1982 See Also DOE/NASA CR-161756(N81-25491/NSP)

**MFS-25706** Vol. 6, No. 3, P. 272

Solar space-heating and hot water system installed at Alderson-Broaddus College, Philippi, West Virginia, is described in 87-page document. Report contains description of building and its solar-energy system; specifications for solar-energy system, including collectors, coolant, storage tanks, circulation equipment, piping, controls, and insulation; acceptance test data; and discussion of problems with installation, their solution, and recommendations for dealing with excess solar energy.

**B81-10273  
SOLAR HEATING SYSTEM AT A RACQUETBALL CLUB**

Innovator Not Given(ARC Associates) Dec. 1982 See Also NASA CR-16179(N81-28518/NSP)

**MFS-25720** Vol. 6, No. 3, P. 272

Detailed 93-page report describes Arlington, Virginia racquetball club which obtains heat and hot water for its support area from solar collectors. Report explains modes of operation of system and details of acceptance-test plan.

**B81-10274****SOLAR HEATING IN AN ELEMENTARY SCHOOL**

Innovator Not Given (Portsmouth Public Schools) Dec. 1982 See Also DOE/NASA CR-161830(N81-31625/NSP)

**MFS-25747****Vol. 6, No. 3, P. 272**

Solar-heating and hot-water system installed in elementary school in Virginia is described in 154 page report. Report contains discussion of design philosophy and acceptance-test report. Provides instructions for installation, maintenance, and operation. Also furnishes mechanical drawings and manufacturers' data on pumps, valves, controllers, and other components.

**B81-10275****SOLAR-COOLED HOTEL IN THE VIRGIN ISLANDS**

H. HARBER

Dec. 1982 See Also DOE/NASA TM-82442(N81-33611/NSP)

**MFS-25776****Vol. 6, No. 3, P. 273**

Performance of solar cooling system is described in 21-page report. System provides cooling for public areas including ball rooms, restaurant, lounge, lobby and shops. Chilled water from solar-cooling system is also used to cool hot water from hotel's desalinization plant.

**B81-10276****HOT WATER FOR MOTOR INN--GARLAND, TEXAS**

Innovator Not Given (Day's Inn of America, Inc.) Dec. 1982 See Also DOE/NASA CR-161802(N81-28515/NSP)

**MFS-25726****Vol. 6, No. 3, P. 273**

35-page report describes solar collector system and its operation and presents projected system performance. Details calibration and maintenance procedures and lists and describes equipment that makes up system. System provides hot water for laundry, for showers and sinks in inn rooms.

**B81-10277****SOLAR SPACE HEATING FOR WAREHOUSE--KANSAS CITY, KANSAS**

Innovator Not Given (Ducat Investments, Inc.) Dec. 1982

**MFS-25712****Vol. 6, No. 3, P. 273**

New report describes warehouse/office building in Kansas City, Kansas which uses solar heating for warehouse portion and conventional heating and cooling for office portion. Building is divided into 20 equal units, each with its own solar-heating system. Modular design enables multiple units to be combined to form offices or warehouses of various sizes as required by tenants.

**B81-10278****THE ECONOMICS OF SOLAR HEATING**

J. A. FORNEY

Dec. 1982

**MFS-25391****Vol. 6, No. 3, P. 274**

SHCOST program assesses economic feasibility of solar energy for single-family residences and light commercial applications. Program analyzes life-cycle costs as well as sensitivity studies to aid designer in selecting most economically attractive solar system for single-family residence or light commercial application. SHCOST includes fairly comprehensive list of cost elements from which user may select.

## 04 MATERIALS

**B81-10036****PREPARATION OF PERFLUORINATED IMIDOYLAMID-****OXIME POLYMERS**

R. W. ROSSER, R. H. KRATZER (Ultrasystem, Inc.), K. J. L. PACIOREK (Ultrasystem, Inc.), and T. I. ITO (Ultrasystem, Inc.)

Sep. 1982

**ARC-11267****Vol. 6, No. 1, P. 35**

Perfluorinated imidoylamidoxime polymers with excellent resistance to heat, chemicals and solvents are prepared by condensing a perfluorinated nitrile with a perfluorinated amidoxime in vacuum or inert atmosphere from 20 degrees to 70 degrees C. When both reactants are difunctional, oligomeric or polymeric products are obtained. After cyclization of imidoylamidoxime groups to 1,2,4-oxadiazole linkages, process yields highly resistant elastomers. Competing side reactions are inhibited by low processing temperature.

**B81-10038****SYNTHESIS OF FIRE-EXTINGUISHING DAWSONITES**

R. L. ALTMAN

Sep. 1982

**ARC-11326****Vol. 6, No. 1, P. 36**

Simple nonaqueous process synthesizes sodium or potassium, dawsonites effective against hydrocarbon fuel fires. Fire-extinguishing alkali metal dawsonites are prepared using a finely-pulverized equimolar mixture of hydrogen carbonate, or carbonates and aluminum hydroxide heated for 1 to 6 hours under carbon dioxide pressure.

**B81-10039****IMPROVED FIRE-RESISTANT RESINS FOR LAMINATES**

G. M. FOHLEN, J. A. PARKER, and I. K. VARMA (National Research Council)

Sep. 1982

**ARC-11321****Vol. 6, No. 1, P. 37**

Fire-resistant resins for fabricating laminates with inorganic fibers, especially graphite fibers, are formed from bisimides containing main-chain phosphorus and olefinic end groups. Bisimides are thermally polymerized to form resins and laminates virtually imcombustible in pure oxygen at 300 degrees C. New resins are suitable for many applications requiring good adhesion and excellent resistance to heat, fire, solvents and chemicals.

**B81-10040****ELASTOMER-TOUGHENED POLYIMIDE ADHESIVES**

A. K. ST. CLAIR and T. L. ST. CLAIR

Sep. 1982

**LAR-12775****Vol. 6, No. 1, P. 38**

T-Peel strengths of adhesive/Titanium bonds are compared for LARC-13 with and without elastomer additives. Elastomer toughening (incorporation of small amounts of rubber into polymer matrix) has been one of the most successful methods for modifying polymer toughness. Addition polyimides are currently under consideration as high-temperature adhesives for bonding composite materials such as titanium.

**B81-10041****VISCOELASTIC PROPERTIES OF POLYMER BLENDS**

S. D. HONG (CALTECH), J. MOACANIN (CALTECH), and D. SOONG (CALTECH)

Sep. 1982

**NPO-14924****Vol. 6, No. 1, P. 39**

Viscosity, shear modulus and other viscoelastic properties of multicomponent polymer blends are predicted from behavior of individual components, using a mathematical model. Model is extension of two-component-blend model based on Rouse-Bueche-Zimm theory of polymer viscoelasticity. Extension assumes that probabilities of forming various possible intracomponent and intercomponent entanglements among polymer molecules are proportional to relative abundances of components.

**B81-10042****TWO-STAGE COMBUSTOR REDUCES POLLUTANT EMISSIONS**

## 04 MATERIALS

R. M. CLAYTON (CALTECH)

Sep. 1982

NPO-14911

Vol. 6, No. 1, P. 40

By controlling fuel-to-air ratio of local reactants, pollutant emissions would be minimized in a proposed two-stage combustor for gas-turbine engines. It would use fuel-rich partial-oxidation stage and air-rich combustion stage to reduce emissions of nitrogen oxide, carbon monoxide and hydrocarbons. Combustor fuel-lean burning limit would be extended simultaneously.

B81-10043

DEFORMATION-INDUCED ANISOTROPY OF POLYMERS

S. T. J. PENG (CALTECH) and R. F. LANDEL (CALTECH)

Sep. 1982

NPO-15325

Vol. 6, No. 1, P. 41

New theory calculates anisotropies induced by large deformations in polymers. Theory was developed primarily for calculating anisotropy of thermal expansivity, but is also applicable to thermal conductivity, elastic moduli and other properties. Theory assumes that in isotropic state, long polymer chains are randomly coiled and not oriented in particular direction. They acquire an orientation when material is deformed. As average molecular orientation increases with deformation, properties of bulk material exhibit averaging of the microscopic anisotropies of the oriented molecular segments.

B81-10044

PLASMA DEPOSITION OF AMORPHOUS SILICON

H. F. CALCOTE (Aerochem Research Laboratories, Inc.)

Sep. 1982

NPO-14954

Vol. 6, No. 1, P. 42

Strongly adhering films of silicon are deposited directly on such materials as Pyrex and Vycor (or equivalent materials) and aluminum by a non-equilibrium plasma jet. Amorphous silicon films are formed by decomposition of silicon tetrachloride or trichlorosilane in the plasma. Plasma-jet technique can also be used to deposit an adherent silicon film on aluminum from silane and to dope such films with phosphorus. Ability to deposit silicon films on such readily available, inexpensive substrates could eventually lead to lower cost photovoltaic cells.

B81-10162

SYSTEM CONTROLS AND MEASURES OXYGEN FUGACITY

R. J. WILLIAMS

Nov. 1982 See Also NASA TM-58234(N81-17188/NSP)

MSC-20096

Vol. 6, No. 2, P. 163

System developed at Johnson Space Center controls and measures oxygen fugacity in high-temperature chemical research. A ceramic-electrolyte cell is the sensing element. All hardware needed to control gas flow and temperature and to measure cell electromotive force is included. An analytic balance allows in situ thermogravimetric sample analysis.

B81-10163

SURFACE SEAL FOR CARBON PARTS

D. M. SHUFORD (Vought Corp.) and J. P. SPRUIELL (Vought Corp.)

Nov. 1982

MSC-18898

Vol. 6, No. 2, P. 164

Surface pores in parts made of graphite or reinforced-carbon/ carbon materials are sealed by a silicon carbide-based coating. Coating inhibits subsurface oxidation and lengthens part life. Starting material for coating is graphite felt, which is converted to silicon carbide felt by processing it according to a prescribed time/temperature schedule. Converted felt is pulverized in a ball mill and resulting powder is mixed with an equal weight of black silicon carbide powder. Powder mixture is combined with an equal weight of adhesive to form a paste.

B81-10164

IMPROVED CURE-IN-PLACE SILICONE ADHESIVES

C. E. BLEVINS (McDonnell Douglas Corp.), J. SWEET (McDonnell Douglas Corp.), and R. GONZALEZ (McDonnell Douglas Corp.)

Nov. 1982

MSC-18782

Vol. 6, No. 2, P. 164

Two improved cure-in-place silicone-elastomer-based adhesives have low thermal expansion and low thermal conductivity. Adhesives are flexible at low temperature and withstand high temperatures without disintegrating. New ablative compounds were initially developed for in-flight repair of insulating tile on Space Shuttle orbiter. Could find use in other applications requiring high-performance adhesives, such as sealants for solar collectors.

B81-10165

MEASURING INTERDIFFUSION IN BINARY LIQUIDS

S. H. GELLES (Battelle Columbus Laboratories) and A. J. MARKWORTH (Battelle Columbus Laboratories)

Nov. 1982

MFS-25576

Vol. 6, No. 2, P. 165

Liquid-phase binary interdiffusion sample is prepared by enclosing wires of two metals in a capillary tube with ends touching. While sample is at elevated temperature, tube is kept oriented with lighter metal at top to prevent convection. New method is potential research tool in such areas as zone refining of metals, recycling of spent fuel rods, and improving removal of slag and inclusions from steel castings.

B81-10166

SUPERCRITICAL-FLUID EXTRACTION OF OIL FROM TAR SANDS

L. E. COMPTON (CALTECH)

Nov. 1982

NPO-15476

Vol. 6, No. 2, P. 166

New supercritical solvent mixtures have been laboratory-tested for extraction of oil from tar sands. Mixture is circulated through sand at high pressure and at a temperature above critical point, dissolving organic matter into the compressed gas. Extract is recovered from sand residues. Low-temperature super-critical solvents reduce energy consumption and waste-disposal problems.

B81-10167

PROLONGING THE LIFE OF REFRACTORY FILLERS

C. SCHOMBURG and R. L. DOTTS

Nov. 1982

MSC-18832

Vol. 6, No. 2, P. 166

Useful life of refractory glass-cloth gap filler is increased by coating it with a suspension of silicon carbide in butanol and polyethylene. Coating is applied to refractory-fiber cloth filler that seals gaps between insulating tiles on Space Shuttle orbiter. Tests showed that cloth fibers would be embrittled by extreme temperatures encountered on reentry into Earth's atmosphere and that only 25 percent of the thousands of fillers would be reusable after a mission. With coating, 85 percent of fillers would be reusable.

B81-10168

FLAME-RETARDANT COATING IS HEAT-SEALED

R. P. TSCHIRCH (Arthur D. Little, Inc.) and K. R. SIDMAN (Arthur D. Little, Inc.)

Nov. 1982

MSC-18382

Vol. 6, No. 2, P. 167

Plastic coating that makes fabrics flame- and abrasion-resistant is sealed to fabric by heat. Coating produces flexible, lightweight, impermeable fabrics that are firesafe and can withstand rough use. Coated fabric was developed for use in garments and containers for space exploration, but would also be suitable for rainwear, clothing for hazardous environments, and leakproof containers.

B81-10169

SUPERABSORBENT MULTILAYER FABRIC

J. V. COREALE and F. S. DAWN

Nov. 1982

MSC-18223

Vol. 6, No. 2, P. 168

**B81-10170****FACTORS AFFECTING LIQUID-METAL EMBRITTLEMENT IN C-103**

R. MCLEMORE (The Marquardt Co.) and F. K. LAMPSON (The Marquardt Co.)

Nov. 1982

MSC-18865

Vol. 6, No. 2, P. 168

Results of a study of weld cracks on Space Shuttle control thrusters point toward better understanding of cracking problem in columbium metal, which has also plagued nonaerospace users. Although liquid-metal embrittlement is known to be cause of problem, factors affecting growth and severity of cracks are not well understood. New results tie crack growth to type of contaminants present, grain size and level of stress present while welding is done.

**B81-10171****ULTRAVIOLET-INDUCED MIRROR DEGRADATION**

F. L. BOUQUET (CALTECH), T. T. HASEGAWA (CALTECH), and E. L. CLELAND (CALTECH)

Nov. 1982

NPO-15520

Vol. 6, No. 2, P. 169

Recent tests of second-surface mirrors show that ultraviolet radiation penetrates glass and metalized zone and impinges upon backing paint. According to report, many backing materials are degraded by ultraviolet radiation. Mirror corrosion is a serious problem in solar-energy collection systems. Effects of UV on polymeric materials have been studied, and in general, all are degraded by UV. Polymers most resistant to UV radiation are polyimides.

**B81-10172****LOW-GRAVITY INVESTIGATIONS IN CAST-IRON PROCESSING**

W. L. FRANKHOUSER (System Planning Corp.)

Nov. 1982

MFS-25491

Vol. 6, No. 2, P. 169

Report on the state of the art in cast-iron processing identifies possible improvements that might result from processing in absence of gravity. Report suggests areas in which the knowledge of gravitational effects could eventually lead to practical improvements in material performance.

**B81-10173****'SIAION' MATERIALS FOR ADVANCED STRUCTURAL APPLICATIONS**

S. DUTTA

Nov. 1982 See Also NASA TM-79207(N79-30378/NSP)

LEW-13671

Vol. 6, No. 2, P. 170

New ceramics for gas turbines and other applications are strong, oxidation resistant, and chemically stable. Recently prepared state-of-the-art report on SiAION materials includes work on phase relations, crystal structure, synthesis, fabrication, micro-structure, and properties of various SiAION's.

**B81-10279****SILICONE/ACRYLATE COPOLYMERS**

W. E. DENNIS (Dow Corning Corp.)

Dec. 1982

NPO-15523

Vol. 6, No. 3, P. 277

Two-step process forms silicone/acrylate copolymers. Resulting acrylate functional fluid is reacted with other ingredients to produce copolymer. Films of polymer were formed by simply pouring or spraying mixture and allowing solvent to evaporate. Films showed good weatherability. Durable, clear polymer films protect photovoltaic cells.

**B81-10280****COAL AS A SUBSTITUTE FOR CARBON BLACK**

R. O. KUSHIDA (CALTECH)

Dec. 1982

NPO-15461

Vol. 6, No. 3, P. 277

New proposal shows sprayed coal powder formed by extrusion of coal heated to plastic state may be inexpensive substitute for carbon black. Carbon black is used extensively in rubber industry as reinforcing agent in such articles as tires and hoses. It is made from natural gas and petroleum, both of which are in short supply.

**B81-10281****SOUND-BURST GENERATOR FOR MEASURING COAL PROPERTIES**

W. J. J. HADDEN (Georgia Institute of Technology), J. M. MILLS (Georgia Institute of Technology), and A. D. PIERCE (Georgia Institute of Technology)

Dec. 1982

MFS-25438

Vol. 6, No. 3, P. 278

Acoustical properties of coal can be measured accurately and with relative ease with aid of digital two-channel sine-wave sound generator. Generator is expected to provide information for development of acoustic devices for measuring thickness of coal in longwall mining. In echo-cancellation measurements, sound bursts are sent to coal sample from opposite directions. Transmitted and reflected amplitudes and phases are measured by transducers to determine coal properties.

**B81-10282****CATALYZING THE COMBUSTION OF COAL**

M. F. HUMPHREY (CALTECH) and W. DOKKO (CALTECH)

Dec. 1982

NPO-15456

Vol. 6, No. 3, P. 279

Reaction rate of coal in air can be increased by contacting or coating coal with compound such as calcium acetate. The enhanced reaction rate generates more heat, reducing furnace size. Increase in combustion rate is about 26 percent, and internal pollutants in powerplant are reduced.

**B81-10283****LOW-GOLD-CONTENT BRAZING ALLOYS**

A. BRENNAN (Rockwell International Corp.) and R. D. MCKOWN (Rockwell International Corp.)

Dec. 1982

MFS-19629

Vol. 6, No. 3, P. 280

Two new alloys for brazing at 1,760 degrees to 1,850 degrees F are stronger and have better gap-filling capability. Alloys have lower gold content than other gold brazes for their temperature range and therefore are far less expensive. They are produced in wire, foil, and powder and are excellent for brazing at temperatures where no suitable alloys existed--especially for step brazing copper.

**B81-10284****ELECTROCHEMICAL ASSAY OF GOLD-PLATING SOLUTIONS**

R. CHIODO (Rockwell International Corp.)

Dec. 1982

MFS-19639

Vol. 6, No. 3, P. 280

Gold content of plating solution is assayed by simple method that required only ordinary electrochemical laboratory equipment and materials. Technique involves electrodeposition of gold from solution onto electrode, the weight gain of which is measured. Suitable fast assay methods are economically and practically necessary in electronics and decorative-plating industries. If gold content in plating bath is too low, poor plating may result, with consequent economic loss to user.

**B81-10285****XPS STUDY OF SiO<sub>2</sub> AND THE Si/SiO<sub>2</sub> INTERFACE**

F. J. GRUNTHANER (CALTECH), P. J. GRUNTHANER (CALTECH), R. P. VASQUEZ (CALTECH), B. F. LEWIS (CALTECH), J. MASERJIAN (CALTECH), and A. MADHUKAR (CALTECH)

Dec. 1982

## 04 MATERIALS

**NPO-14968**

**Vol. 6, No. 3, P. 281**

X-ray photoelectron spectroscopy (XPS) is analytical technique for understanding electronic structure of atoms close to surface in solids, in preference to bulk structure of material. Study found evidence for core-level chemical shifts arising from changes in local structural environment in amorphous SiO<sub>2</sub> and at Si/SiO<sub>2</sub> interface. Observed XPS spectra may be understood as sequential convolution of several functions, each with well-defined physical interpretation.

**B81-10286**

### **BLOWING AGENTS FOR FABRICATION OF POLYIMIDE FOAMS**

J. GAGLIANI (International Harvester Co.), U. A. K. SORATHIA (International Harvester Co.), and R. LEE (International Harvester Co.)

Dec. 1982

**MSC-18993**

**Vol. 6, No. 3, P. 282**

Polyimide resin can be foamed by agent generated within matrix of powder precursor. Blowing agent is mixture of water and methanol that are byproducts of condensation/polymerization reaction in resin. Expansion of these two compounds produces cellular foam structure that is flexible and resilient but that tends to have very-fine cellular structure. More open structure with lower density can be attained by modifying mechanism of foam formation. Foams have applications as fillers for seat cushions, wall panels, floor sheets, and thermal and acoustical insulation.

**B81-10287**

### **VAPOR DETECTOR**

H. M. WADDELL (Rockwell International Corp.), G. C. GARRARD (Rockwell International Corp.), and D. W. HOUSTON (Rockwell International Corp.)

Dec. 1982

**MSC-18989**

**Vol. 6, No. 3, P. 282**

Detector eliminates need for removing covers to take samples. Detector is canister consisting of screw-in base and clear plastic tube that contains two colors of silica gel. Monoethylhydrazine and nitrogen tetroxide vapors are visually monitored with canister containing color-changing gels.

**B81-10288**

### **REGENERATING WATER-STERILIZING RESINS**

G. V. COLOMBO (Umpqua Research Co.) and D. F. PUTNAM (Umpqua Research Co.)

Dec. 1982

**MSC-20001**

**Vol. 6, No. 3, P. 283**

Iodine-dispensing resin can be regenerated after iodine content has been depleted, without being removed from water system. Resin is used to make water potable by killing bacteria, fungi, and viruses. Regeneration technique may be come basis of water purifier for very long space missions. Enough crystalline iodine for multiple regenerations during mission can be stored in one small cartridge. Cartridge could be inserted in waterline as necessary on signal from iodine monitor or timer.

**B81-10289**

### **WIDE-TEMPERATURE-RANGE TORQUE-STRIP PAINT**

E. R. MILLS (Rockwell International Corp.)

Dec. 1982

**MFS-19644**

**Vol. 6, No. 3, P. 284**

'Torque-stripe' paint withstands wide range of temperatures. The bright yellow paint, brushed on electrical connector, serves as both locking agent and indicator of loosened connection: Crack in paint stripe is readily visible and shows that bolts that are exposed to extremes of heat and cold.

**B81-10290**

### **NEUTRALIZING AMINE-CURED EPOXY SURFACES**

S. Y. LEE

Dec. 1982

**GSC-12686**

**Vol. 6, No. 3, P. 284**

New surface treatment is a rapid, convenient, and effective method for converting unused amines and amine functional groups into neutral, noncorrosive substituted urea. Reaction proceeds at room temperature, takes only a few minutes, and leaves no corrosive residue. Surface should first be washed with alcohol to remove as much as possible of unreacted amine. Then it should be dried, since residual moisture or alcohol may consume some of treatment reagent and neutralization may then be incomplete.

**B81-10291**

### **HEAT-EXCHANGE FLUIDS FOR SULFURIC ACID VAPORIZERS**

D. D. LAWSON (CALTECH) and G. R. PETERSEN (CALTECH)

Dec. 1982

**NPO-15015**

**Vol. 6, No. 3, P. 285**

Some fluorine-substituted organic materials meet criteria for heat-exchange fluids in contact with sulfuric acid. Most promising of these are perfluoropropylene oxide polymers with degree of polymerization (DP) between 10 and 50. It is desirable to have DP in high range because vapor pressure of material decreases as DP increases, and high-DP liquids have lower loss due to vaporization.

**B81-10292**

### **GAS DIFFUSION IN FLUIDS CONTAINING BUBBLES**

M. ZAK (CALTECH) and M. C. WEINBERG (CALTECH)

Dec. 1982

**NPO-15060**

**Vol. 6, No. 3, P. 286**

Mathematical model describes movement of gases in fluid containing many bubbles. Model makes it possible to predict growth and shrink age of bubbles as function of time. New model overcomes complexities involved in analysis of varying conditions by making two simplifying assumptions. It treats bubbles as point sources, and it employs approximate expression for gas concentration gradient at liquid/bubble interface. In particular, it is expected to help in developing processes for production of high-quality optical glasses in space.

**B81-10293**

### **GRAPHITE-FIBER-REINFORCED GLASS-MATRIX COMPOSITE**

K. M. PREWO (United Technologies Corp.) and D. L. DICUS

Dec. 1982 See Also NASA CR-165711(N81-24181/NSP)

and NASA CR-159312(N80-32440/NSP)

**LAR-12764**

**Vol. 6, No. 3, P. 286**

G/GI structural composite material made of graphite fibers embedded in borosilicate glass exhibit excellent strength, fracture toughness, and dimensional stability at elevated temperatures. It is made by passing graphite-fiber yarn through slurry containing suspension of fine glass particles in carrier liquid and winding on drum to produce prepegged uniaxial tape. After drying, tapes are cut into appropriate lengths and laid up in graphite die in desired stacking scheme. Stack is consolidated by hot pressing in furnace.

**B81-10294**

### **BINDERS FOR THERMAL-CONTROL COATINGS**

W. J. PATTERSON and J. E. CURRY

Dec. 1982

**MFS-25620**

**Vol. 6, No. 3, P. 287**

Methyl trialkoxysilane hydrolysates have been found to be superior binders for radiative thermal-control coatings. Using sprayed test panels, candidate coating formulations were optimized with respect to binder/pigment ratio, ethanol content, pigment particle size, coating thickness, and curing conditions. Binders are made from monomers of trialkoxy-silanes or chain-extended alkoxy-silanes. Monomers are believed to polymerize to ladder-type structures like methyl silicene.

**B81-10295**

### **THERMAL POLYMERIZATION OF N-BUTYL ACRYLATE**

J. D. INGHAM (CALTECH)  
Dec. 1982

**NPO-15010**

**Vol. 6, No. 3, P. 288**

Simple new polymerization method enables production of n-butyl acrylate polymer of desired high molecular weight, without disadvantages that usually attend more conventional methods. Process, which is hybrid of thermal, solution, and emulsion polymerization methods, involves controlled thermal polymerization of monomer at moderate temperatures without use of catalysts or additives.

## 05 LIFE SCIENCES

**B81-10045**

**ALGORITHMS COULD AUTOMATE CANCER DIAGNOSIS**  
A. A. BAKY (Northrop Services, Inc.) and D. G. WINKLER (Northrop Services, Inc.)

Sep. 1982

**MSC-18764**

**vol. 6, No. 1, p. 45**

Five new algorithms are a complete statistical procedure for quantifying cell abnormalities from digitized images. Procedure could be basis for automated detection and diagnosis of cancer. Objective of procedure is to assign each cell an atypia status index (ASI), which quantifies level of abnormality. It is possible that ASI values will be accurate and economical enough to allow diagnoses to be made quickly and accurately by computer processing of laboratory specimens extracted from patients.

**B81-10046**

**CONSTRAINT-FREE MEASUREMENT OF METABOLIC RATE**

K. L. KOESTER (Technology, Inc.)

Sep. 1982 See Also NASA CR-160893(N81-14614/NSP)

**MSC-18885**

**Vol. 6, No. 1, P. 46**

By using hardware and software originally developed for manned spacecraft, metabolism is now measured while subject wears a loose-fitting mask. This more comfortable, less-restrictive measurement technique uses speed, accuracy and control capabilities of a microcomputer. Because mask imposes minimum interference to subject undergoing testing, it can be used to measure respiratory responses to such activities as treadmill exercise. Mask can be worn for long periods with little discomfort.

**B81-10047**

**PORTABLE RADIOMETER MONITORS PLANT GROWTH**

C. J. TUCKER, III and L. D. MILLER

Sep. 1982 See also NASA TM-80641(N80-27674/NSP)

**GSC-12412**

**Vol. 6, No. 1, P. 47**

Three-band hand-held spectral radiometer measures electromagnetic energy reflected from plant canopies in the visible and infrared portions of the spectrum. It is mobile and easy to use for rapid, repeated measurements. Radiometer probe is held level over plant canopy, readout range switches are set and measurements are recorded. Chlorophyll content, leaf area index and leaf water content can be quickly and easily measured.

**B81-10048**

**CHEMICAL GROWTH REGULATORS FOR GUAYULE PLANTS**

M. N. DASTOOR (CALTECH), W. W. SCHUBERT (CALTECH), and G. R. PETERSEN (CALTECH)

Sep. 1982

**NPO-15213**

**Vol. 6, No. 1, P. 48**

Test Tubes containing Guayule - tissue cultures were used in experiments to test effects of chemical-growth

regulators. The shoots grew in response to addition of 2-(3,4-dichlorophenoxy)-triethylamine (triethylamine (TEA) derivative) to agar medium. Preliminary results indicate that a class of compounds that promotes growth in soil may also promote growth in a culture medium. Further experiments are needed to define the effect of the TEA derivative.

**B81-10174**

**IMPROVED ELECTROPHORESIS CELL**

P. H. RHODES and R. S. SNYDER

Nov. 1982

**MFS-25426**

**Vol. 6, No. 2, P. 173**

Several proposed modifications are expected to improve performance of a continuous-flow electrophoresis cell. Changes would allow better control of buffer flow and would increase resolution by suppressing thermal gradients. Improved electrophoresis device would have high resolution and be easy to operate. Improvements would allow better flow control and heat dissipation.

**B81-10175**

**SPEEDY ACQUISITION OF SURFACE-CONTAMINATION SAMPLES**

J. R. PULEO (CALTECH) and L. E. KIRSCHNER (CALTECH)

Nov. 1982

**NPO-14934**

**Vol. 6, No. 2, P. 174**

Biological contamination of large-area surfaces can be determined quickly, inexpensively, and accurately with the aid of a polyester bonded cloth. Cloth is highly effective in removing microbes from a surface and releasing them for biological assay. In releasing contaminants, polyester bonded cloth was found to be superior to other commercial cleanroom cloths, including spun-bound polyamid cloths and cellulose cloths.

**B81-10176**

**RETRACTOR TOOL FOR BRAIN SURGERY**

R. HELMS and T. HAYES

Nov. 1982

**MFS-25380**

**Vol. 6, No. 2, P. 175**

Proposed brain-surgery tool has an octagonal fixture for positioning latex tube over incision. Eight stainless-steel wires embedded in latex extend to hold positioning fixture. Another eight are also embedded in the latex. Concentric sleeves are successively inserted into expandable latex tube. The first sleeve is placed over a solid rod. Last sleeve is a stainless-steel tube 1 inch in diameter. It is overcoated with Teflon (or equivalent) material.

**B81-10177**

**IMPROVED METHOD FOR CULTURING GUINEA-PIG MACROPHAGE CELLS**

J. SAVAGE (Alabama A&M University)

Nov. 1982 See Also NASA CR-158777(N79-27814/NSP)

**MFS-25307**

**Vol. 6, No. 2, P. 176**

Proper nutrients and periodic changes in culture medium maintain cell viability for a longer period. New method uses a thioglycolate solution, instead of mineral oil, to induce macrophage cells in guinea pigs and also uses an increased percent of fetal-calf bovine serum in cultivation medium. Macrophage cells play significant roles in the body's healing and defense systems.

**B81-10178**

**AERIAL INFRARED PHOTOS FOR CITRUS GROWERS**

C. H. BLAZQUEZ and F. W. J. HORN

Nov. 1982 See Also NASA RP-1067(N81-21437/NSP)

**KSC-11209**

**Vol. 6, No. 2, P. 176**

Handbook advises on benefits and methods of aerial photography with color infrared film. Interpretation of photographs is discussed in detail. Necessary equipment for interpretation is described--light table, magnifying lenses, and microfiche viewers, for example. Advice is given on rating tree condition; identifying effects of diseases, insects, and nematodes; and evaluating effects of soil, water, and weather.

## 05 LIFE SCIENCES

### **B81-10296** **CUFF FOR BLOOD-VESSEL PRESSURE MEASUREMENTS**

M. SHIMIZU (National Research Council)  
Dec. 1982

**ARC-11264** Vol. 6, No. 3, P. 291

Pressure within blood vessel is measured by new cufflike device without penetration of vessel. Device continuously monitors blood pressure for up to 6 months or longer without harming vessel. Is especially useful for vessels smaller than 4 or 5 millimeters in diameter. Invasive methods damage vessel wall, disturb blood flow, and cause clotting. They do not always give reliable pressure measurements over prolonged periods.

### **B81-10297** **ENVIRONMENTAL-ANALYSIS ROUTINE LIBRARY**

K. PARKER (TRW, Co.) and J. TORIAN (TRW, Co.)  
Dec. 1982

**MSC-18925** Vol. 6, No. 3, P. 292

Program available from COSMIC contains library of routines that simulate environmental control and life support systems (ECLSS). Through interactive dialogue with program, user selects routines to be assembled into simulation of particular ECLSS under consideration. Program is modular, and allows addition of new routines as they are required.

## 06 MECHANICS

### **B81-10049** **LESS-COSTLY INERTIAL GUIDANCE**

S. J. MERHAV (National Research Council)  
Sep. 1982

**ARC-11257** Vol. 6, No. 1, P. 51

Two gyroscopes mounted in gimbals yield signals that allow calculation of velocity, position and altitude of an aircraft. The mass lowers center of gravity of gimbal-and-gyro assembly to below the intersection of their axes. Combination acts as a two-axis pendulum. Rate signals from the leveling gyroscope are integrated, amplified, and fed to gimbal torquers to restore pendulum to alignment with local vertical.

### **B81-10050** **HIGH-SPEED LASER ANEMOMETER**

J. A. POWELL, A. STRAZISAR, and R. SEASHOLTZ  
Sep. 1982 See Also NASA TM-79320(N80-14375/NSP)

**LEW-13527** Vol. 6, No. 1, P. 52

New high-speed laser anemometer system rapidly and efficiently maps gas-flow velocities within rotating blade rows of turbomachinery. Small seed particles entrained in gas flow fluoresce when they pass through probe volume, which is the fringe pattern formed by intersecting laser beams. Transit time of particles is obtained by use of suitable optics, photomultiplier tube and electronic signal processor. Data are then sent to a minicomputer.

### **B81-10051** **CORRECTING FOR BACKGROUND IN FLOWING PLASMA MEASUREMENTS**

M. R. CARRUTH, JR. (CALTECH)

Sep. 1982

**NPO-15332** Vol. 6, No. 1, P. 53

Movable langmuir probe measures charge-exchange plasma density and flow in vicinity of an ion engine. Angular dependence of probe current is utilized to determine plasma

flow direction at probe location. By rotating target, data are shown to be independent of target-sputtered ions.

### **B81-10052** **DUAL-LASER SCHLIEREN SYSTEM**

R. B. OWEN and W. K. WINTHEROW

Sep. 1982

**MFS-25315** Vol. 6, No. 1, P. 54

Proposed schlieren system uses two lasers and two knife edges to simultaneously view perpendicular refractive-index gradients in a test volume. It is improvement over conventional schlieren systems, which monitor gradient along only one axis. Although originally developed to monitor materials-processing experiments in space, it should find application wherever there is need to study two-dimensional temperature, pressure, concentration or other gradients related to index of refraction.

### **B81-10053** **FIBRE-OPTIC SEMICONDUCTOR TEMPERATURE GAGE**

M. SHARMA (TRW, Inc.)

Sep. 1982 See Also NASA CR-160448(N80-17848/NSP)

**MSC-18627** Vol. 6, No. 1, P. 55

'Safe' temperature gage for explosive liquids is based on optical transmission. Semiconductor crystal inserted between input and output optical fibers is temperature-sensing element in a new approach to measuring temperature of cryogenics. Since no electrical components are immersed in liquid, new sensor minimizes danger of electrically ignited explosions in hazardous cryogenics such as oxygen and hydrogen. Gage also useful for handling noncryogenic liquids in aircraft, automobiles, boats and water tanks.

### **B81-10054** **DETECTING CRACKS ON INNER SURFACES**

A. SAX (Rockwell International Corp.)

Sep. 1982

**MFS-19575** Vol. 6, No. 1, P. 56

Microscopic cracks or flaws in surface of a workpiece are often detected with fluorescent dye. Dye is spread over surface to be inspected and then washed off. When piece is viewed under ultraviolet light, a glow is seen from dye trapped in any flaws. Intensity of fluorescence gives a rough indication of depth of defect. Fluorescent inspection procedure is fast, inexpensive and simple to perform.

### **B81-10055** **VISCOUS TORQUES ON A LEVITATING BODY**

F. BUSSE (CALTECH) and T. WANG (CALTECH)

Sep. 1982

**NPO-15413** Vol. 6, No. 1, P. 56

New analytical expressions for viscous torque generated by orthogonal sound waves agree well with experiment. It is possible to calculate torque on an object levitated in a fluid. Levitation has applications in containerless materials processing, coating, and fabrication of small precision parts. Sound waves cause fluid particles to move in elliptical paths and induce azimuthal circulation in boundary layer, giving rise to time-averaged torque.

### **B81-10056** **ADHESIVE-BONDED TAB ATTACHES THERMOCOUPLES TO TITANIUM**

C. F. COOK

Sep. 1982

**FRC-11017** Vol. 6, No. 1, P. 57

Mechanical strength of titanium-alloy structures that support thermocouples is preserved by first spotwelding thermocouples to titanium tabs and then attaching tabs to titanium with a thermosetting adhesive. In contrast to spot welding, a technique previously used for thermocouples, fatigue strength of the titanium is unaffected by adhesive bonding. Technique is also gentler than soldering or attaching thermocouples with a tap screw.



**B81-10057****INTERFEROMETER ACCURATELY MEASURES ROTATION ANGLE**

P. O. MINOTT

Sep. 1982

**GSC-12614****Vol. 6, No. 1, P. 58**

Interference fringes from superimposed beams move across a photodetector, creating electrical pulses. Frequency of pulses is direct measure of angular velocity of rotating body. If separation of the sources changes, it affects separation of all fringes equally and does not affect angular velocity measurement.

**B81-10058****ULTRASONIC TRANSDUCER ANALYZER**

M. K. GROUNDS (M&amp;S Computing, Inc.)

Sep. 1982

**MFS-25410****Vol. 6, No. 1, P. 59**

Ultrasonic transducer-beam-intensity distributions are determined by analyzing echoes from a spherical ball. Computers control equipment and process data. Important beam characteristics, such as location of best beam focus and beam diameter at focus, can be determined quickly from extensive set of plots generated by apparatus.

**B81-10059****FAR-FIELD ANTENNA PATTERN FROM A NEAR-FIELD TEST**

Y. RAHMAT-SAMII (CALTECH), V. GALINDO-ISRAEL (CALTECH), and R. MITTRA (University of Illinois)

Sep. 1982

**NPO-14905****Vol. 6, No. 1, P. 60**

Plane/polar geometry simplifies measurement of near-field data for this antenna and allows a determination of far-field pattern by Jacobi-Bessel series expansion of data. Measuring probe is an undersized, dielectrically loaded and open-ended waveguide with a far-field pattern similar to that of a small magnetic dipole in its forward directions, making it unnecessary to rotate probe in direction similar to antenna rotation.

**B81-10060****HEAT PIPE BLOCKS RETURN FLOW**

J. E. ENINGER (TRW, Inc.)

Sep. 1982 See Also NASA CR-152183(N78-33379/NSP)

**ARC-11285****Vol. 6, No. 1, P. 61**

Metal-foil reed valve in conventional slab-wick heat pipe limits heat flow to one direction only. With sink warmer than source, reed is forced closed and fluid returns to source side through annular transfer wick. When this occurs, wick slab on sink side of valve dries out and heat pipe ceases to conduct heat.

**B81-10061****NOZZLE MODIFICATION SUPPRESSES FLOW TRANSIENTS**

G. V. R. RAO (Rockwell International Corp.)

Sep. 1982

**MFS-19567****Vol. 6, No. 1, P. 62**

Proposal for steadying flow from rocket nozzle on Space Shuttle main engine could be applied to other large-area-ratio contoured nozzles. Oscillations and pulsations in boundary-layer flow would be reduced by flaring nozzle exit. Transient side loads on nozzle would be suppressed. Large pressure gradients and eddies that can lead to fluctuations are suppressed. Exact radius of curvature of corner would depend on shear-layer thickness.

**B81-10062****MICROCOMPUTER CHECKS BUTT-WELD ACCURACY**

W. CLISHAM (Martin Marietta Aerospace), W. GARNER (Martin Marietta Aerospace), C. COHEN (Martin Marietta Aerospace), J. BEAL (Martin Marietta Aerospace), R. POLEN (Martin Marietta Aerospace), and J. LLOYD (Martin Marietta Aerospace)

Sep. 1982

**MFS-25557****Vol. 6, No. 1, P. 62**

Electrical gage and microcomputer eliminate time-consuming manual measurements. Alignment and angle of plates on either side of butt weld are measured and recorded automatically by hand-held gage and desk-top microcomputer. Gage/micro-computer quickly determine whether weld is within dimensional tolerances or whether reworking is needed. Microcomputer prints out measurements while operator moves gage from point to point along weld. Out-of-tolerance measurements are marked by an asterisk on printout.

**B81-10063****SELF-CORRECTING****ELECTRONICALLY-SCANNED****PRESSURE SENSOR**

C. GROSS and T. BASTA

Sep. 1982

**LAR-12686****Vol. 6, No. 1, P. 63**

High-data-rate sensor automatically corrects for temperature variations. Multichannel, self-correcting pressure sensor can be used in wind tunnels, aircraft, process controllers and automobiles. Offers data rates approaching 100,000 measurements per second with inaccuracies due to temperature shifts held below 0.25 percent (nominal) of full scale over a temperature span of 55 degrees C.

**B81-10064****LACQUER REVEALS IMPACT DAMAGE IN COMPOSITES**

M. D. RHODES and J. G. WILLIAMS

Sep. 1982

**LAR-12700****Vol. 6, No. 1, P. 64**

Brittle lacquer unveils effects normally visible only by ultrasonic inspection. Lacquer coating measures spread of cracking and delamination in graphite/epoxy panels subjected to cyclic compression loads after impact damage. Test specimen is coated with lacquer on side opposite surface at which projectile will be fired. Spalled area shows effect of impact without removing specimen from test fixture.

**B81-10065****MEASURING CYCLIC-STRESS PROPERTIES OF PRESSURE VESSELS**

C. F. FIFTAL (Martin Marietta Corp.)

Sep. 1982

**MFS-23734****Vol. 6, No. 1, P. 65**

Simulated-service cycle differs from conventional proof-test cycle in that specimen is subjected to sine-wave variation of stress instead of prolonged steady stress. Simulated-service testing is performed at low and high temperatures as well as at room temperatures. (Flaws initiated by severe stresses of proof testing can later develop into leaks during service, thus effectively reducing useful service life.) Method may be useful for commercial thin-wall vessels.

**B81-10066****MATCHING OF APPARENT-STRAIN CHARACTERISTICS**

T. C. MOORE

Sep. 1982

**LAR-12743****Vol. 6, No. 1, P. 66**

Strain gages are temporarily bonded to surface of test block. Apparent strain is recorded in excursion to -190 degrees C, and gages are disbonded following heating to elevated temperature. Matching strain gages for cryogenic use has several advantages. Initial accuracy for cryogenic transducers is greatly improved, less apparent-strain correction wire is required and there are smaller errors due to loop data caused by long pieces of correction wire.

**B81-10067****PRESSURE SWITCH IS A LOW COST BATTERY INDICATOR**

J. L. ABITA (John Hopkins Univ.)

Sep. 1982

**GSC-12679****Vol. 6, No. 1, P. 67**

Conventional pressure switch, fabricated by printed-

## 06 MECHANICS

circuit manufacturing techniques, can indicate when charge on battery departs from preset level. Membrane on switch is exposed to internal pressure of battery, which varies according to stored charge. When pressure varies from preset level, switch can turn on a light-emitting diode or similar indicator to warn user that battery is low.

### B81-10068

#### PULSED PHASE-LOCKED-LOOP STRAIN MONITOR

J. S. HEYMAN and F. D. STONE

Sep. 1982

LAR-12772

Vol. 6, No. 1, P. 68

P2sup.L2sup. strain monitor measures strain by monitoring change in phase of acoustic signal that passes through stressed sample. Phase sample causes shift in frequency of VCO. As with other monitors of this type, instrument is only accurate in elastic range of material. Monitor is expected to have broad application in materials testing, structural design, fabrication and assembly.

### B81-10069

#### STRAIN-GAGED BOLTS ARE EASILY PREPARED

R. L. WALKER (Rockwell International Corp.)

Sep. 1982

MSC-18823

Vol. 6, No. 1, P. 69

New method for installing strain gages in structural bolts is implemented as standard workbench procedure. Rather than potting gages in a hole along axis of bolt, gages are first installed on outside of plastic carrier tube. Tube is then epoxied in axial hole. Procedure can be used to prepare gages to monitor bolt tension, shear, or torsion.

### B81-10070

#### LOAD-DISPLACEMENT MEASUREMENT ON PIN-LOADED SPECIMENS

D. M. FISHER and R. BUZZARD

Sep. 1982 See Also NASA TM-81379(N80-13513/NSP) and NASA TN-D-3724(N6710749/NSP)

LEW-13624

Vol. 6, No. 1, P. 70

Tubes apply as displacement is registered by long armed, double-cantilever gage. Sharp points at ends of arms protrude through holes in tube walls and contact center of area of load applications. Method was devised for determining load point displacement accurately. No extraneous displacement fraction is present in measurement, and data-correction procedures are unnecessary.

### B81-10071

#### HEAT-ENERGY ANALYSIS FOR SOLAR RECEIVERS

F. L. LANSING (CALTECH)

Sep. 1982

NPO-14835

Vol. 6, No. 1, P. 70

Heat-energy analysis program (HEAP) solves general heat-transfer problems, with some specific features that are 'custom made' for analyzing solar receivers. Can be utilized not only to predict receiver performance under varying solar flux, ambient temperature and local heat-transfer rates but also to detect locations of hotspots and metallurgical difficulties and to predict performance sensitivity of neighboring component parameters.

### B81-10072

#### PROGRAM FOR ANALYSIS AND RESIZING OF STRUCTURES

R. T. HAFTKA (Illinois Institute of Technology), B. PRASAD (Illinois Institute of Technology), and U. TSACH (Illinois Institute of Technology)

Sep. 1982

LAR-12704

Vol. 6, No. 1, P. 71

Program for Analysis and Resizing of Structures (PARS) determines optimum resizing of structures subject to stress, displacement, and flutter constraints. Is an efficient code for sizing large- or small-scale finite-element models in presence of strength, thermal, and aeroelastic constraints with minimum and maximum bounds on structural dimensions. PARS is composed of individual processors that are

executed in a logical sequence to perform analysis or synthesis.

### B81-10073

#### UNSTEADY SUBSONIC LOADINGS DUE TO CONTROL-SURFACE MOTION

W. S. ROWE (The Boeing Co.)

Sep. 1982

LAR-12802

Vol. 6, No. 1, P. 71

RHOIV computer program predicts unsteady lifting-surface loadings caused by motions of leading edge and trailing-edge control surfaces having sealed gaps at hinge lines and side edges. Analysis is based on linear, subsonic, potential-flow theory using kernel function method. Linear combinations of pressure distributions are used that are continuous except at planform edges and hinge lines. Loading solution is obtained by downwash collocation for deflection or motion of main wing and control surfaces.

### B81-10074

#### AERODYNAMICS OF SOUNDING-ROCKET GEOMETRIES

J. BARROWMAN

Sep. 1982

GSC-12680

Vol. 6, No. 1, P. 72

Theoretical aerodynamics program TAD predicts aerodynamic characteristics of vehicles with sounding-rocket configurations. These slender, Axisymmetric finned vehicles have a wide range of aeronautical applications from rockets to high-speed armament. TAD calculates characteristics of separate portions of vehicle, calculates interference between portions, and combines results to form total vehicle solution.

### B81-10075

#### AEROELASTIC ANALYSIS FOR ROTORCRAFT

W. JOHNSON

Sep. 1982

ARC-11150

Vol. 6, No. 1, p. 72

Aeroelastic-analysis computer program incorporates an analytical model of aeroelastic behavior of wide range of rotorcraft. Such an analytical model is desirable for both pretest predictions and posttest correlations. Program can be applied in investigations of isolated rotor aeroelasticity and helicopter-flight dynamics and could be employed as basis for more-extensive investigations or aeroelastic behavior, such as automatic control system design.

### B81-10179

#### FLIGHT-MANAGEMENT ALGORITHM FOR FUEL-CONSERVATIVE DESCENTS

C. E. KNOX and D. G. CANNON (Boeing Commercial Airplane Co.)

Nov. 1982 See Also NASA TP-1717(N80-33404/NSP)

LAR-12814

Vol. 6, No. 12, P. 179

Federal Aviation Administration has developed an automated time-based metering form of air traffic control for arrivals into terminal area called local flow management/profile descent (LFM/PD). LFM/PD saves fuel by matching airplane arrival flow to airport acceptance rate through time-control computations and by allowing pilot to descend at his discretion from cruise altitude to metering fix in an idle-thrust, clean configuration (landing gear up, flaps zero, speed brakes retracted).

### B81-10180

#### MOISTURE IN COMPOSITES IS MEASURED BY POSITRON LIFETIME

J. J. SINGH, W. H. HOLT (Naval Surface Weapons Center), and W. J. MOCK (Naval Surface Weapons Center)

Nov. 1982 See Also NASA TP-1681(N80-27428/NSP)

LAR-12776

Vol. 6, No. 2, P. 180

New technique is expected to measure the moisture content and moisture depth distribution in fiber-reinforced polymeric composites. Technique is based on dependence of positron lifetime on moisture content of composite specimen. None of the previous non-destructive testing

techniques measured moisture content and depth distribution simultaneously.

**B81-10181  
LASER/HETERODYNE MEASUREMENT OF TEMPERATURE AND SALINITY**

D. J. JOBSON, C. L. FALES, and S. J. KATZBERG

Nov. 1982

**LAR-12766**

**Vol. 6, No. 2, P. 181**

Proposed visible-light laser/heterodyne receiver would remotely measure temperature and salinity of subsurface water. Operation is based on acoustic/optical scattering of light by sound waves. Application of this concept is foreseen in current research on energy conversion from ocean currents produced by thermal gradients and on future marine remote-sensing program.

**B81-10182  
WINGTIP-VORTEX TURBINE LOWERS AIRCRAFT DRAG**

J. C. J. PATTERSON

Nov. 1982

**LAR-12544**

**Vol. 6, No. 2, P. 182**

Turbine captures some of energy lost in aircraft wingtip vortices. Wing-tip vortex turbine operates in crossflow of the lift-induced vortex; i.e., flow not parallel to the flightpath. Each turbine blade generates a force as a result of angle of attack between blade and nonstreamwise local flow. Turbine converts lost vortex energy to rotational energy and reduces induced drag.

**B81-10183  
ENGINE-VIBRATION ANALYZER**

V. R. TOLMEI (Rockwell International Corp.)

Nov. 1982

**MFS-19320**

**Vol. 6, No. 2, P. 183**

Proposed circuit would monitor vibration spectrum of engines under test or in service. It could detect subtle out-of-specification conditions and could be programmed to shut down engine if an out-of-limits condition develops. Possible uses of monitor are in bench testing automobiles and outboard motors and as a safety device in very critical engine applications.

**B81-10184  
TIRE TEMPERATURE AND PRESSURE MONITOR**

I. O. MACCONOCHIE and A. G. BESWICK

Nov. 1982

**LAR-19262**

**Vol. 6, No. 2, P. 184**

Wheel-mounted miniature transmitter would signal dangerous conditions to the driver or pilot. Monitor would include a sensor and a radio transmitter mounted so as not to imbalance the wheel. Sensor and batteries are enclosed in a plastic housing on the rim. Also has possibilities as a research tool for experiments on vehicle safety.

**B81-10185  
ORIFICE BLOCKS HEAT PIPE IN REVERSE MODE**

J. P. ALARIO (Grumman Aerospace Corp.)

Nov. 1982

**ARC-11341**

**Vol. 6, No. 2, P. 185**

High forward-mode conductance is combined with rapid reverse-mode shutoff in a heat pipe originally developed to cool spacecraft payloads. A narrow orifice within the pipe 'chokes off' the evaporator if heat sink becomes warmer than source. During normal operation, with source warmer than sink, orifice has little effect. Design is simpler and more compact than other thermal-diode heat pipes and requires no special materials, forgings, or unusual construction techniques.

**B81-10186  
RANGEFINDER CORRECTS FOR AIR DENSITY AND MOISTURE**

J. B. ABSHIRE

Nov. 1982

**GSC-12609**

**Vol. 6, No. 2, P. 186**

Proposed distance-measuring instrument compensates for variations in both dry atmospheric density and water-vapor content. Instrument would be expected to be more accurate than previous laser-ranging instruments. New rangefinder sends three signal trains to target: Two trains are at optical frequencies, and one is at a microwave frequency. All three signals are phase-locked.

**B81-10187  
FASTER TEST FOR CABLE SEALS**

A. T. SHEPHARD (Martin Marietta Corp.)

Nov. 1982

**MFS-25618**

**Vol. 6, No. 2, P. 187**

Vacuum-assisted immersion test is much faster than conventional atmospheric immersion tests of cable seals. Vacuum speeds removal of air, allowing its replacement by conductive salt solution in leaking specimens. Previously, 24-hour immersion was necessary to assure displacement of trapped air. Improved method takes only 10 minutes.

**B81-10188  
CIRCUIT COUNTS CARBON FIBERS**

L. C. YANG (CALTECH)

Nov. 1982

**NPO-14940**

**Vol. 6, No. 2, P. 188**

Carbon fibers are counted when they fall on high-voltage grid. An arc discharge vaporizes fiber and triggers timer. The equal-duration pulses from timer are integrated by operational amplifier, giving an output voltage that is proportional to the number of fibers incident after reset switch was opened. If two or more fibers arrive at grid simultaneously, they are vaporized one at a time; thus all of them are counted.

**B81-10189  
MULTIPRESSURE AND TEMPERATURE PROBE**

K. R. RAMAN (Raman Aeronautics Research)

Nov. 1982

**ARC-11166**

**Vol. 6, No. 2, P. 189**

Aerodynamic probe is a small cylinder tube holding a network of tiny tubes leading to various ports. Six parameters are recorded simultaneously with little interference with aerodynamic flow. Two tubes connected by a hot-wire tungsten probe sense steady and fluctuating components of total and static pressures; the feedbacks from these tubes are input into differential-pressure sensors to measure fluctuating components of the pressures. Data are recorded by instruments at the back end of the probe.

**B81-10190  
SURFACE-CONTAMINATION INSPECTION TOOL FOR FIELD USE**

T. SMITH (Rockwell International Corp.)

Nov. 1982

**MFS-25581**

**Vol. 6, No. 2, P. 190**

Inspection tool detects surface contamination by measuring photoelectron emission. No vacuum chamber or controlled environment is used. Photoemission is measured under ordinary atmospheric conditions, so surfaces may easily be inspected in factories or in the field.

**B81-10191  
PRESSURE TRANSDUCER HAS LONG SERVICE LIFE**

R. E. PROUT (Rockwell International Corp.) and A. J. CHAVES (Moog, Inc.)

Nov. 1982

**MSC-18904**

**Vol. 6, No. 2, P. 191**

Differential-pressure transducer includes a piston, helical springs, and a linear variable-differential transformer concentric with piston. Transducer senses motion of piston in response to changes in pressure differential. Eight seals within the transducer prevent fluid leakage from one pressure line to the other. Reliability and operating life of the new unit are superior to many conventional transducers.

## 06 MECHANICS

### B81-10192

**HEATER COMPOSITE MEASURES HEAT TRANSFER**  
S. A. HIPPENSTEELE, L. M. RUSSEL, F. S. STEPKA, and  
R. J. MOFFAT (Stanford University)  
Nov. 1982 See Also NASA TM-81639(N81-21313/NSP)  
LEW-13731 Vol. 6, No. 2, P. 192

Composite consisting of commercially available elements has been developed to measure heat transfer. Composite provides a simple, convenient, low-cost device for use in heat-transfer work for rapid evaluation of thermal performance of both flat and simply curved objects. Device utilizes available off-the-shelf materials and provides a convenient method, with good resolution of local temperatures and heat transfer, with measurement accuracy at near-normal room conditions.

### B81-10193

**SURVEY OF FACILITIES FOR TESTING PHOTOVOLTAICS**

R. W. WEAVER (CALTECH)

Nov. 1982

NPO-15361

Vol. 6, No. 2, P. 192

42-page report describes facilities capable of testing complete photovoltaic systems, subsystems, or components. Compilation includes facilities and capabilities of five field centers of national photovoltaics program, two state-operated agencies, and five private testing laboratories.

### B81-10194

**GRAPHICS FOR FINITE-ELEMENT ANALYSIS**

E. A. THORNTON (Old Dominion University Research Foundation) and L. M. SAWYER (Old Dominion University Research Foundation)

Nov. 1982

LAR-12793

Vol. 6, No. 2, P. 193

ELPLOT program is a passive computer graphics system that could be utilized for display of models and responses of general finite-element analyses. Program includes: Wide range of view-orientation selections, number of alternative data-input formats, extensive family of finite-element types, and capabilities for both static and dynamic-response displays.

### B81-10195

**FINITE-ELEMENT ANALYSIS OF FORCED CONVECTION AND CONDUCTION**

A. R. WIETING

Nov. 1982

LAR-12794

Vol. 6, No. 2, P. 193

TAP2 thermal-analysis program was developed as part of research on finite element methodology for thermal analysis of convectively cooled structures, such as scramjet engines and hypersonic aircraft. Program simplifies computations when both structural and thermal analyses are required and is suited for thermal analysis of nuclear reactors and solar-panel heating systems.

### B81-10196

**MODEL VERIFICATION OF MIXED DYNAMIC SYSTEMS**

D. A. EVENSEN (J. W. Wiggins Co.), J. D. CHROSTOWSKI (J. W. Wiggins Co.), and T. K. HASSELMAN (J. W. Wiggins Co.)

Nov. 1982

MFS-23806

Vol. 6, No. 2, P. 194

MOVER uses experimental data to verify mathematical models of 'mixed' dynamic systems. The term 'mixed' refers to interactive mechanical, hydraulic, electrical, and other components. Program compares analytical transfer functions with experiment.

### B81-10197

**IMPROVED NUMERICAL DIFFERENCING ANALYZER**

J. T. SKLADANY

Nov. 1982

GSC-12671

Vol. 6, No. 2, P. 194

SINDA, Systems Improved Numerical Differencing

Analyzer, solves differential and algebraic equations representing physical systems. SINDA solves numerically almost any set of ordinary differential equations that represent transient behavior of a lumped-parameter system or any set of nonlinear algebraic equations that represents the steady state conditions of a physical system.

### B81-10198

**SIMPLIFIED THERMAL ANALYZER -VAX VERSION**

J. T. SKLADANY

Nov. 1982

GSC-12698

Vol. 6, No. 2, P. 195

DEC VAX 11/780 version of the Simplified Shuttle Payload Thermal Analyzer (SSPTA) aids in evaluating thermal design of instruments to be flown in the Space Shuttle cargo bay. SSPTA is a collection of programs that are currently used in thermal analysis of spacecraft, modified for quick, preliminary analysis of payloads.

### B81-10199

**AERODYNAMICS OF SUPERSONIC AIRCRAFT**

W. D. MIDDLETON (The Boeing Co.), J. L. LUNDY (The Boeing Co.), and R. G. COLEMAN (The Boeing Co.)

Nov. 1982

LAR-12857

Vol. 6, No. 2, P. 195

An integrated system for the analysis of supersonic configurations consists of an executive driver and eight basic computer programs that build up force coefficients of an selected configuration. System employs modified linearized theory for calculation of surface pressures and employs supersonic-area-rule concepts in combination with linearized theory for calculation of aerodynamic force coefficients.

### B81-10200

**DYNAMIC-LOADS ANALYSIS OF FLEXIBLE AIRCRAFT WITH ACTIVE CONTROLS**

B. I. PERRY and B. J. DURLING

Nov. 1982

LAR-12747

Vol. 6, No. 2, P. 196

Integrated system of stand-alone computer programs, DYLOFLEX, analyzes dynamic loads on flexible aircraft with active controls. DYLOFLEX capabilities include calculating dynamic loads due to continuous atmospheric turbulence, discrete gusts, and discrete control inputs. Each of the eight individual DYLOFLEX programs may be used alone or in conjunction with other DYLOFLEX programs.

### B81-10298

**FAST-ACTING ELECTROHYDRAULIC SERVO**

J. A. J. WEBB, O. MEHMED, and C. F. LORENZO

Dec. 1982 See Also NASA TP-1678(N80-29369/NSP)

LEW-13730

Vol. 6, No. 3, P. 295

Electrohydraulic servo controls moving elements of airflow valve. Position of moving element and attached piston is monitored by linear variable-differential transformer (LVDT). Single-stage servo valve lets fluid into and out of piston volume in response to feedback signals from the LVDT.

### B81-10299

**IMPROVED MAGNETIC-FIELD-COMPONENT RESOLVERS**

H. D. GARNER

Dec. 1982

LAR-12638

Vol. 6, No. 3, P. 296

New resolvers for vectorially summing outputs of aircraft-mounted magnetometers are lighter and more economical to fabricate than conventional electromagnetic resolvers. One resolver is based on potentiometric principles, the second uses polarization filters, and the third has variable-capacitance elements. Optical, capacitive and potentiometric devices have applications in aircraft navigation systems.

### B81-10300

**SIMPLE MAGNETOMETER FOR AUTOPILOTS**

H. D. GARNER

Dec. 1982

LAR-12832

Vol. 6, No. 3, P. 297

Simple, low-cost magnetometer is suitable for heading-reference applications in autopilots and other directional control systems. Sensing element utilizes commercially available transformer core; and supporting electronics consist of one transistor, two readily-available integrated-circuit chips, and associated resistors and capacitors.

B81-10301

# ULTRASONIC INSTRUMENT FOR EVALUATION OF COMPOSITES

A. VARY and A. GREEN (Acoustic Emission Technology Corp.)

Dec. 1982

LEW-13716

Vol. 6, No. 3, P. 298

Ultimate strength of composite material is related to normalized stress-wave factor, a measure of attenuation of stress wave. New portable ultrasonic inspection instrument measures strength of composite materials. New commercial instrument has similar specifications to prototype developed at Lewis Research Center. Device may ultimately help to reduce energy consumption and improve efficiencies of vehicles by allowing use of composite materials to their full potential in critical application areas.

B81-10302

# SMALL FIXTURE STRAINS COMPOSITES FOR ENVIRONMENTAL TESTS

F. W. TERVET (CALTECH)

Dec. 1982

NPO-15062

Vol. 6, No. 3, P. 298

Fixture for long-term strain tests of composites is based on inexpensive tool for repairing motorcycle chains. (In normal use tool forces rivet out of chain element.) As modified for composite testing, tool has precision screw and shim. Qualification tests for graphite/epoxy composites are made less expensive by simple test fixture. Used in quantity, fixtures apply precisely similar loads to many samples.

B81-10303

# SOLUTION ACCOUNTS FOR STRUCTURAL DAMPING

L. A. ROUSSOS, M. W. HYER (Virginia Polytechnic Institute and State University), and E. A. THORNTON (Old Dominion University)

Dec. 1982

LAR-12863

Vol. 6, No. 3, P. 299

New analytical technique determines dynamic response of damped structures dominated by internal structural damping mechanisms. Though structural damping is often negligible compared with damping due to air friction and friction in joints, structural damping can be of major importance in structures having heavy damping treatments or in outer-space structures. Finite-element model includes nonlinear, nonviscous internal damping.

B81-10304

# TILE-GAP MEASUREMENT TOOL

D. H. HELMAN (Rockwell International Corp.) and A. R. KEIR (Rockwell International Corp.)

Dec. 1982

MSC-20057

Vol. 6, No. 3, P. 300

Hand-held tool measures small gaps between tiles rapidly and accurately, even when gap is tapered or indented below surface. Tool indicates gap dimensions on calibrated disk. Measurements are accurate within plus or minus 0.003 inch. Tool was developed for determining gap between tiles on Space Shuttle, but may be of use in other applications requiring precise setting of gaps between tiles or other structures.

B81-10305

# GAGE FOR SURFACE WAVINESS

G. W. WILLIAMS (Rockwell International Corp.)

Dec. 1982

MSC-20055

Vol. 6, No. 3, P. 301

New device gives qualitative readings of flatness, curvature, or waviness of surface. Designed to check for waviness in surface of Space Shuttle prior to installation of heat-resistant tiles, it could be used to measure regularity or irregularity of other surfaces. Irregularities are measured by noting readings of three dial indicators on simple, inexpensive instruments.

B81-10306

# NEW CONFIGURATION FOR COMPRESSION-TEST FIXTURE

G. C. SHANKS (McDonnell Douglas Corp.)

Dec. 1982

MSC-18723

Vol. 6, No. 3, P. 301

Gravity-load axial-compression test fixture is operated by raising lower platen and specimen against weighted upper platen. Wheel turns nut on threaded rod to move lower platen up or down. Limiting rods prevent further upward movement if sample buckles.

B81-10307

# MASS-LOSS BUTTONS MONITOR MATERIAL DEGRADATION

C. N. WEBSTER (Vought Corp.)

Dec. 1982

MSC-18903

Vol. 6, No. 3, P. 302

Small button-sized samples attached to parent materials are simple way of monitoring degradation of parent in harsh environments. Samples determine effects of multiple exposures to environmental extremes without disturbing fit or function of parent. They are less costly and more convenient than complex instrumentation normally required to measure complete temperature/pressure time history of parent component.

B81-10308

# HOT FILM STATIC-PRESSURE PROBE FOR FLOW-FIELD SURVEYS

L. M. WEINSTEIN and G. C. J. ASHBY

Dec. 1982

LAR-12799

Vol. 6, No. 3, P. 303

New hot film static pressure probe significantly reduces response time in flow-field surveys during wind-tunnel tests. Probe incorporates two hot film sensors, unheated film for temperature compensation and heated film for pressure measurement, and sonic orifice for flow control. Hot film probe measures static pressure while compensating for gas temperature.

B81-10309

# PREDICTING THE STRENGTHS OF ANGLE-PLYED LAMINATES

C. C. CHAMIS

Dec. 1982 See Also NASA TM-81404(N80-16107/NSP)

LEW-13733

Vol. 6, No. 3, P. 304

Simplified convenient procedure has been developed that can be used to determine elastic and strength properties of angle-plyed laminates. Method is suitable for use with pocket calculator. Consists of simple equations and graphs of ply combinations from most frequently used composites. Procedure makes use of well-known transformation equations, ply stress influence coefficients, and ply uniaxial composites including interply and intraply hybrids.

B81-10310

# IMPROVED TENSILE TEST FOR CERAMICS

R. A. OSIECKI (Lockheed Missiles &amp; Space Co., Inc.)

Dec. 1982

MSC-20105

Vol. 6, No. 3, P. 304

For almost-nondestructive tensile testing of ceramics, steel rod is bonded to sample of ceramic. Assembly is then pulled apart in conventional tensile-test machine. Test destroys only shallow surface layer which can be machined away making specimen ready for other uses. Method

## 06 MECHANICS

should be useful as manufacturing inspection procedure for low-strength brittle materials.

**B81-10311**  
**PREDICTING TENSILE STRENGTHS OF BORON/ALUMINUM COMPOSITES**  
J. A. DECARLO  
Dec. 1982 See Also NASA TM-81474(N80-21452/NSP)  
**LEW-13745** Vol. 6, No. 3, P. 305

To develop predictive theory to account for time/temperature effect of B/A1 composites, series of deformation and fracture studies was performed on commercial boron fibers over wide ranges of stress, stress application time, and temperature. By combining these single fiber results with fracture theory for metal matrix composites, design formulas were derived that describe B/A1 composite tensile and stress rupture strengths as function of time and temperature. Using derived formulas, calculated and experimental results agree to within 3 percent.

**B81-10312**  
**DOUBLE-ADHESIVE TAPE TEST REDUCES WASTE**  
L. C. LEE (Vought Corp.) and M. W. REED (Vought Corp.)  
Dec. 1982  
**MSC-20047** Vol. 6, No. 3, P. 306

New method for testing peel strength of particular thermal-control tape used on Space Shuttle orbiter radiators requires only half amount of tape of method previously employed. Thermal-control tape consists of layers of FEP, silver, Inconel metal, adhesive, Kapton Film, and second adhesive layer. Method also avoids cost of labor and materials to prepare second test coupon and can be adapted for testing other types of double-faced adhesive tapes in military, industrial and consumer applications.

**B81-10313**  
**DETECTING CONTAMINATION WITH PHOTOELECTRON EMISSION**  
T. SMITH (Rockwell International Corp.)  
Dec. 1982  
**MFS-25619** Vol. 6, No. 3, P. 307

Photoelectron emission from aluminum or epoxy-painted aluminum can be used to reveal presence and concentration of surface contaminants. Emission can be used to locate those parts of surface that are excessively contaminated and to which coatings cannot be reliably bonded. Cleaning can then be done on areas that most need it. Probe moves at rate of typically 1 ft/s (30 cm/s), speed slow enough to ensure sensitivity but fast enough to keep scanning time within reasonable limit.

**B81-10314**  
**NEW APPARATUS TESTS PRESSURE-SUIT JOINTS**  
H. C. VYKUKAL and B. WEBBON  
Dec. 1982  
**ARC-11314** Vol. 6, No. 3, P. 308

New apparatus measures applied torque and angle-of-flexure in pressurized flexible joints, such as those found in diving suits and flight suits. Torque and flexure are permanently recorded on x-y plotter. Family of curves can be taken as function of suit pressure or other variables. Apparatus could also measure torque-versus-angle in mechanical linkages.

**B81-10315**  
**MODULAR ENGINE INSTRUMENTATION SYSTEM**  
W. J. RICE and A. G. BIRCHENOUGH  
Dec. 1982 See Also NASA TP-1757(N81-11315/NSP)  
**LEW-13729** Vol. 6, No. 3, P. 309

System that provides information and measurements never obtained before in real time has been developed. System shows not only real-time measurements but also results of computations of key combustion parameters in meaningful and easily understood display. Standard commercially-available shaft encoder plus data from pressure transducer act as principal drivers to device. Eventually,

modular system could be developed into onboard controller for automobile engines.

**B81-10316**  
**ALGORITHM FOR UNSTEADY POTENTIAL FLOW ABOUT AIRFOILS**  
R. CHIPMAN (Grumman Aerospace Corp.)  
Dec. 1982  
**ARC-11378** Vol. 6, No. 3, P. 310

Implicit finite-difference scheme efficiently computes unsteady potential flow about airfoils. Formulation uses density and velocity potential as dependent variables. Conservation form is retained to assure that shock wave location and speed are computed correctly. Scheme fills need for method to calculate efficiently unsteady potential flow about airfoils and to predict flutter and other unsteady aeroelastic phenomena in transonic flow regimes.

**B81-10317**  
**USING NOMARSKI INTERFERENCE TO DETECT MICROCRACKS IN GLASS**  
C. M. J. FLEETWOOD  
Dec. 1982  
**GSC-12649** Vol. 6, No. 3, P. 310

Nomarski interference-contrast microscopy has been proposed as technique for detecting, measuring, and observing Griffith microcracks in glass and glasslike substances. Would facilitate research into cause and elimination of these flaws, along with short-and long-term effects of temperature, humidity, and other conditions. Nomarski interference-contrast technique is expected to find wide use in inspection of glass and other materials.

**B81-10318**  
**TORQUE SIMULATOR FOR ROTATING SYSTEMS**  
W. T. DAVIS  
Dec. 1982  
**LAR-12751** Vol. 6, No. 3, P. 311

New torque brake simulates varying levels of friction in bearings of rotating body. Rolling-tail torque brake uses magnetic force to produce friction between rotating part and stationary part. Simulator electronics produce positive or negative feedback signal, depending on direction of rotation. New system allows for first time in-depth study of effects of tail-fin spin rates on pitch-, yaw-, and roll-control characteristics.

**B81-10319**  
**EXPLOSIVELY ACTUATED OPENING FOR RAPID EGRESS**  
L. J. BEMENT, J. W. BAILEY (LTV Corp.), and R. PERRY (LTV Corp.)  
Dec. 1982 See Also NASA TM-80235(N80-21293/NSP)  
**LAR-12624** Vol. 6, No. 3, P. 312

Flexible linear-shaped charge provides explosive energy to create opening and to jettison panel. Container around explosive charge protects pilot from effects of explosion. Exterior steel strip receives most of force of explosion to jettison severed panel. System allows pilot to bail out from left side of airplane by creating opening where no door exists. Egress system is simple and highly responsive, requiring minimal modifications to airplane.

**B81-10320**  
**VIBRATION ANALYSIS WITH FINITE DYNAMIC ELEMENTS**  
K. K. GUPTA (CALTECH)  
Dec. 1982  
**NPO-15087** Vol. 6, No. 3, P. 313

To enhance usefulness of computers in solving engineering problems, new techniques are being developed for numerical analysis of structural dynamics. Two aspects of this analysis--structural discretization with finite dynamic elements and solution of resulting equations--have been applied in detail to membrane and plane stress/strain continua.

**B81-10321**  
**ELASTIC SURFACE WRINKLING**  
 M. ZAK (CALTECH)  
 Dec. 1982

**NPO-15091** Vol. 6, No. 3, P. 313

Instability phenomena in elastic surfaces subject to compressive stresses are examined theoretically in new report. Theory is potentially applicable to such practical problems as aircraft panel flutter, nondestructive testing, piezoelectric transducer design, distortion of optical surfaces, and tolerance studies of very precise machine parts.

**B81-10322**  
**STRUCTURAL DESIGN WITH STRESS AND BUCKLING CONSTRAINTS**

J. KIUSALAAS (The Pennsylvania State University) and G. B. REDDY (The Pennsylvania State University)  
 Dec. 1982

**MFS-25234** Vol. 6, No. 3, P. 314

DESAP 2 synthesizes linear-elastic structures under static loads. Objective is to find element sizes (cross-sectional areas, plate thicknesses, and the like) that minimize total structural weight without changing layout of structure. Weight is minimized for given layout subject to prescribed constraints.

**B81-10323**  
**PLASTIC AND LARGE-DEFLECTION ANALYSIS OF NONLINEAR STRUCTURES**

R. G. THOMSON, R. J. HAYDUK, M. P. ROBINSON, B. J. DURLING, A. PIFKO (Grumman Aerospace Corp.), H. S. LEVINE (Grumman Aerospace Corp.), H. J. ARMEN (Grumman Aerospace Corp.), A. LEVY (Grumman Aerospace Corp.), and P. OGILVIE (Grumman Aerospace Corp.)  
 Dec. 1982

**LAR-12816** Vol. 6, No. 3, P. 314

Plastic and Large Deflection Analysis of Nonlinear Structures (PLANS) system is collection of five computer programs for finite-element static-plastic and large deflection analysis of variety of nonlinear structures. System considers bending and membrane stresses, general three-dimensional bodies, and laminated composites.

**B81-10324**  
**HIGH-LIFT SEPARATED FLOW ABOUT AIRFOILS**

L. A. CARLSON (Texas A & M University)  
 Dec. 1982

**LAR-12853** Vol. 6, No. 3, P. 315

TRANSEP Calculates flow field about low-speed single-element airfoil at high-angle-of-attack and high-lift conditions with massive boundary-layer separation. TRANSEP includes effects of weak viscous interactions and can be used for subsonic/transonic airfoil design and analysis. The approach used in TRANSEP is based on direct-inverse method and its ability to use either displacement surface or pressure as airfoil boundary condition.

Research Center program for development of highly sensitive instruments that remotely measure important chemical constituents of atmosphere. Instruments typically have requirement for cryogenic cooling of sensitive detectors and components that are necessary to detect presence of tenuous constituents of atmosphere. Key elements of mounting are two bellows, reaction plate, flexible straps and vibration isolators.

**B81-10077**  
**CONSTANT-PRESSURE HYDRAULIC PUMP**

C. W. GALLOWAY

Sep. 1982

**MSC-18794** Vol. 6, No. 1, P. 76

Constant output pressure in gas-driven hydraulic pump would be assured in new design for gas-to-hydraulic power converter. With a force-multiplying ring attached to gas piston, expanding gas would apply constant force on hydraulic piston even though gas pressure drops. As a result, pressure of hydraulic fluid remains steady, and power output of the pump does not vary.

**B81-10078**  
**ADHESIVES MIXER APPLICATOR**

D. O. RAMOS (General Electric Co.) and K. E. WERNER  
 Sep. 1982

**MSC-18916** Vol. 6, No. 1, P. 77

Two-part adhesives are stored, mixed, and dispensed by an applicator originally developed for use aboard the Space Shuttle orbiter. Compressed gas furnishes energy for mixing and dispensing. An operator needs only to open pressure valve and pull a trigger on dispenser nozzle to apply adhesive.

**B81-10079**  
**AUTOMATIC COLLECTION OF ROCK AND SOIL SAMPLES**

G. M. KYRIAS (Martin Marietta Corp.)

Sep. 1982

**MSC-18868** Vol. 6, No. 1, P. 77

Proposed machine would sample rock or soil automatically. Mounted on a wheeled or tracked vehicle, machine positions drill for cut at any angle from horizontal to vertical, moves power head to drive drill into cut, and stores drilled core in a container. New concept may also be useful in terrestrial agricultural and geologic surveys.

**B81-10080**  
**AERODYNAMICS IMPROVE WIND WHEEL**

V. W. RAMSEY (National Research Council)

Sep. 1982

**MFS-25506** Vol. 6, No. 1, P. 78

Modifications based on aerodynamic concepts would raise efficiency of wind-wheel electric-power generator. Changes smooth airflow, to increase power output, without increasing size of wheel. Significant improvements in efficiency anticipated without any increase in size or number of moving parts and without departing from simplicity of original design.

**B81-10081**  
**LATHE ATTACHMENT FINISHES INNER SURFACE OF TUBES**

A. J. LANCKI

Sep. 1982

**MSC-18780** Vol. 6, No. 1, P. 79

Extremely smooth finishes are machined on inside surfaces of tubes by new attachment for a lathe. The relatively inexpensive accessory, called a 'microhone,' holds a honing stone against workpiece by rigid tangs instead of springs as in conventional honing tools. Inner rod permits adjustment of microhoning stone, while outer tube supports assembly. Outer tube is held between split blocks on lathe toolpost. Microhoning can be done with either microhone or workpiece moving and other member stationary.

## 07 MACHINERY

**B81-10076**  
**DYNAMIC ISOLATION FOR CRYOGENIC REFRIGERATORS**

R. D. AVERILL and J. CROSSLEY EDWARD A.

Sep. 1982

**LAR-12728** Vol. 6, No. 1, P. 75

Prototype pressure-compensated mounting isolates a Tunable Diode Laser (TDL) housing from mechanical vibration. Mounting is being tested as part of Langley

## 07 MACHINERY

### B81-10082

#### BLIND FASTENER IS EASY TO INSTALL

S. A. PETERSON (Rockwell International Corp.)

Sep. 1982

MSC-18742

Vol. 6, No. 1, P. 80

Panels, sheets, doors and other structures could be easily attached to and removed from mating part by proposed new fastener. Fastener is permanently anchored in removable part only. Its protruding end is inserted into a hole in mating part. When wedge pin is screwed tightly closed, segmented collar contracts or expands to release parts or to grip them. Installation has no loose parts, and no rear nut is needed.

### B81-10083

#### RESISTANCE HEATER HELPS STIRLING-ENGINE RE-SEARCH

F. W. HOEHN (CALTECH)

Sep. 1982

NPO-14928

Vol. 6, No. 1, P. 81

Stirling engine heater head consists of 18 double-turn coils of tubing, each of which is tightly wrapped with resistance-heating element, through which working gas flows. Coils form a toroid about periphery of heater-head body. With new resistance heater, total circuit resistance can be selected independently of tube geometry by changing size of wires and/or number of wire wraps around each tube.

### B81-10084

#### BALL-AND-SOCKET JOINT CAN BE DISASSEMBLED

R. S. TOTAH (Rockwell International Corp.)

Sep. 1982

LAR-12770

Vol. 6, No. 1, P. 82

Ball-and-socket joint originally developed for construction of large platforms in zero g could be used in such Earth-based temporary structures as scaffolding, camping equipment, tent posts, trade shows and displays. New joint consists of a socket mounted on central hub or union and ball-ended bolt or fitting mounted at end of a column or any structural member. Unit is self-contained, requires no loose hardware and is engaged or disengaged without tools manually, or remotely by a manipulator.

### B81-10085

#### INTEGRATED STRUCTURAL AND CABLE CONNECTOR

R. S. TOTAH (Rockwell International Corp.)

Sep. 1982

LAR-12769

Vol. 6, No. 1, P. 82

Ball-and-socket coupling includes fiber-optic cable. Three steps couple two parts of fiber-optic cable: ball is inserted into socket; cone is released in, and cable moves toward plug. Sleeve is pulled to end of its travel and cable and plug are mated. Device is a quick-connect/disconnect coupling that has application in hazardous environments, such as space, undersea and nuclear installations.

### B81-10086

#### DEVICE ACQUIRES, ORIENTS, AND CLAMPS

E. C. PRUETT (Essex Corp.) and K. B. ROBERTSON (Essex Corp.)

Sep. 1982

MFS-25403

Vol. 6, No. 1, P. 84

Proposed mechanism secures an object in three stages: initial acquisition, alignment, and clamping. Originally developed to aid Space Shuttle crews in retrieving satellites, concept may also be useful in undersea work or as a machine-tool attachment for quick changes of tools.

### B81-10087

#### ADVANCES IN TURBINE-ENGINE TECHNOLOGY

J. C. FRECHE and M. G. AUTT

Sep. 1982 See Also NASA TM-X-73628(N77-33159/NSP)

LEW-13672

Vol. 6, No. 1, P. 84

Status report describes major advances in high-temperature materials, coatings, and turbine-blade coating

technology for aircraft turbine engines, which are keys to achieving improved performance.

### B81-10201

#### SIMPLER VARIABLE-SPEED DRIVE FOR FAN OR PUMP

H. D. OBLER

Nov. 1982

GSC-12643

Vol. 6, No. 2, P. 199

Static pressure developed by a fan or pump is used directly to control its speed in a new drive unit. System is simpler and more economical than many other speed controllers, although it is less accurate and has a narrower speed range. However, since very accurate control is not usually required for fans and pumps, unit would work well in many applications.

### B81-10202

#### MAGNETIC BEARING CONSUMES LOW POWER

P. A. STUDER

Nov. 1982

GSC-12517

Vol. 6, No. 2, P. 200

Energy-efficient linear magnetic bearing maintains a precise small separation between its moving and stationary parts. Originally designed for cryogenic compressors on spacecraft, proposed magnetic bearing offers an alternative to roller or gas bearing in linear motion system. Linear noncontacting bearing operates in environments where lubricants cannot be used.

### B81-10203

#### MAGNETIC BEARING WITH ACTIVE CONTROL

M. GOLDSKY (North American Philips Corp.)

Nov. 1982

GSC-12582

Vol. 6, No. 2, P. 201

Magnetic shaft bearing employs electromagnets energized by signals related to shaft position and velocity. Electromagnets are arranged in orthogonal pairs. Axial and rotational shaft motions are accommodated, and lateral motions are restrained. Axial motion can also be restrained. Self-regulating bearing includes velocity and position control.

### B81-10204

#### SPRING SUPPORT FOR TURBOPUMP ROTOR BEARING

M. L. STRANGELAND (Rockwell International Corp.) and

C. T. ELLINGBOE (Rockwell International Corp.)

Nov. 1982

MFS-19624

Vol. 6, No. 2, P. 202

Novel bearing support for liquid-oxygen turbopumps protects against impact loads while avoiding a major disadvantage of earlier flexible supports. It allows controlled axial movement necessary for proper operation of pressure-operated pump impeller. While spring-loading rotor to midpoint of the axial movement to avoid impact-load damage to turbopump components. Support is made by machining azimuthal slots in cylindrical portion. Resulting structure permits controlled axial deformations.

### B81-10205

#### 'BOTTLE-BRUSH' HEAT EXCHANGER

E. TWARD (CALTECH) and J. R. GATEWOOD (CALTECH)

Nov. 1982

NPO-15479

Vol. 6, No. 2, P. 202

Heat exchanger consists of a metal tube with wires extending inward from wall. Conduction of heat along wires improves heat transfer to gas or other filling. Fluid is heated throughout the cross section of tube. Suggested applications are refrigerators, heat engines, thermal instrumentation, and heat switches.

### B81-10206

#### CAM-DESIGN TORQUE WRENCH

P. H. J. SCHICK (Rockwell International Corp.) and S. A.

GATTUSO (Rockwell International Corp.)

Nov. 1982

MFS-19586

Vol. 6, No. 2, P. 203



New Torque wrench for electrical connectors automatically tightens its grip with increasing torque to insure against slippage. Tool requires only minimal clearance between connector and adjacent structures or components. Wrench is operated with one hand and can be used on connectors of various shapes.

**B81-10207**  
**CLAMP RESTRAINS PRESSURE LINE**  
J. A. ALIBERTI

Nov. 1982

**KSC-11205**

**Vol. 6, No. 2, P. 204**

Safety restraint protects people and property if a high-pressure fitting fails. As long as pressure line remains attached at the fitting, clamp exerts essentially no force on hose. If fitting fails, force of fluid leaving free end of hose causes the cam on the clamp to compress hose with a positive locking action.

**B81-10208**  
**UNIDIRECTIONAL FLEXURAL PIVOT**  
H. BAHIMAN

Nov. 1982

**GSC-12622**

**Vol. 6, No. 2, P. 204**

Flexural pivot deflects in only one angular direction (either clockwise or counterclockwise) and has a longer operating life than many previous designs. Pivot consists of two rings interconnected by three flat metal parallelograms welded into grooves or slots in inside diameters of rings. Springs flex to relieve compressive stress imparted by angular rotation.

**B81-10209**  
**TECHNIQUE FOR MACHINING GLASS**  
S. H. RICE

Nov. 1982

**GSC-12636**

**Vol. 6, No. 2, P. 205**

Process for machining glass with conventional carbide tools requires a small quantity of a lubricant for aluminum applied to area of glass to be machined. A carbide tool is then placed against workpiece with light pressure. Tool is raised periodically to clear work of glass dust and particles. Additional lubricant is applied as it is displaced.

**B81-10210**  
**IMPROVED HIGH-TEMPERATURE SEAL**  
K. E. WOOD (Rockwell International Corp.), P. P. ZEBUS (Rockwell International Corp.), and A. R. OLSON (Rockwell International Corp.)

Nov. 1982

**MSC-18790**

**Vol. 6, No. 2, P. 206**

High-temperature seals on Space Shuttle Orbiter elevons will be improved by a new flexible seal design that increases the number of leak barriers, allows for thermal expansion and cuts weight by more than two-thirds. Improved seal may be useful in applications where it is necessary to seal gaps between moving surfaces.

**B81-10211**  
**COMPACT LIQUID DEAERATOR**  
S. T. YAMAUCHI (Rockwell International Corp.)

Nov. 1982

**MSC-18936**

**Vol. 6, No. 2, P. 206**

Gases are removed from liquids by a new deaerator that takes up only 5 inches (12.7 cm) at top of a medium-sized storage tank. Deaerator has a multiple cascading header that exposes more fluid at lower pressures than typical commercial deaerators. Potential applications are in hydraulic systems for aircraft and heavy machinery, in cooling systems where deaerated liquid is needed to prevent cavitation of pump.

**B81-10212**  
**TOUCH SENSOR RESPONDS TO CONTACT PRESSURE**  
A. K. BEJCZY (CALTECH)

Nov. 1982

**NPO-15375**

**Vol. 6, No. 2, P. 207**

Optical tactile sensor for mechanical hands senses contact pressure via change in light reflected from an elastic covering. Pressure against a cell cover causes distortion, which changes internal reflection of light. Change is sensed by detector, and output signal informs operator of contact. The greater the pressure and distortion, the greater the change in light reflection.

**B81-10213**  
**STAGED TURBOJET ENGINE WOULD EMIT LESS NO**  
R. A. CRAIG and H. O. PRITCHARD (Centre for Research in Experimental Space Science, York University)

Nov. 1982

**ARC-10814**

**Vol. 6, No. 2, P. 208**

New turbojet-engine concept could reduce nitric oxide emissions to a level from one-fifteenth to as little as one three-hundredth that of conventional units. Multiple-stage combustor could overcome flame instability problems associated with previous low-flame-temperature systems. It operates in a relatively-simple adiabatic mode without elaborate fuel-flow and air circulation patterns.

**B81-10214**  
**IMPROVED CABLE GRIP REDUCES WEAR**  
R. J. PEYRAN

Nov. 1982

**ARC-11318**

**Vol. 6, No. 2, P. 209**

Improved cable grip reduces wear due to sliding friction between cable and gripping surfaces. Drive wheels are grooved with a helical pattern that meshes with the lay of cable, analogous to a worm gear. Cable is gripped between drive wheels and guide rollers, and cable pull is exerted on the grip when drive wheels are slowed by hydraulic clutches. Cable grip may be applicable to cable-operated systems, such as ore trams in mines, overhead cable cars and ski lifts.

**B81-10215**  
**VACUUM HEAD REMOVES SANDING DUST**  
C. G. BENGLE (Rockwell International Corp.) and J. W. HOLT (Rockwell International Corp.)

Nov. 1982

**MSC-19526**

**Vol. 6, No. 2, P. 210**

Vacuum sander prevents sanding dust from entering a work area, since dust particles are drawn off as quickly as they are produced. Tool is useful where dust presents health hazards, interferes with such processes as semiconductor manufacture, or could destroy wet paint or varnish finishes. Could be used to sand such materials as lead paint.

**B81-10216**  
**TOOL LIFTS AGAINST SURFACE TENSION**  
P. MILLER (McDonnell Douglas Corp.), S. MCCORMICK (McDonnell Douglas Corp.), E. MUEGGE (McDonnell Douglas Corp.), and P. DEVEREAUX (McDonnell Douglas Corp.)

Nov. 1982

**GSC-12672**

**Vol. 6, No. 2, P. 210**

Simple tool overcomes surface tension gently but firmly by tightening a bolt in steel angle located on either side of an object mounted on a base plate, such as a battery. As bolts press against protective sheets of metal on the mounting plate, they lift the object, overcoming surface tension of grease on the mounting plate.

**B81-10217**  
**FOUR-DEGREE-OF-FREEDOM PLATFORM**  
R. C. CHOU (Franklin Institute)

Nov. 1982

**ARC-11286**

**Vol. 6, No. 2, P. 211**

Hydraulic actuators make a new motion control system more compact and more efficient than previous designs that use gimbals. System moves a platform in four degrees of freedom--simultaneous pitch, roll, yaw, and displacement. Developed for flight simulators, kinematic concept may also

## 07 MACHINERY

be useful in stabilizing platforms for shipboard equipment, material-handling machinery, and construction equipment.

### **B81-10218 EXPLOSIVE SEPARATION OF ELECTRICAL CONNECTORS**

R. T. BARBOUR (Rockwell International Corp.)

Nov. 1982

**MSC-18828**

**Vol. 6, No. 2, P. 212**

Concept proposed for separating electrical cable that connects the Space Shuttle to deployable payloads could be used to sever electrical connections in other inaccessible environments. Although triggered explosively, connector would not release combustion products that could damage sensitive electronics. Suggested applications are undersea exploration, chemical processing and areas with high levels of radiation.

### **B81-10219**

#### **RELIABLE 'UNLATCH'**

T. O. KILLGROVE (CALTECH)

Nov. 1982

**NPO-15438**

**Vol. 6, No. 2, P. 213**

Reliable unlatching mechanism utilizes preloading, a favorable geometric arrangement of mating surfaces, and redundancy to assure release. Even if only one rocking arm initially releases, the entire assembly will rotate or rock sideways to complete unlatching. Device could be useful in other applications requiring reliable remote disconnection of cables or pipes.

### **B81-10220**

#### **LATCH WITH SINGLE-MOTION RELEASE**

D. N. SETZER (Pan American World Airways, Inc.) and S. L. HOOPER (Pan American World Airways, Inc.)

Nov. 1982

**MSC-18923**

**Vol. 6, No. 2, P. 214**

Quick-load/quick-release mechanism allows an object such as a battery to be inserted with a single motion, locks and latches the object, and allows the object to be released with a single motion.

### **B81-10325**

#### **A SIMPLE TILTMETER**

M. G. DIX, D. R. HARRISON, and T. M. EDWARDS

Dec. 1982

**ARC-11344**

**Vol. 6, No. 3, P. 319**

Bubble vial with external aluminum-foil electrodes is sensing element for simple indicating tiltmeter. To measure bubble displacement, bridge circuit detects difference in capacitance between two sensing electrodes and reference electrode. Tiltmeter was developed for experiment on forecasting seismic events by changes in Earth's magnetic field.

### **B81-10326**

#### **'TEACHING' AN INDUSTRIAL ROBOT TO SPRAY**

A. R. EVANS (United Space Boosters Inc.) and G. K. SWEET (United Space Boosters Inc.)

Dec. 1982

**MFS-25523**

**Vol. 6, No. 3, P. 320**

Teaching device, consisting of spacer rod or tube with three-pointed tip and line level, is used during pattern 'teach-in' to make sure that robot manipulator holds spray gun perpendicular to surface to be sprayed and at right distance from it. For slanted surfaces angle adapter is added between spacer rod and line-level indicator. Angle is determined by slope of surface to be sprayed, thus allowing a perpendicular spray pattern against even slanted surfaces.

### **B81-10327**

#### **HYBRID POSITION/FORCE CONTROL OF ROBOT MANIPULATORS**

M. H. RAIBERT (CALTECH) and J. J. CRAIG (CALTECH)

Dec. 1982

### **NPO-14997**

**Vol. 6, No. 3, P. 320**

In proposed method for task-oriented control of robot manipulator, position and force error signals for each task degree of freedom are used to calculate appropriate control parameters in task coordinates. Position and force error signals are transformed and summed to create drive signal for each actuator. New hybrid control technique does not require operator to supply complex transform matrices. Control trajectories are easily visualized in terms of task to be performed.

### **B81-10328**

#### **PRECISE RESTRAIGHTENING OF BENT STUDS**

R. E. BOARDMAN (Rockwell International Corp.)

Dec. 1982

**MFS-19632**

**Vol. 6, No. 3, P. 321**

Special tool quickly bends studs back into shape accurately and safely by force applied by hydraulic ram, with deflection being measured by dial indicator. Ram and indicator can be interchanged for straightening in reverse direction.

### **B81-10329**

#### **UNIVERSAL ASSEMBLY FOR CAPTIVE BOLTS**

M. L. MARKE (Rockwell International Corp.) and B. HAGOP-  
IAN (Rockwell International Corp.)

Dec. 1982

**MSC-18905**

**Vol. 6, No. 3, P. 322**

New method allows for virtually any bolt to be easily converted to 'captive' bolt. Method eliminates need for separate design for each application. Cup-shaped washer that is flattened secures tap to bolt. Wire attached to tab holds bolt assembly captive. Flattening washer can also be done during installation of bolt. Wash, tab and spacer are all made of corrosion-resistant steel.

### **B81-10330**

#### **ARTICULATED VACUUM CHUCK**

S. A. PETERSON (Rockwell International Corp.)

Dec. 1982

**MSC-18933**

**Vol. 6, No. 3, P. 323**

Vacuum chuck conforms to complex surface contours. Gripping surface is polyurethane panel embedded with links of roller chain. Panel flexes under vacuum to adjust to surface contour, and then bolts are tightened to lock configuration. Possible applications of new chuck are in pull-testing contoured surfaces, holding assemblies together for repairs, or for handling unusually-shaped parts.

### **B81-10331**

#### **FLYWHEELS WOULD COMPENSATE FOR ROTOR IMBALANCE**

J. A. S. HRASTAR

Dec. 1982

**GSC-12550**

**Vol. 6, No. 3, P. 323**

Spinning flywheels within rotor can null imbalance forces in rotor. Flywheels axes are perpendicular to each other and to rotor axis. Feedback signals from accelerometers or strain gages in platform control flywheel speeds and rotation directions. Concept should be useful for compensating rotating bodies on Earth. For example, may be applied to large industrial centrifuge, particularly if balance changes during operation.

### **B81-10332**

#### **HIGH-SPEED WAFER SLICER**

F. SCHMID (Crystal Systems, Inc.), C. P. KHATTAK (Crystal Systems, Inc.), and M. B. SMITH (Crystal Systems, Inc.)

Dec. 1982

**NPO-15463**

**Vol. 6, No. 3, P. 324**

Multiblade cutter slices silicon ingots into solar-cell wafers quickly and with little waste. Speed and blade pressure ensure high wafer-production rate. Lightweight, balanced construction minimizes blade vibration and reduces sideways motion that would otherwise widen kerf and waste silicon.

**B81-10333**  
**BRUSHLESS CLEANING OF SOLAR PANELS AND WINDOWS**

H. W. SCHNEIDER (CALTECH)  
 Dec. 1982

**NPO-14922** Vol. 6, No. 3, P. 325

Machine proposed for cleaning solar panels and reflectors uses multiple vortexes of air, solvent, and water to remove dust and dirt. Uses no brushes that might abrade solar surfaces and thereby reduce efficiency. Machine can be readily automated and can be used on curved surfaces such as aspherical reflectors as well as on flat ones. Cleaning fluids are recycled, so that large quantities of water and solvent are not needed.

**B81-10334**  
**SAFETY BOLT DOUBLES AS A BUSHING-REMOVAL TOOL**

C. E. HAVERKAMP (McDonnell Douglas Corp.)

Dec. 1982

**MSC-20032** Vol. 6, No. 3, P. 326

Bushings fitted to close tolerances and limited access can be removed without damage to housing by using bolt with integrated locking dog. Such self-retaining positive-locking bolts are normally used as fasteners in critical joints where accidentally loosened bolt could cause damage or injuries.

**B81-10335**  
**IMPROVED NOZZLE WOULD REDUCE CRYOGENIC BOILOFF**

E. D. SIMON (Martin Marietta Corp.) and W. E. SIMON (Martin Marietta Corp.)

Dec. 1982

**MFS-25589** Vol. 6, No. 3, P. 327

Improved nozzle has slotted orifice that would impart swirling motion to cryogenic liquid inside cylinder. Nozzle is installed with axis vertical. Since most of flow out of cylinder would be radial, fluid spray would not reach liquid surface.

**B81-10336**  
**STAKING TOOL FOR HARD METALS**

J. A. STEIN (Rockwell International Corp.)

Dec. 1982

**MSC-20009** Vol. 6, No. 3, P. 328

Simple tool stakes hard-steel parts--that is, forces one part into recess on another, deforming receiving part so that it restrains inserted one. Tool allows small machine shops to stake hard steel without massive presses. Can be used, for example, to insert ball and spring into hard steel snap-tool body such as that used to turn socket wrenches. Use is not limited to hard steel; can be used as well to assemble parts made of softer materials.

**B81-10337**  
**FORCE AUGMENTATION FOR RELIEF VALVE**

J. LUGER (Parker Hannifin Corp.)

Dec. 1982

**MSC-20065** Vol. 6, No. 3, P. 329

Simple design change for poppet relief valve enables flow through valve to exert additional force to help keep valve open. Although originally intended for relief valves for liquid oxygen and liquid nitrogen in Space Shuttle orbiter, concept is applicable to pressure- or flow-actuated valves for wide range of fluids and temperatures.

**B81-10338**  
**DAMPING VIBRATION AT AN IMPELLER**

J. A. HAGER (Rockwell International Corp.) and B. F. ROWAN (Rockwell International Corp.)

Dec. 1982

**MFS-19645** Vol. 6, No. 3, P. 329

Vibration of pump shaft is damped at impeller--where vibration-induced deflections are greatest--by shroud and seal. Damping reduces vibrational motion of shaft at bearings

and load shaft places on them. Flow through clearance channel absorbs vibration energy.

**B81-10339**  
**TESTS OF 38 BALL-BEARING GREASES**

E. L. MCMURTREY

Dec. 1982

**MFS-25624** Vol. 6, No. 3, P. 330

Report presents interim results in program of long-term tests of ball-bearing greases in vacuum, oxidizing, and otherwise hostile environment. Program is motivated by need for mechanisms that will operate for long periods in spacecraft or space stations. Class of lubricants based on perfluoroalkylpolyether (PFPE) with fluorotelomer thickeners has given best results in vacuum tests completed thus far. Test methods and performances of various lubricants could be of interest in automotive and industrial communities.

## 08 FABRICATION TECHNOLOGY

**B81-10088**  
**IMPROVED CLOTHING FOR FIREFIGHTERS**

F. J. ABELES (Grumman Aerospace Corp.)

Sep. 1982 See also NASA CR-161529(N80-32098/NSP); NASA CR-161530(N80-32586/NSP); NASA CR-161531(N80-32100/NSP); NASA CR-161532(N80-32099/NSP)

**MFS-25546** Vol. 6, No. 1, P. 87

Application of space technology should reduce incidence of injuries, heat exhaustion, and fatigue in firefighters. Using advanced materials and design concepts of aerospace technology, protective gear was fabricated and tested for the heat, face, torso, hand and foot. In tests, it was found that new gear protects better than conventional firefighter gear, weighs 40 percent less, and reduces wearer's energy expenditure by 25 percent.

**B81-10089**  
**GRAVITY-FEED GROWTH OF SILICON RIBBON**

G. W. CULLEN (RCA Corp.)

Sep. 1982

**NPO-14967** Vol. 6, No. 1, P. 88

In inverted Stepanov apparatus, silicon is melted in vee-shaped crucible that has long narrow slot at bottom of vee. Molten silicon flows from slot at a rate controlled by fluid pressure. As it emerges, it cools and solidifies to form a continuous ribbon. To eliminate surface-tension effects, crucible walls are made of a material that liquid silicon does not wet.

**B81-10090**  
**HEAT-EXCHANGER METHOD OF CRYSTAL GROWTH**

C. P. KHATTAK (Crystal Systems, Inc.) and F. SCHMID (Crystal Systems, Inc.)

Sep. 1982

**NPO-14819** Vol. 6, No. 1, P. 89

Large crystals of silicon are grown from melt, in either vacuum or pressurized atmosphere, without moving crucible, furnace, or anything else. Seed crystal is mounted on helium-cooled heat exchanger, which prevents seed from melting when furnace melts rest of silicon material in crucible; heat exchanger draws off heat from melt so that a solid ingot grows outward from seed in a regular crystal structure. Bottom of crucible is insulated so that heat exchanger cools only seed.

**B81-10091**  
**REMOVING DEFECTS FROM SILICON RIBBON**

K. SHIMADA (CALTECH)

## 08 FABRICATION TECHNOLOGY

Sep. 1982

**NPO-14772**

**Vol. 6, No. 1, P. 89**

Proposal for removing impurities from silicon ribbon and sheet could be developed into an automated production-line process. New technique which combines ion-cluster bombardment, electron-gun heating, and plasma etching, could be key step in fabricating inexpensive solar-cell arrays. Silicon sheets and ribbons treated this way could have enhanced carrier lifetimes necessary for satisfactory solar-cell performance.

**B81-10092**

**CERAMIC FOR SILICON-SHAPING DIES**

I. SEKERCIOGLU (Battelle Memorial Inst.) and R. R. WILLS (Battelle Memorial Inst.)

Sep. 1982

**NPO-14783**

**Vol. 6, No. 1, P. 90**

Silicon beryllium oxynitride (SiBON) is a promising candidate material for manufacture of shaping dies used in fabricating ribbons or sheets of silicon. It is extremely stable, resists thermal shock, and has excellent resistance to molten silicon. SiBON is a solid solution of beryllium silicate in beta-silicon nitride.

**B81-10093**

**RECHARGING THE SILICON CRUCIBLE IN A HOT FURNACE**

R. L. LANE (Kayex Corp.)

Sep. 1982

**NPO-14980**

**Vol. 6, No. 1, P. 91**

'Melt recharger' adds raw silicon to crucible in crystal-growing furnace without disturbing inert-gas atmosphere or significantly lowering temperature of melt. Crucible-refill hopper is lowered into hot zone of crystal-pulling chamber through an isolation valve. Cable that supports hopper is fastened to cone-shaped stopper in bottom of hopper. Stopper moves out of opening in hopper, allowing part of polysilicon charge to drop into crucible.

**B81-10094**

**CRUCIBLE GROWS WIDE SILICON RIBBON**

R. SEIDENSTICKER (Westinghouse Electric Corp.)

Sep. 1982

**NPO-14859**

**Vol. 6, No. 1, P. 91**

Inexpensive manufacture of solar cells may require quality silicon ribbon crystals. One way to produce them is by growing wide dendritic webs, which can be very long and have high structural perfection. Dendrites grow from supercooled melt, so width of ribbon depends on how wide a region of supercooled molten silicon can be maintained in crucible. Elongated geometry of susceptor/crucible/lid assembly allows molten silicon to supercool over a wider region -- a necessary condition for the growth of wide dendritic crystal ribbon.

**B81-10095**

**REFRACTORIES KEEP SILICON CRYSTALS PURE**

F. SCHMID (Crystal Systems, Inc.) and C. P. KHATTAK (Crystal Systems, Inc.)

Sep. 1982

**NPO-14820**

**Vol. 6, No. 1, P. 92**

Formation of carbon monoxide gas is prevented by a linear of refractory material free of elemental carbon. For pressures above about 4 torr, silicon carbide can be used as refractory liner. The problem of carbide contamination can arise in crystal growth of any material that forms a carbide more stable than carbon monoxide. Prevention in such cases is possible by using noncarbon refractories in place of graphite.

**B81-10096**

**IMPROVED FACILITY FOR PRODUCING SILICON WEB**

C. S. DUNCAN (Westinghouse Electric Corp.)

Sep. 1982

**NPO-14860**

**Vol. 6, No. 1, P. 93**

Growth of continuous silicon dendritic web that is up to

5 cm wide instead on only 1.3 cm is formed by freezing of supercooled liquid silicon between two needlelike dendritic crystals. Growth takes place in a work chamber filled with argon gas. As web grows, it is drawn out of chamber through a duct and guided to a storage reel.

**B81-10097**

**AUTOMATIC CONTROL OF SILICON MELT LEVEL**

C. S. DUNCAN (Westinghouse Electric Corp.) and W. B. STICKEL (Westinghouse Electric Corp.)

Sep. 1982

**NPO-15487**

**Vol. 6, No. 1, P. 94**

A new circuit, when combined with melt-replenishment system and melt level sensor, offers continuous closed-loop automatic control of melt-level during web growth. Installed on silicon-web furnace, circuit controls melt-level to within 0.1 mm for as long as 8 hours. Circuit affords greater area growth rate and higher web quality, automatic melt-level control also allows semiautomatic growth of web over long periods which can greatly reduce costs.

**B81-10098**

**TEMPERATURE-CONTROLLED SUPPORT FOR A SEED CRYSTAL**

J. L. REEVE (TRW, Inc.)

Sep. 1982

**MFS-25341**

**Vol. 6, No. 1, P. 94**

A rodlike structure called a sting has been proposed for supporting a seed crystal at center of a body of saturated fluid and for controlling temperature/time profile of seed for experiments on crystal growth. Seed crystal is cooled or heated by thermoelectric modules while surrounding sheath remains at solution temperature. Heat is withdrawn to cooling fins by heat pipe, which replaces solid copper rod in a previous design.

**B81-10099**

**FIBER-REINFORCED SLIP CASTINGS**

J. C. BLOME, D. N. DRENNAN (McDonnell Douglas Corp.), and H. M. KEESER (McDonnell Douglas Corp.)

Sep. 1982

**ARC-11279**

**Vol. 6, No. 1, P. 95**

Addition of silica fibers greatly reduces shrinkage and cracking during casting of ceramics. Fiber-reinforced slip-cast silica ceramics are also tougher and have lower dielectric loss. Silica fibers are hyperpure material containing only 1 part per million total metal-ion impurities. Hyperpure fibers ensure high reflectance and allow casting to be fired at temperature greater than 2,200 degrees F without loss of strength from devitrification.

**B81-10100**

**FLUXLESS BRAZING OF LARGE STRUCTURAL PANELS**

C. S. BEUYUKIAN (Rockwell International Corp.)

Sep. 1982 See Also NASA CR-3159(N79-31628/NSP)

**LAR-12519**

**Vol. 6, No. 1, P. 96**

Fluxless brazing is used in fabricating aluminum structural panels that withstand high internal pressure. Aluminum sheet of structural thickness with 4045 aluminum/silicon-braze-alloy cladding is brazed to corrugated 'fin stock' having channels 0.001 inch (0.03mm) high by same width. Process is carried out in an inert (argon) atmosphere in a retort furnace. Filler bars are used in some channels to prevent fin stock from collapsing as pressure is applied.

**B81-10101**

**WEATHERPROOF CRIMP CONNECTOR**

F. J. MOSNA (Motorola, Inc.)

Sep. 1982

**NPO-15497**

**Vol. 6, No. 1, P. 97**

Concept for electrical connector combines environmental durability of a sealed connection with simplicity and economy of a crimped connection. Device should provide convenient and reliable outdoor electrical connections. Environmental durability and crimpability are ensured by

elastomer tube and metal barrel. An external metal sheath protects elastomer from damage during crimping.

**B81-10102  
CAPACITIVELY-HEATED FLUIDIZED BED**

E. J. MCHALE (Union Carbide Corp.)

Sep. 1982

**NPO-14912**

**Vol. 6, No. 1, P. 98**

Fluidized-bed chamber in which particles in bed are capacitively heated produces high yields of polycrystalline silicon for semiconductor devices. Deposition of unrecoverable silicon on chamber wall is reduced, and amount of recoverable silicon depositing on seed particles in bed is increased. Particles also have a size and density suitable for direct handling without consolidation, unlike silicon dust produced in heated-wall chambers.

**B81-10103  
SHAPING TRANSISTOR LEADS FOR BETTER SOLDER JOINTS**

H. MANDEL (TRW, Inc.) and J. D. DILLON (TRW, Inc.)

Sep. 1982

**MSC-18837**

**Vol. 6, No. 1, P. 99**

Special lead-forming tool puts step in leads of microwave power transistors without damaging braze joints that fasten leads to package. Stepped leads are soldered to circuit boards more reliably than straight leads, and stress on brazes is relieved. Lead-forming hand-tool has two parts: a forming die and an actuator. Spring-loaded saddle is adjusted so that when transistor package is placed on it, leads rest on forming rails.

**B81-10104  
METALLIC PANELS WOULD INSULATE AT 2,700 DEGREES F**

R. L. JACKSON

Sep. 1982

**LAR-12620**

**Vol. 6, No. 1, P. 100**

Multiwall metallic panels now under development as replacements for ceramic surface-insulation tiles of Space Shuttle could eventually be used in other aircraft, possibly even as thermal protection in ground-based applications. Various configurations of basic multilayer sandwich are expected to protect against temperatures ranging from 700 degrees to 2,700 degrees F (370 degrees -1, 480 degrees C). With assistance from heat-pipe cooling, panels should withstand temperature to 3,500 degrees F (1,930 degrees C); however, heat pipes would not exceed 1,600 degrees F (870 degrees C).

**B81-10105  
WIRE EDM FOR REFRACTORY MATERIALS**

G. R. ZELLARS, F. E. HARRIS, C. E. LOWELL, W. M. POLLMAN, V. J. RYS, and R. J. WILLS

Sep. 1982

**LEW-13460**

**Vol. 6, No. 1, P. 101**

In an attempt to reduce fabrication time and costs, Wire Electrical Discharge Machine (Wire EDM) method was investigated as tool for fabricating matched blade roots and disk slots. Eight high-strength nickel-base superalloys were used. Computer-controlled Wire EDM technique provided high quality surfaces with excellent dimensional tolerances. Wire EDM method offers potential for substantial reductions in fabrication costs for 'hard to machine' alloys and electrically conductive materials in specific high-precision applications.

**B81-10106  
HEAT LAMPS SOLDER SOLAR ARRAY QUICKLY**

P. J. COYLE (RCA Corp.) and M. S. CROUTHAMEL (RCA Corp.)

Sep. 1982

**NPO-14866**

**Vol. 6, No. 1, P. 101**

Interconnection tabs in a nine-solar-cell array have been soldered simultaneously with radiant heat. Cells and tabs are held in position for soldering by sandwiching them

between compliant silicone-rubber vacuum platen and transparent polyimide sealing membrane. Heat lamps warm cells, producing smooth, flat solder joints of high quality.

**B81-10107  
HIGH-TEMPERATURE SEAL FOR SLIDING-GATE VALVE**

R. G. LEONARD (Rockwell International Corp.)

Sep. 1982

**MFS-19607**

**Vol. 6, No. 1, P. 102**

Sliding-gate valve originally developed for rocket exhaust-gas ducts is sealed by a Belleville spring. It is simple, compact, and operates over a wider range of temperatures than conventional O-ring sealed valves.

**B81-10108  
STRUCTURAL MODULES WOULD CONTAIN TRANSMISSION LINES**

W. A. LEAVY

Sep. 1982

**GSC-12523**

**Vol. 6, No. 1, P. 103**

New proposal, originally suggested for Spacecraft, is a set of uniformly sized mass-producible modular structural elements that contain electric, fluid, and other transmission lines. Since lines are encapsulated, they are less likely to be damaged. Module shell could be solid metal, sheet metal, honeycomb, fiberglass, plastic, composites, or wood.

**B81-10109  
IC CAPACITORS ON GROUPS III-TO-V SUBSTRATES**

G. E. ALCORN and R. JONES

Sep. 1982

**GSC-12543**

**Vol. 6, No. 1, P. 104**

Oxides applied by a 'spin-on' process have been used to fabricate capacitors on gallium arsenide and indium phosphide substrates: they might also be used with other compounds of elements in groups III to V of the periodic table. The III-to-V materials are attractive for integrated circuits because they offer responses potentially six times faster than silicon.

**B81-10210  
LEVITATOR FOR CONTAINERLESS PROCESSING**

L. H. BERG, W. A. ORAN, and J. M. THEISS

Sep. 1982

**MFS-25509**

**Vol. 6, No. 1, P. 105**

Objects are levitated by aerodynamic forces in an apparatus originally developed for space research but just as effective on Earth. New levitator is orientation-independent. Also works equally as well whether or not gravity is present. Apparatus supports a sphere by aerodynamic forces from gas flowing through convergent/divergent section. Concentric inner tube is moved along axis of cylindrical housing.

**B81-10111  
SPRAYED COATING RENEWS BUTYL RUBBER**

R. B. MARTIN (Boeing Service International, Inc.)

Sep. 1982

**KSC-11198**

**Vol. 6, No. 1, P. 106**

Damaged butyl rubber products are renewed by spray technique originally developed for protective suits worn by NASA workers. A commercial two-part adhesive is mixed with Freon-113 (or equivalent) trichlorotrifluoroethane to obtain optimum viscosity for spraying. Mix is applied with an external-air-mix spray gun.

**B81-10112  
METAL SANDWICH PANEL WITH BIAXIALLY CORRUGATED CORE**

W. L. KO

Sep. 1982

**FRC-11026**

**Vol. 6, No. 1, P. 106**

Biaxially-corrugated sandwich core, formed by concurrent diffusion bonding and superplastic deformation, makes a proposed sandwich panel unusually strong and stiff. New panel should be useful where light-weight panel that

## 08 FABRICATION TECHNOLOGY

resists bending is needed. Panel would have internal core consisting of multitude of hollow, truncated pyramids. Four layers of panel would be diffusion-bonded at all contacting areas.

**B81-10113**

### ULTRA-THIN-FILM GAAS SOLAR CELLS

K. L. WANG (CALTECH), B. K. SHIN (CALTECH), Y. C. M. YE (CALTECH), and R. J. STIRN (CALTECH)

Sep. 1982

**NPO-14930**

**Vol. 6, No. 1, P. 108**

Process based on organo-metallic chemical vapor deposition (OM/CVD) of trimethyl gallium with arsine forms economical ultrathin GaAs epitaxial films. Process has higher potential for low manufacturing cost and large-scale production compared with more-conventional halide CVD and liquid-phase epitaxy processes. By reducing thickness of GaAs and substituting low-cost substrate for single-crystal GaAs wafer, process would make GaAs solar cells commercially more attractive.

**B81-10114**

### SEALED STRIP LINE FOR EXTREME TEMPERATURES

G. C. SARGENT (Watkins Johnson Co.)

Sep. 1982

**MSC-16994**

**Vol. 6, No. 1, P. 108**

Enclosed strip-line feed for microwave antennas is made by plating exterior of an assembly of etched copper-clad dielectric boards. New circuit consists of inner conductor, dielectric, and outer conductor, in a structure similar to a coaxial transmission line. New strip line could be used in airborne-radar front ends and feed networks; adaptable for underwater applications.

**B81-10115**

### WIRE WHIP KEEPS SPRAY NOZZLE CLEAN

H. R. CARROLL (Martin Marietta Corp.)

Sep. 1982

**MFS-25175**

**Vol. 6, No. 1, P. 109**

Air-turbine-driven wire whip is clamped near spray-gun mount. When spray gun is installed, wire whip is in position to remove foam buildup from nozzle face. Two lengths of wire 1 to 2 inches long and about 0.03 inch in thickness are used. Foam spray would be prevented from accumulating on nozzle face by increasing purge flow and cutting vortex-generating grooves inside cap and on nozzle flats.

**B81-10116**

### MATERIALS PROCESSING IN SPACE

R. J. NAUMANN

Sep. 1982 See Also NASA TM-78294(N80-31418/NSP)

**MFS-25544**

**Vol. 6, No. 1, P. 110**

A report describes investigations of materials processing in low-gravity environment. Ultimately, research could lead to new commercially-applicable materials and processes and to an understanding of constraints imposed by gravity. NASA-supported work is carried out in 46 academic, industrial, and Government laboratories, and covers a number of areas. An overview is given of objective and current state of development for over 100 tasks.

**B81-10221**

### SOUND WAVES LEVITATE SUBSTRATES

M. C. LEE (CALTECH) and T. G. WANG (CALTECH)

Nov. 1982

**NPO-15435**

**Vol. 6, No. 2, P. 217**

System recently tested uses acoustic waves to levitate liquid drops, millimeter-sized glass microballoons, and other objects for coating by vapor deposition or capillary attraction. Cylindrical contactless coating/handling facility employs a cylindrical acoustic focusing radiator and a tapered reflector to generate a specially-shaped standing wave pattern. Article to be processed is captured by the acoustic force field under the reflector and moves as reflector is moved to different work stations.

**B81-10222**

### PROTECTIVE GARMENT ENSEMBLE

M. E. WAKEFIELD (Martin Marietta Aerospace)

Nov. 1982

**KSC-11203**

**Vol. 6, No. 2, P. 218**

Protective garment ensemble with internally-mounted environmental-control unit contains its own air supply. Alternatively, a remote-environmental control unit or an air line is attached at the umbilical quick disconnect. Unit uses liquid air that is vaporized to provide both breathing air and cooling. Totally enclosed garment protects against toxic substances.

**B81-10223**

### THERMALLY INSULATED GLOVE WITH GOOD TACTILITY

R. BALINSKAS (United Technologies Corp.)

Nov. 1982

**MSC-18926**

**Vol. 6, No. 2, P. 219**

Thermally insulated glove contains short, closely-spaced elastomeric pins that insulate without impairing flexibility. By confining pins to the inter-joint areas of palm, fingers and back of the hand, joint mobility is retained. Glove thermal-insulation requirements dictate the relationships among pin length, pin diameter, and number of pins per unit surface length.

**B81-10224**

### LIGHTWEIGHT FACE MASK

W. E. I. CASON, R. M. BAUCOM, and R. C. EVANS

Nov. 1982

**LAR-12803**

**Vol. 6, No. 2, P. 220**

Lightweight face mask originally developed to protect epileptic patients during seizures could have many other medical and nonmedical applications such as muscular dystrophy patients, football linemen and riot-control police. Masks are extremely lightweight, the lightest of the configurations weighing only 136 grams.

**B81-10225**

### CONTAMINATION CONTROL DURING WELD REPAIRS

M. L. CASSIDENTI (Rockwell International Corp.) and R. K. BURLEY (Rockwell International Corp.)

Nov. 1982

**MFS-19652**

**Vol. 6, No. 2, P. 220**

Using internal pressure, weld defects in pipes or tanks are repaired without contaminating interiors that cannot be protected or recleaned. Procedure can be used with pipes or tubing that is attached to components with critical internal clearances. Method has also been successfully used to cut completely through a pipe with a handsaw.

**B81-10226**

### TECHNIQUE LOWERS WELD POWER REQUIREMENTS

R. PESSIN (Rockwell International Corp.)

Nov. 1982

**MFS-19655**

**Vol. 6, No. 2, P. 221**

Three electron-beam welds and a spacer are used to replace a single deep electron-beam weld. Technique would reduce power required for welding making it possible to use low-power sources.

**B81-10227**

### WELD-WIRE MONITOR

R. OLSON (Rockwell International Corp.) and R. HALL (Rockwell International Corp.)

Nov. 1982

**MFS-19603**

**Vol. 6, No. 2, P. 221**

Changes in the size or composition of weld wire being fed to an automatic welding machine are detected by an impedance-monitoring instrument. The instrument triggers an alarm if the changes would affect weld quality or cause weld failure. Device could find applications in construction of pipelines or nuclear powerplants.

**B81-10228****EDDY-CURRENT METER WOULD CHECK WELD WIRE ONLINE**G. R. BAILEY (General Dynamics Corp.)  
Nov. 1982**MSC-18891****Vol. 6, No. 2, P. 222**

Simple Technique samples an entire spool of welding wire to test for contamination or unauthorized filler wire. Since unit monitors entire length of wire used in welding, completed welds need not be inspected individually. Technique would save time, avoiding human interface and production delays.

**B81-10229****'RUGGEDIZED' MICROCOMPUTER BUS**T. J. BUDNEY and R. W. J. STONE  
Nov. 1982**GSC-12691****Vol. 6, No. 2, P. 222**

'Ruggedized' version of the STD microcomputer bus withstands rigors of space-flight. Could be used as a basis for microcomputers in other hazardous environments, including those at high and low temperatures, those in vacuum, or those subject to extreme shock and vibration.

**B81-10230****BORON/ALUMINUM-TITANIUM HAT-SECTION STIFFENER**C. R. MAIKISH (General Dynamics Corp.) and R. R. ECKBERG (General Dynamics Corp.)  
Nov. 1982**MSC-18895****Vol. 6, No. 2, P. 223**

B/Ai-Ti hat-section stiffener is formed from laminated boron/ aluminum and titanium foils. Double layers of titanium at end of a section offer additional strength and protection. Advanced composite structural element combines stiffness, light weight and durability.

**B81-10231****PROLONGING THE LIFE OF REFRACTORY FILLERS**C. SCHOMBURG and R. L. DOTTS  
Nov. 1982**MSC-18832****Vol. 6, No. 2, P. 223**

Useful life of a refractory glass cloth gap filler is increased by coating it with a suspension of silicon carbide in butanol and polyethylene. Coating is applied to the refractory filler that seals gaps between insulating tiles on the Space Shuttle orbiter. Silicon carbide coating prevents embrittlement at high temperatures such as those encountered on reentry into Earth's atmosphere.

**B81-10232****NEW METHOD FOR JOINING STAINLESS STEEL TO TITANIUM**W. H. EMANUEL (McDonnell Douglas Corp.)  
Nov. 1982**MSC-18820****Vol. 6, No. 2, P. 224**

In new process, edge of stainless-steel sheet is perforated, and joined to titanium by resistance seam welding. Titanium flows into perforations, forming a strong interlocking joint. Process creates a quasi-metallurgical bond between the thin sheets of stainless steel and titanium.

**B81-10233****ORIENTATION INSENSITIVITY FOR ELECTROCHEMICAL SENSOR**R. B. CROMER (Becton-Dickinson and Co.)  
Nov. 1982**KSC-11176****Vol. 6, No. 2, P. 224**

Using a wettable polypropylene wick, performance of an electro-chemical hydrazine sensor is made independent of its orientation. Wick keeps all electrodes in constant contact with electrolyte solution so that one or more of the electrodes do not become isolated from the electrolyte if the sensor is tilted or vibrated.

**B81-10234****IMPROVED AIR-TREATMENT CANISTER**A. M. BOEHM (United Technologies Corp.)  
Nov. 1982**MSC-18942****Vol. 6, No. 2, P. 225**

Proposed air-treatment canister integrates a heater-in-tube water evaporator into canister header. Improved design prevents water from condensing and contaminating chemicals that regenerate the air. Heater is evenly spiraled about the inlet header on the canister. Evaporator is brazed to the header.

**B81-10235****EASILY ASSEMBLED REFLECTOR FOR SOLAR CONCENTRATORS**F. L. BOUQUET (CALTECH) and T. HASEGAWA (CALTECH)  
Nov. 1982**NPO-15518****Vol. 6, No. 2, P. 226**

Reflectors for concentrating solar collectors are assembled quickly and inexpensively by method that employs precontoured supports, plastic film, and adhesive to form a segmented glass mirror. New method is self-focusing, and does not require skilled labor at any stage. Contoured ribs support film and mirror segments of reflector. Nine mirror segments are bonded to sheet. Combined mirror surface closely approximates a spherical surface with a radius of curvature of 36 inches (0.91 m).

**B81-10236****INTEGRATED SOLID-ELECTROLYTE CONSTRUCTION**R. RICHTER (CALTECH)  
Nov. 1982**NPO-15471****Vol. 6, No. 2, P. 227**

Proposed construction method for electrolytic cells would integrate porous surface electrodes into a block of solid electrolyte. Porous electrodes would facilitate unrestricted gas flow thereby improving cell performance. Electrode wire mesh is embedded at surface of solid electrolyte. Construction would assure high electrode conductance and low resistance to gas flow.

**B81-10237****ASSEMBLING MULTICOLOR PRINTING PLATES**W. J. WATERS  
Nov. 1982**LEW-13598****Vol. 6, No. 2, P. 227**

Improved joining method uses wave-soldering techniques developed for integrated-circuit-board assemblies. Thermosetting plastic is replaced by wave soldering, which applies a thin even coat of solder to mating copper surfaces. This is done after ink holes and channels have been protected by water-soluble, high-temperature solder mask which prevents wetting and clogging.

**B81-10238****SELECTIVE ETCHING OF SEMICONDUCTOR GLASSIVATION**N. CASPER (Sperry Corp.)  
Nov. 1982**GSC-12667****Vol. 6, No. 2, P. 228**

Selective etching technique removes portions of glassivation on a semi-conductor die for failure analysis or repairs. A periodontal needle attached to a plastic syringe is moved by a microprobe. Syringe is filled with a glass etch. A drop of hexane and vacuum pump oil is placed on microcircuit die and hexane is allowed to evaporate leaving a thin film of oil. Microprobe brings needle into contact with area of die to be etched.

**B81-10239****INDIUM SECOND-SURFACE MIRRORS**F. L. BOUQUET (CALTECH) and T. HASEGAWA (CALTECH)  
Nov. 1982**NPO-15085****Vol. 6, No. 2, P. 228**

## 08 FABRICATION TECHNOLOGY

Second-surface mirrors are formed by vapor deposition of indium onto glass. Mirrors have reflectances comparable to those of ordinary silver or aluminized mirrors and are expected to show superior corrosion resistance. Mirrors may be used in solar concentrators.

**B81-10240**

### **MATCHING DISSIMILAR GRAPHICAL SCALES**

R. H. FRENCH (Magnavox Co.)

Nov. 1982

**MSC-14864**

**Vol. 6, No. 2, P. 229**

Projection of one drawing on another with projected image adjusted to have same scale as other drawing permits quick comparisons of such features as relative sizes of parts and clearance or interferences in assemblies. Technique uses standard overhead projector and transparency of one drawing to project an enlarged image, the scale of which matches scale of second drawings. Image may be traced directly onto copy of second drawing.

**B81-10241**

### **DISH ANTENNA WOULD DEPLOY FROM A CANISTER**

L. A. FINLEY (Astro Research Corp.) and J. A. HEDGEPEETH (Astro Research Corp.)

Nov. 1982

**NPO-15448**

**Vol. 6, No. 2, P. 229**

37-tile portable microwave antenna is composed of hexagonal tiles supported by a truss. Skewed connecting struts are hinged at their ends, and rotated during storage and deployment. Proposed microwave antenna would be stored compactly in a canister and deployed onsite.

**B81-10242**

### **AIR BAG APPLIES UNIFORM BONDING PRESSURE**

C. A. GILLESPIE (Rockwell International Corp.)

Nov. 1982

**KSC-11182**

**Vol. 6, No. 2, P. 231**

Air-bag box applies constant uniform pressure to tiles and other objects undergoing adhesive bonding. Box is basically a compliant clamp with adjustable force and position. Can be used on irregular surfaces as well as on flat ones. Pressurized air is fed to bag through a tube so that it expands, filling the box and pressing against work. Bag adopts a contour that accommodates surface under open side of box.

**B81-10243**

### **GLASSES FOR SOLAR-CELL ARRAYS**

F. L. BOUQUET (CALTECH)

Nov. 1982

**NPO-15528**

**Vol. 6, No. 2, P. 231**

Report presents data on glass for encapsulation of solar-cell arrays, with special emphasis on materials and processes for automated high-volume production of low-cost arrays. Commercial suppliers of glass are listed. Factors that affect the cost of glass are examined: type (sheet, float, or plate), formulation, and energy consumed in manufacturing.

**B81-10244**

### **CADAT PRINTED-WIRING-BOARD DESIGNER**

C. D. BRINKERHOFF (M & S Computing, Inc.)

Nov. 1982

**MFS-25464**

**Vol. 6, No. 2, P. 232**

CADAT printed-wiring-board system (PWB) designs printed-circuit and hybrid-circuit boards. It is comprised of four programs: preprocessor, placement program, organizer program, and the router. Component placement and interconnection paths are optimized.

**B81-10245**

### **COMPOSITE-MATERIAL POINT-STRESS ANALYSIS**

F. SPEARS, S. (Rockwell International Corp.)

Nov. 1982

**MSC-18978**

**Vol. 6, No. 2, P. 232**

PSANAL computes composite-laminate elastic and

thermal properties and allowable load levels for any combination of applied membrane and bending loads occurring at a point. Basic linear orthotropic stress/strain relationships and standard composite-laminate theory formulas are utilized.

**B81-10340**

### **AUTOMATED SOLAR-ARRAY ASSEMBLY**

A. SOFFA (Kulicke & Soffa Industries, Inc.) and M. BYCER (Kulicke & Soffa Industries, Inc.)

Dec. 1982

**NPO-15501**

**Vol. 6, No. 3, P. 333**

Large arrays are rapidly assembled from individual solar cells by automated production line developed for NASA's Jet Propulsion Laboratory. Apparatus positions cells within array, attaches interconnection tabs, applies solder flux, and solders interconnections. Cells are placed in either straight or staggered configurations and may be connected either in series or in parallel. Are attached at rate of one every 5 seconds.

**B81-10341**

### **WALKING-BEAM SOLAR-CELL CONVEYOR**

H. FEDER (Kulicke & Soffa Industries, Inc.) and W. FRASCH (Kulicke & Soffa Industries, Inc.)

Dec. 1982

**NPO-15503**

**Vol. 6, No. 3, P. 334**

Microprocessor-controlled walking-beam conveyor moves cells between work stations in automated assembly line. Conveyor has arm at each work station. In unison arms pick up all solar cells and advance them one station; then beam retracks to be in position for next step. Microprocessor sets beam stroke, speed and position.

**B81-10342**

### **VACUUM PICKUP FOR SOLAR CELLS**

W. FRASCH (Kulicke & Soffa Industries, Inc.)

Dec. 1982

**NPO-15500**

**Vol. 6, No. 3, P. 334**

Flexible vacuum cups that handle solar cells conform to shape or cell back surfaces. Cups lift vertically, without tilt that might cause stress on interconnections, inaccurate placement, or damage to cells. Vacuum source is venturi valve mounted on air manifold.

**B81-10343**

### **ORIENTING AND APPLYING FLUX TO SOLAR CELLS**

H. FEDER (Kulicke & Soffa Industries, Inc.) and W. FRASCH (Kulicke & Soffa Industries, Inc.)

Dec. 1982

**NPO-15504**

**Vol. 6, No. 3, P. 335**

Solar cells are oriented and fluxed automatically at first work station along solar-array assembly line. In under 2 seconds rotary drive rotates cell into proper position for applying solder flux to bus pad on collector side. When contact bus pad is in correct position, capstan drive is disengaged, and vacuum holddown beneath cell is turned on. Flux system lowers and applies preset amount of solder flux to bus pad. Two interconnect tabs are soldered to fluxed areas.

**B81-10344**

### **TAB INTERCONNECT WORK STATION**

G. GARWOOD (Kulicke & Soffa Industries, Inc.)

Dec. 1982

**NPO-15505**

**Vol. 6, No. 3, P. 336**

Second work station along solar-array assembly line automatically attaches two interconnect tabs to each silicon solar cell. Machine feeds, forms, and cuts tabs from reel of pretinned metal ribbon, transfers tabs into position, and solders them to cell.

**B81-10345**

### **WORK STATION FOR INVERTING SOLAR CELLS**

H. FEDER (Kulicke & Soffa Industries, Inc.) and W. FRASCH (Kulicke & Soffa Industries, Inc.)



Dec. 1982  
NPO-15506

Vol. 6, No. 3, p. 337

Final work station along walking-beam conveyor of solar-array assembly line turns each pretabbed solar cell over, depositing it back-side-up onto landing pad, which centers cell without engaging collector surface. Solar cell arrives at inverting work station collector-side-up with two interconnect tabs attached to collector side. Cells are inverted so that second soldering operation takes place in plain view of operator. Inversion protects collector from damage when handled at later stages of assembly.

**B81-10346  
SOLAR-CELL STRING CONVEYOR**

W. FRASCH (Kulicke & Soffa Industries, Inc.) and S. CIAVOLA (Kulicke & Soffa Industries, Inc.)  
Dec. 1982

NPO-15508

Vol. 6, No. 3, P. 337

String-conveyor portion of solar-array assembly line holds silicon solar cells while assembled into strings and tested. Cells are transported collector-side-down, while uniform cell spacing and registration are maintained. Microprocessor on machine controls indexing of cells.

**B81-10347  
BONDER FOR SOLAR-CELL STRINGS**

G. GARWOOD (Kulicke & Soffa Industries, Inc.) and W. FRASCH (Kulicke & Soffa Industries, Inc.)  
Dec. 1982

NPO-15507

Vol. 6, No. 3, P. 338

String bonder for solar-cell arrays eliminates tedious manual assembly procedure that could damage cell face. Vacuum arm picks up face-down cell from cell-inverting work station and transfers it to string conveyor without changing cell orientation. Arm is activated by signal from microprocessor.

**B81-10348  
TRANSPORTING SOLAR-CELL STRINGS**

M. BYCER (Kulicke & Soffa Industries, Inc.) and W. FRASCH (Kulicke & Soffa Industries, Inc.)  
Dec. 1982

NPO-15502

Vol. 6, No. 3, P. 339

Vacuum 'lance' picks up assembled chain of solar cells from string conveyor without disturbing cells or interconnecting tabs. Lance has 2 vacuum pickups per cell, for total of up to 32 pickups. Positions and number of pickups can be varied. Lance can be adjusted for range of cell sizes, shapes, and spacings.

**B81-10349  
TRANSFER OF STRINGS TO THE MODULE FIXTURE**

W. FRASCH (Kulicke & Soffa Industries, Inc.)  
Dec. 1982

NPO-15509

Vol. 6, No. 3, P. 340

Work station for transferring entire strings of solar cells places successive strings aligned, with offset, or reversed end for end. Thus, various solar module formats can be accommodated. Two vacuum cups hold each solar cell in string being transferred.

**B81-10350  
ULTRASONIC WELDING OF GRAPHITE/THERMOPLASTIC COMPOSITE**

S. S. HARDY (General Dynamics Corp.) and D. B. PAGE (General Dynamics Corp.)  
Dec. 1982

MSC-20013

Vol. 6, No. 3, P. 340

Ultrasonic welding of graphite/thermoplastic composite materials eliminates need for fasteners (which require drilling or punching, add weight, and degrade stiffness) and can be totally automated in beam fabrication and assembly jigs. Feasibility of technique has been demonstrated in laboratory tests which show that neither angular orientation nor vacuum affect weld quality.

**B81-10351  
INCREASING METAL FRACTURE TOUGHNESS**

P. L. LAWING, W. H. WOOD, and P. G. J. SANDEFUR  
Dec. 1982 See Also NASA CR-165745(N81-30251/NSP)  
LAR-12805

Vol. 6, No. 3, P. 341

In technique developed at Langley Research Center several thin sheets of metal are diffusion-brazed together in vacuum furnace to create thick piece of metal that retains much of fracture toughness of its thin components. Technique is expected to make many of high-strength stainless steels, not currently suitable, usable at cryogenic temperatures.

**B81-10352  
CONTROLLING ELECTRON-BEAM-WELD FOCUS**

F. M. COATE (Rockwell International Corp.)  
Dec. 1982

MFS-19635

Vol. 6, No. 3, P. 342

Control loop measures weld-spot temperature to regulate focus current. Square-wave generator modulates current in electron-beam focus coil so that focal point is varied between points slightly above and below surface of weld. Sensor detects intensity of light emitted by weld, proportional to fourth power of temperature at hottest part of weld spot. Sensor signal is detected by chopper demodulator synchronized by square-wave generator, to determine whether average position of focal point is higher than, coincident with, or lower than optimum point; and focus coil current is adjusted accordingly.

**B81-10353  
PLASMA SPRAY FOR DIFFICULT-TO-BRAZE ALLOYS**

A. BRENNAN (Rockwell International Corp.)  
Dec. 1982

MFS-19630

Vol. 6, No. 3, P. 343

Nickel plating on surfaces makes brazing easier for some alloys. Sometimes nickel plating may not be feasible because of manufacturing sequence, size of hardware, or lack of suitable source for nickel plating. Alternative surface preparation in such cases is to grit-blast surface lightly and then plasma-spray 1 1/2 to 2 mils of fine nickel powder or braze-alloy material directly on surface. Powder is sprayed from plasma gun, using argon as carrier gas to prevent oxidation of nickel or braze alloy.

**B81-10354  
WELD WIDTH INDICATES WELD STRENGTH**

A. C. J. NUNES, H. L. NOVAK, and M. C. MCLLWAIN  
Dec. 1982

MFS-25648

Vol. 6, No. 3, P. 344

Width of butt weld in 2219-T87 aluminum has been found to be more reliable indicator of weld strength than more traditional parameters of power input and cooling rate. Yield stress and ultimate tensile strength tend to decrease with weld size. This conclusion supports view of many professional welders who give priority to weld geometry over welding energy or cooling rate as indicator of weld quality.

**B81-10355  
CLEANING INTERNAL-WELD SPLATTER**

R. SNODGRASS (Parker Hannifin Corp.)  
Dec. 1982

MSC-20068

Vol. 6, No. 3, P. 345

Splattered metal produced by welding can be easily removed from inaccessible areas by method resembling ball milling. Hard steel balls are vibrated inside welded unit so that they 'scrub away' excess metal on interior side of weld joint.

**B81-10356  
ELIMINATING DELAMINATION IN CURVED COMPOSITE PARTS**

G. T. SMITH (Rockwell International Corp.)  
Dec. 1982

MSC-20027

Vol. 6, No. 3, P. 345

## 08 FABRICATION TECHNOLOGY

New way of laminating curved graphite/epoxy parts prevents delamination and porosity. Originally developed for a sharply-curved expansion joint frame on Space Shuttle payload-bay doors, new method may also be useful in constructing laminated parts for boat hulls or small aircraft. Method employs shims strategically positioned in layup of graphite/epoxy tape. Shims allow for extra length in layup plies. On final cure, added length compensates for shrinkage that would otherwise have caused delamination.

### **B81-10357 IMPROVING RADIOMETER-CAVITY ABSORPTANCE**

R. C. WILSON (CALTECH)

Dec. 1982

**NPO-15374**

**Vol. 6, No. 3, P. 346**

In improved cavity radiometer, each sensor cone ends in small tube so that black paint cannot form truncating meniscus. Inner diameter of tube is 0.25 mm; its outer diameter is 0.5 mm. During painting process, excess paint is drawn out through tube, preventing formation of meniscus at apex. After paint is cured, end of tube is crimped shut to form effective light trap.

### **B81-10358 ELECTRICALLY-CONDUCTIVE LOW-PERMEABILITY PRESSURE SEAL**

H. C. KRIEG (TRW, Inc.)

Dec. 1982

**MSC-20022**

**Vol. 6, No. 3, p. 346**

Metal-plated butyl rubber seal has been devised for enclosures of electronic equipment that must be maintained under dry, inert atmosphere. Seal prevents gas leakage over prolonged periods, while conductivity suppresses electromagnetic emissions from sealed equipment. Seal is formed by depositing aluminum or gold onto molded-in-place butyl rubber gasket and surrounding areas of flange.

### **B81-10359 CLAMP AND GAS NOZZLE FOR TIG WELDING**

G. B. GUE (AMETEK) and H. L. GOLLER (AMETEK)

Dec. 1982

**MSC-20108**

**Vol. 6, No. 3, P. 347**

Tool that combines clamp with gas nozzle is aid to tungsten/inert-gas (TIG) welding in hard-to-reach spots. Tool holds work to be welded while directing a stream of argon gas at weld joint, providing an oxygen-free environment for tungsten-arc welding.

### **B81-10360 ACOUSTIC EMISSIONS COULD INDICATE WELD QUALITY**

P. E. GUSTAFSON (Honeywell, Inc.) and F. S. SUTCH (Honeywell, Inc.)

Dec. 1982

**MFS-25441**

**Vol. 6, No. 3, P. 348**

Preliminary tests show quality of welds can be assessed by acoustic-emission monitor mounted on welder. Nondestructive measurement technique allows operator to determine uniformity and integrity of weld as being made, evaluate equipment performance and condition, and initiate corrective action if quality is not satisfactory.

### **B81-10361 INTEGRAL FACE SHIELD CONCEPT FOR FIREFIGHTER'S HELMET**

F. ABELES (Grumman Aerospace Corp.), E. HANSBERRY (Grumman Aerospace Corp.), and V. HIMEL (Grumman Aerospace Corp.)

Dec. 1982

**MFS-25493**

**Vol. 6, No. 3, P. 348**

Stowable face shield could be made integral part of helmet worn by firefighters. Shield, made from same tough clear plastic as removable face shields presently used, would be pivoted at temples to slide up inside helmet when not needed. Stowable face shield, being stored in helmet, is

always available, ready for use, and is protected when not being used.

### **B81-10362 RADIANT HEATING OF AMPOULE CONTENTS**

L. R. HOLLAND (Athens State College)

Dec. 1982

**MFS-25436**

**Vol. 6, No. 3, P. 349**

Ampoule charge heating system exploits spectral properties of blackbody radiation and ampoule material transparency to heat charge to high temperature. Cooling gas prevents softening of outside wall of ampoule. Use of proposed method may be limited by tendency of silica (or any other vitreous material) to devitrify on prolonged exposure to temperatures near softening point.

### **B81-10363 YIELDING TORQUE-TUBE SYSTEM REDUCES CRASH INJURIES**

D. G. MCSMITH

Dec. 1982

**LAR-12801**

**Vol. 6, No. 3, P. 350**

Yielding torque-tube system minimizes injuries by limiting load transferred to occupant in crash. When properly integrated into seat structure, torque tube yields in plastic deformation stage of material and maintains a relatively constant resistance to applied torque for many degrees of rotation. Yielding torque-tube system is expected to find application in aircraft and automobile industries.

### **B81-10364 MONITORING CRYSTAL GROWTH FROM SOLUTION**

R. B. LAL (Alabama Agriculture and Mechanical University)

Dec. 1982

**MFS-25622**

**Vol. 6, No. 3, P. 351**

Experimental system for monitoring growth of triglycine sulfate (TGS) crystals from solution is being studied. System consists of outer cell containing distilled water heated and stirred to maintain constant temperature to within plus or minus 0.1 degrees C, inner (growth) cell containing supersaturated solution of TGS, and seed crystal mounted in plastic-covered stainless-steel sting equipped with controlled cooling mechanism and temperature sensors.

### **B81-10365 INFRARED-CONTROLLED WELDING OF SOLAR CELLS**

R. PAULSON (Lockheed Missiles & Space Co., Inc.), S. E. FINNELL (Lockheed Missiles & Space Co., Inc.), H. J. DECKER (Lockheed Missiles & Space Co., Inc.), and J. R. HODOR (Lockheed Missiles & Space Co., Inc.)

Dec. 1982

**MFS-25612**

**Vol. 6, No. 3, P. 351**

Proposed apparatus for welding large arrays of solar cells to flexible circuit substrates would sense infrared emission from welding spot. Emission would provide feedback for control of welding heat. Welding platform containing optical fibers moves upward through slots in movable holding fixture to contact solar cells. Fibers pick up infrared radiation from weld area.

### **B81-10366 STORING AND DEPLOYING SOLAR PANELS**

D. L. BROWNING (General Dynamics Corp.), H. M. STOKER (General Dynamics Corp.), and E. H. KLEIDON (General Dynamics Corp.)

Dec. 1982

**MSC-18950**

**Vol. 6, No. 3, P. 352**

Like upward-drawn window shades, solar blankets are unfurled to length of 89m, almost filling opening in 95.59-meter-square frame. When frame is completely assembled, solar blankets are pulled from canisters, one by one by electric motor. A thin cushion sheet is rolled up with each blanket to cushion solar cells. Sheet is taken up on roller as blanket is unfurled. Unrolling proceeds automatically.

## 09 MATHEMATICS AND INFORMATION SCIENCES

**B81-10367**  
**CUTTING A TAPERED EDGE ON PADDING MATERIAL**  
 M. J. MITCHELL (Rockwell International Corp.)  
 Dec. 1982

**MSC-20011** Vol. 6, No. 3, P. 353  
 Resilience and flexibility of felt, rubber, or other padding materials allow them to be clamped in form block, cut straight down, and then released to produce straight clean tapered edge. With material held in slanted position, edge can be cut straight down; hence cut depth is minimum.

**B81-10368**  
**PIVOT ATTACHMENT FOR PREFABRICATED BEAMS**  
 H. W. J. STROLL (University of Wisconsin)  
 Dec. 1982

**MFS-25476** Vol. 6, No. 3, P. 354  
 Assembly of prefabricated structural beams for roof trusses, bleachers, or other lightweight structures made easier by use of flexural pivot at one or both ends. When pivot is attached, joint is flexible, thus simplifying alignment; joint is subsequently rigidized by threaded collar that completes attachment.

**B81-10369**  
**FABRICATING STRUCTURAL BEAMS**  
 E. E. ENGLER (Grumman Aerospace Corp.), J. EHL (Grumman Aerospace Corp.), W. MUENCH (Grumman Aerospace Corp.), H. MORFIN (Grumman Aerospace Corp.), J. HUBER (Grumman Aerospace Corp.), R. BRAUN (Grumman Aerospace Corp.), W. MARX (Grumman Aerospace Corp.), A. ALBERI (Grumman Aerospace Corp.), R. ROMAN-ECK (Grumman Aerospace Corp.), C. JOHNSON (Grumman Aerospace Corp.) et al  
 Dec. 1982

**MFS-25228** Vol. 6, No. 3, P. 354  
 Automatic machine described in new report has demonstrated on Earth feasibility of machine fabricating beams for huge structures in space. Such structures include solar mirrors, radiometer reflectors, microwave power transmitters, solar-thermal power generators, and solar photoelectric generators, ranging in size from few hundred meters long to tens of kilometers long.

## 09 MATHEMATICS AND INFORMATION SCIENCES

**B81-10117**  
**LINEAR-ALGEBRA PROGRAMS**  
 C. L. LAWSON (CALTECH), F. T. KROGH (CALTECH), S. S. GOLD (CALTECH), D. R. KINCAID (University of Texas), J. SULLIVAN (University of Texas), E. WILLIAMS (University of Texas), R. J. HANSON (Sandia Laboratories), K. HASKELL (Sandia Laboratories), J. DONGARRA (Argonne National Laboratory), and C. B. MOLER (University of New Mexico)  
 Sep. 1982

**NPO-15108** Vol. 6, No. 1, P. 113  
 The Basic Linear Algebra Subprograms (BLAS) library is a collection of 38 FORTRAN-callable routines for performing basic operations of numerical linear algebra. BLAS library is portable and efficient source of basic operations for designers of programs involving linear algebraic computations. BLAS library is supplied in portable FORTRAN and Assembler code versions for IBM 370, UNIVAC 1100 and CDC 6000 series computers.

**B81-10118**  
**I/O ERROR ANALYZER (UNIVAC 1108 VERSION)**  
 E. T. VAUGHAN

Sep. 1982  
**GSC-12621** Vol. 6, No. 1, P. 113  
 IOALZ4 is an Assembly-language utility program for UNIVAC 1108, operational under level 33 of EXEC 8 operating system. It scans user-selected portions of system log file, whether located on tape or mass storage, searching for and processing I/O error entries.

**B81-10246**  
**CALCULATING THE PERFORMANCE OF A SOLAR REFLECTOR**  
 M. K. SELCUK (CALTECH)  
 Nov. 1982  
**NPO-15314** Vol. 6, No. 2, P. 235

New method calculates efficiency and useful heat of parabolic solar concentrator. Method uses three-part nomogram, consisting of a main chart and two other components. User enters the nomogram using known factors, then proceeds to plot lines to intercepts on nomogram to find results.

**B81-10247**  
**PROGRAM STRUCTURE COMBINES SEGMENTATION AND DYNAMIC STORAGE**  
 S. H. TIFFANY (Kentron International, Inc.)  
 Nov. 1982 See Also NASA CR-3315(N80-31071/NSP)  
**LAR-12830** Vol. 6, No. 2, P. 236

Programming techniques incorporate advantages of overlaying into segmented loads while retaining all dynamic load advantages of segmentation, employing those capabilities that best suit mode of operation, whether batch or interactive. User is allowed to load a program automatically in a variable manner, based solely on a single data input to the program, to maintain minimal field lengths for interactive use.

**B81-10370**  
**NUMERICAL SOLUTION FOR NAVIER-STOKES EQUATIONS**  
 Z. U. A. WARSI (Mississippi State University), R. A. WEED (Mississippi State University), and J. F. THOMPSON (Mississippi State University)  
 Dec. 1982

**MFS-25617** Vol. 6, No. 3, P. 357  
 Carefully selected blend of computational techniques solves complete set of equations for viscous, unsteady, hypersonic flow in general curvilinear coordinates. New algorithm has tested computation of axially directed flow about blunt body having shape similar to that of such practical bodies as wide-body aircraft or artillery shells. Method offers significant computational advantages because of conservation-law form of equations and because it reduces amount of metric data required.

**B81-10371**  
**USER DOCUMENTATION FOR MULTIPLE SOFTWARE RELEASES**  
 R. HUMPHREY (International Business Machines Corp.)  
 Dec. 1982

**KSC-11189** Vol. 6, No. 3, P. 358  
 In proposed solution to problems of frequent software releases and updates, documentation would be divided into smaller packages, each of which contains data relating to only one of several software components. Changes would not affect entire document. Concept would improve dissemination of information regarding changes and would improve quality of data supporting packages. Would help to insure both timeliness and more thorough scrutiny of changes.

**B81-10372**  
**PROPOSED RELIABILITY/COST MODEL**  
 L. M. DELIONBACK  
 Dec. 1982 See Also NASA TMX-64777(N73-32372/NSP)  
**MFS-25494** Vol. 6, No. 3, P. 359  
 New technique estimates cost of improvement in

## 09 MATHEMATICS AND INFORMATION SCIENCES

reliability for complex system. Model format/approach is dependent upon use of subsystem cost-estimating relationships (CER's) in devising cost-effective policy. Proposed methodology should have application in broad range of engineering management decisions.

**B81-10373**

### **COMPUTING THE POWER-DENSITY SPECTRUM FOR AN ENGINEERING MODEL**

H. J. DUNN


Dec. 1982 See Also NASA TM-83120(N81-25699/NSP)

**LAR-12918**

**Vol. 6, No. 3, P. 360**

Computer program for calculating of power-density spectrum (PDS) from data base generated by Advanced Continuous Simulation Language (ACSL) uses algorithm that employs fast Fourier transform (FFT) to calculate PDS of variable. Accomplished by first estimating autocovariance function of variable and then taking FFT of smoothed autocovariance function to obtain PDS. Fast-Fourier-transform technique conserves computer resources.

## Typical Subject Index Listing

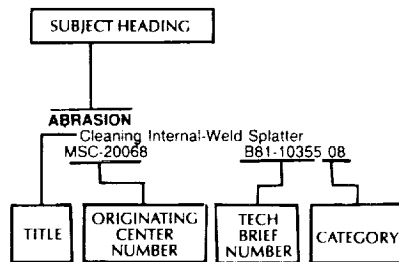

The title of each Tech Brief is listed under several selected subject headings to provide the user with a variety of approaches in his search for specific information. The Tech Brief number, e.g., B81-10316, is located under and to the right of the title and is followed by a two-digit number, e.g., 06, which designates the subject category in which the entire entry can be found.

## A

### ABLATIVE MATERIALS

Improved Cure-in-Place Silicone  
Adhesives  
MSC-18782 B81-10164 04

### ABRASION

Cleaning Internal-Weld Splatter  
MSC-20068 B81-10355 08

### ABSORBERS (MATERIALS)

Superabsorbent Multilayer Fabric  
MSC-18223 B81-10169 04

### ABSORPTANCE

Improving Radiometer-Cavity  
Absorptance  
NPO-15374 B81-10357 08

### ACCELERATED LIFE TESTS

Improved Model for MOS  
Breakdown  
NPO-14850 B81-10007 01

### ACOUSTIC LEVITATION

Sound Waves Levitate Substrates  
NPO-15435 B81-10221 08

### ACOUSTIC MEASUREMENT

Pulsed Phase-Locked-Loop Strain  
Monitor  
LAR-12772 B81-10068 06  
Sound-burst Generator for Measuring  
Coal Properties  
MFS-25438 B81-10281 04  
Acoustic Emissions Could Indicate  
Weld Quality  
MFS-25441 B81-10360 08

### ACOUSTIC STREAMING

Viscous Torques on a Levitating  
Body  
NPO-15413 B81-10055 06

### ACRYLATES

Silicone/Acrylate Copolymers  
NPO-15523 B81-10279 04  
Thermal Polymerization of N-Butyl  
Acrylate  
NPO-15010 B81-10295 04

### ACTUATORS

Fast-Acting Electrohydraulic Servo  
LEW-13730 B81-10298 06

### ADHESION TESTS

Double-Adhesive Tape Test Reduces  
Waste  
MSC-20047 B81-10312 06

### ADHESIVE BONDING

Air Bag Applies Uniform Bonding  
Pressure  
KSC-11182 B81-10242 08

### ADHESIVES

Elastomer-Toughened Polyimide  
Adhesives  
LAR-12775 B81-10040 04  
Adhesives Mixer Applicator  
MSC-18916 B81-10078 07  
Improved Cure-in-Place Silicone  
Adhesives  
MSC-18782 B81-10164 04  
Binders for Thermal-Control  
Coatings  
MFS-25620 B81-10294 04

### AERIAL PHOTOGRAPHY

Aerial Infrared Photos for Citrus  
Growers  
KSC-11209 B81-10178 05

### AERODYNAMIC CHARACTERISTICS

Aerodynamics of Sounding-Rocket  
Geometries  
GSC-12680 B81-10074 06

### AERODYNAMIC CONFIGURATIONS

Aerodynamics of Supersonic Aircraft  
LAR-12857 B81-10199 06  
Dynamic-Loads Analysis of Flexible  
Aircraft With Active Controls  
LAR-12747 B81-10200 06

### AERODYNAMIC FORCES

Aerodynamics of Supersonic Aircraft  
LAR-12857 B81-10199 06

### AERODYNAMIC LOADS

Unsteady Subsonic Loadings Due to  
Control-Surface Motion  
LAR-12802 B81-10073 06  
Aerodynamics of Sounding-Rocket  
Geometries  
GSC-12680 B81-10074 06

### AERODYNAMIC STABILITY

Aeroelastic Analysis for Rotorcraft  
ARC-11150 B81-10075 06

### AERODYNAMICS

Aeroelastic Analysis for Rotorcraft  
ARC-11150 B81-10075 06  
Multipressure and Temperature  
Probe  
ARC-11166 B81-10189 06

### AEROELASTICITY

Aeroelastic Analysis for Rotorcraft  
ARC-11150 B81-10075 06  
Dynamic-Loads Analysis of Flexible  
Aircraft With Active Controls  
LAR-12747 B81-10200 06  
Algorithm for Unsteady Potential Flow  
About Airfoils  
ARC-11378 B81-10316 06

### AIR POLLUTION

Circuit Counts Carbon Fibers  
NPO-14940 B81-10188 06

### AIR PURIFICATION

Improved Air-Treatment Canister  
MSC-18942 B81-10234 08

### AIRCRAFT CONTROL

Advanced Technologies for  
Commercial Airplanes  
MSC-18982 B81-10017 02

### AIRCRAFT DESIGN

Advanced Technologies for  
Commercial Airplanes  
MSC-18982 B81-10017 02  
Aerodynamics of Supersonic Aircraft  
LAR-12857 B81-10199 06  
Dynamic-Loads Analysis of Flexible  
Aircraft With Active Controls  
LAR-12747 B81-10200 06

### AIRCRAFT EQUIPMENT

Advanced Technologies for  
Commercial Airplanes  
MSC-18982 B81-10017 02

### AIRCRAFT INSTRUMENTS

Improved Magnetic-Field-Component  
Resolvers  
LAR-12638 B81-10299 06  
Simple Magnetometer for Autopilots  
LAR-12832 B81-10300 06

### AIRFOIL PROFILES

Aerodynamics Improve Wind Wheel  
MFS-25506 B81-10080 07

### AIRFOILS

Algorithm for Unsteady Potential Flow  
About Airfoils  
ARC-11378 B81-10316 06  
High-Lift Separated Flow About  
Airfoils  
LAR-12853 B81-10324 06

### ALGEBRA

Linear-Algebra Programs  
NPO-15108 B81-10117 09

### ALGORITHMS

New Algorithms Manage Fourfold  
Redundancy  
MSC-18498 B81-10013 02  
Flight-Management Algorithm for  
Fuel-Conservative Descents  
LAR-12814 B81-10179 06

### ALIGNMENT

Precise Restraightening of Bent  
Studs  
MFS-19632 B81-10328 07

### ALLOYS

Low-Gold-Content Brazing Alloys  
MFS-19629 B81-10283 04

### ALUMINUM

Predicting Tensile Strengths of  
Boron/Aluminum Composites  
LEW-13745 B81-10311 06

### AMMETERS

Lightweight, Low-Loss dc  
Transducer  
NPO-14618 B81-10126 01

# AMPLIFIER DESIGN

# SUBJECT INDEX

## AMPLIFIER DESIGN

Log-Output Signal Processor Scans  
Eight Decades  
AFC-11293 B81-10010 01

## AMPLIFIERS

Wideband Amplifier With  
Subpicosecond Stability  
GSC-12646 B81-10248 01  
Low-Noise Band-Pass Amplifier  
GSC-12567 B81-10255 01

## AMPOULES

Radiant Heating of Ampoule  
contents  
MFS-25436 B81-10362 08

## ANALOG CIRCUITS

Resistors Improve Ramp Linearity  
GSC-12635 B81-10005 01

## ANALYSIS (MATHEMATICS)

Ultrasonic Transducer Analyzer  
MFS-25410 B81-10058 06  
Linear-Algebra Programs  
NPO-15108 B81-10117 09

## ANCHORS (FASTENERS)

Universal Assembly for Captive  
Bolts  
MSC-18905 B81-10329 07

## ANEMOMETERS

High-Speed Laser Anemometer  
LEW-13527 B81-10050 06

## ANGLES (GEOMETRY)

New Apparatus Tests Pressure-Suit  
Joints  
ARC-11314 B81-10314 06

## ANGULAR MOMENTUM

Efficient Energy-Storage Concept  
MFS-25331 B81-10138 03

## ANGULAR VELOCITY

Interferometer Accurately Measures  
Rotation Angle  
GSC-12614 B81-10057 06

## ANISOTROPY

Deformation-Induced Anisotropy of  
Polymers  
NPO-15325 B81-10043 04

## ANTENNA ARRAYS

Proposed Integrated  
Radio-Telescope Network  
NPO-15417 B81-10143 03  
Modular Amplifier/Antenna Arrays  
MSC-18981 B81-10258 01

## ANTENNA COUPLERS

Unequal-Split Strip-Line Power  
Divider  
LAR-12797 B81-10250 01

## ANTENNA FEEDS

Sealed Strip Line for Extreme  
Temperatures  
MSC-16994 B81-10114 08

Unequal-Split Strip-Line Power  
Divider  
LAR-12797 B81-10250 01

## ANTENNA RADIATION PATTERNS

Far-Field Antenna Pattern From a  
Near-Field Test  
NPO-14905 B81-10059 06

## ANTENNAS

Compact Dual-Mode Microwave  
Antenna  
LAR-12784 B81-10004 01  
Dish Antenna Would Deploy From a  
Canister  
NPO-15448 B81-10241 08

## ANTIFRICTION BEARINGS

Magnetic Bearing Consumes Low  
Power  
GSC-12517 B81-10202 07

Magnetic Bearing With Active  
Control  
GSC-12582 B81-10203 07

## ANTIOXIDANTS

Surface Seal for Carbon Parts  
MSC-18898 B81-10163 04

## ANTIREFLECTION COATINGS

Effects of High Temperature on  
Collector Coatings  
MFS-25651 B81-10148 03

## ARC DISCHARGES

Arc-Free High-Power dc Switch  
MSC-20091 B81-10256 01

## ASSAYING

Electrochemical Assay of  
Gold-Plating Solutions  
MFS-19639 B81-10284 04

## ASSEMBLING

Ball-and-Socket Joint Can Be  
Disassembled  
LAR-12770 B81-10084 07

Automated Solar-Array Assembly  
NPO-15501 B81-10340 08  
Walking-Beam Solar-Cell Conveyor  
NPO-15503 B81-10341 08

Orienting and Applying Flux to Solar  
Cells  
NPO-15504 B81-10343 08

Tab Interconnect Work Station  
NPO-15505 B81-10344 08

Work Station For Inverting Solar  
Cells  
NPO-15506 B81-10345 08

Solar-Cell String Conveyor  
NPO-15508 B81-10346 08

Bonder for Solar-Cell Strings  
NPO-15507 B81-10347 08

Transporting Solar-Cell Strings  
NPO-15502 B81-10348 08

Transfer of Strings to the Module  
Fixture  
NPO-15509 B81-10349 08

## ATTITUDE INDICATORS

A Simple Tiltmeter  
ARC-11344 B81-10325 07

## AUGMENTATION

Force Augmentation for Relief Valve  
MSC-20065 B81-10337 07

## AUTOMATIC CONTROL

Simpler Variable-Speed Drive for Fan  
or Pump  
GSC-12643 B81-10201 07

One Way of Testing a Distributed  
Processor  
KSC-11123 B81-10263 02

Controlling Electron-Beam-Weld  
Focus  
MFS-19635 B81-10352 08

## AUTOMATIC GAIN CONTROL

Spike-Free Automatic Level Control  
KSC-11170 B81-10006 01

## AUTOMATIC PILOTS

Simple Magnetometer for Autopilots  
LAR-12832 B81-10300 06

## AUTOMATIC TEST EQUIPMENT

Testing Patchboard Connections  
Automatically  
KSC-11065 B81-10129 02

One Way of Testing a Distributed  
Processor  
KSC-11123 B81-10263 02

## AUTOMOBILE ENGINES

Alternating-Current Motor Drive for  
Electric Vehicles  
NPO-14768 AND NPO-14830  
B81-10124 01

## AUXILIARY POWER SOURCES

Controller Regulates Auxiliary Source  
for Solar Power  
MFS-25637 B81-10133 02

## AVIONICS

Advanced Technologies for  
Commercial Airplanes  
MSC-18982 B81-10017 02

## AXIAL COMPRESSION LOADS

New Configuration for  
Compression-Test Fixture  
MSC-18723 B81-10306 06

# B

## BAFFLES

Battle Keeps Solar Energy in  
Receiver  
NPO-15387 B81-10023 03

## BALLOUT

Explosively Actuated Opening for  
Rapid Egress  
LAR-12624 B81-10319 06

## BALANCING

Flywheels Would Compensate for  
Rotor Imbalance  
GSC-12550 B81-10331 07

## BALL BEARINGS

Tests of 38 Ball-Bearing Greases  
MFS-25624 B81-10339 07

## BALLS

Ball-and-Socket Joint Can Be  
Disassembled  
LAR-12770 B81-10084 07

## BANDPASS FILTERS

Low-Noise Band-Pass Amplifier  
GSC-12567 B81-10255 01

## BARRIER LAYERS

Improved High-Temperature Seal  
MSC-18790 B81-10210 07

## BATTERY CHARGERS

Pressure Switch Is a Low Cost  
Battery Indicator  
GSC-12679 B81-10067 06

## BEAM SPLITTERS

Beam Splitter Intensities Are  
Preselected  
MFS-25312 B81-10019 03

## BEAM SWITCHING

Rotating the Plane of Parallel Light  
Beams  
ARC-11311 B81-10265 03

## BEAMS (RADIATION)

Far-Field Antenna Pattern From a  
Near-Field Test  
NPO-14905 B81-10059 06

## BEAMS (SUPPORTS)

Boron/Aluminum-Titanium  
on Stiffener  
MSC-18895 B81-10230 08

Fabricating Structural Beams  
MFS-25228 B81-10369 08

## BEARINGS

Magnetic Bearing Consumes Low  
Power  
GSC-12517 B81-10202 07

Magnetic Bearing With Active  
Control  
GSC-12582 B81-10203 07

Spring Support for Turbopump Rotor  
Bearing  
MFS-19624 B81-10204 07

# SUBJECT INDEX

# CLAMPS

## BELLOWS

3-D Manipulator for Mass Spectrometer  
ARC-11323 B81-10137 03

## BENDING

Metal Sandwith Panel With Biaxially Corrugated Core  
FRC-11026 B81-10112 08  
Precise Restraightening of Bent Studs  
MFS-19632 B81-10328 07

## BINARY SYSTEMS (MATERIALS)

Measuring Interdiffusion in Binary Liquids  
MFS-25576 B81-10165 04

## BINDERS (MATERIALS)

Binders for Thermal-Control Coatings  
MFS-25620 B81-10294 04

## BIOASSAY

Speedy Acquisition of Surface-Contamination Samples  
NPO-14934 B81-10175 05

## BIOINSTRUMENTATION

Cuff for Blood-Vessel Pressure Measurements  
ARC-11264 B81-10296 05

## BITS

Optical Memory Stores 10 12sup. Bits  
MFS-25456 B81-10012 02

## BLOOD PRESSURE

Cuff for Blood-Vessel Pressure Measurements  
ARC-11264 B81-10296 05

## BOLTS

Strain-Gaged Bolts Are Easily Prepared  
MSC-18823 B81-10069 06  
Precise Restraightening of Bent Studs  
MFS-19632 B81-10328 07  
Universal Assembly for Captive Bolts  
MSC-18905 B81-10329 07  
Safety Bolt Doubles as a Bushing-Removal Tool  
MSC-20032 B81-10334 07

## BONDING

Flame-Retardant Coating is Heat-Sealed  
MSC-18382 B81-10168 04  
New Method For Joining Stainless Steel to Titanium  
MSC-18820 B81-10232 08  
Air Bag Applies Uniform Bonding Pressure  
KSC-11182 B81-10242 08  
Tab Interconnect Work Station  
NPO-15505 B81-10344 08  
Bonder for Solar-Cell Strings  
NPO-15507 B81-10347 08

## BORON REINFORCED MATERIALS

Predicting Tensile Strengths of Boron/Aluminum Composites  
LEW-13745 B81-10311 06

## BOUNDARY LAYER FLOW

Nozzle Modification Suppresses Flow Transients  
MFS-19567 B81-10061 06

## BOUNDARY LAYER SEPARATION

High-Lift Separated Flow About Airfoils  
LAR-12853 B81-10324 06

## BOW WAVES

Numerical Solution for Navier-Stokes Equations  
MFS-25617 B81-10370 09

## BRAIN

Retractor Tool for Brain Surgery  
MFS-25380 B81-10176 05

## BRAKES (FOR ARRESTING MOTION)

Torque Simulator for Rotating Systems  
LAR-12751 B81-10318 06

## BRAZING

Fluxless Brazing of Large Structural Panels  
LAR-12519 B81-10100 08  
Low-Gold-Content Brazing Alloys  
MFS-19629 B81-10283 04  
Increasing Metal Fracture Toughness  
LAR-12805 B81-10351 08  
Plasma Spray for Difficult-To-Braze Alloys  
MFS-19630 B81-10353 08

## BRILLOUIN EFFECT

Laser/Heterodyne Measurement of Temperature and Salinity  
LAR-12766 B81-10181 06

## BROADBAND AMPLIFIERS

Wideband Amplifier With Subpicosecond Stability  
GSC-12646 B81-10248 01

## BUBBLES

Gas Diffusion in Fluids Containing Bubbles  
NPO-15060 B81-10292 04

## BUCKLING

Vibration Analysis With Finite Dynamic Elements  
NPO-15087 B81-10320 06  
Structural Design With Stress and Buckling Constraints  
MFS-25234 B81-10322 06

## BUS CONDUCTORS

'Ruggedized' Microcomputer Bus  
GSC-12691 B81-10229 08

## BUSHINGS

Safety Bolt Doubles as a Bushing-Removal Tool  
MSC-20032 B81-10334 07

## BUTT JOINTS

Microcomputer Checks Butt-Weld Accuracy  
MFS-25557 B81-10062 06

# C

## CABLES (ROPES)

Improved Cable Grip Reduces Wear  
ARC-11318 B81-10214 07

## CALIBRATING

Electronically Calibratable Clock  
LAR-12654 B81-10122 01

## CAMS

Cam-Design Torque Wrench  
MFS-19586 B81-10206 07

## CANCER

Compact Dual-Mode Microwave Antenna  
LAR-12784 B81-10004 01  
Algorithms Could Automate Cancer Diagnosis  
MSC-18764 B81-10045 05

## CANS

Improved Air-Treatment Canister  
MSC-18942 B81-10234 08

## CAPACITORS

IC Capacitors on Groups III-to-V Substrates  
GSC-12543 B81-10109 08

## CARBON

Coal as a Substitute for Carbon Black  
NPO-15461 B81-10280 04

## CARBON DIOXIDE REMOVAL

Improved Air-Treatment Canister  
MSC-18942 B81-10234 08

## CARBON FIBERS

Circuit Counts Carbon Fibers  
NPO-14940 B81-10188 06

## CASTINGS

Fiber-Reinforced Slip Castings  
ARC-11279 B81-10099 08  
Low-Gravity Investigations in Cast-Iron Processing  
MFS-25491 B81-10172 04

## CATALYSTS

Catalyzing the Combustion of Coal  
NPO-15456 B81-10282 04

## CELLS (BIOLOGY)

Algorithms Could Automate Cancer Diagnosis  
MSC-18764 B81-10045 05

## CENTRIFUGAL PUMPS

Damping Vibration at an Impeller  
MFS-19645 B81-10338 07

## CERAMICS

Fiber-Reinforced Slip Castings  
ARC-11279 B81-10099 08  
Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08  
'SiAlON' Materials for Advanced Structural Applications  
LEW-13671 B81-10173 04

## CHARGE COUPLED DEVICES

Study of Two Digital Charge-Coupled Devices  
MFS-25606 B81-10128 02

## CHECKOUT

Processing PCM Data in Real Time  
KSC-11131 B81-10262 02  
One Way of Testing a Distributed Processor  
KSC-11123 B81-10263 02

## CHEMICAL ANALYSIS

Electrochemical Assay of Gold-Plating Solutions  
MFS-19639 B81-10284 04

## CHEMICAL INDICATORS

Vapor Detector  
MSC-18989 B81-10287 04

## CHEMICAL REACTORS

Capacitively-Heated Fluidized Bed  
NPO-14912 B81-10102 08

## CHIPS

Contamination Control During Weld Repairs  
MFS-19652 B81-10225 08

## CIRCUIT BOARDS

'Ruggedized' Microcomputer Bus  
GSC-12691 B81-10229 08

## CIRCUIT RELIABILITY

Study of Two Digital Charge-Coupled Devices  
MFS-25606 B81-10128 02

## CITRUS TREES

Aerial Infrared Photos for Citrus Growers  
KSC-11209 B81-10178 05

## CLAMPS

Device Acquires, Orients, and Clamps  
MFS-25403 B81-10086 07

## CLEANING

Clamp Restrains Pressure Line  
KSC-11205 B81-10207 07  
Improved Cable Grip Reduces Wear  
ARC-11318 B81-10214 07  
Air Bag Applies Uniform Bonding  
Pressure  
KSC-11182 B81-10242 08  
Boltless Seal for Electronic  
Housings  
NPO-14818 B81-10249 01  
Small Fixture Strains Composites for  
Environmental Tests  
NPO-15062 B81-10302 06  
New Configuration for  
Compression-Test Fixture  
MSC-18723 B81-10306 06  
Clamp and Gas Nozzle for TIG  
Welding  
MSC-20108 B81-10359 08

## CLEANING

Wire Whip Keeps Spray Nozzle  
Clean  
MFS-25175 B81-10115 08  
Vacuum Head Removes Sanding  
Dust  
MSC-19526 B81-10215 07  
Brushless Cleaning of Solar Panels  
and Windows  
NPO-14922 B81-10333 07  
Cleaning Internal-Weld Splatter  
MSC-20068 B81-10355 08

## CLEANLINESS

Surface-Contamination Inspection  
Tool for Field Use  
MFS-25581 B81-10190 06  
Contamination Control During Weld  
Repairs  
MFS-19652 B81-10225 08  
Detecting Contamination With  
Photoelectron Emission  
MFS-25619 B81-10313 06

## CLIPS

Boltless Seal for Electronic  
Housings  
NPO-14818 B81-10249 01

## CLOCKS

Electronically Calibratable Clock  
LAR-12654 B81-10122 01

## CLOSED ECOLOGICAL SYSTEMS

Protective Garment Ensemble  
KSC-11203 B81-10222 08

## CLOSURES

Boltless Seal for Electronic  
Housings  
NPO-14818 B81-10249 01

## COAL

EMR Gage Would Measure Coal  
Thickness Accurately  
MFS-25555 B81-10139 03  
Sound-burst Generator for Measuring  
Coal Properties  
MFS-25438 B81-10281 04  
Catalyzing the Combustion of Coal  
NPO-15456 B81-10282 04

## COAL UTILIZATION

Combustion of Coal/Oil/Water  
Slurries  
NPO-15462 B81-10144 03  
Coal as a Substitute for Carbon  
Black  
NPO-15461 B81-10280 04

## COATING

IC Capacitors on Groups III-to-V  
Substrates  
GSC-12543 B81-10109 08

## COATINGS

Plasma Deposition of Amorphous  
Silicon  
NPO-14954 B81-10044 04  
Effects of High Temperature on  
Collector Coatings  
MFS-25651 B81-10148 03  
Surface Seal for Carbon Parts  
MSC-18898 B81-10163 04  
Flame-Retardant Coating is  
Heat-Sealed  
MSC-18382 B81-10168 04  
Binders for Thermal-Control  
Coatings  
MFS-25620 B81-10294 04  
Thermal Polymerization of N-Butyl  
Acrylate  
NPO-15010 B81-10295 04

## COAXIAL CABLES

Sealed Strip Line for Extreme  
Temperatures  
MSC-16994 B81-10114 08

## COLD WORKING

Staking Tool for Hard Metals  
MSC-20009 B81-10336 07

## COLOR TELEVISION

Graphics-System Color-Code  
Interface  
LAR-12646 B81-10014 02

## COMBUSTION CHAMBERS

Two-Stage Combustor Reduces  
Pollutant Emissions  
NPO-14911 B81-10042 04

## COMBUSTION EFFICIENCY

Combustion of Coal/Oil/Water  
Slurries  
NPO-15462 B81-10144 03  
Staged Turbojet Engine Would Emit  
Less NO  
ARC-10814 B81-10213 07  
Catalyzing the Combustion of Coal  
NPO-15456 B81-10282 04

## COMBUSTION PHYSICS

Combustion of Coal/Oil/Water  
Slurries  
NPO-15462 B81-10144 03  
Modular Engine Instrumentation  
System  
LEW-13729 B81-10315 06

## COMMERCIAL ENERGY

Energy-Systems Economic Analysis  
NPO-15097 B81-10035 03

## COMMUNICATION CABLES

Integrated Structural and Cable  
Connector  
LAR-12769 B81-10085 07

## COMPARATORS

Fast Holographic Comparator  
LAR-12509 B81-10132 02  
Precise Phase Comparator for Nearly  
Equal Frequencies  
GSC-12645 B81-10253 01

## COMPARISON

Matching Dissimilar Graphical  
Scales  
MSC-14864 B81-10240 08

## COMPOSITE MATERIALS

Lacquer Reveals Impact Damage in  
Composites  
LAR-12700 B81-10064 06  
Improved Cure-in-Place Silicone  
Adhesives  
MSC-18782 B81-10164 04  
Moisture in Composites is Measured  
by Positron Lifetime  
LAR-12776 B81-10180 06

## Boron/Aluminum-Titanium

on Stiffener  
MSC-18895 B81-10230 08  
Composite-Material Point-Stress  
Analysis  
MSC-18978 B81-10245 08  
Coal as a Substitute for Carbon  
Black  
NPO-15461 B81-10280 04  
Graphite-Fiber-Reinforced  
Composite  
LAR-12764 B81-10293 04  
Ultrasonic Instrument for Evaluation  
of Composites  
LEW-13716 B81-10301 06  
Small Fixture Strains Composites for  
Environmental Tests  
NPO-15062 B81-10302 06  
Predicting the Strengths of  
Angle-Plied Laminates  
LEW-13733 B81-10309 06  
Predicting Tensile Strengths of  
Boron/Aluminum Composites  
LEW-13745 B81-10311 06  
Ultrasonic Welding of  
Graphite/Thermoplastic Composite  
MSC-20013 B81-10350 08  
Eliminating Delamination in Curved  
Composite Parts  
MSC-20027 B81-10356 08

## COMPRESSION TESTS

New Configuration for  
Compression-Test Fixture  
MSC-18723 B81-10306 06

## COMPUTER COMPONENTS

'Ruggedized' Microcomputer Bus  
GSC-12691 B81-10229 08  
Programmable Interface Handles Many  
Peripherals  
KSC-11132 B81-10261 02

## COMPUTER DESIGN

Array Processor Has Power and  
Flexibility  
ARC-11292 B81-10130 02  
Automatically Reconfigurable  
Computer  
MFS-25455 B81-10131 02  
Aerodynamics of Supersonic Aircraft  
LAR-12857 B81-10199 06  
CADAT Printed-Wiring-Board  
Designer  
MFS-25464 B81-10244 08

## COMPUTER GRAPHICS

Graphics-System Color-Code  
Interface  
LAR-12646 B81-10014 02  
Graphics for Finite-Element Analysis  
LAR-12793 B81-10194 06

## COMPUTER PROGRAMMING

Program Structure Combines  
Segmentation and Dynamic Storage  
LAR-12830 B81-10247 09

## COMPUTER PROGRAMS

Unsteady Subsonic Loadings Due to  
Control-Surface Motion  
LAR-12802 B81-10073 06  
I/O Error Analyzer (UNIVAC 1108  
Version)  
GSC-12621 B81-10118 09  
Improved Numerical Differencing  
Analyzer  
GSC-12671 B81-10197 06  
Simplified Thermal Analyzer --VAX  
Version  
GSC-12698 B81-10198 06



# SUBJECT INDEX

One Way of Testing a Distributed Processor  
KSC-11123 B81-10263 02

**COMPUTER STORAGE DEVICES**  
Optical Memory Stores 10 12sup. Bits  
MFS-25456 B81-10012 02  
Array Processor Has Power and Flexibility  
ARC-11292 B81-10130 02

**COMPUTER SYSTEMS PROGRAMS**  
I/O Error Analyzer (UNIVAC 1108 Version)  
GSC-12621 B81-10118 09  
User Documentation for Multiple Software Releases  
KSC-11189 B81-10371 09

**COMPUTERIZED SIMULATION**  
Powerplant Thermal-Pollution Models  
KSC-11210 B81-10142 03

**CONCAVITY**  
Gage for Surface Waviness  
MSC-20055 B81-10305 06

**CONCENTRATORS**  
Easily Assembled Reflector for Solar Concentrators  
NPO-15518 B81-10235 08

**CONDUCTIVE HEAT TRANSFER**  
Finite-Element Analysis of Forced Convection and Conduction  
LAR-12794 B81-10195 06

**CONNECTORS**  
Blind Fastener Is Easy To Install  
MSC-18742 B81-10082 07  
Unidirectional Flexural Pivot  
GSC-12622 B81-10208 07

**CONTACT RESISTANCE**  
Wire-Wrap Chatter Detector  
NPO-15290 B81-10121 01

**CONTAINERLESS MELTS**  
Levigator for Containerless Processing  
MFS-25509 B81-10110 08  
Materials Processing in Space  
MFS-25544 B81-10116 08

**CONTAMINANTS**  
Refractories Keep Silicon Crystals Pure  
NPO-14820 B81-10095 08

**CONTAMINATION**  
Removing Defects From Silicon Ribbon  
NPO-14772 B81-10091 08  
Ceramic for Silicon-Shaping Dies  
NPO-14783 B81-10092 08  
Speedy Acquisition of Surface-Contamination Samples  
NPO-14934 B81-10175 05  
Circuit Counts Carbon Fibers  
NPO-14940 B81-10188 06  
Surface-Contamination Inspection Tool for Field Use  
MFS-25581 B81-10190 06  
Contamination Control During Weld Repairs  
MFS-19652 B81-10225 08  
Detecting Contamination With Photoelectron Emission  
MFS-25619 B81-10313 06

**CONTROL EQUIPMENT**  
Three-Phase Power Factor Controller  
MFS-25535 B81-10001 01  
Load-Responsive Motor Controller  
MFS-25560 B81-10002 01

Power-Factor Controller With Regenerative Braking  
MFS-25477 B81-10003 01  
Spike-Free Automatic Level Control  
KSC-11170 B81-10006 01  
Hybrid Position/Force Control of Robot Manipulators  
NPO-14997 B81-10327 07

**CONTROL SURFACES**  
Unsteady Subsonic Loadings Due to Control-Surface Motion  
LAR-12802 B81-10073 06

**CONTROL UNITS (COMPUTERS)**  
Programmable Interface Handles Many Peripherals  
KSC-11132 B81-10261 02

**CONTROLLED ATMOSPHERES**  
Environmental-Analysis Routine Library  
MSC-18925 B81-10297 05

**CONVECTIVE HEAT TRANSFER**  
Finite-Element Analysis of Forced Convection and Conduction  
LAR-12794 B81-10195 06

**CONVEXITY**  
Gage for Surface Waviness  
MSC-20055 B81-10305 06

**CONVEYORS**  
Walking-Beam Solar-Cell Conveyor  
NPO-15503 B81-10341 08  
Work Station For Inverting Solar Cells  
NPO-15506 B81-10345 08  
Solar-Cell String Conveyor  
NPO-15508 B81-10346 08

**COOLING**  
Modular Amplifier/Antenna Arrays  
MSC-18981 B81-10258 01

**COPOLYMERS**  
Silicone/Acrylate Copolymers  
NPO-15523 B81-10279 04

**COPPER ALLOYS**  
Low-Gold-Content Brazing Alloys  
MFS-19629 B81-10283 04

**CORE SAMPLING**  
Automatic Collection of Rock and Soil Samples  
MSC-18868 B81-10079 07

**CORROSION**  
Ultraviolet-Induced Mirror Degradation  
NPO-15520 B81-10171 04

**CORROSION PREVENTION**  
Neutralizing Amine-Cured Epoxy Surfaces  
GSC-12686 B81-10290 04

**COST ANALYSIS**  
Energy-Systems Economic Analysis  
NPO-15097 B81-10035 03  
Economic Evaluation of Observatory Solar-Energy System  
MFS-25682 B81-10153 03  
Economic Evaluation of Single-Family-Residence Solar-Energy Installation  
MFS-25683 B81-10154 03  
Economic Evaluation of Townhouse Solar Energy System  
MFS-25684 B81-10155 03  
Economic Evaluation of Office Solar-Heating System  
MFS-25685 B81-10156 03  
Dormitory Solar-Energy-System Economics  
MFS-25693 B81-10157 03  
Two-Story-Dwelling Solar Installation  
MFS-25697 B81-10158 03

# CRUCIBLES

Ranger Station Solar-Energy System Receives Economic Evaluation  
MFS-25699 B81-10159 03  
Economic Evaluation of Dual-Level-Residence Solar-Energy System  
MFS-25700 B81-10160 03  
Economic Evaluation of Single-Family-Residence Solar-Energy System  
MFS-25701 B81-10161 03  
The Economics of Solar Heating  
MFS-25391 B81-10278 03

**COST EFFECTIVENESS**  
Proposed Reliability/Cost Model  
MFS-25494 B81-10372 09

**COST ESTIMATES**  
Proposed Reliability/Cost Model  
MFS-25494 B81-10372 09

**COUNTDOWN**  
Programmable Interface Handles Many Peripherals  
KSC-11132 B81-10261 02  
One Way of Testing a Distributed Processor  
KSC-11123 B81-10263 02

**COUNTERS**  
Circuit Counts Carbon Fibers  
NPO-14940 B81-10188 06

**COUPLING CIRCUITS**  
Improved Parallel-Access Alinement Network  
ARC-11155 B81-10134 02  
Parallel-Access Alinement Network Using Barrel Switches  
ARC-11162 B81-10135 02  
Unequal-Split Strip-Line Power Divider  
LAR-12797 B81-10250 01

**COUPLINGS**  
Blind Fastener Is Easy To Install  
MSC-18742 B81-10082 07  
Ball-and-Socket Joint Can Be Disassembled  
LAR-12770 B81-10084 07  
Unidirectional Flexural Pivot  
GSC-12622 B81-10208 07  
Latch With Single-Motion Release  
MSC-18923 B81-10220 07  
Pivot Attachment for Prefabricated Beams  
MFS-25476 B81-10368 08

**CRACK INITIATION**  
Factors Affecting Liquid-Metal Embrittlement in C-103  
MSC-18865 B81-10170 04

**CRACKS**  
Detecting Cracks on Inner Surfaces  
MFS-19575 B81-10054 06

**CREEP RUPTURE STRENGTH**  
Predicting Tensile Strengths of Boron/Aluminum Composites  
LEW-13745 B81-10311 06

**CROP GROWTH**  
Portable Radiometer Monitors Plant Growth  
GSC-12412 B81-10047 05  
Chemical Growth Regulators for Guayule Plants  
NPO-15213 B81-10048 05

**CRUCIBLES**  
Gravity-Feed Growth of Silicon Ribbon  
NPO-14967 B81-10089 08  
Heat-Exchanger Method of Crystal Growth  
NPO-14819 B81-10090 08

## CRUDE OIL

Recharging the Silicon Crucible in a  
Hot Furnace  
NPO-14980 B81-10093 08  
Crucible Grows Wide Silicon Ribbon  
NPO-14859 B81-10094 08

## CRUDE OIL

Supercritical-Fluid Extraction of Oil  
From Tar Sands  
NPO-15476 B81-10166 04

## CRYOGENIC EQUIPMENT

Dynamic Isolation for Cryogenic  
Refrigerators  
LAR-12728 B81-10076 07  
Increasing Metal Fracture  
Toughness  
LAR-12805 B81-10351 08

## CRYOGENIC FLUID STORAGE

Improved Nozzle Would Reduce  
Cryogenic Boiloff  
MFS-25589 B81-10335 07

## CRYOGENIC FLUIDS

Fibre-Optic Semiconductor  
Temperature Gage  
MSC-18627 B81-10053 06

## CRYSTAL GROWTH

Gravity-Feed Growth of Silicon  
Ribbon  
NPO-14967 B81-10089 08  
Heat-Exchanger Method of Crystal  
Growth  
NPO-14819 B81-10090 08  
Removing Defects From Silicon  
Ribbon  
NPO-14772 B81-10091 08  
Ceramic for Silicon-Shaping Dies  
NPO-14783 B81-10092 08  
Recharging the Silicon Crucible in a  
Hot Furnace  
NPO-14980 B81-10093 08  
Crucible Grows Wide Silicon Ribbon  
NPO-14859 B81-10094 08  
Improved Facility for Producing  
Silicon Web  
NPO-14860 B81-10096 08  
Automatic Control of Silicon Melt  
Level  
NPO-15487 B81-10097 08  
Temperature-Controlled Support for a  
Seed Crystal  
MFS-25341 B81-10098 08  
Materials Processing in Space  
MFS-25544 B81-10116 08  
Monitoring Crystal Growth From  
Solution  
MFS-25622 B81-10364 08

## CRYSTAL STRUCTURE

XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub>  
Interface  
NPO-14968 B81-10285 04

## CUFFS

Cuff for Blood-Vessel Pressure  
Measurements  
ARC-11264 B81-10296 05

## CULTURE TECHNIQUES

Improved Method for Culturing  
Guinea-Pig Macrophage Cells  
MFS-25307 B81-10177 05

## CURING

Improved Cure-in-Place Silicone  
Adhesives  
MSC-18782 B81-10164 04

## CURRENT DISTRIBUTION

Unequal-Split Strip-Line Power  
Divider  
LAR-12797 B81-10250 01

## CUTTING

High-Speed Wafer Slicer  
NPO-15463 B81-10332 07  
Cutting a Tapered Edge on Padding  
Material  
MSC-20011 B81-10367 08

## CYCLOTRON RESONANCE

Compact Ion Source for Mass  
Spectrometers  
NPO-14324 B81-10136 03

## CYTOLOGY

Improved Method for Culturing  
Guinea-Pig Macrophage Cells  
MFS-25307 B81-10177 05

## D

## DAMPING

Aerodynamics of Sounding-Rocket  
Geometries  
GSC-12680 B81-10074 06

## DATA PROCESSING EQUIPMENT

Programmable Interface Handles Many  
Peripherals  
KSC-11132 B81-10261 02  
Processing PCM Data in Real Time  
KSC-11131 B81-10262 02

## DATA RETRIEVAL

Improved Parallel-Access Alinement  
Network  
ARC-11155 B81-10134 02  
Parallel-Access Alinement Network  
Using Barrel Switches  
ARC-11162 B81-10135 02

## DATA SAMPLING

Analyzing Multirate-Sampled  
Systems  
MFS-25541 B81-10264 02

## DATA TRANSMISSION

Programmable Interface Handles Many  
Peripherals  
KSC-11132 B81-10261 02

## DECONTAMINATION

Vacuum Head Removes Sanding  
Dust  
MSC-19526 B81-10215 07  
Detecting Contamination With  
Photoelectron Emission  
MFS-25619 B81-10313 06

## DECOUPLING

Explosive Separation of Electrical  
Connectors  
MSC-18828 B81-10218 07  
Reliable 'Unlatch'  
NPO-15438 B81-10219 07

Latch With Single-Motion Release  
MSC-18923 B81-10220 07

## DEFECTS

Detecting Cracks on Inner Surfaces  
MFS-19575 B81-10054 06  
Removing Defects From Silicon  
Ribbon  
NPO-14772 B81-10091 08

## DEFLECTION

Plastic and Large-Deflection Analysis  
of Nonlinear Structures  
LAR-12816 B81-10323 06

## DEFORMATION

Deformation-Induced Anisotropy of  
Polymers  
NPO-15325 B81-10043 04

## DEGASSING

Compact Liquid Deaerator  
MSC-18936 B81-10211 07

## DEGRADATION

Ultraviolet-Induced Mirror  
Degradation  
NPO-15520 B81-10171 04  
Mass-Loss Buttons Monitor Material  
Degradation  
MSC-18903 B81-10307 06

## DELAMINATING

Eliminating Delamination in Curved  
Composite Parts  
MSC-20027 B81-10356 08

## DENDRITIC CRYSTALS

Crucible Grows Wide Silicon Ribbon  
NPO-14859 B81-10094 08  
Improved Facility for Producing  
Silicon Web  
NPO-14860 B81-10096 08  
Automatic Control of Silicon Melt  
Level  
NPO-15487 B81-10097 08

## DEPOSITION

Plasma Deposition of Amorphous  
Silicon  
NPO-14954 B81-10044 04

## DEPTH MEASUREMENT

EMR Gage Would Measure Coal  
Thickness Accurately  
MFS-25555 B81-10139 03  
Sound-burst Generator for Measuring  
Coal Properties  
MFS-25438 B81-10281 04

## DESCALING

Cleaning Internal-Weld Splatter  
MSC-20068 B81-10355 08

## DESCENT TRAJECTORIES

Flight-Management Algorithm for  
Fuel-Conservative Descents  
LAR-12814 B81-10179 06

## DESIGN ANALYSIS

Line Replaceable Unit Analysis  
MSC-20183 B81-10259 02

## DESTRUCTIVE TESTS

Lacquer Reveals Impact Damage in  
Composites  
LAR-12700 B81-10064 06  
Improved Tensile Test for Ceramics  
MSC-20105 B81-10310 06

## DETONATORS

Sequential-Impulse Generator Uses  
Fiber-Optics  
NPO-14939 B81-10020 03

## DIAGNOSIS

Algorithms Could Automate Cancer  
Diagnosis  
MSC-18764 B81-10045 05

## DIELECTRICS

IC Capacitors on Groups III-to-V  
Substrates  
GSC-12543 B81-10109 08

## DIES

Ceramic for Silicon-Shaping Dies  
NPO-14783 B81-10092 08

## DIFFERENCE EQUATIONS

Improved Numerical Differencing  
Analyzer  
GSC-12671 B81-10197 06

## DIFFERENTIAL EQUATIONS

Improved Numerical Differencing  
Analyzer  
GSC-12671 B81-10197 06

## DIFFERENTIAL PRESSURE

Pressure Transducer Has Long  
Service Life  
MSC-18904 B81-10191 06

## SUBJECT INDEX

### DIFFUSION

Measuring Interdiffusion in Binary Liquids  
MFS-25576 B81-10165 04

### DIFFUSION THEORY

Gas Diffusion in Fluids Containing Bubbles  
NPO-15060 B81-10292 04

### DIFFUSION WELDING

Metal Sandwith Panel With Biaxially Corrugated Core  
FRC-11026 B81-10112 08  
Increasing Metal Fracture Toughness  
LAR-12805 B81-10351 08

### DIGITAL COMPUTERS

Automatically Reconfigurable Computer  
MFS-25455 B81-10131 02

### DIGITAL TECHNIQUES

Electronically Calibratable Clock  
LAR-12654 B81-10122 01

### DIMENSIONAL MEASUREMENT

Tile-Gap Measurement Tool  
MSC-20057 B81-10304 06

### DIMENSIONS

Matching Dissimilar Graphical Scales  
MSC-14864 B81-10240 08

### DISCONNECT DEVICES

Explosive Separation of Electrical Connectors  
MSC-18828 B81-10218 07  
Reliable 'Unlatch'  
NPO-15438 B81-10219 07

### DISCRIMINATORS

Fast Holographic Comparator  
LAR-12509 B81-10132 02

### DISPENSERS

Adhesives Mixer Applicator  
MSC-18916 B81-10078 07

### DISPLACEMENT MEASUREMENT

Interferometer Accurately Measures Rotation Angle  
GSC-12614 B81-10057 06  
Load-Displacement Measurement on Pin-Loaded Specimens  
LEW-13624 B81-10070 06

### DISTANCE MEASURING EQUIPMENT

Rangefinder Corrects for Air Density and Moisture  
GSC-12609 B81-10186 06  
Tile-Gap Measurement Tool  
MSC-20057 B81-10304 06

### DOCUMENTATION

User Documentation for Multiple Software Releases  
KSC-11189 B81-10371 09

### DOPPLER EFFECT

Method for Canceling Ionospheric Doppler Effect  
MFS-25599 B81-10260 02

### DRAFTING (DRAWING)

Graphics for Finite-Element Analysis  
LAR-12793 B81-10194 06

### DRAG REDUCTION

Wingtip-Vortex Turbine Lowers Aircraft Drag  
LAR-12544 B81-10182 06

### DRAWINGS

Matching Dissimilar Graphical Scales  
MSC-14864 B81-10240 08

### DRILLING

Automatic Collection of Rock and Soil Samples  
MSC-18868 B81-10079 07

Technique for Machining Glass  
GSC-12636 B81-10209 07

### DUST COLLECTORS

Vacuum Head Removes Sanding Dust  
MSC-19526 B81-10215 07

### DYNAMIC RESPONSE

Model Verification of Mixed Dynamic Systems  
MFS-23806 B81-10196 06

### DYNAMIC STABILITY

Analyzing Multirate-Sampled Systems  
MFS-25541 B81-10264 02

### DYNAMIC STRUCTURAL ANALYSIS

Solution Accounts for Structural Damping  
LAR-12863 B81-10303 06  
Vibration Analysis With Finite Dynamic Elements  
NPO-15087 B81-10320 06

## E

### ECONOMIC ANALYSIS

Energy-Systems Economic Analysis  
NPO-15097 B81-10035 03

### EGRESS

Explosively Actuated Opening for Rapid Egress  
LAR-12624 B81-10319 06

### ELASTIC DEFORMATION

Plastic and Large-Deflection Analysis of Nonlinear Structures  
LAR-12816 B81-10323 06

### ELASTIC PROPERTIES

Predicting the Strengths of Angle-Plated Laminates  
LEW-13733 B81-10309 06

### ELASTIC WAVES

Elastic Surface Wrinkling  
NPO-15091 B81-10321 06

### ELASTOMERS

Preparation of Perfluorinated Imidoylamidoxime Polymers  
ARC-11267 B81-10036 04  
Synthesis of Perfluorinated Polymers  
ARC-11241 B81-10037 04  
Elastomer-Toughened Polyimide Adhesives  
LAR-12775 B81-10040 04  
Improved Cure-in-Place Silicone Adhesives  
MSC-18782 B81-10164 04  
Coal as a Substitute for Carbon Black  
NPO-15461 B81-10280 04

### ELECTRIC CONNECTORS

Weatherproof Crimp Connector  
NPO-15497 B81-10101 08  
Testing Patchboard Connections Automatically  
KSC-11065 B81-10129 02  
Explosive Separation of Electrical Connectors  
MSC-18828 B81-10218 07  
'Ruggedized' Microcomputer Bus  
GSC-12691 B81-10229 08  
High-Density Terminal Box for Testing Wire Harness  
NPO-15147 B81-10251 01  
Tab Interconnect Work Station  
NPO-15505 B81-10344 08  
Bonder for Solar-Cell Strings  
NPO-15507 B81-10347 08

## ELECTROCHEMICAL CELLS

### ELECTRIC CONTACTS

Multilayer, Front-Contact Grid for Solar Cells  
LAR-12613 B81-10009 01  
Arc-Free High-Power dc Switch  
MSC-20091 B81-10256 01

### ELECTRIC CONTROL

Fast-Acting Electrohydraulic Servo  
LEW-13730 B81-10298 06

### ELECTRIC CURRENT

Power-MOSFET Voltage Regulator  
MSC-20059 B81-10257 01

### ELECTRIC DISCHARGES

Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08

### ELECTRIC EQUIPMENT

Survey of Facilities for Testing Photovoltaics  
NPO-15361 B81-10193 06

### ELECTRIC EQUIPMENT TESTS

Load Pulsers Is Sparkless  
KSC-11199 B81-10123 01  
Testing Patchboard Connections Automatically  
KSC-11065 B81-10129 02

### ELECTRIC FIELDS

Improved Model for MOS Breakdown  
NPO-14850 B81-10007 01

### ELECTRIC GENERATORS

Solar-Driven Liquid-Metal MHD Generator  
LAR-12495 B81-10266 03

### ELECTRIC MOTORS

Alternating-Current Motor Drive for Electric Vehicles  
NPO-14768 AND NPO-14830 B81-10124 01

### ELECTRIC POTENTIAL

Line Replaceable Unit Analysis  
MSC-20183 B81-10259 02

### ELECTRIC POWER PLANTS

Powerplant Thermal-Pollution Models  
KSC-11210 B81-10142 03

### ELECTRIC POWER TRANSMISSION

Short-Circuited Power Networks  
MSC-18977 B81-10018 02

### ELECTRIC WELDING

Clamp and Gas Nozzle for TIG Welding  
MSC-20108 B81-10359 08  
Acoustic Emissions Could Indicate Weld Quality  
MFS-25441 B81-10360 08  
Infrared-Controlled Welding of Solar Cells  
MFS-25612 B81-10365 08

### ELECTRICAL FAULTS

Improved Model for MOS Breakdown  
NPO-14850 B81-10007 01

Short-Circuited Power Networks  
MSC-18977 B81-10018 02

Wire-Wrap Chatter Detector  
NPO-15290 B81-10121 01

Failure Detector for Power-Factor Controller  
MFS-25607 B81-10252 01

### ELECTRO-OPTICAL EFFECT

Fast Holographic Comparator  
LAR-12509 B81-10132 02

### ELECTROCHEMICAL CELLS

Orientation Insensitivity for Electrochemical Sensor  
KSC-11176 B81-10233 08

# ELECTRODES

# SUBJECT INDEX

## ELECTRODES

Improved Electrophoresis Cell  
MFS-25426 B81-10174 05  
Integrated Solid-Electrolyte  
Construction  
NPO-15471 B81-10236 08

## ELECTROLYTIC CELLS

Integrated Solid-Electrolyte  
Construction  
NPO-15471 B81-10236 08

## ELECTROMAGNETIC SHIELDING

Electrically-conductive  
lity Pressure Seal  
MSC-20022 B81-10358 08

## ELECTRON BEAM WELDING

Technique Lowers Weld Power  
Requirements  
MFS-19655 B81-10226 08  
Controlling Electron-Beam-Weld  
Focus  
MFS-19635 B81-10352 08

## ELECTRONIC CONTROL

Infrared-Controlled Welding of Solar  
Cells  
MFS-25612 B81-10365 08

## ELECTRONIC EQUIPMENT TESTS

Wire-Wrap Chatter Detector  
NPO-15290 B81-10121 01  
Study of Two Digital Charge-Coupled  
Devices  
MFS-25606 B81-10128 02  
High-Density Terminal Box for  
Testing Wire Harness  
NPO-15147 B81-10251 01

## ELECTRONIC MODULES

Modular Amplifier/Antenna Arrays  
MSC-18981 B81-10258 01  
Modular Engine Instrumentation  
System  
LEW-13729 B81-10315 06

## ELECTROPHORESIS

Improved Electrophoresis Cell  
MFS-25426 B81-10174 05

## ELECTROPLATING

Electrochemical Assay of  
Gold-Plating Solutions  
MFS-19639 B81-10284 04

## ELECTROSTATIC PROBES

Correcting for Background in Flowing  
Plasma Measurements  
NPO-15332 B81-10051 06

## EMBRITTELEMENT

Factors Affecting Liquid-Metal  
Embrittlement in C-103  
MSC-18865 B81-10170 04

## EMERGENCY LIFE SUSTAINING SYSTEMS

Protective Garment Ensemble  
KSC-11203 B81-10222 08

## EMISSIONS

Effects of High Temperature on  
Collector Coatings  
MFS-25651 B81-10148 03

## ENCAPSULATING

Structural Modules Would Contain  
Transmission Lines  
GSC-12523 B81-10108 08  
Thermal Polymerization of N-Butyl  
Acrylate  
NPO-15010 B81-10295 04

## ENERGY ABSORPTION

Yielding Torque-Tube System  
Reduces Crash Injuries  
LAR-12801 B81-10363 08

## ENERGY ABSORPTION FILMS

Effects of High Temperature on  
Collector Coatings  
MFS-25651 B81-10148 03

## ENERGY CONSERVATION

New Energy-Saving Technologies  
Use Induction Generators  
MFS-25513 B81-10021 03

## ENERGY CONVERSION

Energy-Systems Economic Analysis  
NPO-15097 B81-10035 03  
Heat-Energy Analysis for Solar  
Receivers  
NPO-14835 B81-10071 06

## ENERGY CONVERSION EFFICIENCY

Three-Phase Power Factor  
Controller  
MFS-25535 B81-10001 01  
Load-Responsive Motor Controller  
MFS-25560 B81-10002 01  
Power-Factor Controller With  
Regenerative Braking  
MFS-25477 B81-10003 01  
Battle Keeps Solar Energy in  
Receiver  
NPO-15387 B81-10023 03  
Aerodynamics Improve Wind Wheel  
MFS-25506 B81-10080 07  
Alternating-Current Motor Drive for  
Electric Vehicles  
NPO-14768 AND NPO-14830  
B81-10124 01

Controller Regulates Auxiliary Source  
for Solar Power  
MFS-25637 B81-10133 02  
Calculating the Performance of a  
Solar Reflector  
NPO-15314 B81-10246 09

## ENERGY STORAGE

Efficient Energy-Storage Concept  
MFS-25331 B81-10138 03  
Energy-Storage Modules for Active  
Solar Heating and Cooling  
MFS-25681 B81-10145 03

## ENERGY TECHNOLOGY

Catalyzing the Combustion of Coal  
NPO-15456 B81-10282 04

## ENGINE CONTROL

Two-Stage Combustor Reduces  
Pollutant Emissions  
NPO-14911 B81-10042 04

## ENGINE DESIGN

Advances in Turbine-Engine  
Technology  
LEW-13672 B81-10087 07

## ENGINE MONITORING INSTRUMENTS

Modular Engine Instrumentation  
System  
LEW-13729 B81-10315 06

## ENGINE TESTS

Engine-Vibration Analyzer  
MFS-19320 B81-10183 06

## ENVIRONMENTAL CONTROL

Environmental-Analysis Routine  
Library  
MSC-18925 B81-10297 05

## ENVIRONMENTAL MONITORING

Mass-Loss Buttons Monitor Material  
Degradation  
MSC-18903 B81-10307 06

## ENVIRONMENTAL TESTS

Faster Test for Cable Seals  
MFS-25618 B81-10187 06  
Small Fixture Strains Composites for  
Environmental Tests  
NPO-15062 B81-10302 06

## EPOXY COMPOUNDS

Neutralizing Amine-Cured Epoxy  
Surfaces  
GSC-12686 B81-10290 04

## EPOXY RESINS

Adhesives Mixer Applicator  
MSC-18916 B81-10078 07

## ERROR DETECTION CODES

I/O Error Analyzer (UNIVAC 1108  
Version)  
GSC-12621 B81-10118 09

## ERROR SIGNALS

Precise Phase Comparator for Nearly  
Equal Frequencies  
GSC-12645 B81-10253 01

## ESCAPE SYSTEMS

Explosively Actuated Opening for  
Rapid Egress  
LAR-12624 B81-10319 06

## ETCHING

Selective Etching of Semiconductor  
Glassivation  
GSC-12667 B81-10238 08

## EXHAUST GASES

Staged Turbojet Engine Would Emit  
Less NO  
ARC-10814 B81-10213 07

## EXPLOSIVE DEVICES

Sequential-Impulse Generator Uses  
Fiber-Optics  
NPO-14939 B81-10020 03  
Explosive Separation of Electrical  
Connectors  
MSC-18828 B81-10218 07  
Explosively Actuated Opening for  
Rapid Egress  
LAR-12624 B81-10319 06

## EXTINGUISHING

Synthesis of Fire-Extinguishing  
Dawsonites  
ARC-11326 B81-10038 04

## EYE PROTECTION

Integral Face Shield Concept for  
Firefighter's Helmet  
MFS-25493 B81-10361 08

# F

## FABRICATION

Fabricating Structural Beams  
MFS-25228 B81-10369 08

## FABRICS

Flame-Retardant Coating is  
Heat-Sealed  
MSC-18382 B81-10168 04  
Superabsorbent Multilayer Fabric  
MSC-18223 B81-10169 04

## FAILURE

New Algorithms Manage Fourfold  
Redundancy  
MSC-18498 B81-10013 02

## FAR FIELDS

Far-Field Antenna Pattern From a  
Near-Field Test  
NPO-14905 B81-10059 06

## FAST FOURIER TRANSFORMATIONS

Computing the Power-Density  
Spectrum for an Engineering Model  
LAR-12918 B81-10373 09

## FASTENERS

Blind Fastener Is Easy To Install  
MSC-18742 B81-10082 07  
Device Acquires, Orients, and  
Clamps  
MFS-25403 B81-10086 07

# SUBJECT INDEX

# FUEL COMBUSTION

Boltless Seal for Electronic Housings  
NPO-14818 B81-10249 01  
Wide-Temperature-Range  
MFS-19644 B81-10289 04  
Universal Assembly for Captive Bolts  
MSC-18905 B81-10329 07  
Pivot Attachment for Prefabricated Beams  
MFS-25476 B81-10368 08

**FEEDBACK CIRCUITS**  
Two-Stage Linearization Circuit  
LAR-12577 B81-10125 01

**FEEDBACK CONTROL**  
Spike-Free Automatic Level Control  
KSC-11170 B81-10006 01  
Controlling Electron-Beam-Weld Focus  
MFS-19635 B81-10352 08

**FELTS**  
Cutting a Tapered Edge on Padding Material  
MSC-20011 B81-10367 08

**FIBER OPTICS**  
Fibre-Optic Semiconductor Temperature Gage  
MSC-18627 B81-10053 06

**FIBER STRENGTH**  
Predicting Tensile Strengths of Boron/Aluminum Composites  
LEW-13745 B81-10311 06

**FILLERS**  
Prolonging the Life of Refractory Fillers  
MSC-18832 B81-10167 04  
Prolonging the Life of Refractory Fillers  
MSC-18832 B81-10231 08  
Coal as a Substitute for Carbon Black  
NPO-15461 B81-10280 04

**FINITE DIFFERENCE THEORY**  
Numerical Solution for Navier-Stokes Equations  
MFS-25617 B81-10370 09

**FINITE ELEMENT METHOD**  
Program for Analysis and Resizing of Structures  
LAR-12704 B81-10072 06  
Graphics for Finite-Element Analysis  
LAR-12793 B81-10194 06  
Finite-Element Analysis of Forced Convection and Conduction  
LAR-12794 B81-10195 06  
Vibration Analysis With Finite Dynamic Elements  
NPO-15087 B81-10320 06  
Plastic and Large-Deflection Analysis of Nonlinear Structures  
LAR-12816 B81-10323 06

**FIRE EXTINGUISHERS**  
Synthesis of Fire-Extinguishing Dawsonites  
ARC-11326 B81-10038 04

**FIRE FIGHTING**  
Improved Clothing for Firefighters  
MFS-25546 B81-10088 08  
Integral Face Shield Concept for Firefighter's Helmet  
MFS-25493 B81-10361 08

**FIREPROOFING**  
Improved Fire-Resistant Resins for Laminates  
ARC-11321 B81-10039 04

**FIXTURES**  
Small Fixture Strains Composites for Environmental Tests  
NPO-15062 B81-10302 06  
New Configuration for Compression-Test Fixture  
MSC-18723 B81-10306 06

**FLAME RETARDANTS**  
Flame-Retardant Coating is Heat-Sealed  
MSC-18382 B81-10168 04

**FLASH LAMPS**  
Flashlamp Driver for Quasi-CW Laser Pumping  
GSC-12566 B81-10254 01

**FLATNESS**  
Gage for Surface Waviness  
MSC-20055 B81-10305 06

**FLEXIBILITY**  
Unidirectional Flexural Pivot  
GSC-12622 B81-10208 07  
New Apparatus Tests Pressure-Suit Joints  
ARC-11314 B81-10314 06

**FLIGHT CHARACTERISTICS**  
Aeroelastic Analysis for Rotorcraft  
ARC-11150 B81-10075 06

**FLIGHT OPTIMIZATION**  
Flight-Management Algorithm for Fuel-Conservative Descents  
LAR-12814 B81-10179 06

**FLIGHT PATHS**  
Flight-Management Algorithm for Fuel-Conservative Descents  
LAR-12814 B81-10179 06

**FLIGHT SIMULATORS**  
Four-Degree-of-Freedom Platform  
ARC-11286 B81-10217 07

**FLOW DISTRIBUTION**  
High-Lift Separated Flow About Airfoils  
LAR-12853 B81-10324 06

**FLOW MEASUREMENT**  
High-Speed Laser Anemometer  
LEW-13527 B81-10050 06  
Hot Film Static-Pressure Probe for Flow-Field Surveys  
LAR-12799 B81-10308 06

**FLOW VELOCITY**  
High-Speed Laser Anemometer  
LEW-13527 B81-10050 06

**FLUID FLOW**  
Hot Film Static-Pressure Probe for Flow-Field Surveys  
LAR-12799 B81-10308 06  
Algorithm for Unsteady Potential Flow About Airfoils  
ARC-11378 B81-10316 06  
Improved Nozzle Would Reduce Cryogenic Boiloff  
MFS-25589 B81-10335 07  
Numerical Solution for Navier-Stokes Equations  
MFS-25617 B81-10370 09

**FLUIDIZED BED PROCESSORS**  
Capacitively-Heated Fluidized Bed  
NPO-14912 B81-10102 08

**FLUORINE ORGANIC COMPOUNDS**  
Heat-Exchange Fluids for Sulfuric Acid Vaporizers  
NPO-15015 B81-10291 04

**FLUSHING**  
Brushless Cleaning of Solar Panels and Windows  
NPO-14922 B81-10333 07

**FLUTTER**  
Algorithm for Unsteady Potential Flow About Airfoils  
ARC-11378 B81-10316 06

**FLUTTER ANALYSIS**  
Vibration Analysis With Finite Dynamic Elements  
NPO-15087 B81-10320 06

**FLUXES**  
Fluxless Brazing of Large Structural Panels  
LAR-12519 B81-10100 08

**FLY BY WIRE CONTROL**  
Advanced Technologies for Commercial Airplanes  
MSC-18982 B81-10017 02

**FLYWHEELS**  
Efficient Energy-Storage Concept  
MFS-25331 B81-10138 03  
Flywheels Would Compensate for Rotor Imbalance  
GSC-12550 B81-10331 07

**FOAMING**  
Blowing Agents for Fabrication of Polyimide Foams  
MSC-18993 B81-10286 04

**FOAMS**  
Wire Whip Keeps Spray Nozzle Clean  
MFS-25175 B81-10115 08  
Blowing Agents for Fabrication of Polyimide Foams  
MSC-18993 B81-10286 04

**FOCUSING**  
Controlling Electron-Beam-Weld Focus  
MFS-19635 B81-10352 08

**FOLDING**  
Weatherproof Crimp Connector  
NPO-15497 B81-10101 08

**FOLDING STRUCTURES**  
Dish Antenna Would Deploy From a Canister  
NPO-15448 B81-10241 08  
Storing and Deploying Solar Panels  
MSC-18950 B81-10366 08

**FORMING TECHNIQUES**  
Low-Gravity Investigations in Cast-Iron Processing  
MFS-25491 B81-10172 04

**FRACTURE STRENGTH**  
Measuring Cyclic-Stress Properties of Pressure Vessels  
MFS-23734 B81-10065 06  
Increasing Metal Fracture Toughness  
LAR-12805 B81-10351 08

**FRAMES**  
Storing and Deploying Solar Panels  
MSC-18950 B81-10366 08

**FREQUENCY SHIFT**  
Method for Canceling Ionospheric Doppler Effect  
MFS-25599 B81-10260 02

**FREQUENCY SYNTHESIZERS**  
Method for Canceling Ionospheric Doppler Effect  
MFS-25599 B81-10260 02  
Sound-burst Generator for Measuring Coal Properties  
MFS-25438 B81-10281 04

**FUEL COMBUSTION**  
Two-Stage Combustor Reduces Pollutant Emissions  
NPO-14911 B81-10042 04

## FUEL CONSUMPTION

- Combustion of Coal/Oil/Water Slurries  
 NPO-15462 B81-10144 03  
 Staged Turbojet Engine Would Emit Less NO  
 ARC-10814 B81-10213 07
- FUEL CONSUMPTION**  
 Flight-Management Algorithm for Fuel-Conservative Descents  
 LAR-12814 B81-10179 06
- FUEL TANKS**  
 Improved Nozzle Would Reduce Cryogenic Boiloff  
 MFS-25589 B81-10335 07
- FUEL-AIR RATIO**  
 Staged Turbojet Engine Would Emit Less NO  
 ARC-10814 B81-10213 07
- FUNCTION GENERATORS**  
 Sound-burst Generator for Measuring Coal Properties  
 MFS-25438 B81-10281 04
- FURLABLE ANTENNAS**  
 Dish Antenna Would Deploy From a Canister  
 NPO-15448 B81-10241 08
- FURNACES**  
 Radiant Heating of Ampoule contents  
 MFS-25436 B81-10362 08

## G

- GALLIUM ARSENIDES**  
 Ultra-Thin-Film GaAs Solar Cells  
 NPO-14930 B81-10113 08
- GAPS**  
 Prolonging the Life of Refractory Fillers  
 MSC-18832 B81-10167 04  
 Prolonging the Life of Refractory Fillers  
 MSC-18832 B81-10231 08
- GAS DETECTORS**  
 Orientation Insensitivity for Electrochemical Sensor  
 KSC-11176 B81-10233 08  
 Vapor Detector  
 MSC-18989 B81-10287 04
- GAS TUNGSTEN ARC WELDING**  
 Clamp and Gas Nozzle for TIG Welding  
 MSC-20108 B81-10359 08
- GASEOUS DIFFUSION**  
 Gas Diffusion in Fluids Containing Bubbles  
 NPO-15060 B81-10292 04
- GASKETS**  
 Electrically-conductive lity Pressure Seal  
 MSC-20022 B81-10358 08
- GELS**  
 Superabsorbent Multilayer Fabric  
 MSC-18223 B81-10169 04
- GENERATORS**  
 New Energy-Saving Technologies Use Induction Generators  
 MFS-25513 B81-10021 03
- GLASS**  
 Technique for Machining Glass  
 GSC-12636 B81-10209 07  
 Glasses for Solar-Cell Arrays  
 NPO-15528 B81-10243 08

- Gas Diffusion in Fluids Containing Bubbles  
 NPO-15060 B81-10292 04  
 Graphite-Fiber-Reinforced rix Composite  
 LAR-12764 B81-10293 04  
 Using Nomarski Interference to Detect Microcracks in Glass  
 GSC-12649 B81-10317 06
- GLASS COATINGS**  
 Selective Etching of Semiconductor Glassivation  
 GSC-12667 B81-10238 08  
 Glasses for Solar-Cell Arrays  
 NPO-15528 B81-10243 08
- GLOVES**  
 Improved Clothing for Firefighters  
 MFS-25546 B81-10088 08  
 Thermally Insulated Glove With Good Tactility  
 MSC-18926 B81-10223 08
- GOLD**  
 Electrochemical Assay of Gold-Plating Solutions  
 MFS-19639 B81-10284 04
- GOLD ALLOYS**  
 Low-Gold-Content Brazing Alloys  
 MFS-19629 B81-10283 04
- GONIOMETERS**  
 New Apparatus Tests Pressure-Suit Joints  
 ARC-11314 B81-10314 06
- GRAPHITE**  
 Graphite-Fiber-Reinforced rix Composite  
 LAR-12764 B81-10293 04
- GRAVITATIONAL EFFECTS**  
 Monitoring Crystal Growth From Solution  
 MFS-25622 B81-10364 08
- GRAVITY GRADIENT SATELLITES**  
 Efficient Energy-Storage Concept  
 MFS-25331 B81-10138 03
- GREASES**  
 Tests of 38 Ball-Bearing Greases  
 MFS-25624 B81-10339 07
- GRIFFITH CRACK**  
 Using Nomarski Interference to Detect Microcracks in Glass  
 GSC-12649 B81-10317 06
- GUAYULE**  
 Chemical Growth Regulators for Guayule Plants  
 NPO-15213 B81-10048 05
- GUIDANCE (MOTION)**  
 Less-Costly Inertial Guidance  
 ARC-11257 B81-10049 06
- GUINEA PIGS**  
 Improved Method for Culturing Guinea-Pig Macrophage Cells  
 MFS-25307 B81-10177 05
- GUST LOADS**  
 Unsteady Subsonic Loadings Due to Control-Surface Motion  
 LAR-12802 B81-10073 06  
 Dynamic-Loads Analysis of Flexible Aircraft With Active Controls  
 LAR-12747 B81-10200 06
- GYROSCOPES**  
 Less-Costly Inertial Guidance  
 ARC-11257 B81-10049 06  
 Flywheels Would Compensate for Rotor Imbalance  
 GSC-12550 B81-10331 07

## SUBJECT INDEX

## H

- HARNESSES**  
 Clamp Restrains Pressure Line  
 KSC-11205 B81-10207 07
- HEAT EXCHANGERS**  
 Heat Pipe Blocks Return Flow  
 ARC-11285 B81-10060 06  
 Resistance Heater Helps Stirling-Engine Research  
 NPO-14928 B81-10083 07  
 Heat-Exchanger Method of Crystal Growth  
 NPO-14819 B81-10090 08  
 Finite-Element Analysis of Forced Convection and Conduction  
 LAR-12794 B81-10195 06  
 'Bottle-Brush' Heat Exchanger  
 NPO-15479 B81-10205 07
- HEAT PIPES**  
 Heat Pipe Blocks Return Flow  
 ARC-11285 B81-10060 06  
 Metallic Panels Would Insulate at 2,700 Degrees F  
 LAR-12620 B81-10104 08  
 Orifice Blocks Heat Pipe in Reverse Mode  
 ARC-11341 B81-10185 06
- HEAT SHIELDING**  
 Metallic Panels Would Insulate at 2,700 Degrees F  
 LAR-12620 B81-10104 08
- HEAT TRANSFER**  
 Heat-Energy Analysis for Solar Receivers  
 NPO-14835 B81-10071 06  
 Heat-Transfer Fluids for Solar-Energy Systems  
 MFS-25629 B81-10147 03  
 Heater Composite Measures Heat Transfer  
 LEW-13731 B81-10192 06  
 Finite-Element Analysis of Forced Convection and Conduction  
 LAR-12794 B81-10195 06  
 'Bottle-Brush' Heat Exchanger  
 NPO-15479 B81-10205 07  
 Heat-Exchange Fluids for Sulfuric Acid Vaporizers  
 NPO-15015 B81-10291 04
- HEAT TRANSMISSION**  
 Orifice Blocks Heat Pipe in Reverse Mode  
 ARC-11341 B81-10185 06
- HEATING EQUIPMENT**  
 Pyramidal-Reflector Solar Heater  
 MFS-25571 B81-10024 03  
 Solar Water Heater Installation Package  
 MFS-25573 B81-10025 03  
 Motel DHW Retrofit--Dallas, Texas  
 MFS-25580 B81-10026 03  
 Solar Hot Water for Motor Inn--Texas City, Texas  
 MFS-25614 B81-10027 03  
 Solar-Energy System for a Commercial Building--Topeka, Kansas  
 MFS-25609 B81-10028 03  
 Solar-Heated Water at a Motel--Mobile, Alabama  
 MFS-25603 B81-10029 03  
 Solar-Heated Public Library--Troy, Ohio  
 MFS-25601 B81-10030 03

# SUBJECT INDEX

# INDIUM

Solar-Cooled Classroom Building--Columbus, Ohio  
MFS-25597 B81-10031 03  
Solar-Heated and Cooled Office Building--Columbus, Ohio  
MFS-25608 B81-10032 03  
Solar Hot Water for an Industrial Laundry--Fresno, California  
MFS-25550 B81-10033 03  
Solar Water-Heater Design Package  
MFS-25574 B81-10034 03  
Resistance Heater Helps Stirling-Engine Research  
NPO-14928 B81-10083 07  
Energy-Storage Modules for Active Solar Heating and Cooling  
MFS-25681 B81-10145 03  
Solar Water-Heater Design and Installation  
LEW-13665 B81-10146 03  
Solar Heating and Cooling for a Controls Manufacturing Plant  
Lumberton, New Jersey  
MFS-25665 B81-10149 03  
Solar Space and Water Heating for Hospital --Charlottesville, Virginia  
MFS-25666 B81-10150 03  
Solar Hot Water for a Motor Inn -- Las Vegas, Nevada  
MFS-25646 B81-10151 03  
Solar Heating for a Bottling Plant -- Jackson, Tennessee  
MFS-25595 B81-10152 03  
Economic Evaluation of Observatory Solar-Energy System  
MFS-25682 B81-10153 03  
Economic Evaluation of Single-Family-Residence Solar-Energy Installation  
MFS-25683 B81-10154 03  
Economic Evaluation of Townhouse Solar Energy System  
MFS-25684 B81-10155 03  
Economic Evaluation of Office Solar-Heating System  
MFS-25685 B81-10156 03  
Dormitory Solar-Energy-System Economics  
MFS-25693 B81-10157 03  
Two-Story-Dwelling Solar Installation  
MFS-25697 B81-10158 03  
Ranger Station Solar-Energy System Receives Economic Evaluation  
MFS-25699 B81-10159 03  
Economic Evaluation of Dual-Level-Residence Solar-Energy System  
MFS-25700 B81-10160 03  
Economic Evaluation of Single-Family-Residence Solar-Energy System  
MFS-25701 B81-10161 03  
Heater Composite Measures Heat Transfer  
LEW-13731 B81-10192 06  
Solar Simulator at Marshall Space Flight Center  
MFS-25742 B81-10269 03  
Evaluation of a Line-Concentrating Solar Collector  
MFS-25778 B81-10270 03  
Manifold Insulation for Solar Collectors  
MFS-25779 B81-10271 03  
Solar Heater in a West Virginia College  
MFS-25706 B81-10272 03

Solar Heating System at a Racquetball Club  
MFS-25720 B81-10273 03  
Solar Heating in an Elementary School  
MFS-25747 B81-10274 03  
Solar-Cooled Hotel in the Virgin Islands  
MFS-25776 B81-10275 03  
Hot Water for Motor Inn--Garland, Texas  
MFS-25726 B81-10276 03  
Solar Space Heating for Warehouse--Kansas City, Kansas  
MFS-25712 B81-10277 03  
The Economics of Solar Heating  
MFS-25391 B81-10278 03  
Radiant Heating of Ampoule contents  
MFS-25436 B81-10362 08  
**HELICOPTER DESIGN**  
Aeroelastic Analysis for Rotorcraft  
ARC-11150 B81-10075 06  
**HELICOPTER PERFORMANCE**  
Aeroelastic Analysis for Rotorcraft  
ARC-11150 B81-10075 06  
**HELMETS**  
Improved Clothing for Firefighters  
MFS-25546 B81-10088 08  
Integral Face Shield Concept for Firefighter's Helmet  
MFS-25493 B81-10361 08  
**HIGH TEMPERATURE ENVIRONMENTS**  
High-Temperature Seal for Sliding-Gate Valve  
MFS-19607 B81-10107 08  
Sealed Strip Line for Extreme Temperatures  
MSC-16994 B81-10114 08  
**HIGH TEMPERATURE FLUIDS**  
Heat-Exchange Fluids for Sulfuric Acid Vaporizers  
NPO-15015 B81-10291 04  
**HIGH TEMPERATURE TESTS**  
Temperature Controller for a Solar Furnace  
NPO-15388 B81-10022 03  
**HINGES**  
Unidirectional Flexural Pivot  
GSC-12622 B81-10208 07  
**HOLDERS**  
Air Bag Applies Uniform Bonding Pressure  
KSC-11182 B81-10242 08  
Universal Assembly for Captive Bolts  
MSC-18905 B81-10329 07  
Articulated Vacuum Chuck  
MSC-18933 B81-10330 07  
Walking-Beam Solar-Cell Conveyor  
NPO-15503 B81-10341 08  
Vacuum Pickup for Solar Cells  
NPO-15500 B81-10342 08  
Orienting and Applying Flux to Solar Cells  
NPO-15504 B81-10343 08  
Tab Interconnect Work Station  
NPO-15505 B81-10344 08  
Work Station For Inverting Solar Cells  
NPO-15506 B81-10345 08  
Solar-Cell String Conveyor  
NPO-15508 B81-10346 08  
Bondor for Solar-Cell Strings  
NPO-15507 B81-10347 08

Transporting Solar-Cell Strings  
NPO-15502 B81-10348 08  
Transfer of Strings to the Module Fixture  
NPO-15509 B81-10349 08  
**HOLOGRAPHIC INTERFEROMETRY**  
Fast Holographic Comparator  
LAR-12509 B81-10132 02  
**HONEYCOMB STRUCTURES**  
Metallic Panels Would Insulate at 2,700 Degrees F  
LAR-12620 B81-10104 08  
**HONING**  
Lathe Attachment Finishes Inner Surface of Tubes  
MSC-18780 B81-10081 07  
**HORMONES**  
Chemical Growth Regulators for Guayule Plants  
NPO-15213 B81-10048 05  
**HOT-WIRE FLOWMETERS**  
Hot Film Static-Pressure Probe for Flow-Field Surveys  
LAR-12799 B81-10308 06  
**HYDRAULIC CONTROL**  
Fast-Acting Electrohydraulic Servo  
LEW-13730 B81-10298 06  
**HYDRAULIC EQUIPMENT**  
Constant-Pressure Hydraulic Pump  
MSC-18794 B81-10077 07  
Four-Degree-of-Freedom Platform  
ARC-11286 B81-10217 07  
**HYDRAZINES**  
Vapor Detector  
MSC-18989 B81-10287 04  
**HYPERSONIC FLOW**  
Numerical Solution for Navier-Stokes Equations  
MFS-25617 B81-10370 09

## I

**IMAGE CONVERTERS**  
Improved Lixiscope  
GSC-12587 B81-10267 03  
**IMAGE INTENSIFIERS**  
Improved Lixiscope  
GSC-12587 B81-10267 03  
**IMAGING TECHNIQUES**  
Test-Bed Aircraft Scanner  
LAR-12796 B81-10268 03  
**IMIDES**  
Improved Fire-Resistant Resins for Laminates  
ARC-11321 B81-10039 04  
**IMPACT LOADS**  
Impact-Energized Transmitter  
MFS-25379 B81-10127 02  
**IMPACT TESTS**  
Lacquer Reveals Impact Damage in Composites  
LAR-12700 B81-10064 06  
**IMPEDANCE MATCHING**  
Unequal-Split Strip-Line Power Divider  
LAR-12797 B81-10250 01  
**IMPULSE GENERATORS**  
Sequential-Impulse Generator Uses Fiber-Optics  
NPO-14939 B81-10020 03  
**INDIUM**  
Indium Second-Surface Mirrors  
NPO-15085 B81-10239 08

## INDUCTION MOTORS

## SUBJECT INDEX

### INDUCTION MOTORS

Three-Phase Power Factor  
Controller  
MFS-25535 B81-10001 01  
Load-Responsive Motor Controller  
MFS-25560 B81-10002 01  
Power-Factor Controller With  
Regenerative Braking  
MFS-25477 B81-10003 01  
New Energy-Saving Technologies  
Use Induction Generators  
MFS-25513 B81-10021 03  
Controller Regulates Auxiliary Source  
for Solar Power  
MFS-25637 B81-10133 02

### INERTIAL GUIDANCE

Less-Costly Inertial Guidance  
ARC-11257 B81-10049 06

### INFLATABLE STRUCTURES

Solar Concentrator is Gas-Filled  
NPO-15416 B81-10141 03

### INFORMATION DISSEMINATION

User Documentation for Multiple  
Software Releases  
KSC-11189 B81-10371 09

### INFRARED DETECTORS

Infrared-Controlled Welding of Solar  
Cells  
MFS-25612 B81-10365 08

### INFRARED PHOTOGRAPHY

Aerial Infrared Photos for Citrus  
Growers  
KSC-11209 B81-10178 05

### INFRARED RADIOMETERS

Portable Radiometer Monitors Plant  
Growth  
GSC-12412 B81-10047 05

### INFRARED SCANNERS

Test-Bed Aircraft Scanner  
LAR-12796 B81-10268 03

### INPUT/OUTPUT ROUTINES

Graphics for Finite-Element Analysis  
LAR-12793 B81-10194 06

### INSPECTION

Microcomputer Checks Butt-Weld  
Accuracy  
MFS-25557 B81-10062 06  
Lacquer Reveals Impact Damage in  
Composites  
LAR-12700 B81-10064 06  
Surface-Contamination Inspection  
Tool for Field Use  
MFS-25581 B81-10190 06  
Weld-Wire Monitor  
MFS-19603 B81-10227 08  
Eddy-Current Meter Would Check  
Weld Wire Online  
MSC-18891 B81-10228 08  
Tile-Gap Measurement Tool  
MSC-20057 B81-10304 06  
Gage for Surface Waviness  
MSC-20055 B81-10305 06  
Detecting Contamination With  
Photoelectron Emission  
MFS-25619 B81-10313 06  
Using Nomarski Interference to  
Detect Microcracks in Glass  
GSC-12649 B81-10317 06

### INSTRUMENT COMPENSATION

Self-Correcting  
d Pressure Sensor  
LAR-12686 B81-10063 06  
Electronically Calibratable Clock  
LAR-12654 B81-10122 01

### INSTRUMENT ORIENTATION

Orientation Insensitivity for  
Electrochemical Sensor  
KSC-11176 B81-10233 08

### INSTRUMENT PACKAGES

Simplified Thermal Analyzer --VAX  
Version  
GSC-12698 B81-10198 06

### INTEGRATED CIRCUITS

IC Capacitors on Groups III-to-V  
Substrates  
GSC-12543 B81-10109 08

### INTERFACES

Graphics-System Color-Code  
Interface  
LAR-12646 B81-10014 02  
Programmable Interface Handles Many  
Peripherals  
KSC-11132 B81-10261 02

### INTERFACIAL TENSION

Tool Lifts Against Surface Tension  
GSC-12672 B81-10216 07

### INTERFEROMETERS

Interferometer Accurately Measures  
Rotation Angle  
GSC-12614 B81-10057 06

### INTERNAL COMBUSTION ENGINES

Modular Engine Instrumentation  
System  
LEW-13729 B81-10315 06

### INVERTERS

Alternating-Current Motor Drive for  
Electric Vehicles  
NPO-14768 AND NPO-14830  
B81-10124 01

### INVISCID FLOW

Elastic Surface Wrinkling  
NPO-15091 B81-10321 06

### IODINE

Regenerating Water-Sterilizing  
Resins  
MSC-20001 B81-10288 04

### ION DENSITY (CONCENTRATION)

Correcting for Background in Flowing  
Plasma Measurements  
NPO-15332 B81-10051 06

### ION EMISSION

Improved Model for MOS  
Breakdown  
NPO-14850 B81-10007 01

### ION EXCHANGE RESINS

Regenerating Water-Sterilizing  
Resins  
MSC-20001 B81-10288 04

### ION EXCHANGING

Regenerating Water-Sterilizing  
Resins  
MSC-20001 B81-10288 04

### ION SOURCES

Compact Ion Source for Mass  
Spectrometers  
NPO-14324 B81-10136 03

### IONOSPHERE

Method for Canceling Ionospheric  
Doppler Effect  
MFS-25599 B81-10260 02

### IRON ALLOYS

Low-Gravity Investigations in  
Cast-Iron Processing  
MFS-25491 B81-10172 04

## J

### JACKS (LIFTS)

Tool Lifts Against Surface Tension  
GSC-12672 B81-10216 07

### JETTISON SYSTEMS

Explosively Actuated Opening for  
Rapid Egress  
LAR-12624 B81-10319 06

### JIGS

3-D Manipulator for Mass  
Spectrometer  
ARC-11323 B81-10137 03  
Air Bag Applies Uniform Bonding  
Pressure  
KSC-11182 B81-10242 08  
Small Fixture Strains Composites for  
Environmental Tests  
NPO-15062 B81-10302 06

### JOINTS (JUNCTIONS)

Ball-and-Socket Joint Can Be  
Disassembled  
LAR-12770 B81-10084 07  
Pivot Attachment for Prefabricated  
Beams  
MFS-25476 B81-10368 08

### JUMPERS

High-Density Terminal Box for  
Testing Wire Harness  
NPO-15147 B81-10251 01

## L

### LABORATORY EQUIPMENT

Radiant Heating of Ampoule  
contents  
MFS-25436 B81-10362 08

### LACQUERS

Lacquer Reveals Impact Damage in  
Composites  
LAR-12700 B81-10064 06

### LAMINATES

Improved Fire-Resistant Resins for  
Laminates  
ARC-11321 B81-10039 04  
Composite-Material Point-Stress  
Analysis  
MSC-18978 B81-10245 08  
Predicting the Strengths of  
Angle-Ply Laminates  
LEW-13733 B81-10309 06  
Eliminating Delamination in Curved  
Composite Parts  
MSC-20027 B81-10356 08

### LAP JOINTS

New Method For Joining Stainless  
Steel to Titanium  
MSC-18820 B81-10232 08

### LASER APPLICATIONS

High-Speed Laser Anemometer  
LEW-13527 B81-10050 06  
Dual-Laser Schlieren System  
MFS-25315 B81-10052 06  
Laser/Heterodyne Measurement of  
Temperature and Salinity  
LAR-12766 B81-10181 06

### LASER HEATING

Sequential-Impulse Generator Uses  
Fiber-Optics  
NPO-14939 B81-10020 03

### LASER RANGE FINDERS

Rangefinder Corrects for Air Density  
and Moisture  
GSC-12609 B81-10186 06



## SUBJECT INDEX

### LASERS

Flashlamp Driver for Quasi-CW Laser  
Pumping  
GSC-12566 B81-10254 01

### LATCHES

Reliable 'Unlatch'  
NPO-15438 B81-10219 07  
Latch With Single-Motion Release  
MSC-18923 B81-10220 07

### LATHES

Lathe Attachment Finishes Inner  
Surface of Tubes  
MSC-18780 B81-10081 07

### LEVEL (HORIZONTAL)

A Simple Tiltmeter  
ARC-11344 B81-10325 07

### LEVITATION

Levitator for Containerless  
Processing  
MFS-25509 B81-10110 08  
Magnetic Bearing Consumes Low  
Power  
GSC-12517 B81-10202 07  
Magnetic Bearing With Active  
Control  
GSC-12582 B81-10203 07  
Sound Waves Levitate Substrates  
NPO-15435 B81-10221 08

### LIFE (DURABILITY)

Mass-Loss Buttons Monitor Material  
Degradation  
MSC-18903 B81-10307 06

### LIFE SUPPORT SYSTEMS

Protective Garment Ensemble  
KSC-11203 B81-10222 08  
Environmental-Analysis Routine  
Library  
MSC-18925 B81-10297 05

### LIGHT BEAMS

Beam Splitter Intensities Are  
Preselected  
MFS-25312 B81-10019 03

### LINEAR AMPLIFIERS

Resistors Improve Ramp Linearity  
GSC-12635 B81-10005 01

### LINEAR CIRCUITS

Resistors Improve Ramp Linearity  
GSC-12635 B81-10005 01

### LINEAR EQUATIONS

Linear-Algebra Programs  
NPO-15108 B81-10117 09

### LINEARIZATION

Two-Stage Linearization Circuit  
LAR-12577 B81-10125 01

### LIQUID METALS

Solar-Driven Liquid-Metal MHD  
Generator  
LAR-12495 B81-10266 03

### LIQUID-LIQUID INTERFACES

Measuring Interdiffusion in Binary  
Liquids  
MFS-25576 B81-10165 04

### LOAD TESTS

Load-Displacement Measurement on  
Pin-Loaded Specimens  
LEW-13624 B81-10070 06

### LOADS (FORCES)

Structural Design With Stress and  
Buckling Constraints  
MFS-25234 B81-10322 06

### LOGARITHMIC RECEIVERS

Log-Output Signal Processor Scans  
Eight Decades  
ARC-11293 B81-10010 01

### LOW GRAVITY MANUFACTURING

Levitator for Containerless  
Processing  
MFS-25509 B81-10110 08  
Low-Gravity Investigations in  
Cast-Iron Processing  
MFS-25491 B81-10172 04  
Sound Waves Levitate Substrates  
NPO-15435 B81-10221 08

### LUBRICANTS

Tests of 38 Ball-Bearing Greases  
MFS-25624 B81-10339 07

## M

### MACHINING

Lathe Attachment Finishes Inner  
Surface of Tubes  
MSC-18780 B81-10081 07  
Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08  
Technique for Machining Glass  
GSC-12636 B81-10209 07  
Contamination Control During Weld  
Repairs  
MFS-19652 B81-10225 08

### MACROPHAGES

Improved Method for Culturing  
Guinea-Pig Macrophage Cells  
MFS-25307 B81-10177 05

### MAGNETIC BEARINGS

Magnetic Bearing With Active  
Control  
GSC-12582 B81-10203 07

### MAGNETIC CIRCUITS

Magnetic Bearing Consumes Low  
Power  
GSC-12517 B81-10202 07  
Magnetic Bearing With Active  
Control  
GSC-12582 B81-10203 07  
Torque Simulator for Rotating  
Systems  
LAR-12751 B81-10318 06

### MAGNETIC CORES

Rotary Transformer Seals Power In  
GSC-12595 B81-10008 01

### MAGNETIC RESONANCE

EMR Gage Would Measure Coal  
Thickness Accurately  
MFS-25555 B81-10139 03

### MAGNETOHYDRODYNAMIC

ORS  
Solar-Driven Liquid-Metal MHD  
Generator  
LAR-12495 B81-10266 03

### MAGNETOMETERS

Improved Magnetic-Field-Component  
Resolvers  
LAR-12638 B81-10299 06  
Simple Magnetometer for Autopilots  
LAR-12832 B81-10300 06

### MANIPULATORS

3-D Manipulator for Mass  
Spectrometer  
ARC-11323 B81-10137 03  
Sound Waves Levitate Substrates  
NPO-15435 B81-10221 08  
Walking-Beam Solar-Cell Conveyor  
NPO-15503 B81-10341 08  
Vacuum Pickup for Solar Cells  
NPO-15500 B81-10342 08  
Orienting and Applying Flux to Solar  
Cells  
NPO-15504 B81-10343 08

## METAL BONDING

Tab Interconnect Work Station  
NPO-15505 B81-10344 08  
Work Station For Inverting Solar  
Cells  
NPO-15506 B81-10345 08  
Solar-Cell String Conveyor  
NPO-15508 B81-10346 08  
Bonder for Solar-Cell Strings  
NPO-15507 B81-10347 08  
Transfer of Strings to the Module  
Fixture  
NPO-15509 B81-10349 08

### MANUFACTURING

Levitator for Containerless  
Processing  
MFS-25509 B81-10110 08  
Materials Processing in Space  
MFS-25544 B81-10116 08

### MASKS

Lightweight Face Mask  
LAR-12803 B81-10224 08

### MASS SPECTROMETERS

Compact Ion Source for Mass  
Spectrometers  
NPO-14324 B81-10136 03

### MATCHING

Matching Dissimilar Graphical  
Scales  
MSC-14864 B81-10240 08

### MATRIX METHODS

Solution Accounts for Structural  
Damping  
LAR-12863 B81-10303 06

### MEASURING INSTRUMENTS

Gage for Surface Waviness  
MSC-20055 B81-10305 06

### MECHANICAL MEASUREMENT

New Apparatus Tests Pressure-Suit  
Joints  
ARC-11314 B81-10314 06

### MECHANICAL PROPERTIES

Measuring Cyclic-Stress Properties of  
Pressure Vessels  
MFS-23734 B81-10065 06  
Load-Displacement Measurement on  
Pin-Loaded Specimens  
LEW-13624 B81-10070 06  
Ultrasonic Instrument for Evaluation  
of Composites  
LEW-13716 B81-10301 06  
Small Fixture Strains Composites for  
Environmental Tests  
NPO-15062 B81-10302 06  
Predicting the Strengths of  
Angle-Plied Laminates  
LEW-13733 B81-10309 06  
Predicting Tensile Strengths of  
Boron/Aluminum Composites  
LEW-13745 B81-10311 06

### MEDICAL ELECTRONICS

Constraint-Free Measurement of  
Metabolic Rate  
MSC-18885 B81-10046 05

### MELTING

Automatic Control of Silicon Melt  
Level  
NPO-15487 B81-10097 08

### METABOLISM

Constraint-Free Measurement of  
Metabolic Rate  
MSC-18885 B81-10046 05

### METAL BONDING

Fluxless Brazing of Large Structural  
Panels  
LAR-12519 B81-10100 08  
Wire-Wrap Chatter Detector  
NPO-15290 B81-10121 01

# METAL FATIGUE

# SUBJECT INDEX

Weld width indicates weld strength  
MFS-25648 B81-10354 08

**METAL FATIGUE**  
Increasing Metal Fracture  
Toughness  
LAR-12805 B81-10351 08

**METAL OXIDE SEMICONDUCTORS**  
Improved Model for MOS  
Breakdown  
NPO-14850 B81-10007 01

**METAL PLATES**  
Metal Sandwich Panel With Biaxially  
Corrugated Core  
FRC-11026 B81-10112 08

**METAL WORKING**  
Staking Tool for Hard Metals  
MSC-20009 B81-10336 07

**METAL-METAL BONDING**  
Increasing Metal Fracture  
Toughness  
LAR-12805 B81-10351 08

**MICROCOMPUTERS**  
Microcomputer Checks Butt-Weld  
Accuracy  
MFS-25557 B81-10062 06

**MICROCRACKS**  
Using Nomarski Interference to  
Detect Microcracks in Glass  
GSC-12649 B81-10317 06

**MICROSCOPY**  
Using Nomarski Interference to  
Detect Microcracks in Glass  
GSC-12649 B81-10317 06

**MICROWAVE AMPLIFIERS**  
Modular Amplifier/Antenna Arrays  
MSC-18981 B81-10258 01

**MICROWAVE ANTENNAS**  
Compact Dual-Mode Microwave  
Antenna  
LAR-12784 B81-10004 01  
Dish Antenna Would Deploy From a  
Canister  
NPO-15448 B81-10241 08

**MICROWAVE EQUIPMENT**  
Sealed Strip Line for Extreme  
Temperatures  
MSC-16994 B81-10114 08

**MILLING (MACHINING)**  
Technique for Machining Glass  
GSC-12636 B81-10209 07

**MINING**  
EMR Gage Would Measure Coal  
Thickness Accurately  
MFS-25555 B81-10139 03

**MIRRORS**  
Ultraviolet-Induced Mirror  
Degradation  
NPO-15520 B81-10171 04  
Easily Assembled Reflector for Solar  
Concentrators  
NPO-15518 B81-10235 08  
Indium Second-Surface Mirrors  
NPO-15085 B81-10239 08

**MIXING**  
Adhesives Mixer Applicator  
MSC-18916 B81-10078 07  
Compact Liquid Deaerator  
MSC-18936 B81-10211 07

**MODELS**  
Model Verification of Mixed Dynamic  
Systems  
MFS-23806 B81-10196 06

**MODULES**  
Integrated Structural and Cable  
Connector  
LAR-12769 B81-10085 07

**MOISTURE CONTENT**  
Moisture in Composites is Measured  
by Positron Lifetime  
LAR-12776 B81-10180 06

**MOMENTS OF INERTIA**  
Efficient Energy-Storage Concept  
MFS-25331 B81-10138 03

**MONITORS**  
Processing PCM Data in Real Time  
KSC-11131 B81-10262 02  
One Way of Testing a Distributed  
Processor  
KSC-11123 B81-10263 02  
Mass-Loss Buttons Monitor Material  
Degradation  
MSC-18903 B81-10307 06  
Modular Engine Instrumentation  
System  
LEW-13729 B81-10315 06  
Acoustic Emissions Could Indicate  
Weld Quality  
MFS-25441 B81-10360 08

**MOTION SIMULATORS**  
Four-Degree-of-Freedom Platform  
ARC-11286 B81-10217 07

**MOTORS**  
Alternating-Current Motor Drive for  
Electric Vehicles  
NPO-14768 AND NPO-14830  
B81-10124 01  
Tests of 38 Ball-Bearing Greases  
MFS-25624 B81-10339 07

**MOUNTING**  
Adhesive-Bonded Tab Attaches  
Thermocouples to Titanium  
FRC-11017 B81-10056 06  
Dynamic Isolation for Cryogenic  
Refrigerators  
LAR-12728 B81-10076 07

**MULTIPLEXING**  
Self-Correcting  
d Pressure Sensor  
LAR-12686 B81-10063 06

**MULTIPROCESSING (COMPUTERS)**  
Array Processor Has Power and  
Flexibility  
ARC-11292 B81-10130 02

**MULTISPECTRAL PHOTOGRAPHY**  
Test-Bed Aircraft Scanner  
LAR-12796 B81-10268 03

# N

**NAVIER-STOKES EQUATION**  
Numerical Solution for Navier-Stokes  
Equations  
MFS-25617 B81-10370 09

**NAVIGATION INSTRUMENTS**  
Improved Magnetic-Field-Component  
Resolvers  
LAR-12638 B81-10299 06  
Simple Magnetometer for Autopilots  
LAR-12832 B81-10300 06

**NEAR FIELDS**  
Far-Field Antenna Pattern From a  
Near-Field Test  
NPO-14905 B81-10059 06

**NEGATIVE RESISTANCE CIRCUITS**  
Low-Noise Band-Pass Amplifier  
GSC-12567 B81-10255 01

**NETWORK ANALYSIS**  
Short-Circuited Power Networks  
MSC-18977 B81-10018 02  
Load Pulsar Is Sparkless  
KSC-11199 B81-10123 01

**NEUTRALIZERS**  
Neutralizing Amine-Cured Epoxy  
Surfaces  
GSC-12686 B81-10290 04

**NEWTON-RAPHSON METHOD**  
Finite-Element Analysis of Forced  
Convection and Conduction  
LAR-12794 B81-10195 06

**NICKEL ALLOYS**  
Plasma Spray for Difficult-To-Brake  
Alloys  
MFS-19630 B81-10353 08

**NIOBUM**  
Factors Affecting Liquid-Metal  
Embrittlement in C-103  
MSC-18865 B81-10170 04

**NITRIC OXIDE**  
Staged Turbojet Engine Would Emit  
Less NO  
ARC-10814 B81-10213 07

**NITROGEN TETROXIDE**  
Vapor Detector  
MSC-18989 B81-10287 04

**NOISE REDUCTION**  
Low-Noise Band-Pass Amplifier  
GSC-12567 B81-10255 01

**NOMOGRAPHS**  
Calculating the Performance of a  
Solar Reflector  
NPO-15314 B81-10246 09

**NONAQUEOUS ELECTROLYTES**  
Integrated Solid-Electrolyte  
Construction  
NPO-15471 B81-10236 08

**NONDESTRUCTIVE TESTS**  
Strain-Gaged Bolts Are Easily  
Prepared  
MSC-18823 B81-10069 06  
Weld-Wire Monitor  
MFS-19603 B81-10227 08  
Eddy-Current Meter Would Check  
Weld Wire Online  
MSC-18891 B81-10228 08  
Improved Tensile Test for Ceramics  
MSC-20105 B81-10310 06  
Acoustic Emissions Could Indicate  
Weld Quality  
MFS-25441 B81-10360 08

**NOZZLE DESIGN**  
Nozzle Modification Suppresses Flow  
Transients  
MFS-19567 B81-10061 06

**NOZZLE FLOW**  
Nozzle Modification Suppresses Flow  
Transients  
MFS-19567 B81-10061 06

**NOZZLES**  
Improved Nozzle Would Reduce  
Cryogenic Boiloff  
MFS-25589 B81-10335 07

**NUMERICAL ANALYSIS**  
Linear-Algebra Programs  
NPO-15108 B81-10117 09

**NUMERICAL CONTROL**  
'Teaching' an Industrial Robot To  
Spray  
MFS-25523 B81-10326 07

**NUMERICAL INTEGRATION**  
Numerical Solution for Navier-Stokes  
Equations  
MFS-25617 B81-10370 09

## O

**OHMMETERS**

Wire-Wrap Chatter Detector  
NPO-15290 B81-10121 01

**OILS**

Supercritical-Fluid Extraction of Oil  
From Tar Sands  
NPO-15476 B81-10166 04

**OPERATING SYSTEMS (COMPUTERS)**

User Documentation for Multiple  
Software Releases  
KSC-11189 B81-10371 09

**OPTICAL DATA PROCESSING**

Fast Holographic Comparator  
LAR-12509 B81-10132 02

**OPTICAL EQUIPMENT**

Beam Splitter Intensities Are  
Preselected  
MFS-25312 B81-10019 03  
Rotating the Plane of Parallel Light  
Beams  
ARC-11311 B81-10265 03

**OPTICAL HETERODYNING**

Laser/Heterodyne Measurement of  
Temperature and Salinity  
LAR-12766 B81-10181 06

**OPTICAL MEMORY (DATA STORAGE)**

Optical Memory Stores 10 12sup.  
Bits  
MFS-25456 B81-10012 02

Fast Holographic Comparator  
LAR-12509 B81-10132 02

**OPTICAL MICROSCOPES**

Using Nomarski Interference to  
Detect Microcracks in Glass  
GSC-12649 B81-10317 06

**OPTICAL PUMPING**

Flashlamp Driver for Quasi-CW Laser  
Pumping  
GSC-12566 B81-10254 01

**OPTICAL TRACKING**

Sensors for Precise Tracking  
MFS-25579 B81-10140 03

**ORCHARDS**

Aerial Infrared Photos for Citrus  
Growers  
KSC-11209 B81-10178 05

**ORIFICE FLOW**

Orifice Blocks Heat Pipe in Reverse  
Mode  
ARC-11341 B81-10185 06

**ORIFICES**

Orifice Blocks Heat Pipe in Reverse  
Mode  
ARC-11341 B81-10185 06

**OSCILLATORS**

High-Frequency Gated Oscillator  
MSC-18634 B81-10011 01

**OUTGASSING**

Compact Liquid Deaerator  
MSC-18936 B81-10211 07

**OXIDE FILMS**

IC Capacitors on Groups III-to-V  
Substrates  
GSC-12543 B81-10109 08

**OXYGEN TENSION**

System Controls and Measures  
Oxygen Fugacity  
MSC-20096 B81-10162 04

## P

**PAINTS**

Wide-Temperature-Range  
Ipe Paint  
MFS-19644 B81-10289 04

**PANELS**

Metal Sandwich Panel With Biaxially  
Corrugated Core  
FRC-11026 B81-10112 08

**PARABOLIC ANTENNAS**

Far-Field Antenna Pattern From a  
Near-Field Test  
NPO-14905 B81-10059 06

**PARALLEL (COMPUTERS)**

Improved Parallel-Access Alinement  
Network  
ARC-11155 B81-10134 02  
Parallel-Access Alinement Network  
Using Barrel Switches  
ARC-11162 B81-10135 02  
Processing PCM Data in Real Time  
KSC-11131 B81-10262 02  
One Way of Testing a Distributed  
Processor  
KSC-11123 B81-10263 02

**PARTIAL PRESSURE**

System Controls and Measures  
Oxygen Fugacity  
MSC-20096 B81-10162 04

**PASSIVITY**

Neutralizing Amine-Cured Epoxy  
Surfaces  
GSC-12686 B81-10290 04

**PATHOLOGY**

Algorithms Could Automate Cancer  
Diagnosis  
MSC-18764 B81-10045 05

**PAYLOADS**

Simplified Thermal Analyzer --VAX  
Version  
GSC-12698 B81-10198 06

**PCM TELEMETRY**

Processing PCM Data in Real Time  
KSC-11131 B81-10262 02

**PEELING**

Double-Adhesive Tape Test Reduces  
Waste  
MSC-20047 B81-10312 06

**PERFLUORO COMPOUNDS**

Preparation of Perfluorinated  
Imidoylamidoxime Polymers  
ARC-11267 B81-10036 04

**PHASE DETECTORS**

Precise Phase Comparator for Nearly  
Equal Frequencies  
GSC-12645 B81-10253 01

**PHASE ERROR**

Precise Phase Comparator for Nearly  
Equal Frequencies  
GSC-12645 B81-10253 01

**PHASE LOCK DEMODULATORS**

Improved Phase-Lock Detector  
MSC-18797 B81-10016 02

**PHASE LOCKED SYSTEMS**

Pulsed Phase-Locked-Loop Strain  
Monitor  
LAR-12772 B81-10068 06

**PHOSPHORUS COMPOUNDS**

Improved Fire-Resistant Resins for  
Laminates  
ARC-11321 B81-10039 04

**PHOSPHORUS POLYMERS**

Improved Fire-Resistant Resins for  
Laminates  
ARC-11321 B81-10039 04

**PHOTOELECTRIC EMISSION**

Surface-Contamination Inspection  
Tool for Field Use  
MFS-25581 B81-10190 06

**PHOTOELECTRONS**

XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub>  
Interface  
NPO-14968 B81-10285 04  
Detecting Contamination With  
Photoelectron Emission  
MFS-25619 B81-10313 06

**PHOTOVOLTAIC CELLS**

Solar-Array Simulator  
MSC-18864 B81-10119 01  
Survey of Facilities for Testing  
Photovoltaics  
NPO-15361 B81-10193 06  
Glasses for Solar-Cell Arrays  
NPO-15528 B81-10243 08

**PIEZOELECTRIC TRANSDUCERS**

Impact-Energized Transmitter  
MFS-25379 B81-10127 02

**PIGMENTS**

Coal as a Substitute for Carbon  
Black  
NPO-15461 B81-10280 04

**PIVOTS**

Unidirectional Flexural Pivot  
GSC-12622 B81-10208 07  
Pivot Attachment for Prefabricated  
Beams  
MFS-25476 B81-10368 08

**PLANTS (BOTANY)**

Portable Radiometer Monitors Plant  
Growth  
GSC-12412 B81-10047 05  
Chemical Growth Regulators for  
Guayule Plants  
NPO-15213 B81-10048 05

**PLASMA DIAGNOSTICS**

Correcting for Background in Flowing  
Plasma Measurements  
NPO-15332 B81-10051 06

**PLASMA JETS**

Plasma Deposition of Amorphous  
Silicon  
NPO-14954 B81-10044 04

**PLASMA SPRAYING**

Plasma Spray for Difficult-To-Braze  
Alloys  
MFS-19630 B81-10353 08

**PLASTIC ANISOTROPY**

Deformation-Induced Anisotropy of  
Polymers  
NPO-15325 B81-10043 04

**PLASTIC DEFORMATION**

Metal Sandwich Panel With Biaxially  
Corrugated Core  
FRC-11026 B81-10112 08  
Plastic and Large-Deflection Analysis  
of Nonlinear Structures  
LAR-12816 B81-10323 06

**PLASTICS**

Thermal Polymerization of N-Butyl  
Acrylate  
NPO-15010 B81-10295 04

**PLATES**

Metal Sandwich Panel With Biaxially  
Corrugated Core  
FRC-11026 B81-10112 08

## PLOTTERS

### PLOTTERS

'Teaching' an Industrial Robot To Spray  
MFS-25523 B81-10326 07

### PLOTTING

Graphics for Finite-Element Analysis  
LAR-12793 B81-10194 06

### POLLUTION CONTROL

Two-Stage Combustor Reduces Pollutant Emissions  
NPO-14911 B81-10042 04

### POLYETHER RESINS

Synthesis of Perfluorinated Polymers  
ARC-11241 B81-10037 04

### POLYIMIDES

Elastomer-Toughened Polyimide Adhesives  
LAR-12775 B81-10040 04

Blowing Agents for Fabrication of Polyimide Foams  
MSC-18993 B81-10286 04

### POLYMER CHEMISTRY

Preparation of Perfluorinated Imidoylamidoxime Polymers  
ARC-11267 B81-10036 04

Viscoelastic Properties of Polymer Blends  
NPO-14924 B81-10041 04

### POLYMER PHYSICS

Deformation-Induced Anisotropy of Polymers  
NPO-15325 B81-10043 04

### POLYMERIC FILMS

Silicone/Acrylate Copolymers  
NPO-15523 B81-10279 04

### POLYMERIZATION

Thermal Polymerization of N-Butyl Acrylate  
NPO-15010 B81-10295 04

### POLYPROPYLENE

Orientation Insensitivity for Electrochemical Sensor  
KSC-11176 B81-10233 08

### POLYURETHANE RESINS

Flame-Retardant Coating is Heat-Sealed  
MSC-18382 B81-10168 04

### PORTABLE EQUIPMENT

Storing and Deploying Solar Panels  
MSC-18950 B81-10366 08

### POSITIONING

Device Acquires, Orients, and Clamps  
MFS-25403 B81-10086 07

### POSITIONING DEVICES (MACHINERY)

3-D Manipulator for Mass Spectrometer  
ARC-11323 B81-10137 03

Hybrid Position/Force Control of Robot Manipulators  
NPO-14997 B81-10327 07

Walking-Beam Solar-Cell Conveyor  
NPO-15503 B81-10341 08

Orienting and Applying Flux to Solar Cells  
NPO-15504 B81-10343 08

Tab Interconnect Work Station  
NPO-15505 B81-10344 08

Work Station For Inverting Solar Cells  
NPO-15506 B81-10345 08

Solar-Cell String Conveyor  
NPO-15508 B81-10346 08

Transporting Solar-Cell Strings  
NPO-15502 B81-10348 08

Transfer of Strings to the Module Fixture  
NPO-15509 B81-10349 08

### POSITRONS

Moisture in Composites is Measured by Positron Lifetime  
LAR-12776 B81-10180 06

### POTENTIAL FLOW

Algorithm for Unsteady Potential Flow About Airfoils  
ARC-11378 B81-10316 06

### POWDER (PARTICLES)

Vacuum Head Removes Sanding Dust  
MSC-19526 B81-10215 07

### POWER CONDITIONING

Three-Phase Power Factor Controller  
MFS-25535 B81-10001 01

Load-Responsive Motor Controller  
MFS-25560 B81-10002 01

Power-Factor Controller With Regenerative Braking  
MFS-25477 B81-10003 01

Failure Detector for Power-Factor Controller  
MFS-25607 B81-10252 01

Power-MOSFET Voltage Regulator  
MSC-20059 B81-10257 01

### POWER FACTOR CONTROLLERS

Controller Regulates Auxiliary Source for Solar Power  
MFS-25637 B81-10133 02

### POWER SPECTRA

Computing the Power-Density Spectrum for an Engineering Model  
LAR-12918 B81-10373 09

### POWER SUPPLY CIRCUITS

Solar-Powered Supply Is Light and Reliable  
MFS-25430 B81-10015 02

Solar-Array Simulator  
MSC-18864 B81-10119 01

High-Efficiency dc/dc Converter  
LEW-13486 B81-10120 01

Alternating-Current Motor Drive for Electric Vehicles  
NPO-14768 AND NPO-14830 B81-10124 01

Controller Regulates Auxiliary Source for Solar Power  
MFS-25637 B81-10133 02

### PRELAUNCH TESTS

Processing PCM Data in Real Time  
KSC-11131 B81-10262 02

One Way of Testing a Distributed Processor  
KSC-11123 B81-10263 02

### PREPOLYMERS

Synthesis of Perfluorinated Polymers  
ARC-11241 B81-10037 04

### PRESSURE HEADS

Gravity-Feed Growth of Silicon Ribbon  
NPO-14967 B81-10089 08

### PRESSURE MEASUREMENT

System Controls and Measures Oxygen Fugacity  
MSC-20096 B81-10162 04

Tire Temperature and Pressure Monitor  
LAR-19262 B81-10184 06

Multipressure and Temperature Probe  
ARC-11166 B81-10189 06

Pressure Transducer Has Long Service Life  
MSC-18904 B81-10191 06

### PRESSURE REGULATORS

Constant-Pressure Hydraulic Pump  
MSC-18794 B81-10077 07

Force Augmentation for Relief Valve  
MSC-20065 B81-10337 07

### PRESSURE SENSORS

Self-Correcting d Pressure Sensor  
LAR-12686 B81-10063 06

Pressure Switch Is a Low Cost Battery Indicator  
GSC-12679 B81-10067 06

Multipressure and Temperature Probe  
ARC-11166 B81-10189 06

Touch Sensor Responds to Contact Pressure  
NPO-15375 B81-10212 07

Cuff for Blood-Vessel Pressure Measurements  
ARC-11264 B81-10296 05

Hot Film Static-Pressure Probe for Flow-Field Surveys  
LAR-12799 B81-10308 06

### PRESSURE SUITS

Protective Garment Ensemble  
KSC-11203 B81-10222 08

New Apparatus Tests Pressure-Suit Joints  
ARC-11314 B81-10314 06

### PRESSURE SWITCHES

Pressure Switch Is a Low Cost Battery Indicator  
GSC-12679 B81-10067 06

### PRESSURE VESSELS

Measuring Cyclic-Stress Properties of Pressure Vessels  
MFS-23734 B81-10065 06

### PRESSURIZING

Air Bag Applies Uniform Bonding Pressure  
KSC-11182 B81-10242 08

### PRINTED CIRCUITS

CADAT Printed-Wiring-Board Designer  
MFS-25464 B81-10244 08

### PRINTING

Assembling Multicolor Printing Plates  
LEW-13598 B81-10237 08

### PRISMS

Rotating the Plane of Parallel Light Beams  
ARC-11311 B81-10265 03

### PRODUCT DEVELOPMENT

Materials Processing in Space  
MFS-25544 B81-10116 08

### PROTECTIVE CLOTHING

Improved Clothing for Firefighters  
MFS-25546 B81-10088 08

Sprayed Coating Renews Butyl Rubber  
KSC-11198 B81-10111 08

Protective Garment Ensemble  
KSC-11203 B81-10222 08

Thermally Insulated Glove With Good Tactility  
MSC-18926 B81-10223 08

Lightweight Face Mask  
LAR-12803 B81-10224 08

Integral Face Shield Concept for Firefighter's Helmet  
MFS-25493 B81-10361 08

# SUBJECT INDEX

# RESONANCE

## PROTECTIVE COATINGS

Surface Seal for Carbon Parts  
MSC-18898 B81-10163 04  
Flame-Retardant Coating is  
Heat-Sealed  
MSC-18382 B81-10168 04  
Glasses for Solar-Cell Arrays  
NPO-15528 B81-10243 08  
Silicone/Acrylate Copolymers  
NPO-15523 B81-10279 04  
Thermal Polymerization of N-Butyl  
Acrylate  
NPO-15010 B81-10295 04

## PULLING

Articulated Vacuum Chuck  
MSC-18933 B81-10330 07

## PULSE GENERATORS

Load Pulsers Is Sparkless  
KSC-11199 B81-10123 01  
Flashlamp Driver for Quasi-CW Laser  
Pumping  
GSC-12566 B81-10254 01

## PUMP IMPELLERS

Damping Vibration at an Impeller  
MFS-19645 B81-10338 07

## PUMPS

Constant-Pressure Hydraulic Pump  
MSC-18794 B81-10077 07  
Simpler Variable-Speed Drive for Fan  
or Pump  
GSC-12643 B81-10201 07  
Spring Support for Turbopump Rotor  
Bearing  
MFS-19624 B81-10204 07  
Damping Vibration at an Impeller  
MFS-19645 B81-10338 07

## PURITY

Refractories Keep Silicon Crystals  
Pure  
NPO-14820 B81-10095 08

## Q

## QUALITY CONTROL

Testing Patchboard Connections  
Automatically  
KSC-11065 B81-10129 02  
Weld-Wire Monitor  
MFS-19603 B81-10227 08  
Eddy-Current Meter Would Check  
Weld Wire Online  
MSC-18891 B81-10228 08  
Double-Adhesive Tape Test Reduces  
Waste  
MSC-20047 B81-10312 06  
Acoustic Emissions Could Indicate  
Weld Quality  
MFS-25441 B81-10360 08

## QUANTITATIVE ANALYSIS

Electrochemical Assay of  
Gold-Plating Solutions  
MFS-19639 B81-10284 04

## R

## RADAR MEASUREMENT

Far-Field Antenna Pattern From a  
Near-Field Test  
NPO-14905 B81-10059 06

## RADIANT HEATING

Heat Lamps Solder Solar Array  
Quickly  
NPO-14866 B81-10106 08

Radiant Heating of Ampoule  
contents  
MFS-25436 B81-10362 08

## RADIATION DAMAGE

Ultraviolet-Induced Mirror  
Degradation  
NPO-15520 B81-10171 04

## RADIATION DETECTORS

Improved Lixoscope  
GSC-12587 B81-10267 03

## RADIATIVE HEAT TRANSFER

Simplified Thermal Analyzer --VAX  
Version  
GSC-12698 B81-10198 06

## RADIO ASTRONOMY

Proposed Integrated  
Radio-Telescope Network  
NPO-15417 B81-10143 03

## RADIO FREQUENCY HEATING

Capacitively-Heated Fluidized Bed  
NPO-14912 B81-10102 08

## RADIO FREQUENCY SHIELDING

Electrically-conductive  
ity Pressure Seal  
MSC-20022 B81-10358 08

## RADIO INTERFEROMETERS

Proposed Integrated  
Radio-Telescope Network  
NPO-15417 B81-10143 03

## RADIO TELESCOPES

Proposed Integrated  
Radio-Telescope Network  
NPO-15417 B81-10143 03  
Dish Antenna Would Deploy From a  
Canister  
NPO-15448 B81-10241 08

## RADIO TRANSMITTERS

Impact-Energized Transmitter  
MFS-25379 B81-10127 02

## RADIOMETERS

Portable Radiometer Monitors Plant  
Growth  
GSC-12412 B81-10047 05  
Improving Radiometer-Cavity  
Absorbance  
NPO-15374 B81-10357 08

## RAMP FUNCTIONS

Two-Stage Linearization Circuit  
LAR-12577 B81-10125 01

## RAYS

XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub>  
Interface  
NPO-14968 B81-10285 04

## REAL TIME OPERATION

Processing PCM Data in Real Time  
KSC-11131 B81-10262 02

## REDUNDANCY

New Algorithms Manage Fourfold  
Redundancy  
MSC-18498 B81-10013 02

## REDUNDANT COMPONENTS

Automatically Reconfigurable  
Computer  
MFS-25455 B81-10131 02

## REENTRY SHIELDING

Metallic Panels Would Insulate at  
2,700 Degrees F  
LAR-12620 B81-10104 08

## REFLECTORS

Easily Assembled Reflector for Solar  
Concentrators  
NPO-15518 B81-10235 08  
Dish Antenna Would Deploy From a  
Canister  
NPO-15448 B81-10241 08

## REFRACTIVITY

Dual-Laser Schlieren System  
MFS-25315 B81-10052 06

## REFRACTORY MATERIALS

Refractories Keep Silicon Crystals  
Pure  
NPO-14820 B81-10095 08  
Prolonging the Life of Refractory  
Fillers  
MSC-18832 B81-10167 04  
'SiAlON' Materials for Advanced  
Structural Applications  
LEW-13671 B81-10173 04  
Improved High-Temperature Seal  
MSC-18790 B81-10210 07  
Prolonging the Life of Refractory  
Fillers  
MSC-18832 B81-10231 08

## REFRACTORY METAL ALLOYS

Metallic Panels Would Insulate at  
2,700 Degrees F  
LAR-12620 B81-10104 08  
Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08

## REGULATORS

Simpler Variable-Speed Drive for Fan  
or Pump  
GSC-12643 B81-10201 07

## REINFORCEMENT (STRUCTURES)

Boron/Aluminum-Titanium  
on Stiffener  
MSC-18895 B81-10230 08

## REINFORCING FIBERS

Fiber-Reinforced Slip Castings  
ARC-11279 B81-10099 08

## RELAXATION

High-Lift Separated Flow About  
Airfoils  
LAR-12853 B81-10324 06

## RELEASING

Tool Lifts Against Surface Tension  
GSC-12672 B81-10216 07  
Explosive Separation of Electrical  
Connectors  
MSC-18828 B81-10218 07  
Reliable 'Unlatch'  
NPO-15438 B81-10219 07  
Latch With Single-Motion Release  
MSC-18923 B81-10220 07

## RELIABILITY ANALYSIS

Proposed Reliability/Cost Model  
MFS-25494 B81-10372 09

## RELIEF VALVES

Force Augmentation for Relief Valve  
MSC-20065 B81-10337 07

## REMOTE SENSORS

Laser/Heterodyne Measurement of  
Temperature and Salinity  
LAR-12766 B81-10181 06

## REPLENISHMENT

Recharging the Silicon Crucible in a  
Hot Furnace  
NPO-14980 B81-10093 08

## RESISTANCE HEATING

Resistance Heater Helps  
Stirling-Engine Research  
NPO-14928 B81-10083 07

## RESOLVERS

Improved Magnetic-Field-Component  
Resolvers  
LAR-12638 B81-10299 06

## RESONANCE

Low-Noise Band-Pass Amplifier  
GSC-12567 B81-10255 01

## RIBS (SUPPORTS)

## SUBJECT INDEX

### RIBS (SUPPORTS)

Boron/Aluminum-Titanium  
on Stiffener  
MSC-18895 B81-10230 08

### RIGID STRUCTURES

Boron/Aluminum-Titanium  
on Stiffener  
MSC-18895 B81-10230 08

### ROBOTS

'Teaching' an Industrial Robot To  
Spray  
MFS-25523 B81-10326 07  
Hybrid Position/Force Control of  
Robot Manipulators  
NPO-14997 B81-10327 07

### ROCKS

Automatic Collection of Rock and Soil  
Samples  
MSC-18868 B81-10079 07

### ROTATING BODIES

Rotating the Plane of Parallel Light  
Beams  
ARC-11311 B81-10265 03  
Flywheels Would Compensate for  
Rotor Imbalance  
GSC-12550 B81-10331 07

### ROTATING SHAFTS

Rotary Transformer Seals Power In  
GSC-12595 B81-10008 01

### ROTATION

Interferometer Accurately Measures  
Rotation Angle  
GSC-12614 B81-10057 06

### ROTORS

Efficient Energy-Storage Concept  
MFS-25331 B81-10138 03  
Spring Support for Turbopump Rotor  
Bearing  
MFS-19624 B81-10204 07

### RUBBER

Chemical Growth Regulators for  
Guayule Plants  
NPO-15213 B81-10048 05  
Sprayed Coating Renews Butyl  
Rubber  
KSC-11198 B81-10111 08  
Coal as a Substitute for Carbon  
Black  
NPO-15461 B81-10280 04  
Cutting a Tapered Edge on Padding  
Material  
MSC-20011 B81-10367 08

## S

### SAFETY DEVICES

Engine-Vibration Analyzer  
MFS-19320 B81-10183 06  
Tire Temperature and Pressure  
Monitor  
LAR-19262 B81-10184 06  
Clamp Restrains Pressure Line  
KSC-11205 B81-10207 07  
Lightweight Face Mask  
LAR-12803 B81-10224 08  
Failure Detector for Power-Factor  
Controller  
MFS-25607 B81-10252 01  
Integral Face Shield Concept for  
Firefighter's Helmet  
MFS-25493 B81-10361 08  
Yielding Torque-Tube System  
Reduces Crash Injuries  
LAR-12801 B81-10363 08

### SALINITY

Laser/Heterodyne Measurement of  
Temperature and Salinity  
LAR-12766 B81-10181 06

### SAMPLERS

Automatic Collection of Rock and Soil  
Samples  
MSC-18868 B81-10079 07

### SAMPLING

Speedy Acquisition of  
Surface-Contamination Samples  
NPO-14934 B81-10175 05  
Mass-Loss Buttons Monitor Material  
Degradation  
MSC-18903 B81-10307 06

### SANDS

Vacuum Head Removes Sanding  
Dust  
MSC-19526 B81-10215 07

### SATURABLE REACTORS

Lightweight, Low-Loss dc  
Transducer  
NPO-14618 B81-10126 01

### SAWTOOTH WAVEFORMS

Two-Stage Linearization Circuit  
LAR-12577 B81-10125 01

### SCALE (RATIO)

Matching Dissimilar Graphical  
Scales  
MSC-14864 B81-10240 08

### SCANNERS

Rotating the Plane of Parallel Light  
Beams  
ARC-11311 B81-10265 03

### SCARFING

Cutting a Tapered Edge on Padding  
Material  
MSC-20011 B81-10367 08

### SCATTERING

Ultrasonic Transducer Analyzer  
MFS-25410 B81-10058 06

### SCHLIEREN PHOTOGRAPHY

Dual-Laser Schlieren System  
MFS-25315 B81-10052 06

### SCREWS

Universal Assembly for Captive  
Bolts  
MSC-18905 B81-10329 07

### SEALERS

Synthesis of Perfluorinated Polymers  
ARC-11241 B81-10037 04

### SEALING

High-Temperature Seal for  
Sliding-Gate Valve  
MFS-19607 B81-10107 08  
Surface Seal for Carbon Parts  
MSC-18898 B81-10163 04  
Flame-Retardant Coating is  
Heat-Sealed  
MSC-18382 B81-10168 04  
Boltless Seal for Electronic  
Housings  
NPO-14818 B81-10249 01

### SEALS (STOPPERS)

Faster Test for Cable Seals  
MFS-25618 B81-10187 06  
Improved High-Temperature Seal  
MSC-18790 B81-10210 07  
Electrically-conductive  
lity Pressure Seal  
MSC-20022 B81-10358 08

### SEATS

Yielding Torque-Tube System  
Reduces Crash Injuries  
LAR-12801 B81-10363 08

### SELECTIVE DISSEMINATION OF INFORMATION

User Documentation for Multiple  
Software Releases  
KSC-11189 B81-10371 09

### SELF FOCUSING

Controlling Electron-Beam-Weld  
Focus  
MFS-19635 B81-10352 08

### SEPARATED FLOW

High-Lift Separated Flow About  
Airfoils  
LAR-12853 B81-10324 06

### SERVICE LIFE

Mass-Loss Buttons Monitor Material  
Degradation  
MSC-18903 B81-10307 06

### SERVOCONTROL

Fast-Acting Electrohydraulic Servo  
LEW-13730 B81-10298 06

### SERVOMECHANISMS

Fast-Acting Electrohydraulic Servo  
LEW-13730 B81-10298 06

### SHIELDING

Integral Face Shield Concept for  
Firefighter's Helmet  
MFS-25493 B81-10361 08

### SHIFT REGISTERS

Study of Two Digital Charge-Coupled  
Devices  
MFS-25606 B81-10128 02

### SHOCK ABSORBERS

Dynamic Isolation for Cryogenic  
Refrigerators  
LAR-12728 B81-10076 07  
Yielding Torque-Tube System  
Reduces Crash Injuries  
LAR-12801 B81-10363 08

### SHOCK LAYERS

Numerical Solution for Navier-Stokes  
Equations  
MFS-25617 B81-10370 09

### SHORT CIRCUITS

Short-Circuited Power Networks  
MSC-18977 B81-10018 02

### SIGNAL DETECTORS

Improved Phase-Lock Detector  
MSC-18797 B81-10016 02

### SIGNAL GENERATORS

High-Frequency Gated Oscillator  
MSC-18634 B81-10011 01  
Sound-burst Generator for Measuring  
Coal Properties  
MFS-25438 B81-10281 04

### SIGNAL PROCESSING

Log-Output Signal Processor Scans  
Eight Decades  
ARC-11293 B81-10010 01

### SIGNAL TRANSMISSION

Rotary Transformer Seals Power In  
GSC-12595 B81-10008 01

### SILICON

Gravity-Feed Growth of Silicon  
Ribbon  
NPO-14967 B81-10089 08  
Heat-Exchanger Method of Crystal  
Growth  
NPO-14819 B81-10090 08  
Removing Defects From Silicon  
Ribbon  
NPO-14772 B81-10091 08  
Ceramic for Silicon-Shaping Dies  
NPO-14783 B81-10092 08  
Recharging the Silicon Crucible in a  
Hot Furnace  
NPO-14980 B81-10093 08

## SUBJECT INDEX

Crucible Grows Wide Silicon Ribbon  
NPO-14859 B81-10094 08  
Refractories Keep Silicon Crystals  
Pure  
NPO-14820 B81-10095 08  
Improved Facility for Producing  
Silicon Web  
NPO-14860 B81-10096 08  
Automatic Control of Silicon Melt  
Level  
NPO-15487 B81-10097 08  
Capacitively-Heated Fluidized Bed  
NPO-14912 B81-10102 08  
High-Speed Wafer Slicer  
NPO-15463 B81-10332 07

**SILICON CARBIDES**  
Refractories Keep Silicon Crystals  
Pure  
NPO-14820 B81-10095 08  
Surface Seal for Carbon Parts  
MSC-18898 B81-10163 04  
'SiAlON' Materials for Advanced  
Structural Applications  
LEW-13671 B81-10173 04

**SILICON COMPOUNDS**  
'SiAlON' Materials for Advanced  
Structural Applications  
LEW-13671 B81-10173 04  
XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub>  
Interface  
NPO-14968 B81-10285 04

**SILICON FILMS**  
Plasma Deposition of Amorphous  
Silicon  
NPO-14954 B81-10044 04

**SILICON NITRIDES**  
'SiAlON' Materials for Advanced  
Structural Applications  
LEW-13671 B81-10173 04

**SILICON POLYMERS**  
Binders for Thermal-Control  
Coatings  
MFS-25620 B81-10294 04

**SILICONE RUBBER**  
Improved Cure-in-Place Silicone  
Adhesives  
MSC-18782 B81-10164 04

**SILICONES**  
Silicone/Acrylate Copolymers  
NPO-15523 B81-10279 04  
Binders for Thermal-Control  
Coatings  
MFS-25620 B81-10294 04

**SIMULATORS**  
Solar-Array Simulator  
MSC-18864 B81-10119 01  
Line Replaceable Unit Analysis  
MSC-20183 B81-10259 02  
Solar Simulator at Marshall Space  
Flight Center  
MFS-25742 B81-10269 03  
Torque Simulator for Rotating  
Systems  
LAR-12751 B81-10318 06

**SITE DATA PROCESSORS**  
Self-Correcting  
d Pressure Sensor  
LAR-12686 B81-10063 06

**SIZE DETERMINATION**  
Program for Analysis and Resizing of  
Structures  
LAR-12704 B81-10072 06

**SLICING**  
High-Speed Wafer Slicer  
NPO-15463 B81-10332 07

Cutting a Tapered Edge on Padding  
Material  
MSC-20011 B81-10367 08

**SLURRIES**  
Combustion of Coal/Oil/Water  
Slurries  
NPO-15462 B81-10144 03

**SMOOTHING**  
Lathe Attachment Finishes Inner  
Surface of Tubes  
MSC-18780 B81-10081 07

**SOIL SCIENCE**  
Automatic Collection of Rock and Soil  
Samples  
MSC-18868 B81-10079 07

**SOLAR ARRAYS**  
Heat Lamps Solder Solar Array  
Quickly  
NPO-14866 B81-10106 08  
Brushless Cleaning of Solar Panels  
and Windows  
NPO-14922 B81-10333 07  
Automated Solar-Array Assembly  
NPO-15501 B81-10340 08  
Walking-Beam Solar-Cell Conveyor  
NPO-15503 B81-10341 08  
Vacuum Pickup for Solar Cells  
NPO-15500 B81-10342 08  
Orienting and Applying Flux to Solar  
Cells  
NPO-15504 B81-10343 08  
Tab Interconnect Work Station  
NPO-15505 B81-10344 08  
Work Station For Inverting Solar  
Cells  
NPO-15506 B81-10345 08  
Solar-Cell String Conveyor  
NPO-15508 B81-10346 08  
Bonder for Solar-Cell Strings  
NPO-15507 B81-10347 08  
Transporting Solar-Cell Strings  
NPO-15502 B81-10348 08  
Transfer of Strings to the Module  
Fixture  
NPO-15509 B81-10349 08  
Storing and Deploying Solar Panels  
MSC-18950 B81-10366 08

**SOLAR CELLS**  
Multilayer, Front-Contact Grid for  
Solar Cells  
LAR-12613 B81-10009 01  
Heat Lamps Solder Solar Array  
Quickly  
NPO-14866 B81-10106 08  
Ultra-Thin-Film GaAs Solar Cells  
NPO-14930 B81-10113 08  
Solar-Array Simulator  
MSC-18864 B81-10119 01  
Survey of Facilities for Testing  
Photovoltaics  
NPO-15361 B81-10193 06  
Glasses for Solar-Cell Arrays  
NPO-15528 B81-10243 08  
Silicone/Acrylate Copolymers  
NPO-15523 B81-10279 04  
Thermal Polymerization of N-Butyl  
Acrylate  
NPO-15010 B81-10295 04  
Automated Solar-Array Assembly  
NPO-15501 B81-10340 08  
Walking-Beam Solar-Cell Conveyor  
NPO-15503 B81-10341 08  
Vacuum Pickup for Solar Cells  
NPO-15500 B81-10342 08  
Orienting and Applying Flux to Solar  
Cells  
NPO-15504 B81-10343 08

## SOLAR ENERGY

Tab Interconnect Work Station  
NPO-15505 B81-10344 08  
Work Station For Inverting Solar  
Cells  
NPO-15506 B81-10345 08  
Solar-Cell String Conveyor  
NPO-15508 B81-10346 08  
Bonder for Solar-Cell Strings  
NPO-15507 B81-10347 08  
Transporting Solar-Cell Strings  
NPO-15502 B81-10348 08  
Transfer of Strings to the Module  
Fixture  
NPO-15509 B81-10349 08

**SOLAR COLLECTORS**  
Battle Keeps Solar Energy in  
Receiver  
NPO-15387 B81-10023 03  
Effects of High Temperature on  
Collector Coatings  
MFS-25651 B81-10148 03  
Easily Assembled Reflector for Solar  
Concentrators  
NPO-15518 B81-10235 08  
Solar-Driven Liquid-Metal MHD  
Generator  
LAR-12495 B81-10266 03

**SOLAR ENERGY**  
Temperature Controller for a Solar  
Furnace  
NPO-15388 B81-10022 03  
Battle Keeps Solar Energy in  
Receiver  
NPO-15387 B81-10023 03  
Pyramidal-Reflector Solar Heater  
MFS-25571 B81-10024 03  
Solar Water Heater Installation  
Package  
MFS-25573 B81-10025 03  
Motel DHW Retrofit--Dallas, Texas  
MFS-25580 B81-10026 03  
Solar Hot Water for Motor Inn--Texas  
City, Texas  
MFS-25614 B81-10027 03  
Solar-Energy System for a  
Commercial Building--Topeka, Kansas  
MFS-25609 B81-10028 03  
Solar-Heated Water at a  
Motel--Mobile, Alabama  
MFS-25603 B81-10029 03  
Solar-Heated Public Library--Troy,  
Ohio  
MFS-25601 B81-10030 03  
Solar-Cooled Classroom  
Building--Columbus, Ohio  
MFS-25597 B81-10031 03  
Solar-Heated and Cooled Office  
Building--Columbus, Ohio  
MFS-25608 B81-10032 03  
Solar Hot Water for an Industrial  
Laundry--Fresno, California  
MFS-25550 B81-10033 03  
Solar Water-Heater Design Package  
MFS-25574 B81-10034 03  
Heat-Energy Analysis for Solar  
Receivers  
NPO-14835 B81-10071 06  
Controller Regulates Auxiliary Source  
for Solar Power  
MFS-25637 B81-10133 02  
Solar Concentrator is Gas-Filled  
NPO-15416 B81-10141 03  
Energy-Storage Modules for Active  
Solar Heating and Cooling  
MFS-25681 B81-10145 03

# SOLAR ENERGY CONVERSION

# SUBJECT INDEX

Solar Water-Heater Design and Installation  
LEW-13665 B81-10146 03  
Heat-Transfer Fluids for Solar-Energy Systems  
MFS-25629 B81-10147 03  
Effects of High Temperature on Collector Coatings  
MFS-25651 B81-10148 03  
Solar Heating and Cooling for a Controls Manufacturing Plant  
Lumberton, New Jersey  
MFS-25665 B81-10149 03  
Solar Space and Water Heating for Hospital --Charlottesville, Virginia  
MFS-25666 B81-10150 03  
Solar Hot Water for a Motor Inn -- Las Vegas, Nevada  
MFS-25646 B81-10151 03  
Solar Heating for a Bottling Plant -- Jackson, Tennessee  
MFS-25595 B81-10152 03  
Economic Evaluation of Observatory Solar-Energy System  
MFS-25682 B81-10153 03  
Economic Evaluation of Single-Family-Residence Solar-Energy Installation  
MFS-25683 B81-10154 03  
Economic Evaluation of Townhouse Solar Energy System  
MFS-25684 B81-10155 03  
Economic Evaluation of Office Solar-Heating System  
MFS-25685 B81-10156 03  
Dormitory Solar-Energy-System Economics  
MFS-25693 B81-10157 03  
Two-Story-Dwelling Solar Installation  
MFS-25697 B81-10158 03  
Ranger Station Solar-Energy System Receives Economic Evaluation  
MFS-25699 B81-10159 03  
Economic Evaluation of Dual-Level-Residence Solar-Energy System  
MFS-25700 B81-10160 03  
Economic Evaluation of Single-Family-Residence Solar-Energy System  
MFS-25701 B81-10161 03  
Easily Assembled Reflector for Solar Concentrators  
NPO-15518 B81-10235 08  
Solar-Driven Liquid-Metal MHD Generator  
LAR-12495 B81-10266 03  
Solar Simulator at Marshall Space Flight Center  
MFS-25742 B81-10269 03  
Evaluation of a Line-Concentrating Solar Collector  
MFS-25778 B81-10270 03  
Manifold Insulation for Solar Collectors  
MFS-25779 B81-10271 03  
Solar Heater in a West Virginia College  
MFS-25706 B81-10272 03  
Solar Heating System at a Racquetball Club  
MFS-25720 B81-10273 03  
Solar Heating in an Elementary School  
MFS-25747 B81-10274 03

Solar-Cooled Hotel in the Virgin Islands  
MFS-25776 B81-10275 03  
Hot Water for Motor Inn--Garland, Texas  
MFS-25726 B81-10276 03  
Solar Space Heating for Warehouse--Kansas City, Kansas  
MFS-25712 B81-10277 03  
The Economics of Solar Heating  
MFS-25391 B81-10278 03  
**SOLAR ENERGY CONVERSION**  
Modular Amplifier/Antenna Arrays  
MSC-18981 B81-10258 01  
**SOLAR FURNACES**  
Temperature Controller for a Solar Furnace  
NPO-15388 B81-10022 03  
**SOLAR GENERATORS**  
Solar-Powered Supply Is Light and Reliable  
MFS-25430 B81-10015 02  
Controller Regulates Auxiliary Source for Solar Power  
MFS-25637 B81-10133 02  
Solar-Driven Liquid-Metal MHD Generator  
LAR-12495 B81-10266 03  
**SOLAR HEATING**  
Solar-Driven Liquid-Metal MHD Generator  
LAR-12495 B81-10266 03  
**SOLAR RADIATION**  
Solar-Driven Liquid-Metal MHD Generator  
LAR-12495 B81-10266 03  
**SOLAR REFLECTORS**  
Battle Keeps Solar Energy in Receiver  
NPO-15387 B81-10023 03  
Solar Concentrator is Gas-Filled  
NPO-15416 B81-10141 03  
Easily Assembled Reflector for Solar Concentrators  
NPO-15518 B81-10235 08  
Indium Second-Surface Mirrors  
NPO-15085 B81-10239 08  
Calculating the Performance of a Solar Reflector  
NPO-15314 B81-10246 09  
**SOLAR SENSORS**  
Sensors for Precise Tracking  
MFS-25579 B81-10140 03  
**SOLDERING**  
Shaping Transistor Leads for Better Solder Joints  
MSC-18837 B81-10103 08  
Heat Lamps Solder Solar Array Quickly  
NPO-14866 B81-10106 08  
Assembling Multicolor Printing Plates  
LEW-13598 B81-10237 08  
Orienting and Applying Flux to Solar Cells  
NPO-15504 B81-10343 08  
Tab Interconnect Work Station  
NPO-15505 B81-10344 08  
Bondor for Solar-Cell Strings  
NPO-15507 B81-10347 08  
**SOLID ELECTROLYTES**  
Integrated Solid-Electrolyte Construction  
NPO-15471 B81-10236 08

**SOLVENT EXTRACTION**  
Supercritical-Fluid Extraction of Oil From Tar Sands  
NPO-15476 B81-10166 04  
**SOUND GENERATORS**  
Sound Waves Levitate Substrates  
NPO-15435 B81-10221 08  
Sound-burst Generator for Measuring Coal Properties  
MFS-25438 B81-10281 04  
**SOUNDING ROCKETS**  
Aerodynamics of Sounding-Rocket Geometries  
GSC-12680 B81-10074 06  
**SPACE LABORATORIES**  
Materials Processing in Space  
MFS-25544 B81-10116 08  
**SPACE MANUFACTURING**  
Low-Gravity Investigations in Cast-Iron Processing  
MFS-25491 B81-10172 04  
**SPACE SUITS**  
Thermally Insulated Glove With Good Tactility  
MSC-18926 B81-10223 08  
**SPACECRAFT ANTENNAS**  
Dish Antenna Would Deploy From a Canister  
NPO-15448 B81-10241 08  
**SPACECRAFT PROPULSION**  
Sequential-Impulse Generator Uses Fiber-Optics  
NPO-14939 B81-10020 03  
**SPACERS**  
'Teaching' an Industrial Robot To Spray  
MFS-25523 B81-10326 07  
**SPARK MACHINING**  
Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08  
**SPECTROSCOPY**  
XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub> Interface  
NPO-14968 B81-10285 04  
**SPEED CONTROL**  
Alternating-Current Motor Drive for Electric Vehicles  
NPO-14768 AND NPO-14830 B81-10124 01  
Controller Regulates Auxiliary Source for Solar Power  
MFS-25637 B81-10133 02  
Simpler Variable-Speed Drive for Fan or Pump  
GSC-12643 B81-10201 07  
Failure Detector for Power-Factor Controller  
MFS-25607 B81-10252 01  
**SPEED REGULATORS**  
Three-Phase Power Factor Controller  
MFS-25535 B81-10001 01  
Load-Responsive Motor Controller  
MFS-25560 B81-10002 01  
Power-Factor Controller With Regenerative Braking  
MFS-25477 B81-10003 01  
New Energy-Saving Technologies Use Induction Generators  
MFS-25513 B81-10021 03  
**SPIROMETERS**  
Constraint-Free Measurement of Metabolic Rate  
MSC-18885 B81-10046 05



## SUBJECT INDEX

**SPRAY NOZZLES**  
Wire Whip Keeps Spray Nozzle Clean  
MFS-25175 B81-10115 08

**SPRAYED COATINGS**  
Sprayed Coating Renews Butyl Rubber  
KSC-11198 B81-10111 08  
Binders for Thermal-Control Coatings  
MFS-25620 B81-10294 04  
Plasma Spray for Difficult-To-Braze Alloys  
MFS-19630 B81-10353 08

**SPRAYERS**  
Compact Liquid Deaerator  
MSC-18936 B81-10211 07

**SPRAYING**  
Compact Liquid Deaerator  
MSC-18936 B81-10211 07  
'Teaching' an Industrial Robot To Spray  
MFS-25523 B81-10326 07

**SPRINGS (ELASTIC)**  
High-Temperature Seal for Sliding-Gate Valve  
MFS-19607 B81-10107 08  
Unidirectional Flexural Pivot  
GSC-12622 B81-10208 07

**STABILITY**  
Elastic Surface Wrinkling  
NPO-15091 B81-10321 06

**STABILITY DERIVATIVES**  
Aerodynamics of Sounding-Rocket Geometries  
GSC-12680 B81-10074 06

**STAINLESS STEELS**  
New Method For Joining Stainless Steel to Titanium  
MSC-18820 B81-10232 08

**STAR TRACKERS**  
Sensors for Precise Tracking  
MFS-25579 B81-10140 03

**STATIC DEFORMATION**  
Plastic and Large-Deflection Analysis of Nonlinear Structures  
LAR-12816 B81-10323 06

**STIFFENING**  
Boron/Aluminum-Titanium on Stiffener  
MSC-18895 B81-10230 08

**STIRLING CYCLE**  
Resistance Heater Helps Stirling-Engine Research  
NPO-14928 B81-10083 07

**STORAGE TANKS**  
Improved Nozzle Would Reduce Cryogenic Boiloff  
MFS-25589 B81-10335 07

**STOWAGE (ONBOARD EQUIPMENT)**  
Storing and Deploying Solar Panels  
MSC-18950 B81-10366 08

**STRAIN GAGES**  
Matching of Apparent-Strain Characteristics  
LAR-12743 B81-10066 06  
Pulsed Phase-Locked-Loop Strain Monitor  
LAR-12772 B81-10068 06  
Strain-Gaged Bolts Are Easily Prepared  
MSC-18823 B81-10069 06

**STREAMLINED BODIES**  
Aerodynamics Improve Wind Wheel  
MFS-25506 B81-10080 07

**STRESS ANALYSIS**  
Program for Analysis and Resizing of Structures  
LAR-12704 B81-10072 06  
Composite-Material Point-Stress Analysis  
MSC-18978 B81-10245 08

**STRESS CYCLES**  
Measuring Cyclic-Stress Properties of Pressure Vessels  
MFS-23734 B81-10065 06

**STRESS RELIEVING**  
Shaping Transistor Leads for Better Solder Joints  
MSC-18837 B81-10103 08

**STRESSES**  
Structural Design With Stress and Buckling Constraints  
MFS-25234 B81-10322 06

**STRIP TRANSMISSION LINES**  
Sealed Strip Line for Extreme Temperatures  
MSC-16994 B81-10114 08  
Unequal-Split Strip-Line Power Divider  
LAR-12797 B81-10250 01

**STRUCTURAL ANALYSIS**  
Measuring Cyclic-Stress Properties of Pressure Vessels  
MFS-23734 B81-10065 06  
Analyzing Multirate-Sampled Systems  
MFS-25541 B81-10264 02  
Plastic and Large-Deflection Analysis of Nonlinear Structures  
LAR-12816 B81-10323 06  
Weld width indicates weld strength  
MFS-25648 B81-10354 08

**STRUCTURAL DESIGN**  
Program for Analysis and Resizing of Structures  
LAR-12704 B81-10072 06  
Structural Design With Stress and Buckling Constraints  
MFS-25234 B81-10322 06

**STRUCTURAL MEMBERS**  
Blind Fastener Is Easy To Install  
MSC-18742 B81-10082 07  
Integrated Structural and Cable Connector  
LAR-12769 B81-10085 07  
Fluxless Brazing of Large Structural Panels  
LAR-12519 B81-10100 08  
Structural Modules Would Contain Transmission Lines  
GSC-12523 B81-10108 08  
Boron/Aluminum-Titanium on Stiffener  
MSC-18895 B81-10230 08  
Pivot Attachment for Prefabricated Beams  
MFS-25476 B81-10368 08  
Fabricating Structural Beams  
MFS-25228 B81-10369 08

**STRUCTURAL VIBRATION**  
Solution Accounts for Structural Damping  
LAR-12863 B81-10303 06  
Vibration Analysis With Finite Dynamic Elements  
NPO-15087 B81-10320 06

**STUDS (STRUCTURAL MEMBERS)**  
Precise Restraightening of Bent Studs  
MFS-19632 B81-10328 07

## SWITCHING CIRCUITS

**SUBSONIC FLOW**  
Unsteady Subsonic Loadings Due to Control-Surface Motion  
LAR-12802 B81-10073 06

**SUCTION**  
Articulated Vacuum Chuck  
MSC-18933 B81-10330 07

**SULFURIC ACID**  
Heat-Exchange Fluids for Sulfuric Acid Vaporizers  
NPO-15015 B81-10291 04

**SUPERCritical PRESSURES**  
Supercritical-Fluid Extraction of Oil From Tar Sands  
NPO-15476 B81-10166 04

**SUPERSATURATION**  
Monitoring Crystal Growth From Solution  
MFS-25622 B81-10364 08

**SUPPORTS**  
Temperature-Controlled Support for a Seed Crystal  
MFS-25341 B81-10098 08  
Spring Support for Turbopump Rotor Bearing  
MFS-19624 B81-10204 07  
Four-Degree-of-Freedom Platform  
ARC-11286 B81-10217 07

**SURFACE CRACKS**  
Detecting Cracks on Inner Surfaces  
MFS-19575 B81-10054 06

**SURFACE DISTORTION**  
Gage for Surface Waviness  
MSC-20055 B81-10305 06  
Elastic Surface Wrinkling  
NPO-15091 B81-10321 06

**SURFACE FINISHING**  
Vacuum Head Removes Sanding Dust  
MSC-19526 B81-10215 07  
Neutralizing Amine-Cured Epoxy Surfaces  
GSC-12686 B81-10290 04

**SURFACE LAYERS**  
Speedy Acquisition of Surface-Contamination Samples  
NPO-14934 B81-10175 05

**SURFACE PROPERTIES**  
Surface-Contamination Inspection Tool for Field Use  
MFS-25581 B81-10190 06  
Detecting Contamination With Photoelectron Emission  
MFS-25619 B81-10313 06

**SURFACE VEHICLES**  
Alternating-Current Motor Drive for Electric Vehicles  
NPO-14768 AND NPO-14830 B81-10124 01

**SURFACE WAVES**  
Elastic Surface Wrinkling  
NPO-15091 B81-10321 06

**SURGERY**  
Retractor Tool for Brain Surgery  
MFS-25380 B81-10176 05

**SWEEP CIRCUITS**  
Resistors Improve Ramp Linearity  
GSC-12635 B81-10005 01

**SWITCHING CIRCUITS**  
Improved Parallel-Access Alignment Network  
ARC-11155 B81-10134 02  
Parallel-Access Alignment Network Using Barrel Switches  
ARC-11162 B81-10135 02

# SYNCHRONIZED OSCILLATORS

Flashlamp Driver for Quasi-CW Laser  
Pumping  
GSC-12566 B81-10254 01  
Arc-Free High-Power dc Switch  
MSC-20091 B81-10256 01  
**SYNCHRONIZED OSCILLATORS**  
Method for Canceling Ionospheric  
Doppler Effect  
MFS-25599 B81-10260 02  
**SYSTEMS ENGINEERING**  
Proposed Reliability/Cost Model  
MFS-25494 B81-10372 09  
**SYSTEMS STABILITY**  
Analyzing Multirate-Sampled  
Systems  
MFS-25541 B81-10264 02

# T

**TACTILE DISCRIMINATION**  
Touch Sensor Responds to Contact  
Pressure  
NPO-15375 B81-10212 07  
Thermally Insulated Glove With Good  
Tactility  
MSC-18926 B81-10223 08  
**TARS**  
Supercritical-Fluid Extraction of Oil  
From Tar Sands  
NPO-15476 B81-10166 04  
**TELECOMMUNICATION**  
Array Processor Has Power and  
Flexibility  
ARC-11292 B81-10130 02  
**TEMPERATURE COMPENSATION**  
Self-Correcting  
d Pressure Sensor  
LAR-12686 B81-10063 06  
**TEMPERATURE CONTROL**  
Temperature Controller for a Solar  
Furnace  
NPO-15388 B81-10022 03  
Pyramidal-Reflector Solar Heater  
MFS-25571 B81-10024 03  
Solar Water Heater Installation  
Package  
MFS-25573 B81-10025 03  
Motel DHW Retrofit--Dallas, Texas  
MFS-25580 B81-10026 03  
Solar Hot Water for Motor Inn--Texas  
City, Texas  
MFS-25614 B81-10027 03  
Solar-Energy System for a  
Commercial Building--Topeka, Kansas  
MFS-25609 B81-10028 03  
Solar-Heated Water at a  
Motel--Mobile, Alabama  
MFS-25603 B81-10029 03  
Solar-Heated Public Library--Troy,  
Ohio  
MFS-25601 B81-10030 03  
Solar-Cooled Classroom  
Building--Columbus, Ohio  
MFS-25597 B81-10031 03  
Solar-Heated and Cooled Office  
Building--Columbus, Ohio  
MFS-25608 B81-10032 03  
Solar Hot Water for an Industrial  
Laundry--Fresno, California  
MFS-25550 B81-10033 03  
Solar Water-Heater Design Package  
MFS-25574 B81-10034 03  
Heat Pipe Blocks Return Flow  
ARC-11285 B81-10060 06

Temperature-Controlled Support for a  
Seed Crystal  
MFS-25341 B81-10098 08  
Energy-Storage Modules for Active  
Solar Heating and Cooling  
MFS-25681 B81-10145 03  
Solar Water-Heater Design and  
Installation  
LEW-13665 B81-10146 03  
Heat-Transfer Fluids for Solar-Energy  
Systems  
MFS-25629 B81-10147 03  
Solar Heating and Cooling for a  
Controls Manufacturing Plant  
Lumberton, New Jersey  
MFS-25665 B81-10149 03  
Solar Space and Water Heating for  
Hospital --Charlottesville, Virginia  
MFS-25666 B81-10150 03  
Solar Hot Water for a Motor Inn --  
Las Vegas, Nevada  
MFS-25646 B81-10151 03  
Solar Heating for a Bottling Plant --  
Jackson, Tennessee  
MFS-25595 B81-10152 03  
Economic Evaluation of Observatory  
Solar-Energy System  
MFS-25682 B81-10153 03  
Economic Evaluation of  
Single-Family-Residence Solar-Energy  
Installation  
MFS-25683 B81-10154 03  
Economic Evaluation of Townhouse  
Solar Energy System  
MFS-25684 B81-10155 03  
Economic Evaluation of Office  
Solar-Heating System  
MFS-25685 B81-10156 03  
Dormitory Solar-Energy-System  
Economics  
MFS-25693 B81-10157 03  
Two-Story-Dwelling Solar Installation  
MFS-25697 B81-10158 03  
Ranger Station Solar-Energy System  
Receives Economic Evaluation  
MFS-25699 B81-10159 03  
Economic Evaluation of  
Dual-Level-Residence Solar-Energy  
System  
MFS-25700 B81-10160 03  
Economic Evaluation of  
Single-Family-Residence Solar-Energy  
System  
MFS-25701 B81-10161 03  
Evaluation of a Line-Concentrating  
Solar Collector  
MFS-25778 B81-10270 03  
Manifold Insulation for Solar  
Collectors  
MFS-25779 B81-10271 03  
Solar Heater in a West Virginia  
College  
MFS-25706 B81-10272 03  
Solar Heating System at a  
Racquetball Club  
MFS-25720 B81-10273 03  
Solar Heating in an Elementary  
School  
MFS-25747 B81-10274 03  
Solar-Cooled Hotel in the Virgin  
Islands  
MFS-25776 B81-10275 03  
Hot Water for Motor Inn--Garland,  
Texas  
MFS-25726 B81-10276 03

# SUBJECT INDEX

Solar Space Heating for  
Warehouse--Kansas City, Kansas  
MFS-25712 B81-10277 03  
Monitoring Crystal Growth From  
Solution  
MFS-25622 B81-10364 08  
Infrared-Controlled Welding of Solar  
Cells  
MFS-25612 B81-10365 08  
**TEMPERATURE DISTRIBUTION**  
Simplified Thermal Analyzer --VAX  
Version  
GSC-12698 B81-10198 06  
**TEMPERATURE EFFECTS**  
Predicting Tensile Strengths of  
Boron/Aluminum Composites  
LEW-13745 B81-10311 06  
Monitoring Crystal Growth From  
Solution  
MFS-25622 B81-10364 08  
**TEMPERATURE MEASUREMENT**  
Fibre-Optic Semiconductor  
Temperature Gage  
MSC-18627 B81-10053 06  
Tire Temperature and Pressure  
Monitor  
LAR-19262 B81-10184 06  
**TEMPERATURE MEASURING  
INSTRUMENTS**  
Compact Dual-Mode Microwave  
Antenna  
LAR-12784 B81-10004 01  
Laser/Heterodyne Measurement of  
Temperature and Salinity  
LAR-12766 B81-10181 06  
**TEMPERATURE PROBES**  
Multipressure and Temperature  
Probe  
ARC-11166 B81-10189 06  
**TEMPERATURE SENSORS**  
Heater Composite Measures Heat  
Transfer  
LEW-13731 B81-10192 06  
Hot Film Static-Pressure Probe for  
Flow-Field Surveys  
LAR-12799 B81-10308 06  
**TEMPLATES**  
'Teaching' an Industrial Robot To  
Spray  
MFS-25523 B81-10326 07  
**TENSILE STRENGTH**  
Predicting Tensile Strengths of  
Boron/Aluminum Composites  
LEW-13745 B81-10311 06  
**TENSILE TESTS**  
Improved Tensile Test for Ceramics  
MSC-20105 B81-10310 06  
**TEST EQUIPMENT**  
Solar-Array Simulator  
MSC-18864 B81-10119 01  
Wire-Wrap Chatter Detector  
NPO-15290 B81-10121 01  
Load Pulser Is Sparkless  
KSC-11199 B81-10123 01  
Faster Test for Cable Seals  
MFS-25618 B81-10187 06  
**TEST FACILITIES**  
Survey of Facilities for Testing  
Photovoltaics  
NPO-15361 B81-10193 06  
**TESTS**  
Survey of Facilities for Testing  
Photovoltaics  
NPO-15361 B81-10193 06

**THERMAL CONTROL COATINGS**

Prolonging the Life of Refractory  
Fillers  
MSC-18832 B81-10167 04  
Prolonging the Life of Refractory  
Fillers  
MSC-18832 B81-10231 08  
Binders for Thermal-Control  
Coatings  
MFS-25620 B81-10294 04

**THERMAL DEGRADATION**

Effects of High Temperature on  
Collector Coatings  
MFS-25651 B81-10148 03

**THERMAL EXPANSION**

Deformation-Induced Anisotropy of  
Polymers  
NPO-15325 B81-10043 04

**THERMAL INSULATION**

Metallic Panels Would Insulate at  
2,700 Degrees F  
LAR-12620 B81-10104 08  
Thermally Insulated Glove With Good  
Tactility  
MSC-18926 B81-10223 08  
Blowing Agents for Fabrication of  
Polyimide Foams  
MSC-18993 B81-10286 04

**THERMAL POLLUTION**

Powerplant Thermal-Pollution  
Models  
KSC-11210 B81-10142 03

**THERMAL SIMULATION**

Improved Numerical Differencing  
Analyzer  
GSC-12671 B81-10197 06  
Simplified Thermal Analyzer --VAX  
Version  
GSC-12698 B81-10198 06

**THERMOCHEMICAL PROPERTIES**

Heat-Exchange Fluids for Sulfuric  
Acid Vaporizers  
NPO-15015 B81-10291 04

**THERMOCOUPLES**

Adhesive-Bonded Tab Attaches  
Thermocouples to Titanium  
FRC-11017 B81-10056 06

**THERMOGRAVIMETRY**

System Controls and Measures  
Oxygen Fugacity  
MSC-20096 B81-10162 04

**THICK FILMS**

IC Capacitors on Groups III-to-V  
Substrates  
GSC-12543 B81-10109 08

**THICKNESS**

EMR Gage Would Measure Coal  
Thickness Accurately  
MFS-25555 B81-10139 03

**THIN FILMS**

IC Capacitors on Groups III-to-V  
Substrates  
GSC-12543 B81-10109 08  
Ultra-Thin-Film GaAs Solar Cells  
NPO-14930 B81-10113 08

**THIOLS**

Improved Method for Culturing  
Guinea-Pig Macrophage Cells  
MFS-25307 B81-10177 05

**TIME MEASUREMENT**

Electronically Calibratable Clock  
LAR-12654 B81-10122 01

**TIME MEASURING INSTRUMENTS**

Method for Canceling Ionospheric  
Doppler Effect  
MFS-25599 B81-10260 02

**TIME SIGNALS**

Programmable Interface Handles Many  
Peripherals  
KSC-11132 B81-10261 02

**TIRES**

Tire Temperature and Pressure  
Monitor  
LAR-19262 B81-10184 06

**TITANIUM**

Adhesive-Bonded Tab Attaches  
Thermocouples to Titanium  
FRC-11017 B81-10056 06  
New Method For Joining Stainless  
Steel to Titanium  
MSC-18820 B81-10232 08

**TITANIUM ALLOYS**

Adhesive-Bonded Tab Attaches  
Thermocouples to Titanium  
FRC-11017 B81-10056 06  
Metal Sandwich Panel With Biaxially  
Corrugated Core  
FRC-11026 B81-10112 08

**TOOLS**

Cam-Design Torque Wrench  
MFS-19586 B81-10206 07  
Tool Lifts Against Surface Tension  
GSC-12672 B81-10216 07  
Tile-Gap Measurement Tool  
MSC-20057 B81-10304 06  
Gage for Surface Waviness  
MSC-20055 B81-10305 06  
Precise Restraightening of Bent  
Studs  
MFS-19632 B81-10328 07  
Articulated Vacuum Chuck  
MSC-18933 B81-10330 07  
Safety Bolt Doubles as a  
Bushing-Removal Tool  
MSC-20032 B81-10334 07  
Staking Tool for Hard Metals  
MSC-20009 B81-10336 07

**TOROIDS**

Rotary Transformer Seals Power In  
GSC-12595 B81-10008 01

**TORQUE**

Viscous Torques on a Levitating  
Body  
NPO-15413 B81-10055 06  
Yielding Torque-Tube System  
Reduces Crash Injuries  
LAR-12801 B81-10363 08

**TORQUEMETERS**

Wide-Temperature-Range  
Ipe Paint  
MFS-19644 B81-10289 04  
New Apparatus Tests Pressure-Suit  
Joints  
ARC-11314 B81-10314 06

**TORQUERS**

Torque Simulator for Rotating  
Systems  
LAR-12751 B81-10318 06

**TOUCH**

Touch Sensor Responds to Contact  
Pressure  
NPO-15375 B81-10212 07

**TOUGHNESS**

Elastomer-Toughened Polyimide  
Adhesives  
LAR-12775 B81-10040 04  
Increasing Metal Fracture  
Toughness  
LAR-12805 B81-10351 08

**TRACKING (POSITION)**

Sensors for Precise Tracking  
MFS-25579 B81-10140 03

**TRANSDUCERS**

Ultrasonic Transducer Analyzer  
MFS-25410 B81-10058 06  
Matching of Apparent-Strain  
Characteristics  
LAR-12743 B81-10066 06

**TRANSFER FUNCTIONS**

Model Verification of Mixed Dynamic  
Systems  
MFS-23806 B81-10196 06

**TRANSFORMERS**

Rotary Transformer Seals Power In  
GSC-12595 B81-10008 01

**TRANSIENT PRESSURES**

Nozzle Modification Suppresses Flow  
Transients  
MFS-19567 B81-10061 06

**TRANSISTORS**

Shaping Transistor Leads for Better  
Solder Joints  
MSC-18837 B81-10103 08

**TRANSMISSION LINES**

Structural Modules Would Contain  
Transmission Lines  
GSC-12523 B81-10108 08  
Unequal-Split Strip-Line Power  
Divider  
LAR-12797 B81-10250 01

**TRANSPONDERS**

Method for Canceling Ionospheric  
Doppler Effect  
MFS-25599 B81-10260 02

**TRANSPORT PROPERTIES**

Gas Diffusion in Fluids Containing  
Bubbles  
NPO-15060 B81-10292 04

**TRUSSES**

Storing and Deploying Solar Panels  
MSC-18950 B81-10366 08

**TUBE HEAT EXCHANGERS**

'Bottle-Brush' Heat Exchanger  
NPO-15479 B81-10205 07

**TUMORS**

Compact Dual-Mode Microwave  
Antenna  
LAR-12784 B81-10004 01

**TURBINE BLADES**

Wingtip-Vortex Turbine Lowers  
Aircraft Drag  
LAR-12544 B81-10182 06

**TURBINE ENGINES**

Advances in Turbine-Engine  
Technology  
LEW-13672 B81-10087 07

**TURBINES**

Wingtip-Vortex Turbine Lowers  
Aircraft Drag  
LAR-12544 B81-10182 06

**TURBOJET ENGINES**

Staged Turbojet Engine Would Emit  
Less NO  
ARC-10814 B81-10213 07

**TURBULENT FLOW**

High-Lift Separated Flow About  
Airfoils  
LAR-12853 B81-10324 06

**TWISTING**

Yielding Torque-Tube System  
Reduces Crash Injuries  
LAR-12801 B81-10363 08

## U

## ULTRASONIC TESTS

Ultrasonic Instrument for Evaluation  
of Composites  
LEW-13716 B81-10301 06

## ULTRASONIC WAVE TRANSDUCERS

Ultrasonic Transducer Analyzer  
MFS-25410 B81-10058 06

## ULTRASONIC WELDING

Ultrasonic Welding of  
Graphite/Thermoplastic Composite  
MSC-20013 B81-10350 08

## ULTRAVIOLET RADIATION

Ultraviolet-Induced Mirror  
Degradation  
NPO-15520 B81-10171 04

## UNDERWATER TESTS

Faster Test for Cable Seals  
MFS-25618 B81-10187 06

## UNSTEADY FLOW

Algorithm for Unsteady Potential Flow  
About Airfoils  
ARC-11378 B81-10316 06

## USER MANUALS (COMPUTER PROGRAMS)

User Documentation for Multiple  
Software Releases  
KSC-11189 B81-10371 09

## V

## VACUUM

Articulated Vacuum Chuck  
MSC-18933 B81-10330 07

## VACUUM APPARATUS

3-D Manipulator for Mass  
Spectrometer  
ARC-11323 B81-10137 03

Vacuum Head Removes Sanding  
Dust  
MSC-19526 B81-10215 07

## VACUUM CHAMBERS

Faster Test for Cable Seals  
MFS-25618 B81-10187 06

## VALUE ENGINEERING

Proposed Reliability/Cost Model  
MFS-25494 B81-10372 09

## VALVES

High-Temperature Seal for  
Sliding-Gate Valve  
MFS-19607 B81-10107 08

Force Augmentation for Relief Valve  
MSC-20065 B81-10337 07

## VAPOR JETS

Plasma Deposition of Amorphous  
Silicon  
NPO-14954 B81-10044 04

## VAPORS

Vapor Detector  
MSC-18989 B81-10287 04

## VARIABLE GEOMETRY STRUCTURES

Solar Concentrator is Gas-Filled  
NPO-15416 B81-10141 03

## VECTOR SPACES

Linear-Algebra Programs  
NPO-15108 B81-10117 09

## VENTILATION FANS

Simpler Variable-Speed Drive for Fan  
or Pump  
GSC-12643 B81-10201 07

## VIABILITY

Improved Method for Culturing  
Guinea-Pig Macrophage Cells  
MFS-25307 B81-10177 05

## VIBRATION DAMPING

Solution Accounts for Structural  
Damping  
LAR-12863 B81-10303 06

Damping Vibration at an Impeller  
MFS-19645 B81-10338 07

## VIBRATION ISOLATORS

Dynamic Isolation for Cryogenic  
Refrigerators  
LAR-12728 B81-10076 07

## VIBRATION METERS

Engine-Vibration Analyzer  
MFS-19320 B81-10183 06

## VISCOELASTICITY

Viscoelastic Properties of Polymer  
Blends  
NPO-14924 B81-10041 04

## VISCOUS DRAG

Viscous Torques on a Levitating  
Body  
NPO-15413 B81-10055 06

## VISCOUS FLOW

High-Lift Separated Flow About  
Airfoils  
LAR-12853 B81-10324 06

Numerical Solution for Navier-Stokes  
Equations  
MFS-25617 B81-10370 09

## VISORS

Improved Clothing for Firefighters  
MFS-25546 B81-10088 08

## VOLTAGE CONVERTERS (DC TO DC)

Solar-Powered Supply Is Light and  
Reliable  
MFS-25430 B81-10015 02

High-Efficiency dc/dc Converter  
LEW-13486 B81-10120 01

## VOLTAGE REGULATORS

Power-MOSFET Voltage Regulator  
MSC-20059 B81-10257 01

## VORTICES

Wingtip-Vortex Turbine Lowers  
Aircraft Drag  
LAR-12544 B81-10182 06

## W

## WAFERS

High-Speed Wafer Slicer  
NPO-15483 B81-10332 07

## WARNING SYSTEMS

Engine-Vibration Analyzer  
MFS-19320 B81-10183 06

## WATER POLLUTION

Powerplant Thermal-Pollution  
Models  
KSC-11210 B81-10142 03

## WATER TEMPERATURE

Powerplant Thermal-Pollution  
Models  
KSC-11210 B81-10142 03

## WATER TREATMENT

Regenerating Water-Sterilizing  
Resins  
MSC-20001 B81-10288 04

## WAVEFORMS

High-Frequency Gated Oscillator  
MSC-18634 B81-10011 01

## WEATHERING

Ultraviolet-Induced Mirror  
Degradation  
NPO-15520 B81-10171 04

## WEATHERPROOFING

Weatherproof Crimp Connector  
NPO-15497 B81-10101 08

## WEIGHT REDUCTION

Structural Design With Stress and  
Buckling Constraints  
MFS-25234 B81-10322 06

## WEIGHTLESSNESS

Materials Processing in Space  
MFS-25544 B81-10116 08

Monitoring Crystal Growth From  
Solution  
MFS-25622 B81-10364 08

## WELD TESTS

Microcomputer Checks Butt-Weld  
Accuracy  
MFS-25557 B81-10062 06

Weld-Wire Monitor  
MFS-19603 B81-10227 08

Acoustic Emissions Could Indicate  
Weld Quality  
MFS-25441 B81-10360 08

## WELDING

Fluxless Brazing of Large Structural  
Panels  
LAR-12519 B81-10100 08

Contamination Control During Weld  
Repairs  
MFS-19652 B81-10225 08

Technique Lowers Weld Power  
Requirements  
MFS-19655 B81-10226 08

Weld-Wire Monitor  
MFS-19603 B81-10227 08

Eddy-Current Meter Would Check  
Weld Wire Online  
MSC-18891 B81-10228 08

New Method For Joining Stainless  
Steel to Titanium  
MSC-18820 B81-10232 08

Ultrasonic Welding of  
Graphite/Thermoplastic Composite  
MSC-20013 B81-10350 08

Weld width indicates weld strength  
MFS-25648 B81-10354 08

Cleaning Internal-Weld Splatter  
MSC-20068 B81-10355 08

Infrared-Controlled Welding of Solar  
Cells  
MFS-25612 B81-10365 08

## WELDING MACHINES

Controlling Electron-Beam-Weld  
Focus  
MFS-19635 B81-10352 08

Clamp and Gas Nozzle for TIG  
Welding  
MSC-20108 B81-10359 08

## WETTABILITY

Orientation Insensitivity for  
Electrochemical Sensor  
KSC-11176 B81-10233 08

## WETTING

Gravity-Feed Growth of Silicon  
Ribbon  
NPO-14967 B81-10089 08

## WHEATSTONE BRIDGES

Matching of Apparent-Strain  
Characteristics  
LAR-12743 B81-10066 06

## WICKS

Superabsorbent Multilayer Fabric  
MSC-18223 B81-10169 04

Orientation Insensitivity for  
Electrochemical Sensor  
KSC-11176 B81-10233 08

## WIND TUNNELS

Multipressure and Temperature  
Probe  
ARC-11166 B81-10189 06

## **SUBJECT INDEX**

## **X RAYS**

### **WINDMILLS (WINDPOWERED MACHINES)**

Aerodynamics Improve Wind Wheel  
MFS-25506 B81-10080 07

### **WINDPOWERED GENERATORS**

New Energy-Saving Technologies  
Use Induction Generators  
MFS-25513 B81-10021 03

### **WING TIPS**

Wingtip-Vortex Turbine Lowers  
Aircraft Drag  
LAR-12544 B81-10182 06

### **WIRING**

Structural Modules Would Contain  
Transmission Lines

GSC-12523 B81-10108 08

CADAT Printed-Wiring-Board

Designer

MFS-25464 B81-10244 08

High-Density Terminal Box for

Testing Wire Harness

NPO-15147 B81-10251 01

### **WRENCHES**

Cam-Design Torque Wrench

MFS-19586 B81-10206 07

### **WRINKLING**

Elastic Surface Wrinkling

NPO-15091 B81-10321 06

## **X**

### **X RAYS**

Improved Lixiscope

GSC-12587 B81-10267 03




# PERSONAL AUTHOR INDEX

INDEX TO NASA TECH BRIEFS

JULY 1986

## Typical Personal Author Index Listing

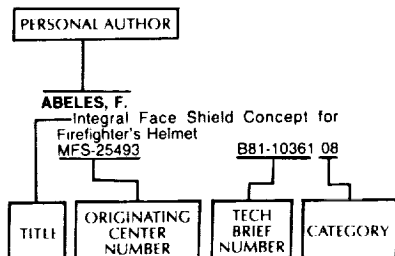

This index is arranged alphabetically by author. The Tech Brief title is listed followed by the originating center number, e.g., MFS-25493. The Tech Brief number, e.g., B81-10361 is followed by a two-digit number, e.g., 08, which designates the subject category.

## A

**ABELES, F.**  
Integral Face Shield Concept for Firefighter's Helmet  
MFS-25493 B81-10361 08

**ABELES, F. J.**  
Improved Clothing for Firefighters  
MFS-25546 B81-10088 08

**ABITA, J. L.**  
Pressure Switch Is a Low Cost Battery Indicator  
GSC-12679 B81-10067 06

**ABSHIRE, J. B.**  
Rangefinder Corrects for Air Density and Moisture  
GSC-12609 B81-10186 06

**ADAMS, W. A.**  
Wideband Amplifier With Subpicosecond Stability  
GSC-12646 B81-10248 01

**ADAMS, W. A.**  
Precise Phase Comparator for Nearly Equal Frequencies  
GSC-12645 B81-10253 01

**ALARIO, J. P.**  
Orifice Blocks Heat Pipe in Reverse Mode  
ARC-11341 B81-10185 06

**ALBERI, A.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08

**ALCORN, G. E.**  
IC Capacitors on Groups III-to-V Substrates  
GSC-12543 B81-10109 08

**ALIBERTI, J. A.**  
Clamp Restrains Pressure Line  
KSC-11205 B81-10207 07

**ALTMAN, R. L.**  
Synthesis of Fire-Extinguishing Dawsonites  
ARC-11326 B81-10038 04

## B

**ANICICH, V. G.**  
Compact Ion Source for Mass Spectrometers  
NPO-14324 B81-10136 03

**ARMEN, H. J.**  
Plastic and Large-Deflection Analysis of Nonlinear Structures  
LAR-12816 B81-10323 06

**ASHBY, G. C. J.**  
Hot Film Static-Pressure Probe for Flow-Field Surveys  
LAR-12799 B81-10308 06

**AUTT, M. G.**  
Advances in Turbine-Engine Technology  
LEW-13672 B81-10087 07

**AVERILL, R. D.**  
Dynamic Isolation for Cryogenic Refrigerators  
LAR-12728 B81-10076 07

**BACKER, D. C.**  
Proposed Integrated Radio-Telescope Network  
NPO-15417 B81-10143 03

**BAHIMAN, H.**  
Unidirectional Flexural Pivot  
GSC-12622 B81-10208 07

**BAILEY, G. R.**  
Eddy-Current Meter Would Check Weld Wire Online  
MSC-18891 B81-10228 08

**BAILEY, J. W.**  
Explosively Actuated Opening for Rapid Egress  
LAR-12624 B81-10319 06

**BAILEY, M. C.**  
Unequal-Split Strip-Line Power Divider  
LAR-12797 B81-10250 01

**BAKY, A. A.**  
Algorithms Could Automate Cancer Diagnosis  
MSC-18764 B81-10045 05

**BALINSKAS, R.**  
Thermally Insulated Glove With Good Tactility  
MSC-18926 B81-10223 08

**BARBOUR, R. T.**  
Explosive Separation of Electrical Connectors  
MSC-18828 B81-10218 07

**BARNES, GEORGEH.**  
Parallel-Access Alinement Network Using Barrel Switches  
ARC-11162 B81-10135 02

**BARNES, G. H.**  
Array Processor Has Power and Flexibility  
ARC-11292 B81-10130 02

**BASTA, T.**  
Self-Correcting d Pressure Sensor  
LAR-12686 B81-10063 06

**BAUCOM, R. M.**  
Lightweight Face Mask  
LAR-12803 B81-10224 08

**BEAL, J.**  
Microcomputer Checks Butt-Weld Accuracy  
MFS-25557 B81-10062 06

**BEJCZY, A. K.**  
Touch Sensor Responds to Contact Pressure  
NPO-15375 B81-10212 07

**BELOHOUBEK, E. F.**  
Modular Amplifier/Antenna Arrays  
MSC-18981 B81-10258 01

**BEMENT, L. J.**  
Explosively Actuated Opening for Rapid Egress  
LAR-12624 B81-10319 06

**BENGLE, C. G.**  
Vacuum Head Removes Sanding Dust  
MSC-19526 B81-10215 07

**BERARD, C. A.**  
High-Frequency Gated Oscillator  
MSC-18634 B81-10011 01

**BERG, L. H.**  
Levitor for Containerless Processing  
MFS-25509 B81-10110 08

**BESWICK, A. G.**  
Tire Temperature and Pressure Monitor  
LAR-19262 B81-10184 06

**BEUYUKIAN, C. S.**  
Fluxless Brazing of Large Structural Panels  
LAR-12519 B81-10100 08

**BIRCHENOUGH, A. G.**  
Modular Engine Instrumentation System  
LEW-13729 B81-10315 06

**BLAZQUEZ, C. H.**  
Aerial Infrared Photos for Citrus Growers  
KSC-11209 B81-10178 05

**BLEVINS, C. E.**  
Improved Cure-in-Place Silicone Adhesives  
MSC-18782 B81-10164 04

**BLOME, J. C.**  
Fiber-Reinforced Slip Castings  
ARC-11279 B81-10099 08

AUTHOR

I-27

# BOARDMAN, R. E.

## BOARDMAN, R. E.

Precise Restraightening of Bent Studs  
MFS-19632 B81-10328 07

**BOEHM, A. M.**  
Improved Air-Treatment Canister  
MSC-18942 B81-10234 08

**BORDEN, C. S.**  
Energy-Systems Economic Analysis  
NPO-15097 B81-10035 03

**BORDEN, T. J.**  
Wire-Wrap Chatter Detector  
NPO-15290 B81-10121 01

**BOUQUET, F. L.**  
Ultraviolet-Induced Mirror  
Degradation  
NPO-15520 B81-10171 04  
Easily Assembled Reflector for Solar Concentrators  
NPO-15518 B81-10235 08  
Indium Second-Surface Mirrors  
NPO-15085 B81-10239 08  
Glasses for Solar-Cell Arrays  
NPO-15528 B81-10243 08

**BRANTLEY, L. W. J.**  
Efficient Energy-Storage Concept  
MFS-25331 B81-10138 03

**BRAUN, R.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08

**BRENNAN, A.**  
Low-Gold-Content Brazing Alloys  
MFS-19629 B81-10283 04  
Plasma Spray for Difficult-To-Braze Alloys  
MFS-19630 B81-10353 08

**BRINKERHOFF, C. D.**  
CADAT Printed-Wiring-Board Designer  
MFS-25464 B81-10244 08

**BRISENDINE, P.**  
Lightweight, Low-Loss dc Transducer  
NPO-14618 B81-10126 01

**BRONSTEIN, L. M.**  
Improved Phase-Lock Detector  
MSC-18797 B81-10016 02

**BROUSSARD, P. H. J.**  
Impact-Energized Transmitter  
MFS-25379 B81-10127 02

**BROWNING, D. L.**  
Storing and Deploying Solar Panels  
MSC-18950 B81-10366 08

**BRUNSON, J. W.**  
Testing Patchboard Connections Automatically  
KSC-11065 B81-10129 02

**BUDNEY, T. J.**  
'Ruggedized' Microcomputer Bus  
GSC-12691 B81-10229 08

**BURCHER, E. E.**  
Test-Bed Aircraft Scanner  
LAR-12796 B81-10268 03

**BURLEY, R. K.**  
Contamination Control During Weld Repairs  
MFS-19652 B81-10225 08

**BUSSE, F.**  
Viscous Torques on a Levitating Body  
NPO-15413 B81-10055 06

**BUZZARD, R.**  
Load-Displacement Measurement on Pin-Loaded Specimens  
LEW-13624 B81-10070 06

## BYCER, M.

Automated Solar-Array Assembly  
NPO-15501 B81-10340 08  
Transporting Solar-Cell Strings  
NPO-15502 B81-10348 08

## C

### CALCOTE, H. F.

Plasma Deposition of Amorphous Silicon  
NPO-14954 B81-10044 04

### CAMPBELL, W.

Beam Splitter Intensities Are Preselected  
MFS-25312 B81-10019 03

### CANNON, D. G.

Flight-Management Algorithm for Fuel-Conservative Descents  
LAR-12814 B81-10179 06

### CARLSON, L. A.

High-Lift Separated Flow About Airfoils  
LAR-12853 B81-10324 06

### CARR, K. L.

Compact Dual-Mode Microwave Antenna  
LAR-12784 B81-10004 01

### CARROLL, H. R.

Wire Whip Keeps Spray Nozzle Clean  
MFS-25175 B81-10115 08

### CARRUTH, M. R., JR.

Correcting for Background in Flowing Plasma Measurements  
NPO-15332 B81-10051 06

### CASON, W. E. I.

Lightweight Face Mask  
LAR-12803 B81-10224 08

### CASPER, N.

Selective Etching of Semiconductor Glassivation  
GSC-12667 B81-10238 08

### CASSIDENTI, M. L.

Contamination Control During Weld Repairs  
MFS-19652 B81-10225 08

### CHAMIS, C. C.

Predicting the Strengths of Angle-Ply Laminates  
LEW-13733 B81-10309 06

### CHAVES, A. J.

Pressure Transducer Has Long Service Life  
MSC-18904 B81-10191 06

### CHIODO, R.

Electrochemical Assay of Gold-Plating Solutions  
MFS-19639 B81-10284 04

### CHIPMAN, R.

Algorithm for Unsteady Potential Flow About Airfoils  
ARC-11378 B81-10316 06

### CHOU, R. C.

Four-Degree-of-Freedom Platform  
ARC-11286 B81-10217 07

### CHROSTOWSKI, J. D.

Model Verification of Mixed Dynamic Systems  
MFS-23806 B81-10196 06

### CIAVOLA, S.

Solar-Cell String Conveyor  
NPO-15508 B81-10346 08

## CIRIUNAS, J.

Solar Water-Heater Design and Installation  
LEW-13665 B81-10146 03

## CIRNER, J. C.

3-D Manipulator for Mass Spectrometer  
ARC-11323 B81-10137 03

## CLAYTON, R. M.

Two-Stage Combustor Reduces Pollutant Emissions  
NPO-14911 B81-10042 04

## CLELAND, E. L.

Ultraviolet-Induced Mirror Degradation  
NPO-15520 B81-10171 04

## CLISHAM, W.

Microcomputer Checks Butt-Weld Accuracy  
MFS-25557 B81-10062 06

## COATE, F. M.

Controlling Electron-Beam-Weld Focus  
MFS-19635 B81-10352 08

## COHEN, C.

Microcomputer Checks Butt-Weld Accuracy  
MFS-25557 B81-10062 06

## COHEN, M. H.

Proposed Integrated Radio-Telescope Network  
NPO-15417 B81-10143 03

## COLEMAN, R. G.

Aerodynamics of Supersonic Aircraft  
LAR-12857 B81-10199 06

## COLLINS, W. G.

High-Density Terminal Box for Testing Wire Harness  
NPO-15147 B81-10251 01

## COLOMBO, G. V.

Regenerating Water-Sterilizing Resins  
MSC-20001 B81-10288 04

## COMPTON, L. E.

Supercritical-Fluid Extraction of Oil From Tar Sands  
NPO-15476 B81-10166 04

## COOK, C. F.

Adhesive-Bonded Tab Attaches Thermocouples to Titanium  
FRC-11017 B81-10056 06

## COREALE, J. V.

Superabsorbent Multilayer Fabric  
MSC-18223 B81-10169 04

## COYLE, P. J.

Heat Lamps Solder Solar Array Quickly  
NPO-14866 B81-10106 08

## CRAIG, J. J.

Hybrid Position/Force Control of Robot Manipulators  
NPO-14997 B81-10327 07

## CRAIG, R. A.

Staged Turbojet Engine Would Emit Less NO  
ARC-10814 B81-10213 07

## CROMER, R. B.

Orientation Insensitivity for Electrochemical Sensor  
KSC-11176 B81-10233 08

## CROSSLEY EDWARD A., J.

Dynamic Isolation for Cryogenic Refrigerators  
LAR-12728 B81-10076 07



- CROUTHAMEL, M. S.**  
Heat Lamps Solder Solar Array  
Quickly  
NPO-14866 B81-10106 08
- CULLEN, G. W.**  
Gravity-Feed Growth of Silicon  
Ribbon  
NPO-14967 B81-10089 08
- CURRY, J. E.**  
Binders for Thermal-Control  
Coatings  
MFS-25620 B81-10294 04

## D

- DASTOOR, M. N.**  
Chemical Growth Regulators for  
Guayule Plants  
NPO-15213 B81-10048 05
- DAVIDSON, J. R.**  
Electronically Calibratable Clock  
LAR-12654 B81-10122 01
- DAVIS, W. T.**  
Torque Simulator for Rotating  
Systems  
LAR-12751 B81-10318 06
- DAWE, R. H.**  
Boltless Seal for Electronic  
Housings  
NPO-14818 B81-10249 01
- DAWN, F. S.**  
Superabsorbent Multilayer Fabric  
MSC-18223 B81-10169 04
- DECARLO, J. A.**  
Predicting Tensile Strengths of  
Boron/Aluminum Composites  
LEW-13745 B81-10311 06
- DECKER, H. J.**  
Infrared-Controlled Welding of Solar  
Cells  
MFS-25612 B81-10365 08
- DELIONBACK, L. M.**  
Proposed Reliability/Cost Model  
MFS-25494 B81-10372 09
- DENDY, J. B.**  
Two-Stage Linearization Circuit  
LAR-12577 B81-10125 01
- DENNIS, W. E.**  
Silicone/Acrylate Copolymers  
NPO-15523 B81-10279 04
- DETWILER, R.**  
Lightweight, Low-Loss dc  
Transducer  
NPO-14618 B81-10126 01
- DEVEREAUX, P.**  
Tool Lifts Against Surface Tension  
GSC-12672 B81-10216 07
- DICUS, D. L.**  
Graphite-Fiber-Reinforced  
Composite  
LAR-12764 B81-10293 04
- DILLON, J. D.**  
Shaping Transistor Leads for Better  
Solder Joints  
MSC-18837 B81-10103 08
- DIX, M. G.**  
A Simple Tiltmeter  
ARC-11344 B81-10325 07
- DOANE, J.**  
Energy-Systems Economic Analysis  
NPO-15097 B81-10035 03
- DOKKO, W.**  
Catalyzing the Combustion of Coal  
NPO-15456 B81-10282 04

- DONGARRA, J.**  
Linear-Algebra Programs  
NPO-15108 B81-10117 09
- DOTTS, R. L.**  
Prolonging the Life of Refractory  
Fillers  
MSC-18832 B81-10167 04
- DRENNAN, D. N.**  
Fiber-Reinforced Slip Castings  
ARC-11279 B81-10099 08
- DUNCAN, C. S.**  
Improved Facility for Producing  
Silicon Web  
NPO-14860 B81-10096 08
- DUNN, H. J.**  
Automatic Control of Silicon Melt  
Level  
NPO-15487 B81-10097 08
- DUNN, H. J.**  
Computing the Power-Density  
Spectrum for an Engineering Model  
LAR-12918 B81-10373 09
- DURLING, B. J.**  
Dynamic-Loads Analysis of Flexible  
Aircraft With Active Controls  
LAR-12747 B81-10200 06
- DURLING, B. J.**  
Plastic and Large-Deflection Analysis  
of Nonlinear Structures  
LAR-12816 B81-10323 06
- DUTTA, S.**  
'SIAION' Materials for Advanced  
Structural Applications  
LEW-13671 B81-10173 04

## E

- ECKBERG, R. R.**  
Boron/Aluminum-Titanium  
on Stiffener  
MSC-18895 B81-10230 08
- EDGE, T. M.**  
Load-Responsive Motor Controller  
MFS-25560 B81-10002 01
- EDSTROM, R.**  
One Way of Testing a Distributed  
Processor  
KSC-11123 B81-10263 02
- EDWARDS, T. M.**  
A Simple Tiltmeter  
ARC-11344 B81-10325 07
- EHL, J.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08
- ELLINGBOE, C. T.**  
Spring Support for Turbopump Rotor  
Bearing  
MFS-19624 B81-10204 07
- EMANUEL, W. H.**  
New Method For Joining Stainless  
Steel to Titanium  
MSC-18820 B81-10232 08
- ENGLER, E. E.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08
- ENINGER, J. E.**  
Heat Pipe Blocks Return Flow  
ARC-11285 B81-10060 06
- EVANS, A. R.**  
'Teaching' an Industrial Robot To  
Spray  
MFS-25523 B81-10326 07
- EVANS, J. T.**  
Boltless Seal for Electronic  
Housings  
NPO-14818 B81-10249 01
- EVANS, R. C.**  
Lightweight Face Mask  
LAR-12803 B81-10224 08
- EVENSEN, D. A.**  
Model Verification of Mixed Dynamic  
Systems  
MFS-23806 B81-10196 06
- EWING, M. S.**  
Proposed Integrated  
Radio-Telescope Network  
NPO-15417 B81-10143 03

## F

- FALES, C. L.**  
Laser/Heterodyne Measurement of  
Temperature and Salinity  
LAR-12766 B81-10181 06
- FEDER, H.**  
Walking-Beam Solar-Cell Conveyor  
NPO-15503 B81-10341 08
- FEDER, H.**  
Orienting and Applying Flux to Solar  
Cells  
NPO-15504 B81-10343 08
- FEDER, H.**  
Work Station For Inverting Solar  
Cells  
NPO-15506 B81-10345 08
- FIFTAL, C. F.**  
Measuring Cyclic-Stress Properties of  
Pressure Vessels  
MFS-23734 B81-10065 06
- FINLEY, L. A.**  
Dish Antenna Would Deploy From a  
Canister  
NPO-15448 B81-10241 08
- FINNELL, S. E.**  
Infrared-Controlled Welding of Solar  
Cells  
MFS-25612 B81-10365 08
- FISCH, G. Z.**  
Wire-Wrap Chatter Detector  
NPO-15290 B81-10121 01
- FISHER, D. M.**  
Load-Displacement Measurement on  
Pin-Loaded Specimens  
LEW-13624 B81-10070 06
- FLAT, A.**  
Multilayer, Front-Contact Grid for  
Solar Cells  
LAR-12613 B81-10009 01
- FLEETWOOD, C. M. J.**  
Using Nomarski Interference to  
Detect Microcracks in Glass  
GSC-12649 B81-10317 06
- FOHLEN, G. M.**  
Improved Fire-Resistant Resins for  
Laminates  
ARC-11321 B81-10039 04
- FORNEY, J. A.**  
The Economics of Solar Heating  
MFS-25391 B81-10278 03
- FRANKHOUSER, W. L.**  
Low-Gravity Investigations in  
Cast-Iron Processing  
MFS-25491 B81-10172 04
- FRASCH, W.**  
Walking-Beam Solar-Cell Conveyor  
NPO-15503 B81-10341 08
- FRASCH, W.**  
Vacuum Pickup for Solar Cells  
NPO-15500 B81-10342 08

- Orienting and Applying Flux to Solar Cells  
 NPO-15504 B81-10343 08  
 Work Station For Inverting Solar Cells  
 NPO-15506 B81-10345 08  
 Solar-Cell String Conveyor  
 NPO-15508 B81-10346 08  
 Bonder for Solar-Cell Strings  
 NPO-15507 B81-10347 08  
 Transporting Solar-Cell Strings  
 NPO-15502 B81-10348 08  
 Transfer of Strings to the Module Fixture  
 NPO-15509 B81-10349 08  
**FRECHE, J. C.**  
 Advances in Turbine-Engine Technology  
 LEW-13672 B81-10087 07  
**FRENCH, R. H.**  
 Matching Dissimilar Graphical Scales  
 MSC-14864 B81-10240 08

## G

- GAGLIANI, J.**  
 Blowing Agents for Fabrication of Polyimide Foams  
 MSC-18993 B81-10286 04  
**GALINDO-ISRAEL, V.**  
 Far-Field Antenna Pattern From a Near-Field Test  
 NPO-14905 B81-10059 06  
**GALLOWAY, C. W.**  
 Constant-Pressure Hydraulic Pump  
 MSC-18794 B81-10077 07  
**GARNER, H. D.**  
 Improved Magnetic-Field-Component Resolvers  
 LAR-12638 B81-10299 06  
 Simple Magnetometer for Autopilots  
 LAR-12832 B81-10300 06  
**GARNER, W.**  
 Microcomputer Checks Butt-Weld Accuracy  
 MFS-25557 B81-10062 06  
**GARRARD, G. C.**  
 Vapor Detector  
 MSC-18989 B81-10287 04  
**GARRETT, H.**  
 Solar-Powered Supply Is Light and Reliable  
 MFS-25430 B81-10015 02  
**GARWOOD, G.**  
 Tab Interconnect Work Station  
 NPO-15505 B81-10344 08  
 Bonder for Solar-Cell Strings  
 NPO-15507 B81-10347 08  
**GATEWOOD, J. R.**  
 'Bottle-Brush' Heat Exchanger  
 NPO-15479 B81-10205 07  
**GATTUSO, S. A.**  
 Cam-Design Torque Wrench  
 MFS-19586 B81-10206 07  
**GELDERLOOS, H. C.**  
 New Algorithms Manage Fourfold Redundancy  
 MSC-18498 B81-10013 02  
**GELLES, S. H.**  
 Measuring Interdiffusion in Binary Liquids  
 MFS-25576 B81-10165 04

- GIANNUZZI, O.**  
 Fabricating Structural Beams  
 MFS-25228 B81-10369 08  
**GILLESPIE, C. A.**  
 Air Bag Applies Uniform Bonding Pressure  
 KSC-11182 B81-10242 08  
**GOLD, S. S.**  
 Linear-Algebra Programs  
 NPO-15108 B81-10117 09  
**GOLDOWSKY, M.**  
 Magnetic Bearing With Active Control  
 GSC-12582 B81-10203 07  
**GOLLER, H. L.**  
 Clamp and Gas Nozzle for TIG Welding  
 MSC-20108 B81-10359 08  
**GONZALEZ, R.**  
 Improved Cure-in-Place Silicone Adhesives  
 MSC-18782 B81-10164 04  
**GRAY, O. E.**  
 Arc-Free High-Power dc Switch  
 MSC-20091 B81-10256 01  
 Power-MOSFET Voltage Regulator  
 MSC-20059 B81-10257 01  
**GREEN, A.**  
 Ultrasonic Instrument for Evaluation of Composites  
 LEW-13716 B81-10301 06  
**GROSS, C.**  
 Self-Correcting d Pressure Sensor  
 LAR-12686 B81-10063 06  
**GROUNDS, M. K.**  
 Ultrasonic Transducer Analyzer  
 MFS-25410 B81-10058 06  
**GRUNTHANER, F. J.**  
 XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub> Interface  
 NPO-14968 B81-10285 04  
**GRUNTHANER, P. J.**  
 XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub> Interface  
 NPO-14968 B81-10285 04  
**GUE, G. B.**  
 Clamp and Gas Nozzle for TIG Welding  
 MSC-20108 B81-10359 08  
**GUPTA, K. K.**  
 Vibration Analysis With Finite Dynamic Elements  
 NPO-15087 B81-10320 06  
**GUSTAFSON, P. E.**  
 Acoustic Emissions Could Indicate Weld Quality  
 MFS-25441 B81-10360 08

## H

- HADDEN, W. J. J.**  
 Sound-burst Generator for Measuring Coal Properties  
 MFS-25438 B81-10281 04  
**HAFTKA, R. T.**  
 Program for Analysis and Resizing of Structures  
 LAR-12704 B81-10072 06  
**HAGER, J. A.**  
 Damping Vibration at an Impeller  
 MFS-19645 B81-10338 07

- HAGOPIAN, B.**  
 Universal Assembly for Captive Bolts  
 MSC-18905 B81-10329 07  
**HALE, R. R.**  
 Temperature Controller for a Solar Furnace  
 NPO-15388 B81-10022 03  
 Battle Keeps Solar Energy in Receiver  
 NPO-15387 B81-10023 03  
 Solar Concentrator is Gas-Filled  
 NPO-15416 B81-10141 03  
**HALL, R.**  
 Weld-Wire Monitor  
 MFS-19603 B81-10227 08  
**HANSBERRY, E.**  
 Integral Face Shield Concept for Firefighter's Helmet  
 MFS-25493 B81-10361 08  
**HANSON, R. J.**  
 Linear-Algebra Programs  
 NPO-15108 B81-10117 09  
**HARBER, H.**  
 Solar-Cooled Hotel in the Virgin Islands  
 MFS-25776 B81-10275 03  
**HARDESTY, C. A.**  
 Test-Bed Aircraft Scanner  
 LAR-12796 B81-10268 03  
**HARDING-BARLOW, I.**  
 3-D Manipulator for Mass Spectrometer  
 ARC-11323 B81-10137 03  
**HARDY, S. S.**  
 Ultrasonic Welding of Graphite/Thermoplastic Composite  
 MSC-20013 B81-10350 08  
**HARLAMERT, P.**  
 Solar Water-Heater Design and Installation  
 LEW-13665 B81-10146 03  
**HARRIS, F. E.**  
 Wire EDM for Refractory Materials  
 LEW-13460 B81-10105 08  
**HARRISON, D. R.**  
 A Simple Tiltmeter  
 ARC-11344 B81-10325 07  
**HASEGAWA, T.**  
 Easily Assembled Reflector for Solar Concentrators  
 NPO-15518 B81-10235 08  
 Indium Second-Surface Mirrors  
 NPO-15085 B81-10239 08  
**HASEGAWA, T. T.**  
 Ultraviolet-Induced Mirror Degradation  
 NPO-15520 B81-10171 04  
**HASKELL, K.**  
 Linear-Algebra Programs  
 NPO-15108 B81-10117 09  
**HASSELMAN, T. K.**  
 Model Verification of Mixed Dynamic Systems  
 MFS-23806 B81-10196 06  
**HAVERKAMP, C. E.**  
 Safety Bolt Doubles as a Bushing-Removal Tool  
 MSC-20032 B81-10334 07  
**HAYDEN, J. L.**  
 Log-Output Signal Processor Scans Eight Decades  
 ARC-11293 B81-10010 01  
**HAYDUK, R. J.**  
 Plastic and Large-Deflection Analysis of Nonlinear Structures  
 LAR-12816 B81-10323 06

**HAYES, T.**  
Retractor Tool for Brain Surgery  
MFS-25380 B81-10176 05

**HEDGEPEETH, J. A.**  
Dish Antenna Would Deploy From a  
Canister  
NPO-15448 B81-10241 08

**HELMAN, D. H.**  
Tile-Gap Measurement Tool  
MSC-20057 B81-10304 06

**HELMS, R.**  
Retractor Tool for Brain Surgery  
MFS-25380 B81-10176 05

**HENDRIX, N.**  
Analyzing Multirate-Sampled  
Systems  
MFS-25541 B81-10264 02

**HEYMAN, J. S.**  
Pulsed Phase-Locked-Loop Strain  
Monitor  
LAR-12772 B81-10068 06

Electronically Calibratable Clock  
LAR-12654 B81-10122 01

**HIMEL, V.**  
Integral Face Shield Concept for  
Firefighter's Helmet  
MFS-25493 B81-10361 08

**HIPPENSTEELE, S. A.**  
Heater Composite Measures Heat  
Transfer  
LEW-13731 B81-10192 06

**HODOR, J. R.**  
Infrared-Controlled Welding of Solar  
Cells  
MFS-25612 B81-10365 08

**HOEHN, F. W.**  
Resistance Heater Helps  
Stirling-Engine Research  
NPO-14928 B81-10083 07

**HOHL, F.**  
Solar-Driven Liquid-Metal MHD  
Generator  
LAR-12495 B81-10266 03

**HOLLAND, L. R.**  
Radiant Heating of Ampoule  
contents  
MFS-25436 B81-10362 08

**HOLT, J. W.**  
Vacuum Head Removes Sanding  
Dust  
MSC-19526 B81-10215 07

**HOLT, W. H.**  
Moisture in Composites is Measured  
by Positron Lifetime  
LAR-12776 B81-10180 06

**HONG, S. D.**  
Viscoelastic Properties of Polymer  
Blends  
NPO-14924 B81-10041 04

**HOOPER, S. L.**  
Latch With Single-Motion Release  
MSC-18923 B81-10220 07

**HORN, F. W. J.**  
Aerial Infrared Photos for Citrus  
Growers  
KSC-11209 B81-10178 05

**HOUSTON, D. W.**  
Vapor Detector  
MSC-18989 B81-10287 04

**HRASTAR, J. A. S.**  
Flywheels Would Compensate for  
Rotor Imbalance  
GSC-12550 B81-10331 07

**HUBER, J.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08

**HUMPHREY, M. F.**  
Catalyzing the Combustion of Coal  
NPO-15456 B81-10282 04

**HUMPHREY, R.**  
User Documentation for Multiple  
Software Releases  
KSC-11189 B81-10371 09

**HUNTRESS, W. T. J.**  
Compact Ion Source for Mass  
Spectrometers  
NPO-14324 B81-10136 03

**HYER, M. W.**  
Solution Accounts for Structural  
Damping  
LAR-12863 B81-10303 06

**I**

**INGHAM, J. D.**  
Thermal Polymerization of N-Butyl  
Acrylate  
NPO-15010 B81-10295 04

**IRWIN, S. H.**  
Test-Bed Aircraft Scanner  
LAR-12796 B81-10268 03

**ITO, T. I.**  
Preparation of Perfluorinated  
Imidoylamidoxime Polymers  
ARC-11267 B81-10036 04

**J**

**JACKSON, R. L.**  
Metallic Panels Would Insulate at  
2,700 Degrees F  
LAR-12620 B81-10104 08

**JASINSKI, M.**  
Programable Interface Handles Many  
Peripherals  
KSC-11132 B81-10261 02

**JOHNSON, D. J.**  
Laser/Heterodyne Measurement of  
Temperature and Salinity  
LAR-12766 B81-10181 06

Test-Bed Aircraft Scanner  
LAR-12796 B81-10268 03

**JOHNSON, C.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08

**JOHNSON, W.**  
Aeroelastic Analysis for Rotorcraft  
ARC-11150 B81-10075 06

**JONES, R.**  
IC Capacitors on Groups III-to-V  
Substrates  
GSC-12543 B81-10109 08

**K**

**KATZBERG, S. J.**  
Laser/Heterodyne Measurement of  
Temperature and Salinity  
LAR-12766 B81-10181 06

Test-Bed Aircraft Scanner  
LAR-12796 B81-10268 03

**KEESER, H. M.**  
Fiber-Reinforced Slip Castings  
ARC-11279 B81-10099 08

**KEIR, A. R.**  
Tile-Gap Measurement Tool  
MSC-20057 B81-10304 06

**KENNARD, J.**  
Solar Water-Heater Design and  
Installation  
LEW-13665 B81-10146 03

**KHATTAK, C. P.**  
Heat-Exchanger Method of Crystal  
Growth  
NPO-14819 B81-10090 08

Refractories Keep Silicon Crystals  
Pure  
NPO-14820 B81-10095 08

High-Speed Wafer Slicer  
NPO-15463 B81-10332 07

**KILLGROVE, T. O.**  
Reliable 'Unlatch'  
NPO-15438 B81-10219 07

**KINCAID, D. R.**  
Linear-Algebra Programs  
NPO-15108 B81-10117 09

**KING, J. D.**  
EMR Gage Would Measure Coal  
Thickness Accurately  
MFS-25555 B81-10139 03

**KIRSCHNER, L. E.**  
Speedy Acquisition of  
Surface-Contamination Samples  
NPO-14934 B81-10175 05

**KIUSALAAS, J.**  
Structural Design With Stress and  
Buckling Constraints  
MFS-25234 B81-10322 06

**KLECKNER, D.**  
One Way of Testing a Distributed  
Processor  
KSC-11123 B81-10263 02

**KLEIDON, E. H.**  
Storing and Deploying Solar Panels  
MSC-18950 B81-10366 08

**KLEINBERG, L.**  
Low-Noise Band-Pass Amplifier  
GSC-12567 B81-10255 01

**KLEINBERG, L. L.**  
Resistors Improve Ramp Linearity  
GSC-12635 B81-10005 01

**KNOX, C. E.**  
Flight-Management Algorithm for  
Fuel-Conservative Descents  
LAR-12814 B81-10179 06

**KO, W. L.**  
Metal Sandwich Panel With Biaxially  
Corrugated Core  
FRC-11026 B81-10112 08

**KOERNER, T.**  
Lightweight, Low-Loss dc  
Transducer  
NPO-14618 B81-10126 01

**KOESTER, K. L.**  
Constraint-Free Measurement of  
Metabolic Rate  
MSC-18885 B81-10046 05

**KRATZER, R. H.**  
Preparation of Perfluorinated  
Imidoylamidoxime Polymers  
ARC-11267 B81-10036 04

**KRAUTHAMER, S.**  
Alternating-Current Motor Drive for  
Electric Vehicles  
NPO-14768 AND NPO-14830 B81-10124 01

**KRIEG, H. C.**  
Electrically-conductive  
lity Pressure Seal  
MSC-20022 B81-10358 08

**KROGH, F. T.**  
Linear-Algebra Programs  
NPO-15108 B81-10117 09

# KUSHIDA, R. O.

**KUSHIDA, R. O.**  
Combustion of Coal/Oil/Water  
Slurries  
NPO-15462 B81-10144 03  
Coal as a Substitute for Carbon  
Black  
NPO-15461 B81-10280 04  
**KYRIAS, G. M.**  
Automatic Collection of Rock and Soil  
Samples  
MSC-18868 B81-10079 07

## L

**LAL, R. B.**  
Monitoring Crystal Growth From  
Solution  
MFS-25622 B81-10364 08  
**LAMPSON, F. K.**  
Factors Affecting Liquid-Metal  
Embrittlement in C-103  
MSC-18865 B81-10170 04  
**LANCKI, A. J.**  
Lathe Attachment Finishes Inner  
Surface of Tubes  
MSC-18780 B81-10081 07  
**LANDEL, R. F.**  
Deformation-Induced Anisotropy of  
Polymers  
NPO-15325 B81-10043 04  
**LANE, R. L.**  
Recharging the Silicon Crucible in a  
Hot Furnace  
NPO-14980 B81-10093 08  
**LANSING, F. L.**  
Heat-Energy Analysis for Solar  
Receivers  
NPO-14835 B81-10071 06  
**LAWING, P. L.**  
Increasing Metal Fracture  
Toughness  
LAR-12805 B81-10351 08  
**LAWSON, C. L.**  
Linear-Algebra Programs  
NPO-15108 B81-10117 09  
**LAWSON, D. D.**  
Heat-Exchange Fluids for Sulfuric  
Acid Vaporizers  
NPO-15015 B81-10291 04  
**LEAVY, W. A.**  
Structural Modules Would Contain  
Transmission Lines  
GSC-12523 B81-10108 08  
**LEE, J. H.**  
Solar-Driven Liquid-Metal MHD  
Generator  
LAR-12495 B81-10266 03  
**LEE, L. C.**  
Double-Adhesive Tape Test Reduces  
Waste  
MSC-20047 B81-10312 06  
**LEE, M. C.**  
Sound Waves Levitate Substrates  
NPO-15435 B81-10221 08  
**LEE, R.**  
Blowing Agents for Fabrication of  
Polyimide Foams  
MSC-18993 B81-10286 04  
**LEE, S. S.**  
Powerplant Thermal-Pollution  
Models  
KSC-11210 B81-10142 03

**LEE, S. Y.**  
Neutralizing Amine-Cured Epoxy  
Surfaces  
GSC-12686 B81-10290 04  
**LEONARD, R. G.**  
High-Temperature Seal for  
Sliding-Gate Valve  
MFS-19607 B81-10107 08  
**LEVINE, H. S.**  
Plastic and Large-Deflection Analysis  
of Nonlinear Structures  
LAR-12816 B81-10323 06  
**LEVY, A.**  
Plastic and Large-Deflection Analysis  
of Nonlinear Structures  
LAR-12816 B81-10323 06  
**LEVY, G. S.**  
Proposed Integrated  
Radio-Telescope Network  
NPO-15417 B81-10143 03  
**LEWIS, B. F.**  
XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub>  
Interface  
NPO-14968 B81-10285 04  
**LI, S. P.**  
Improved Model for MOS  
Breakdown  
NPO-14850 B81-10007 01  
**LLOYD, J.**  
Microcomputer Checks Butt-Weld  
Accuracy  
MFS-25557 B81-10062 06  
**LOGAN, K. E.**  
Flashlamp Driver for Quasi-CW Laser  
Pumping  
GSC-12566 B81-10254 01  
**LORENZO, C. F.**  
Fast-Acting Electrohydraulic Servo  
LEW-13730 B81-10298 06  
**LOWELL, C. E.**  
Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08  
**LOWERY, J. R.**  
Effects of High Temperature on  
Collector Coatings  
MFS-25651 B81-10148 03  
**LUGER, J.**  
Force Augmentation for Relief Valve  
MSC-20065 B81-10337 07  
**LUNDY, J. L.**  
Aerodynamics of Supersonic Aircraft  
LAR-12857 B81-10199 06  
**LUNDSTROM, S. F.**  
Array Processor Has Power and  
Flexibility  
ARC-11292 B81-10130 02

## M

**MACCONOCHIE, I. O.**  
Tire Temperature and Pressure  
Monitor  
LAR-19262 B81-10184 06  
**MADHUKAR, A.**  
XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub>  
Interface  
NPO-14968 B81-10285 04  
**MAIKISH, C. R.**  
Boron/Aluminum-Titanium  
on Stiffener  
MSC-18895 B81-10230 08  
**MALLIS, R. K.**  
Proposed Integrated  
Radio-Telescope Network  
NPO-15417 B81-10143 03

# PERSONAL AUTHOR INDEX

**MANDEL, H.**  
Shaping Transistor Leads for Better  
Solder Joints  
MSC-18837 B81-10103 08  
**MARKE, M. L.**  
Universal Assembly for Captive  
Bolts  
MSC-18905 B81-10329 07  
**MARKWORTH, A. J.**  
Measuring Interdiffusion in Binary  
Liquids  
MFS-25576 B81-10165 04  
**MARTIN, R. B.**  
Sprayed Coating Renews Butyl  
Rubber  
KSC-11198 B81-10111 08  
**MARX, W.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08  
**MASERJIAN, J.**  
Improved Model for MOS  
Breakdown  
NPO-14850 B81-10007 01  
XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub>  
Interface  
NPO-14968 B81-10285 04  
**MATHENEY, J.**  
Solar-Powered Supply Is Light and  
Reliable  
MFS-25430 B81-10015 02  
**MCCARTHY, D.**  
Spike-Free Automatic Level Control  
KSC-11170 B81-10006 01  
**MCCORMICK, S.**  
Tool Lifts Against Surface Tension  
GSC-12672 B81-10216 07  
**MCDUGAL, A. R.**  
Temperature Controller for a Solar  
Furnace  
NPO-15388 B81-10022 03  
Battle Keeps Solar Energy in  
Receiver  
NPO-15387 B81-10023 03  
**MCHALE, E. J.**  
Capacitively-Heated Fluidized Bed  
NPO-14912 B81-10102 08  
**MCKOWN, R. D.**  
Low-Gold-Content Brazing Alloys  
MFS-19629 B81-10283 04  
**MCLEMORE, R.**  
Factors Affecting Liquid-Metal  
Embrittlement in C-103  
MSC-18865 B81-10170 04  
**MCLLWAIN, M. C.**  
Weld width indicates weld strength  
MFS-25648 B81-10354 08  
**MCMURTREY, E. L.**  
Tests of 38 Ball-Bearing Greases  
MFS-25624 B81-10339 07  
**MCSMITH, D. G.**  
Yielding Torque-Tube System  
Reduces Crash Injuries  
LAR-12801 B81-10363 08  
**MEHMED, O.**  
Fast-Acting Electrohydraulic Servo  
LEW-13730 B81-10298 06  
**MERHAV, S. J.**  
Less-Costly Inertial Guidance  
ARC-11257 B81-10049 06  
**MIDDLETON, W. D.**  
Aerodynamics of Supersonic Aircraft  
LAR-12857 B81-10199 06  
**MILLER, L. D.**  
Portable Radiometer Monitors Plant  
Growth  
GSC-12412 B81-10047 05

- MILLER, P.**  
Tool Lifts Against Surface Tension  
GSC-12672 B81-10216 07
- MILLER, W. N.**  
Arc-Free High-Power dc Switch  
MSC-20091 B81-10256 01  
Power-MOSFET Voltage Regulator  
MSC-20059 B81-10257 01
- MILLS, E. R.**  
Wide-Temperature-Range  
Ipe Paint  
MFS-19644 B81-10289 04
- MILLS, J. M.**  
Sound-burst Generator for Measuring  
Coal Properties  
MFS-25438 B81-10281 04
- MILNES, A. G.**  
Multilayer, Front-Contact Grid for  
Solar Cells  
LAR-12613 B81-10009 01
- MINOTT, P. O.**  
Interferometer Accurately Measures  
Rotation Angle  
GSC-12614 B81-10057 06
- MITCHELL, M. J.**  
Cutting a Tapered Edge on Padding  
Material  
MSC-20011 B81-10367 08
- MITTRA, R.**  
Far-Field Antenna Pattern From a  
Near-Field Test  
NPO-14905 B81-10059 06
- MOACANIN, J.**  
Viscoelastic Properties of Polymer  
Blends  
NPO-14924 B81-10041 04
- MOCK, W. J.**  
Moisture in Composites is Measured  
by Positron Lifetime  
LAR-12776 B81-10180 06
- MOFFAT, R. J.**  
Heater Composite Measures Heat  
Transfer  
LEW-13731 B81-10192 06
- MOLER, C. B.**  
Linear-Algebra Programs  
NPO-15108 B81-10117 09
- MOORE, T. C.**  
Matching of Apparent-Strain  
Characteristics  
LAR-12743 B81-10066 06
- MORFIN, H.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08
- MOSNA, F. J.**  
Weatherproof Crimp Connector  
NPO-15497 B81-10101 08
- MUEGGE, E.**  
Tool Lifts Against Surface Tension  
GSC-12672 B81-10216 07
- MUENCH, W.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08

## N

- NAGANO, S.**  
Lightweight, Low-Loss dc  
Transducer  
NPO-14618 B81-10126 01
- NAUMANN, R. J.**  
Materials Processing in Space  
MFS-25544 B81-10116 08

- NOLA, F.**  
New Energy-Saving Technologies  
Use Induction Generators  
MFS-25513 B81-10021 03
- NOLA, F. J.**  
Three-Phase Power Factor  
Controller  
MFS-25535 B81-10001 01  
Power-Factor Controller With  
Regenerative Braking  
MFS-25477 B81-10003 01  
Controller Regulates Auxiliary Source  
for Solar Power  
MFS-25637 B81-10133 02  
Failure Detector for Power-Factor  
Controller  
MFS-25607 B81-10252 01
- NOVAK, H. L.**  
Weld width indicates weld strength  
MFS-25648 B81-10354 08
- NUNES, A. C. J.**  
Weld width indicates weld strength  
MFS-25648 B81-10354 08

## O

- OBLER, H. D.**  
Simpler Variable-Speed Drive for Fan  
or Pump  
GSC-12643 B81-10201 07
- OEPOMO, T.**  
Line Replaceable Unit Analysis  
MSC-20183 B81-10259 02
- OEPOMO, T. S.**  
Short-Circuited Power Networks  
MSC-18977 B81-10018 02
- OGILVIE, P.**  
Plastic and Large-Deflection Analysis  
of Nonlinear Structures  
LAR-12816 B81-10323 06
- OLSON, A. R.**  
Improved High-Temperature Seal  
MSC-18790 B81-10210 07
- OLSON, R.**  
Weld-Wire Monitor  
MFS-19603 B81-10227 08
- ORAN, W. A.**  
Levigator for Containerless  
Processing  
MFS-25509 B81-10110 08
- ORLOFF, K. L.**  
Rotating the Plane of Parallel Light  
Beams  
ARC-11311 B81-10265 03
- OSIECKI, R. A.**  
Improved Tensile Test for Ceramics  
MSC-20105 B81-10310 06
- OWEN, R. B.**  
Beam Splitter Intensities Are  
Preselected  
MFS-25312 B81-10019 03  
Dual-Laser Schlieren System  
MFS-25315 B81-10052 06
- PACIOREK, K. J. L.**  
Preparation of Perfluorinated  
Imidoylamidoxime Polymers  
ARC-11267 B81-10036 04
- PAGE, D. B.**  
Ultrasonic Welding of  
Graphite/Thermoplastic Composite  
MSC-20013 B81-10350 08
- PARKER, J. A.**  
Improved Fire-Resistant Resins for  
Laminates  
ARC-11321 B81-10039 04
- PARKER, J. C.**  
Energy-Storage Modules for Active  
Solar Heating and Cooling  
MFS-25681 B81-10145 03  
Heat-Transfer Fluids for Solar-Energy  
Systems  
MFS-25629 B81-10147 03
- PARKER, K.**  
Environmental-Analysis Routine  
Library  
MSC-18925 B81-10297 05
- PATTERSON, J. C. J.**  
Wingtip-Vortex Turbine Lowers  
Aircraft Drag  
LAR-12544 B81-10182 06
- PATTERSON, W. J.**  
Binders for Thermal-Control  
Coatings  
MFS-25620 B81-10294 04
- PAULKOVICH, J.**  
Rotary Transformer Seals Power In  
GSC-12595 B81-10008 01
- PAULSON, R.**  
Infrared-Controlled Welding of Solar  
Cells  
MFS-25612 B81-10365 08
- PENG, S. T. J.**  
Deformation-Induced Anisotropy of  
Polymers  
NPO-15325 B81-10043 04
- PERRY, B. I.**  
Dynamic-Loads Analysis of Flexible  
Aircraft With Active Controls  
LAR-12747 B81-10200 06
- PERRY, R.**  
Explosively Actuated Opening for  
Rapid Egress  
LAR-12624 B81-10319 06
- PESSIN, R.**  
Technique Lowers Weld Power  
Requirements  
MFS-19655 B81-10226 08
- PETERSEN, G. R.**  
Chemical Growth Regulators for  
Guayule Plants  
NPO-15213 B81-10048 05  
Heat-Exchange Fluids for Sulfuric  
Acid Vaporizers  
NPO-15015 B81-10291 04
- PETERSON, S. A.**  
Blind Fastener Is Easy To Install  
MSC-18742 B81-10082 07  
Articulated Vacuum Chuck  
MSC-18933 B81-10330 07
- PEYRAN, R. J.**  
Improved Cable Grip Reduces Wear  
ARC-11318 B81-10214 07
- PIERCE, A. D.**  
Sound-burst Generator for Measuring  
Coal Properties  
MFS-25438 B81-10281 04
- PIERCE, W. B.**  
High-Density Terminal Box for  
Testing Wire Harness  
NPO-15147 B81-10251 01
- PIFKO, A.**  
Plastic and Large-Deflection Analysis  
of Nonlinear Structures  
LAR-12816 B81-10323 06
- POLEN, R.**  
Microcomputer Checks Butt-Weld  
Accuracy  
MFS-25557 B81-10062 06

## P

- PACIOREK, K. J. L.**  
Preparation of Perfluorinated  
Imidoylamidoxime Polymers  
ARC-11267 B81-10036 04
- PAGE, D. B.**  
Ultrasonic Welding of  
Graphite/Thermoplastic Composite  
MSC-20013 B81-10350 08

# **POLLMAN, W. M.**

- POLLMAN, W. M.**  
Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08
- POWELL, J. A.**  
High-Speed Laser Anemometer  
LEW-13527 B81-10050 06
- PRASAD, B.**  
Program for Analysis and Resizing of Structures  
LAR-12704 B81-10072 06
- PREWO, K. M.**  
Graphite-Fiber-Reinforced  
Composite  
LAR-12764 B81-10293 04
- PRITCHARD, H. O.**  
Staged Turbojet Engine Would Emit Less NO  
ARC-10814 B81-10213 07
- PROUT, R. E.**  
Pressure Transducer Has Long Service Life  
MSC-18904 B81-10191 06
- PROUTY, T. V.**  
Line Replaceable Unit Analysis  
MSC-20183 B81-10259 02
- PRUETT, E. C.**  
Device Acquires, Orients, and Clamps  
MFS-25403 B81-10086 07
- PSARRAS, T.**  
Synthesis of Perfluorinated Polymers  
ARC-11241 B81-10037 04
- PULEO, J. R.**  
Speedy Acquisition of Surface-Contamination Samples  
NPO-14934 B81-10175 05
- PUTNAM, D. F.**  
Regenerating Water-Sterilizing Resins  
MSC-20001 B81-10288 04

# **R**

- RAHMAT-SAMII, Y.**  
Far-Field Antenna Pattern From a Near-Field Test  
NPO-14905 B81-10059 06
- RAIBERT, M. H.**  
Hybrid Position/Force Control of Robot Manipulators  
NPO-14997 B81-10327 07
- RAMAN, K. R.**  
Multipressure and Temperature Probe  
ARC-11166 B81-10189 06
- RAMOS, D. O.**  
Adhesives Mixer Applicator  
MSC-18916 B81-10078 07
- RAMSEY, V. W.**  
Aerodynamics Improve Wind Wheel  
MFS-25506 B81-10080 07
- RAO, G. V. R.**  
Nozzle Modification Suppresses Flow Transients  
MFS-19567 B81-10061 06
- READHEAD, A. C. S.**  
Proposed Integrated Radio-Telescope Network  
NPO-15417 B81-10143 03
- REDDY, G. B.**  
Structural Design With Stress and Buckling Constraints  
MFS-25234 B81-10322 06
- REED, M. W.**  
Double-Adhesive Tape Test Reduces Waste  
MSC-20047 B81-10312 06
- REEVE, J. L.**  
Temperature-Controlled Support for a Seed Crystal  
MFS-25341 B81-10098 08
- REINHARDT, V. S.**  
Wideband Amplifier With Subpicosecond Stability  
GSC-12646 B81-10248 01
- RHODES, M. D.**  
Precise Phase Comparator for Nearly Equal Frequencies  
GSC-12645 B81-10253 01
- RHODES, P. H.**  
Lacquer Reveals Impact Damage in Composites  
LAR-12700 B81-10064 06
- RHODES, P. H.**  
Improved Electrophoresis Cell  
MFS-25426 B81-10174 05
- RICE, S. H.**  
Technique for Machining Glass  
GSC-12636 B81-10209 07
- RICE, W. J.**  
Modular Engine Instrumentation System  
LEW-13729 B81-10315 06
- RICHTER, R.**  
Integrated Solid-Electrolyte Construction  
NPO-15471 B81-10236 08
- RIPPEL, W. E.**  
Alternating-Current Motor Drive for Electric Vehicles  
NPO-14768 AND NPO-14830 B81-10124 01
- ROBERTSON, K. B.**  
Device Acquires, Orients, and Clamps  
MFS-25403 B81-10086 07
- ROBINSON, M. P.**  
Plastic and Large-Deflection Analysis of Nonlinear Structures  
LAR-12816 B81-10323 06
- ROLLWITZ, W. L.**  
EMR Gage Would Measure Coal Thickness Accurately  
MFS-25555 B81-10139 03
- ROMANECK, R.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08
- ROSSER, R. W.**  
Preparation of Perfluorinated Imidoylamidoxime Polymers  
ARC-11267 B81-10036 04
- ROUSSOS, L. A.**  
Synthesis of Perfluorinated Polymers  
ARC-11241 B81-10037 04
- ROUSSOS, L. A.**  
Solution Accounts for Structural Damping  
LAR-12863 B81-10303 06
- ROWAN, B. F.**  
Damping Vibration at an Impeller  
MFS-19645 B81-10338 07
- ROWE, W. S.**  
Unsteady Subsonic Loadings Due to Control-Surface Motion  
LAR-12802 B81-10073 06
- RUPP, C.**  
Efficient Energy-Storage Concept  
MFS-25331 B81-10138 03
- RUSSEL, L. M.**  
Heater Composite Measures Heat Transfer  
LEW-13731 B81-10192 06

# **PERSONAL AUTHOR INDEX**

- RYS, V. J.**  
Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08

# **S**

- SANDEFUR, P. G. J.**  
Increasing Metal Fracture Toughness  
LAR-12805 B81-10351 08
- SARGENT, G. C.**  
Sealed Strip Line for Extreme Temperatures  
MSC-16994 B81-10114 08
- SAVAGE, J.**  
Improved Method for Culturing Guinea-Pig Macrophage Cells  
MFS-25307 B81-10177 05
- SAWYER, L. M.**  
Graphics for Finite-Element Analysis  
LAR-12793 B81-10194 06
- SAX, A.**  
Detecting Cracks on Inner Surfaces  
MFS-19575 B81-10054 06
- SCHICK, P. H. J.**  
Cam-Design Torque Wrench  
MFS-19586 B81-10206 07
- SCHMID, F.**  
Heat-Exchanger Method of Crystal Growth  
NPO-14819 B81-10090 08
- SCHNEIDER, H. W.**  
Refractories Keep Silicon Crystals Pure  
NPO-14820 B81-10095 08
- SCHNEIDER, H. W.**  
High-Speed Wafer Slicer  
NPO-15463 B81-10332 07
- SCHNEIDER, H. W.**  
Brushless Cleaning of Solar Panels and Windows  
NPO-14922 B81-10333 07
- SCHOMBURG, C.**  
Prolonging the Life of Refractory Fillers  
MSC-18832 B81-10167 04
- SCHUBERT, W. W.**  
Prolonging the Life of Refractory Fillers  
MSC-18832 B81-10231 08
- SCHUBERT, W. W.**  
Chemical Growth Regulators for Guayule Plants  
NPO-15213 B81-10048 05
- SEASHOLTZ, R.**  
High-Speed Laser Anemometer  
LEW-13527 B81-10050 06
- SEIDENSTICKER, R.**  
Crucible Grows Wide Silicon Ribbon  
NPO-14859 B81-10094 08
- SEKERCIOGLU, I.**  
Ceramic for Silicon-Shaping Dies  
NPO-14783 B81-10092 08
- SELCUK, M. K.**  
Calculating the Performance of a Solar Reflector  
NPO-15314 B81-10246 09
- SENGUPTA, S.**  
Powerplant Thermal-Pollution Models  
KSC-11210 B81-10142 03
- SETZER, D. N.**  
Latch With Single-Motion Release  
MSC-18923 B81-10220 07
- SHAFER, P. E.**  
Array Processor Has Power and Flexibility  
ARC-11292 B81-10130 02

- SHANKS, G. C.**  
New Configuration for  
Compression-Test Fixture  
MSC-18723 B81-10306 06
- SHARMA, M.**  
Fibre-Optic Semiconductor  
Temperature Gage  
MSC-18627 B81-10053 06
- SHEPARD, A. T.**  
Faster Test for Cable Seals  
MFS-25618 B81-10187 06
- SHIMADA, K.**  
Removing Defects From Silicon  
Ribbon  
NPO-14772 B81-10091 08
- SHIMIZU, M.**  
Cuff for Blood-Vessel Pressure  
Measurements  
ARC-11264 B81-10296 05
- SHIN, B. K.**  
Ultra-Thin-Film GaAs Solar Cells  
NPO-14930 B81-10113 08
- SHUFORD, D. M.**  
Surface Seal for Carbon Parts  
MSC-18898 B81-10163 04
- SIDMAN, K. R.**  
Flame-Retardant Coating is  
Heat-Sealed  
MSC-18382 B81-10168 04
- SIMON, E. D.**  
Improved Nozzle Would Reduce  
Cryogenic Boiloff  
MFS-25589 B81-10335 07
- SIMON, W. E.**  
Improved Nozzle Would Reduce  
Cryogenic Boiloff  
MFS-25589 B81-10335 07
- SINGH, J. J.**  
Moisture in Composites is Measured  
by Positron Lifetime  
LAR-12776 B81-10180 06
- SKLADANY, J. T.**  
Improved Numerical Differencing  
Analyzer  
GSC-12671 B81-10197 06
- SLONSKI, M. L.**  
Simplified Thermal Analyzer --VAX  
Version  
GSC-12698 B81-10198 06
- SLONSKI, M. L.**  
Energy-Systems Economic Analysis  
NPO-15097 B81-10035 03
- SMITH, G. T.**  
Eliminating Delamination in Curved  
Composite Parts  
MSC-20027 B81-10356 08
- SMITH, J. R.**  
Proposed Integrated  
Radio-Telescope Network  
NPO-15417 B81-10143 03
- SMITH, M. B.**  
High-Speed Wafer Slicer  
NPO-15463 B81-10332 07
- SMITH, T.**  
Surface-Contamination Inspection  
Tool for Field Use  
MFS-25581 B81-10190 06
- SMITH, T.**  
Detecting Contamination With  
Photoelectron Emission  
MFS-25619 B81-10313 06
- SNETSINGER, K. G.**  
3-D Manipulator for Mass  
Spectrometer  
ARC-11323 B81-10137 03
- SNODGRASS, R.**  
Cleaning Internal-Weld Splatter  
MSC-20068 B81-10355 08
- SNYDER, R. S.**  
Improved Electrophoresis Cell  
MFS-25426 B81-10174 05
- SOFFA, A.**  
Automated Solar-Array Assembly  
NPO-15501 B81-10340 08
- SOONG, D.**  
Viscoelastic Properties of Polymer  
Blends  
NPO-14924 B81-10041 04
- SORATHIA, U. A. K.**  
Blowing Agents for Fabrication of  
Polyimide Foams  
MSC-18993 B81-10286 04
- SPEARS, F., S.**  
Composite-Material Point-Stress  
Analysis  
MSC-18978 B81-10245 08
- SPIERS, R. B.**  
Test-Bed Aircraft Scanner  
LAR-12796 B81-10268 03
- SPRUIELL, J. P.**  
Surface Seal for Carbon Parts  
MSC-18898 B81-10163 04
- ST. CLAIR, A. K.**  
Elastomer-Toughened Polyimide  
Adhesives  
LAR-12775 B81-10040 04
- ST. CLAIR, T. L.**  
Elastomer-Toughened Polyimide  
Adhesives  
LAR-12775 B81-10040 04
- STEIN, J. A.**  
Staking Tool for Hard Metals  
MSC-20009 B81-10336 07
- STEPKA, F. S.**  
Heater Composite Measures Heat  
Transfer  
LEW-13731 B81-10192 06
- STICKEL, W. B.**  
Automatic Control of Silicon Melt  
Level  
NPO-15487 B81-10097 08
- STIRN, R. J.**  
Ultra-Thin-Film GaAs Solar Cells  
NPO-14930 B81-10113 08
- STOCKER, H. M.**  
Storing and Deploying Solar Panels  
MSC-18950 B81-10366 08
- STONE, F. D.**  
Pulsed Phase-Locked-Loop Strain  
Monitor  
LAR-12772 B81-10068 06
- STONE, R. W. J.**  
'Ruggedized' Microcomputer Bus  
GSC-12691 B81-10229 08
- STRANGELAND, M. L.**  
Spring Support for Turbopump Rotor  
Bearing  
MFS-19624 B81-10204 07
- STRAZISAR, A.**  
High-Speed Laser Anemometer  
LEW-13527 B81-10050 06
- STROLL, H. W. J.**  
Pivot Attachment for Prefabricated  
Beams  
MFS-25476 B81-10368 08
- STUDER, P. A.**  
Rotary Transformer Seals Power In  
GSC-12595 B81-10008 01
- STUDER, P. A.**  
Magnetic Bearing Consumes Low  
Power  
GSC-12517 B81-10202 07
- STURMAN, J.**  
High-Efficiency dc/dc Converter  
LEW-13486 B81-10120 01
- SULLIVAN, J.**  
Linear-Algebra Programs  
NPO-15108 B81-10117 09
- SUTCH, F. S.**  
Acoustic Emissions Could Indicate  
Weld Quality  
MFS-25441 B81-10360 08
- SWEET, G. K.**  
'Teaching' an Industrial Robot To  
Spray  
MFS-25523 B81-10326 07
- SWEET, J.**  
Improved Cure-in-Place Silicone  
Adhesives  
MSC-18782 B81-10164 04

## T

- TERVET, F. W.**  
Small Fixture Strains Composites for  
Environmental Tests  
NPO-15062 B81-10302 06
- THEISS, J. M.**  
Levigator for Containerless  
Processing  
MFS-25509 B81-10110 08
- THOMPSON, J. F.**  
Numerical Solution for Navier-Stokes  
Equations  
MFS-25617 B81-10370 09
- THOMSON, R. G.**  
Plastic and Large-Deflection Analysis  
of Nonlinear Structures  
LAR-12816 B81-10323 06
- THORNTON, E. A.**  
Graphics for Finite-Element Analysis  
LAR-12793 B81-10194 06
- THORNTON, E. A.**  
Solution Accounts for Structural  
Damping  
LAR-12863 B81-10303 06
- TIFFANY, S. H.**  
Program Structure Combines  
Segmentation and Dynamic Storage  
LAR-12830 B81-10247 09
- TOLMEI, V. R.**  
Engine-Vibration Analyzer  
MFS-19320 B81-10183 06
- TOOLE, P. C.**  
Spike-Free Automatic Level Control  
KSC-11170 B81-10006 01
- TORIAN, J.**  
Environmental-Analysis Routine  
Library  
MSC-18925 B81-10297 05
- TOTAH, R. S.**  
Ball-and-Socket Joint Can Be  
Disassembled  
LAR-12770 B81-10084 07
- TOTAH, R. S.**  
Integrated Structural and Cable  
Connector  
LAR-12769 B81-10085 07
- TSACH, U.**  
Program for Analysis and Resizing of  
Structures  
LAR-12704 B81-10072 06
- TSCHIRCH, R. P.**  
Flame-Retardant Coating is  
Heat-Sealed  
MSC-18382 B81-10168 04
- TUCKER, C. J., III**  
Portable Radiometer Monitors Plant  
Growth  
GSC-12412 B81-10047 05

# TULPPO, J. S.

**TULPPO, J. S.**  
Graphics-System Color-Code  
Interface  
LAR-12646 B81-10014 02  
**TWARD, E.**  
'Bottle-Brush' Heat Exchanger  
NPO-15479 B81-10205 07

## V

**VAHEY, D. W.**  
Fast Holographic Comparator  
LAR-12509 B81-10132 02  
**VARMA, I. K.**  
Improved Fire-Resistant Resins for  
Laminates  
ARC-11321 B81-10039 04  
**VARY, A.**  
Ultrasonic Instrument for Evaluation  
of Composites  
LEW-13716 B81-10301 06  
**VASQUEZ, R. P.**  
XPS Study of SiO<sub>2</sub> and the Si/SiO<sub>2</sub>  
Interface  
NPO-14968 B81-10285 04  
**VAUGHAN, E. T.**  
I/O Error Analyzer (UNIVAC 1108  
Version)  
GSC-12621 B81-10118 09  
**VESSOT, R. F. C.**  
Method for Canceling Ionospheric  
Doppler Effect  
MFS-25599 B81-10260 02  
**VYKUKAL, H. C.**  
New Apparatus Tests Pressure-Suit  
Joints  
ARC-11314 B81-10314 06

## W

**WADDELL, H. M.**  
Vapor Detector  
MSC-18989 B81-10287 04  
**WAKEFIELD, M. E.**  
Protective Garment Ensemble  
KSC-11203 B81-10222 08  
**WALDECK, G. C.**  
Two-Stage Linearization Circuit  
LAR-12577 B81-10125 01  
**WALKER, R. L.**  
Strain-Gaged Bolts Are Easily  
Prepared  
MSC-18823 B81-10069 06  
**WANG, K. L.**  
Ultra-Thin-Film GaAs Solar Cells  
NPO-14930 B81-10113 08  
**WANG, T.**  
Viscous Torques on a Levitating  
Body  
NPO-15413 B81-10055 06  
**WANG, T. G.**  
Sound Waves Levitate Substrates  
NPO-15435 B81-10221 08  
**WARSI, Z. U. A.**  
Numerical Solution for Navier-Stokes  
Equations  
MFS-25617 B81-10370 09  
**WASHBURN, F. D.**  
Load Pulser Is Sparkless  
KSC-11199 B81-10123 01  
**WATERS, W. J.**  
Assembling Multicolor Printing  
Plates  
LEW-13598 B81-10237 08

**WEAVER, R. W.**  
Survey of Facilities for Testing  
Photovoltaics  
NPO-15361 B81-10193 06  
**WEBB, J. A. J.**  
Fast-Acting Electrohydraulic Servo  
LEW-13730 B81-10298 06  
**WEBBON, B.**  
New Apparatus Tests Pressure-Suit  
Joints  
ARC-11314 B81-10314 06  
**WEBSTER, C. N.**  
Mass-Loss Buttons Monitor Material  
Degradation  
MSC-18903 B81-10307 06  
**WEED, R. A.**  
Numerical Solution for Navier-Stokes  
Equations  
MFS-25617 B81-10370 09  
**WEINBERG, M. C.**  
Gas Diffusion in Fluids Containing  
Bubbles  
NPO-15060 B81-10292 04  
**WEINER, H.**  
Lightweight, Low-Loss dc  
Transducer  
NPO-14618 B81-10126 01  
**WEINSTEIN, L. M.**  
Hot Film Static-Pressure Probe for  
Flow-Field Surveys  
LAR-12799 B81-10308 06  
**WERNER, K. E.**  
Adhesives Mixer Applicator  
MSC-18916 B81-10078 07  
**WEYHRETER, A.**  
Fabricating Structural Beams  
MFS-25228 B81-10369 08  
**WIETING, A. R.**  
Finite-Element Analysis of Forced  
Convection and Conduction  
LAR-12794 B81-10195 06  
**WILLIAMS, E.**  
Linear-Algebra Programs  
NPO-15108 B81-10117 09  
**WILLIAMS, G. W.**  
Gage for Surface Waviness  
MSC-20055 B81-10305 06  
**WILLIAMS, J. G.**  
Lacquer Reveals Impact Damage in  
Composites  
LAR-12700 B81-10064 06  
**WILLIAMS, R. J.**  
System Controls and Measures  
Oxygen Fugacity  
MSC-20096 B81-10162 04  
**WILLIS, A. E.**  
Solar-Powered Supply Is Light and  
Reliable  
MFS-25430 B81-10015 02  
**WILLS, R. J.**  
Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08  
**WILLS, R. R.**  
Ceramic for Silicon-Shaping Dies  
NPO-14783 B81-10092 08  
**WILSON, D. D.**  
Study of Two Digital Charge-Coupled  
Devices  
MFS-25606 B81-10128 02  
**WILSON, R. C.**  
Improving Radiometer-Cavity  
Absorptance  
NPO-15374 B81-10357 08  
**WINKLER, D. G.**  
Algorithms Could Automate Cancer  
Diagnosis  
MSC-18764 B81-10045 05

# PERSONAL AUTHOR INDEX

**WINTHEROW, W. K.**  
Dual-Laser Schlieren System  
MFS-25315 B81-10052 06  
**WISSINK, T. L.**  
Processing PCM Data in Real Time  
KSC-11131 B81-10262 02  
**WOOD, K. E.**  
Improved High-Temperature Seal  
MSC-18790 B81-10210 07  
**WOOD, W. H.**  
Increasing Metal Fracture  
Toughness  
LAR-12805 B81-10351 08  
**WRIGHT, M. C.**  
Solar-Array Simulator  
MSC-18864 B81-10119 01

## Y

**YAMAUCHI, S. T.**  
Compact Liquid Deaerator  
MSC-18936 B81-10211 07  
**YANAGITA, H.**  
Rotating the Plane of Parallel Light  
Beams  
ARC-11311 B81-10265 03  
**YANG, L. C.**  
Sequential-Impulse Generator Uses  
Fiber-Optics  
NPO-14939 B81-10020 03  
Circuit Counts Carbon Fibers  
NPO-14940 B81-10188 06  
**YEH, Y. C. M.**  
Ultra-Thin-Film GaAs Solar Cells  
NPO-14930 B81-10113 08  
**YIN, L. I.**  
Improved Lixoscope  
GSC-12587 B81-10267 03  
**YOUNG, V. F.**  
Study of Two Digital Charge-Coupled  
Devices  
MFS-25606 B81-10128 02

## Z

**ZAK, M.**  
Gas Diffusion in Fluids Containing  
Bubbles  
NPO-15060 B81-10292 04  
Elastic Surface Wrinkling  
NPO-15091 B81-10321 06  
**ZEBUS, P. P.**  
Improved High-Temperature Seal  
MSC-18790 B81-10210 07  
**ZEHNPFENNING, T. F.**  
Sensors for Precise Tracking  
MFS-25579 B81-10140 03  
**ZELLARS, G. R.**  
Wire EDM for Refractory Materials  
LEW-13460 B81-10105 08




# ORIGINATING CENTER NUMBER INDEX

INDEX TO NASA TECH BRIEFS

JULY 1986

## Typical Originating Center Number Index Listing

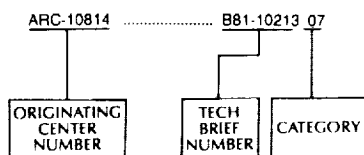

The left hand column identifies the originating Center number, to the right of each originating Center number is the Tech Brief number, e.g., B81-10213, followed by a two-digit number, e.g., 07, which identifies the subject category containing the entire citation.

ARC-10814	B81-10213 07	GSC-12643	B81-10201 07	LAR-12816	B81-10323 06
ARC-11150	B81-10075 06	GSC-12645	B81-10253 01	LAR-12830	B81-10247 09
ARC-11155	B81-10134 02	GSC-12646	B81-10248 01	LAR-12832	B81-10300 06
ARC-11162	B81-10135 02	GSC-12649	B81-10317 06	LAR-12853	B81-10324 06
ARC-11166	B81-10189 06	GSC-12667	B81-10238 08	LAR-12857	B81-10199 06
ARC-11241	B81-10037 04	GSC-12671	B81-10197 06	LAR-12863	B81-10303 06
ARC-11257	B81-10049 06	GSC-12672	B81-10216 07	LAR-12918	B81-10373 09
ARC-11264	B81-10296 05	GSC-12679	B81-10067 06	LAR-19262	B81-10184 06
ARC-11267	B81-10036 04	GSC-12680	B81-10074 06		
ARC-11279	B81-10099 08	GSC-12686	B81-10290 04	LEW-13460	B81-10105 08
ARC-11285	B81-10060 06	GSC-12691	B81-10229 08	LEW-13486	B81-10120 01
ARC-11286	B81-10217 07	GSC-12698	B81-10198 06	LEW-13527	B81-10050 06
ARC-11292	B81-10130 02			LEW-13598	B81-10237 08
ARC-11293	B81-10010 01	KSC-11065	B81-10129 02	LEW-13624	B81-10070 06
ARC-11311	B81-10265 03	KSC-11123	B81-10263 02	LEW-13665	B81-10146 03
ARC-11314	B81-10314 06	KSC-11131	B81-10262 02	LEW-13671	B81-10173 04
ARC-11318	B81-10214 07	KSC-11132	B81-10261 02	LEW-13716	B81-10087 07
ARC-11321	B81-10039 04	KSC-11170	B81-10006 01	LEW-13729	B81-10301 06
ARC-11323	B81-10137 03	KSC-11176	B81-10233 08	LEW-13730	B81-10315 06
ARC-11326	B81-10038 04	KSC-11182	B81-10242 08	LEW-13731	B81-10298 06
ARC-11341	B81-10185 06	KSC-11189	B81-10371 09	LEW-13733	B81-10192 06
ARC-11344	B81-10325 07	KSC-11198	B81-10111 08	LEW-13745	B81-10309 06
ARC-11378	B81-10316 06	KSC-11199	B81-10123 01		B81-10311 06
		KSC-11203	B81-10222 08		
		KSC-11205	B81-10207 07	MFS-19320	B81-10183 06
		KSC-11209	B81-10178 05	MFS-19567	B81-10061 06
		KSC-11210	B81-10142 03	MFS-19575	B81-10054 06
				MFS-19586	B81-10206 07
		LAR-12495	B81-10266 03	MFS-19603	B81-10227 08
		LAR-12509	B81-10132 02	MFS-19607	B81-10107 08
		LAR-12519	B81-10100 08	MFS-19624	B81-10204 07
		LAR-12544	B81-10182 06	MFS-19629	B81-10283 04
		LAR-12577	B81-10125 01	MFS-19630	B81-10353 08
		LAR-12613	B81-10009 01	MFS-19632	B81-10328 07
		LAR-12620	B81-10104 08	MFS-19635	B81-10352 08
		LAR-12624	B81-10319 06	MFS-19639	B81-10284 04
		LAR-12638	B81-10299 06	MFS-19644	B81-10289 04
		LAR-12646	B81-10014 02	MFS-19645	B81-10338 07
		LAR-12654	B81-10122 01	MFS-19652	B81-10225 08
		LAR-12686	B81-10063 06	MFS-19655	B81-10226 08
		LAR-12700	B81-10064 06	MFS-23734	B81-10065 06
		LAR-12704	B81-10072 06	MFS-23806	B81-10196 06
		LAR-12728	B81-10076 07	MFS-25175	B81-10115 08
		LAR-12743	B81-10066 06	MFS-25228	B81-10369 08
		LAR-12747	B81-10200 06	MFS-25234	B81-10322 06
		LAR-12751	B81-10318 06	MFS-25307	B81-10177 05
		LAR-12764	B81-10293 04	MFS-25312	B81-10019 03
		LAR-12766	B81-10181 06	MFS-25315	B81-10052 06
		LAR-12769	B81-10085 07	MFS-25331	B81-10138 03
		LAR-12770	B81-10084 07	MFS-25341	B81-10098 08
		LAR-12772	B81-10068 06	MFS-25379	B81-10127 02
		LAR-12775	B81-10040 04	MFS-25380	B81-10176 05
		LAR-12776	B81-10180 06	MFS-25391	B81-10278 03
		LAR-12784	B81-10004 01	MFS-25403	B81-10086 07
		LAR-12793	B81-10194 06	MFS-25410	B81-10058 06
		LAR-12794	B81-10195 06	MFS-25426	B81-10174 05
		LAR-12796	B81-10268 03	MFS-25430	B81-10015 02
		LAR-12797	B81-10250 01	MFS-25436	B81-10362 08
		LAR-12799	B81-10308 06	MFS-25438	B81-10281 04
		LAR-12801	B81-10363 08	MFS-25441	B81-10360 08
		LAR-12802	B81-10073 06	MFS-25455	B81-10131 02
		LAR-12803	B81-10224 08	MFS-25456	B81-10012 02
		LAR-12805	B81-10351 08	MFS-25464	B81-10244 08
		LAR-12814	B81-10179 06	MFS-25476	B81-10368 08

CONTINUED

# ORIGINATING CENTER/TECH BRIEF NUMBER INDEX


MFS-25477	B81-10003 01	MSC-18764	B81-10045 05	NPO-14934	B81-10175 05
MFS-25491	B81-10172 04	MSC-18780	B81-10081 07	NPO-14939	B81-10020 03
MFS-25493	B81-10361 08	MSC-18782	B81-10164 04	NPO-14940	B81-10188 06
MFS-25494	B81-10372 09	MSC-18790	B81-10210 07	NPO-14954	B81-10044 04
MFS-25506	B81-10080 07	MSC-18794	B81-10077 07	NPO-14967	B81-10089 08
MFS-25509	B81-10110 08	MSC-18797	B81-10016 02	NPO-14968	B81-10285 04
MFS-25513	B81-10021 03	MSC-18820	B81-10232 08	NPO-14980	B81-10093 08
MFS-25523	B81-10326 07	MSC-18823	B81-10069 06	NPO-14997	B81-10327 07
MFS-25535	B81-10001 01	MSC-18828	B81-10218 07	NPO-15010	B81-10295 04
MFS-25541	B81-10264 02	MSC-18832	B81-10167 04	NPO-15015	B81-10291 04
MFS-25544	B81-10116 08	MSC-18837	B81-10231 08	NPO-15060	B81-10292 04
MFS-25546	B81-10088 08	MSC-18864	B81-10103 08	NPO-15062	B81-10302 06
MFS-25550	B81-10033 03	MSC-18865	B81-10119 01	NPO-15085	B81-10239 08
MFS-25555	B81-10139 03	MSC-18868	B81-10170 04	NPO-15087	B81-10320 06
MFS-25557	B81-10062 06	MSC-18885	B81-10079 07	NPO-15091	B81-10321 06
MFS-25560	B81-10002 01	MSC-18891	B81-10046 05	NPO-15097	B81-10035 03
MFS-25571	B81-10024 03	MSC-18895	B81-10228 08	NPO-15108	B81-10117 09
MFS-25573	B81-10025 03	MSC-18898	B81-10230 08	NPO-15147	B81-10251 01
MFS-25574	B81-10034 03	MSC-18903	B81-10163 04	NPO-15213	B81-10048 05
MFS-25576	B81-10165 04	MSC-18904	B81-10307 06	NPO-15290	B81-10121 01
MFS-25579	B81-10140 03	MSC-18905	B81-10191 06	NPO-15314	B81-10246 09
MFS-25580	B81-10026 03	MSC-18916	B81-10329 07	NPO-15325	B81-10043 04
MFS-25581	B81-10190 06	MSC-18923	B81-10078 07	NPO-15332	B81-10051 06
MFS-25589	B81-10335 07	MSC-18925	B81-10220 07	NPO-15361	B81-10193 06
MFS-25595	B81-10152 03	MSC-18926	B81-10297 05	NPO-15374	B81-10357 08
MFS-25597	B81-10031 03	MSC-18933	B81-10223 08	NPO-15375	B81-10212 07
MFS-25599	B81-10260 02	MSC-18936	B81-10330 07	NPO-15387	B81-10023 03
MFS-25601	B81-10030 03	MSC-18942	B81-10211 07	NPO-15388	B81-10022 03
MFS-25603	B81-10029 03	MSC-18950	B81-10234 08	NPO-15413	B81-10055 06
MFS-25606	B81-10128 02	MSC-18977	B81-10366 08	NPO-15416	B81-10141 03
MFS-25607	B81-10252 01	MSC-18978	B81-10018 02	NPO-15417	B81-10143 03
MFS-25608	B81-10032 03	MSC-18981	B81-10245 08	NPO-15435	B81-10221 08
MFS-25609	B81-10028 03	MSC-18982	B81-10258 01	NPO-15438	B81-10219 07
MFS-25612	B81-10365 08	MSC-18989	B81-10017 02	NPO-15448	B81-10241 08
MFS-25614	B81-10027 03	MSC-18993	B81-10287 04	NPO-15456	B81-10282 04
MFS-25617	B81-10370 09	MSC-19526	B81-10286 04	NPO-15461	B81-10280 04
MFS-25618	B81-10187 06	MSC-20001	B81-10215 07	NPO-15462	B81-10144 03
MFS-25619	B81-10313 06	MSC-20009	B81-10288 04	NPO-15463	B81-10332 07
MFS-25620	B81-10294 04	MSC-20011	B81-10336 07	NPO-15471	B81-10236 08
MFS-25622	B81-10364 08	MSC-20013	B81-10367 08	NPO-15476	B81-10166 04
MFS-25624	B81-10339 07	MSC-20022	B81-10350 08	NPO-15479	B81-10205 07
MFS-25629	B81-10147 03	MSC-20027	B81-10358 08	NPO-15487	B81-10097 08
MFS-25637	B81-10133 02	MSC-20032	B81-10356 08	NPO-15497	B81-10101 08
MFS-25646	B81-10151 03	MSC-20047	B81-10334 07	NPO-15500	B81-10342 08
MFS-25648	B81-10354 08	MSC-20055	B81-10312 06	NPO-15501	B81-10340 08
MFS-25651	B81-10148 03	MSC-20057	B81-10305 06	NPO-15502	B81-10348 08
MFS-25665	B81-10149 03	MSC-20059	B81-10304 06	NPO-15503	B81-10341 08
MFS-25666	B81-10150 03	MSC-20065	B81-10257 01	NPO-15504	B81-10343 08
MFS-25681	B81-10145 03	MSC-20068	B81-10337 07	NPO-15505	B81-10344 08
MFS-25682	B81-10153 03	MSC-20091	B81-10355 08	NPO-15506	B81-10345 08
MFS-25683	B81-10154 03	MSC-20096	B81-10256 01	NPO-15507	B81-10347 08
MFS-25684	B81-10155 03	MSC-20105	B81-10162 04	NPO-15508	B81-10346 08
MFS-25685	B81-10156 03	MSC-20108	B81-10310 06	NPO-15509	B81-10349 08
MFS-25693	B81-10157 03	MSC-20183	B81-10359 08	NPO-15518	B81-10235 08
MFS-25697	B81-10158 03		B81-10259 02	NPO-15520	B81-10171 04
MFS-25699	B81-10159 03			NPO-15523	B81-10279 04
MFS-25700	B81-10160 03	NPO-14324	B81-10136 03	NPO-15528	B81-10243 08
MFS-25701	B81-10161 03	NPO-14618	B81-10126 01		
MFS-25706	B81-10272 03	NPO-14768	B81-10124 01		
MFS-25712	B81-10277 03	NPO-14830			
MFS-25720	B81-10273 03	NPO-14772	B81-10091 08		
MFS-25726	B81-10276 03	NPO-14783	B81-10092 08		
MFS-25742	B81-10269 03	NPO-14818	B81-10249 01		
MFS-25747	B81-10274 03	NPO-14819	B81-10090 08		
MFS-25776	B81-10275 03	NPO-14820	B81-10095 08		
MFS-25778	B81-10270 03	NPO-14835	B81-10071 06		
MFS-25779	B81-10271 03	NPO-14850	B81-10007 01		
		NPO-14859	B81-10094 08		
		NPO-14860	B81-10096 08		
MSC-14864	B81-10240 08	NPO-14866	B81-10106 08		
MSC-16994	B81-10114 08	NPO-14905	B81-10059 06		
MSC-18223	B81-10169 04	NPO-14911	B81-10042 04		
MSC-18382	B81-10168 04	NPO-14912	B81-10102 08		
MSC-18498	B81-10013 02	NPO-14922	B81-10333 07		
MSC-18627	B81-10053 06	NPO-14924	B81-10041 04		
MSC-18634	B81-10011 01	NPO-14928	B81-10083 07		
MSC-18723	B81-10306 06	NPO-14930	B81-10113 08		
MSC-18742	B81-10082 07				

# TECH BRIEF NUMBER INDEX

INDEX TO NASA TECH BRIEFS

JULY 1986

## Typical Tech Brief Number Index Listing



The left hand column identifies the Tech Brief number, e.g., B81-10045, followed by a two-digit number, e.g., 05, which identifies the subject category containing the entire citation. Following the subject category number is the originating Center number.

B81-10001 01 ..... MFS-25535  
 B81-10002 01 ..... MFS-25560  
 B81-10003 01 ..... MFS-25477  
 B81-10004 01 ..... LAR-12784  
 B81-10005 01 ..... GSC-12635  
 B81-10006 01 ..... KSC-11170  
 B81-10007 01 ..... NPO-14850  
 B81-10008 01 ..... GSC-12595  
 B81-10009 01 ..... LAR-12613  
 B81-10010 01 ..... ARC-11293  
 B81-10011 01 ..... MSC-18634  
 B81-10012 02 ..... MFS-25456  
 B81-10013 02 ..... MSC-18498  
 B81-10014 02 ..... LAR-12646  
 B81-10015 02 ..... MFS-25430  
 B81-10016 02 ..... MSC-18797  
 B81-10017 02 ..... MSC-18982  
 B81-10018 02 ..... MSC-18977  
 B81-10019 03 ..... MFS-25312  
 B81-10020 03 ..... NPO-14939  
 B81-10021 03 ..... MFS-25513  
 B81-10022 03 ..... NPO-15388  
 B81-10023 03 ..... NPO-15387  
 B81-10024 03 ..... MFS-25571  
 B81-10025 03 ..... MFS-25573  
 B81-10026 03 ..... MFS-25580  
 B81-10027 03 ..... MFS-25614  
 B81-10028 03 ..... MFS-25609  
 B81-10029 03 ..... MFS-25603  
 B81-10030 03 ..... MFS-25601  
 B81-10031 03 ..... MFS-25597  
 B81-10032 03 ..... MFS-25608  
 B81-10033 03 ..... MFS-25550  
 B81-10034 03 ..... MFS-25574  
 B81-10035 03 ..... NPO-15097  
 B81-10036 04 ..... ARC-11267  
 B81-10037 04 ..... ARC-11241  
 B81-10038 04 ..... ARC-11326  
 B81-10039 04 ..... ARC-11321  
 B81-10040 04 ..... LAR-12775  
 B81-10041 04 ..... NPO-14924  
 B81-10042 04 ..... NPO-14911  
 B81-10043 04 ..... NPO-15325  
 B81-10044 04 ..... NPO-14954

B81-10045 05 ..... MSC-18764  
 B81-10046 05 ..... MSC-18885  
 B81-10047 05 ..... GSC-12412  
 B81-10048 05 ..... NPO-15213  
 B81-10049 06 ..... ARC-11257  
 B81-10050 06 ..... LEW-13527  
 B81-10051 06 ..... NPO-15332  
 B81-10052 06 ..... MFS-25315  
 B81-10053 06 ..... MSC-18627  
 B81-10054 06 ..... MFS-19575  
 B81-10055 06 ..... NPO-15413  
 B81-10056 06 ..... FRC-11017  
 B81-10057 06 ..... GSC-12614  
 B81-10058 06 ..... MFS-25410  
 B81-10059 06 ..... NPO-14905  
 B81-10060 06 ..... ARC-11285  
 B81-10061 06 ..... MFS-19567  
 B81-10062 06 ..... MFS-25557  
 B81-10063 06 ..... LAR-12686  
 B81-10064 06 ..... LAR-12700  
 B81-10065 06 ..... MFS-23734  
 B81-10066 06 ..... LAR-12743  
 B81-10067 06 ..... GSC-12679  
 B81-10068 06 ..... LAR-12772  
 B81-10069 06 ..... MSC-18823  
 B81-10070 06 ..... LEW-13624  
 B81-10071 06 ..... NPO-14835  
 B81-10072 06 ..... LAR-12704  
 B81-10073 06 ..... LAR-12802  
 B81-10074 06 ..... GSC-12680  
 B81-10075 06 ..... ARC-11150  
 B81-10076 07 ..... LAR-12728  
 B81-10077 07 ..... MSC-18794  
 B81-10078 07 ..... MSC-18916  
 B81-10079 07 ..... MSC-18868  
 B81-10080 07 ..... MFS-25506  
 B81-10081 07 ..... MSC-18780  
 B81-10082 07 ..... MSC-18742  
 B81-10083 07 ..... NPO-14928  
 B81-10084 07 ..... LAR-12770  
 B81-10085 07 ..... LAR-12769  
 B81-10086 07 ..... MFS-25403  
 B81-10087 07 ..... LEW-13672  
 B81-10088 08 ..... MFS-25546  
 B81-10089 08 ..... NPO-14967  
 B81-10090 08 ..... NPO-14819  
 B81-10091 08 ..... NPO-14772  
 B81-10092 08 ..... NPO-14783  
 B81-10093 08 ..... NPO-14980  
 B81-10094 08 ..... NPO-14859  
 B81-10095 08 ..... NPO-14820  
 B81-10096 08 ..... NPO-14860  
 B81-10097 08 ..... NPO-15487  
 B81-10098 08 ..... MFS-25341  
 B81-10099 08 ..... ARC-11279  
 B81-10100 08 ..... LAR-12519  
 B81-10101 08 ..... NPO-15497  
 B81-10102 08 ..... NPO-14912  
 B81-10103 08 ..... MSC-18837  
 B81-10104 08 ..... LAR-12620  
 B81-10105 08 ..... LEW-13460  
 B81-10106 08 ..... NPO-14866  
 B81-10107 08 ..... MFS-19607  
 B81-10108 08 ..... GSC-12523  
 B81-10109 08 ..... GSC-12543  
 B81-10110 08 ..... MFS-25509  
 B81-10111 08 ..... KSC-11198  
 B81-10112 08 ..... FRC-11026  
 B81-10113 08 ..... NPO-14930  
 B81-10114 08 ..... MSC-16994  
 B81-10115 08 ..... MFS-25175  
 B81-10116 08 ..... MFS-25544  
 B81-10117 09 ..... NPO-15108  
 B81-10118 09 ..... GSC-12621  
 B81-10119 01 ..... MSC-18864  
 B81-10120 01 ..... LEW-13486  
 B81-10121 01 ..... NPO-15290  
 B81-10122 01 ..... LAR-12654  
 B81-10123 01 ..... KSC-11199  
 B81-10124 01 ..... NPO-14768  
 B81-10125 01 ..... NPO-14830  
 B81-10126 01 ..... LAR-12577  
 B81-10127 02 ..... NPO-14618  
 B81-10128 02 ..... MFS-25379  
 B81-10129 02 ..... MFS-25606  
 B81-10130 02 ..... KSC-11065  
 B81-10131 02 ..... ARC-11292  
 B81-10132 02 ..... MFS-25455  
 B81-10133 02 ..... LAR-12509  
 B81-10134 02 ..... MFS-25637  
 B81-10135 02 ..... ARC-11155  
 B81-10136 03 ..... ARC-11162  
 B81-10137 03 ..... NPO-14324  
 B81-10138 03 ..... ARC-11323  
 B81-10139 03 ..... MFS-25331  
 B81-10140 03 ..... MFS-25555  
 B81-10141 03 ..... MFS-25579  
 B81-10142 03 ..... NPO-15416  
 B81-10143 03 ..... KSC-11210  
 B81-10144 03 ..... NPO-15417  
 B81-10145 03 ..... NPO-15462  
 B81-10146 03 ..... MFS-25681  
 B81-10147 03 ..... LEW-13665  
 B81-10148 03 ..... MFS-25629  
 B81-10149 03 ..... MFS-25651  
 B81-10150 03 ..... MFS-25665  
 B81-10151 03 ..... MFS-25666  
 B81-10152 03 ..... MFS-25595  
 B81-10153 03 ..... MFS-25682  
 B81-10154 03 ..... MFS-25683  
 B81-10155 03 ..... MFS-25684  
 B81-10156 03 ..... MFS-25685  
 B81-10157 03 ..... MFS-25693  
 B81-10158 03 ..... MFS-25697  
 B81-10159 03 ..... MFS-25699  
 B81-10160 03 ..... MFS-25700  
 B81-10161 03 ..... MFS-25701  
 B81-10162 04 ..... MSC-20096  
 B81-10163 04 ..... MSC-18898  
 B81-10164 04 ..... MSC-18782  
 B81-10165 04 ..... MFS-25576  
 B81-10166 04 ..... NPO-15476  
 B81-10167 04 ..... MSC-18832  
 B81-10168 04 ..... MSC-18382  
 B81-10169 04 ..... MSC-18223  
 B81-10170 04 ..... MSC-18865  
 B81-10171 04 ..... NPO-15520  
 B81-10172 04 ..... MFS-25491  
 B81-10173 04 ..... LEW-13671

NUMBER

# TECH BRIEF/ORIGINATING CENTER NUMBER INDEX

B81-10174 05	MFS-25426	B81-10251 01	NPO-15147	B81-10328 07	MFS-19632
B81-10175 05	NPO-14934	B81-10252 01	MFS-25607	B81-10329 07	MSC-18905
B81-10176 05	MFS-25380	B81-10253 01	GSC-12645	B81-10330 07	MSC-18933
B81-10177 05	MFS-25307	B81-10254 01	GSC-12566	B81-10331 07	GSC-12550
B81-10178 05	KSC-11209	B81-10255 01	GSC-12567	B81-10332 07	NPO-15463
B81-10179 06	LAR-12814	B81-10256 01	MSC-20091	B81-10333 07	NPO-14922
B81-10180 06	LAR-12776	B81-10257 01	MSC-20059	B81-10334 07	MSC-20032
B81-10181 06	LAR-12766	B81-10258 01	MSC-18981	B81-10335 07	MFS-25589
B81-10182 06	LAR-12544	B81-10259 02	MSC-20183	B81-10336 07	MSC-20009
B81-10183 06	MFS-19320	B81-10260 02	MFS-25599	B81-10337 07	MSC-20065
B81-10184 06	LAR-19262	B81-10261 02	KSC-11132	B81-10338 07	MFS-19645
B81-10185 06	ARC-11341	B81-10262 02	KSC-11131	B81-10339 07	MFS-25624
B81-10186 06	GSC-12609	B81-10263 02	KSC-11123	B81-10340 08	NPO-15501
B81-10187 06	MFS-25618	B81-10264 02	MFS-25541	B81-10341 08	MFS-19503
B81-10188 06	NPO-14940	B81-10265 03	ARC-11311	B81-10342 08	NPO-15500
B81-10189 06	ARC-11166	B81-10266 03	LAR-12495	B81-10343 08	NPO-15504
B81-10190 06	MFS-25581	B81-10267 03	GSC-12587	B81-10344 08	NPO-15505
B81-10191 06	MSC-18904	B81-10268 03	LAR-12796	B81-10345 08	NPO-15506
B81-10192 06	LEW-13731	B81-10269 03	MFS-25742	B81-10346 08	NPO-15508
B81-10193 06	NPO-15361	B81-10270 03	MFS-25778	B81-10347 08	NPO-15507
B81-10194 06	LAR-12793	B81-10271 03	MFS-25779	B81-10348 08	NPO-15502
B81-10195 06	LAR-12794	B81-10272 03	MFS-25706	B81-10349 08	NPO-15509
B81-10196 06	MFS-23806	B81-10273 03	MFS-25720	B81-10350 08	MSC-20013
B81-10197 06	GSC-12671	B81-10274 03	MFS-25747	B81-10351 08	LAR-12805
B81-10198 06	GSC-12698	B81-10275 03	MFS-25776	B81-10352 08	MFS-19635
B81-10199 06	LAR-12857	B81-10276 03	MFS-25726	B81-10353 08	MFS-19630
B81-10200 06	LAR-12747	B81-10277 03	MFS-25712	B81-10354 08	MFS-25648
B81-10201 07	GSC-12643	B81-10278 03	MFS-25391	B81-10355 08	MSC-20068
B81-10202 07	GSC-12517	B81-10279 04	NPO-15523	B81-10356 08	MSC-20027
B81-10203 07	GSC-12582	B81-10280 04	NPO-15461	B81-10357 08	NPO-15374
B81-10204 07	MFS-19624	B81-10281 04	MFS-25438	B81-10358 08	MSC-20022
B81-10205 07	NPO-15479	B81-10282 04	NPO-15456	B81-10359 08	MSC-20108
B81-10206 07	MFS-19586	B81-10283 04	MFS-19629	B81-10360 08	MFS-25441
B81-10207 07	KSC-11205	B81-10284 04	MFS-19639	B81-10361 08	MFS-25493
B81-10208 07	GSC-12622	B81-10285 04	NPO-14968	B81-10362 08	MFS-25436
B81-10209 07	GSC-12636	B81-10286 04	MSC-18993	B81-10363 08	LAR-12801
B81-10210 07	MSC-18790	B81-10287 04	MSC-18989	B81-10364 08	MFS-25622
B81-10211 07	MSC-18936	B81-10288 04	MSC-20001	B81-10365 08	MFS-25612
B81-10212 07	NPO-15375	B81-10289 04	MFS-19644	B81-10366 08	MSC-18950
B81-10213 07	ARC-10814	B81-10290 04	GSC-12686	B81-10367 08	MSC-20011
B81-10214 07	ARC-11318	B81-10291 04	NPO-15015	B81-10368 08	MFS-25476
B81-10215 07	MSC-19526	B81-10292 04	NPO-15060	B81-10369 08	MFS-25228
B81-10216 07	GSC-12672	B81-10293 04	LAR-12764	B81-10370 09	MFS-25617
B81-10217 07	ARC-11286	B81-10294 04	MFS-25620	B81-10371 09	KSC-11189
B81-10218 07	MSC-18828	B81-10295 04	NPO-15010	B81-10372 09	MFS-25494
B81-10219 07	NPO-15438	B81-10296 05	ARC-11264	B81-10373 09	LAR-12918
B81-10220 07	MSC-18923	B81-10297 05	MSC-18925		
B81-10221 08	NPO-15435	B81-10298 06	LEW-13730		
B81-10222 08	KSC-11203	B81-10299 06	LAR-12638		
B81-10223 08	MSC-18926	B81-10300 06	LAR-12832		
B81-10224 08	LAR-12803	B81-10301 06	LEW-13716		
B81-10225 08	MFS-19652	B81-10302 06	NPO-15062		
B81-10226 08	MFS-19655	B81-10303 06	LAR-12863		
B81-10227 08	MFS-19603	B81-10304 06	MSC-20057		
B81-10228 08	MSC-18891	B81-10305 06	MSC-20055		
B81-10229 08	GSC-12691	B81-10306 06	MSC-18723		
B81-10230 08	MSC-18895	B81-10307 06	MSC-18903		
B81-10231 08	MSC-18832	B81-10308 06	LAR-12799		
B81-10232 08	MSC-18820	B81-10309 06	LEW-13733		
B81-10233 08	KSC-11176	B81-10310 06	MSC-20105		
B81-10234 08	MSC-18942	B81-10311 06	LEW-13745		
B81-10235 08	NPO-15518	B81-10312 06	MSC-20047		
B81-10236 08	NPO-15471	B81-10313 06	MFS-25619		
B81-10237 08	LEW-13598	B81-10314 06	ARC-11314		
B81-10238 08	GSC-12667	B81-10315 06	LEW-13729		
B81-10239 08	NPO-15085	B81-10316 06	ARC-11378		
B81-10240 08	MSC-14864	B81-10317 06	GSC-12649		
B81-10241 08	NPO-15448	B81-10318 06	LAR-12751		
B81-10242 08	KSC-11182	B81-10319 06	LAR-12624		
B81-10243 08	NPO-15528	B81-10320 06	NPO-15087		
B81-10244 08	MFS-25464	B81-10321 06	NPO-15091		
B81-10245 08	MSC-18978	B81-10322 06	MFS-25234		
B81-10246 09	NPO-15314	B81-10323 06	LAR-12816		
B81-10247 09	LAR-12830	B81-10324 06	LAR-12853		
B81-10248 01	GSC-12646	B81-10325 07	ARC-11344		
B81-10249 01	NPO-14818	B81-10326 07	MFS-25523		
B81-10250 01	LAR-12797	B81-10327 07	NPO-14997		



