

Study of Synthetic Vision Systems (SVS) and Velocity-vector Based Command Augmentation System (V-CAS) on Pilot Performance

Dahai Liu

**Department of Human Factors and Systems
Embry-Riddle Aeronautical University
Daytona Beach, Florida 32114, USA**

Ken Goodrich

**Dynamic Systems and Control Branch
NASA Langley Research Center
Hampton VA, 23681, USA**

Bob Peak

**Cogent Corporation International
105 Union Avenue
Steilacoom, WA 98388, USA**

Abstract

This study investigated the effects of synthetic vision system (SVS) concepts and advanced flight controls on single pilot performance (SPP). Specifically, we evaluated the benefits and interactions of two levels of terrain portrayal, guidance symbology, and control-system response type on SPP in the context of lower-landing minima (LLM) approaches. Performance measures consisted of flight technical error (FTE) and pilot perceived workload. In this study, pilot rating, control type, and guidance symbology were not found to significantly affect FTE or workload. It is likely that transfer from prior experience, limited scope of the evaluation task, specific implementation limitations, and limited sample size were major factors in obtaining these results.

Keywords: Synthetic vision system (SVS), V-CAS, Pilot Performance

Introduction

Synthetic Vision Systems (SVS) are designed for general aviation to improve pilot performance without increasing a pilot's mental and physical workload significantly. Currently, the aviation industry is using various devices inside the cockpit to provide flight critical information through visual perception and auditory communications of outside environmental conditions. These conventional devices include attitude indicators (AI), radio navigation, instrument landing systems (ILS), Electronic Attitude Indicators (EAI), and many more (Glaab and Takallu, 2002). With these devices, pilots require substantial training to become instrument rated, and even with adequate training, airplanes operated by single pilots experience a relatively high accident rate, especially Low Visibility Loss of Control (LVLOC) and Controlled Flight into Terrain (CFIT) accidents. The SVS concept provides a real-time, un-obscured synthetic view of the outside world to the pilot. (Arthur et al, 2003). An SVS display is typically generated by visually rendering an on-board terrain database using precise navigation data obtained through GPS with augmentation from the Wide Area Augmentation System (WAAS) and low-cost inertial sensors. This terrain presentation is often combined with a graphical presentation of the desired flight path, commonly referred to as "highway-in-the-sky" (HITS) symbology. Studies have shown that SVS/HITS can effectively enhance pilot performance under low visibility conditions, particularly for LVLOC and CFIT prevention (Glaab and Takallu, 2002; Uenking and Hughes, 2002; Comstock et al, 2002; Arthur et al, 2003; Hughes and Takallu, 2002).

While SVS by itself has the potential to significantly enhance flight technical performance and pilot awareness in low visibility conditions, the underlying task of flying the airplane remains essentially unchanged. The basic flight dynamics of the airplane require that the pilot visually monitor the primary flight display nearly full time to control the attitude and short-term motions of the airplane. This still requires a significant amount of pilot's cognitive and physical resources, limiting his ability to attend to other tasks. SVS itself cannot solve this

problem. Autopilots offer a means of addressing this situation but introduce additional complexity and hazards by creating a multitude of ways by which the vehicle can be controlled, and in more complex systems, the introduction of potentially confusing temporal shifts between command inputs and the airplane's responses. In addition, autopilots encourage hazardous detachment from the basic control task by completely removing the pilot from any active involvement in the process (Billings, 1997). While the pilot is expected to monitor the autopilot system for failures or unexpected actions, there is no immediate feedback or consequence if this responsibility is not adequately performed. An alternative to current autopilots is to provide the pilot with a velocity-vector based command augmentation system (V-CAS) providing direct control of key flight path parameters such as flight path angle, turn-rate, and speed through manual control inceptors (e.g. a 2-axis side-stick and air speed command lever). In simulation (Stewart, 1994) and limited flight experiments (Bergman, 1976) V-CASs have shown increased flight precision while reducing training requirements and workload. In addition, since the pilot remains in the control-loop, albeit at a higher level, the potential for hazardous detachment or complacency should be reduced compared to autopilots.

This study is intended to investigate the effectiveness of various SVS concepts, with and without a V-CAS on the conduct of SATS lower-landing minima (LLM) approach procedures as well as the interaction between SVS and V-CAS.

Method

Based on the previous literature, it is hypothesized that SVS/HITS can significantly improve the flight performance of both IFR and non-IFR pilots, and V-CAS has a significant improvement on both IFR and non-IFR pilots' flight performance. These effects are also expected in the workload measures. To test these hypotheses, a mixed factorial experiment was conducted on the following variables.

Independent Variables

Terrain portrayal concepts (X1) with two levels of

1. Blue sky, brown ground (BSBG), baseline
2. Elevation based generic (EBG)

Guidance and position awareness symbology concepts (X2)

1. Pitch / roll flight director (PRFD) + CDI/glideslope, baseline
2. Top HITS from SD-HDD (NASA Ghost)

Control system response types (X3)

1. Conventional aircraft controls, baseline
2. V-CAS

Pilot Rating (X4)

1. Non IFR pilots
2. IFR pilots

Among these variables, X1, X2, X3 are within Subject Variables and X4 is between subject variables.

Dependent variables

1. Quantitative pilot/vehicle performance measures, namely, the aircraft path error and aircraft airspeed error from desired approach speed
2. NASA TLX subjective assessment questionnaires

Apparatus

Test airplane is a modified 1978 Model F33C Bonanza/CJ-144. The left side of the cockpit was modified to serve as a flexible, evaluation pilot's station (EPS) for the evaluation of control and display systems concepts. A picture of the EPS is shown in Figure 1.



Figure 1 – Flight Deck of CJ-144. (Left side of cockpit is the EPS while the conventional instrumentation on the right side is used by the safety pilot.)

Experiment subjects, Tasks and Procedures

Due to limitations on the availability of suitable test subjects when the flights were conducted, the actual mix of evaluation pilots was 8 Non IFR pilots and 4 IFR rated pilots. All the evaluation pilots received extensive training and practice with the terrain portrayal and guidance symbology concepts. Prior to the conduct of the current flight experiment, subject pilots received a refresher briefing on the terrain portrayal and guidance symbology concepts as well as an introduction to the V-CAS. Subjects were also provided with sufficient flight time in the aircraft to become comfortable with the symbology and control concepts prior to the collection of relevant data. Juneau approach tasks were used in this study. The approach incorporates typical flight task complexity. Figure 2 illustrates the approach.

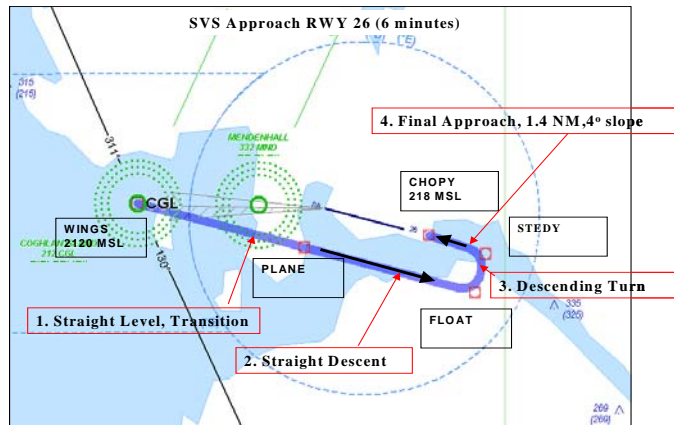


Figure 2 Illustration of Flight approach.

For each flight, each subject (non IFR or IFR) will randomly perform the 4 combinations X1 and X2 under each X3 block. The following Table 1 illustrates the experiment setup.

Table1. Experiment trials for control block (Conventional or V-CAS)

<i>Pilots</i>	<i>Pilot 1</i>		<i>Pilot 2</i>		<i>Pilot 12</i>	
<i>Terrain Type (TPC) (X1)</i>	BSBG	EBG	BSBG	EBG		BSBG	EBG
<i>Guidance Symbology (GSC) (X2)</i>							
<i>Baseline</i>	Flight1	Flight1	Flight2	Flight2	...	Flight12	Flight12
<i>HiTs</i>	Flight1	Flight1	Flight2	Flight2	...	Flight12	Flight12

Each pilot flew 2 flights, with 4 treatments in each flight. In each flight, pilot repeated the same treatments once. The order of treatments and tasks was randomized for one flight. TLX data was collected after each flight.

Results

Flight Performance

Flight performance was measured using two types of metrics: root mean square error (RMSE) and time within standard (TWS). Total aircraft position deviation is quantified in terms of the distance of the aircraft horizontally and vertically from the desired centerline flight path. Computationally, these data are computed using Pythagorean's theorem as expressed: $c^2 = a^2 + b^2$, where c denotes total deviation and a and b denote horizontal and vertical deviation, respectively. The RMSE data were transformed using the natural logarithm function in order to normalize them. TWS is computed as the percentage of participant's total performance within the standard (Airspeed within 90 ± 10 knots, lateral deviation ≤ 200 feet and vertical deviation ≤ 150 feet).

In order to identify the significant factors, in-depth statistical analyses were carried out by performing repeated-measures ANOVA on each of the flight performance metrics. Using a significance level of 5%, results showed the only significant factor is the interaction between control types and pilot instrument rating (with $F(1, 9) = 5.869$ and p value = 0.038). The other factors (including main factors and two-way interactions) were found to be non-significant. The following Figure 3 illustrates the interaction effect between control types and instrument rating. That is to say, for instrument rating (IFR) pilots, their performance on maintaining lateral position using V-CAS was worse than using the conventional control, while for non-IFR pilots, V-CAS improved this performance.

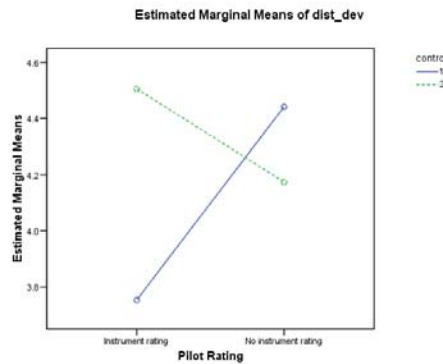


Figure 3. Interaction Plot of Control Types and Instrument Rating

Repeated-measures ANOVA for TWS metrics revealed that there are neither significant factors nor interaction identified. A further look at the mean comparison illustrates that overall IFR pilots have better performance than non-IFR pilots in terms of time within standard proportions, as illustrated in Figure 4.

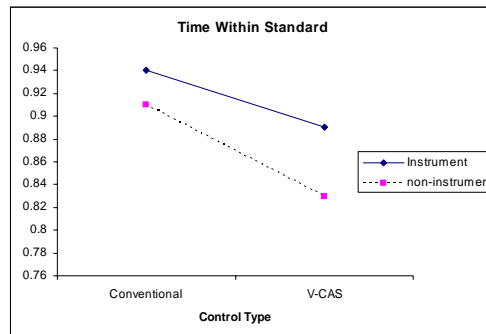


Figure 4. Mean TWS for pilot rating and control type

Workload Assessment

NASA Task Load Index (NASA TLX) was used to measure subjective workload. It measures seven different workload domains, including mental demand, physical demand, temporal demand, effort, performance, frustration, and stress level. TLX questionnaire was administered for each subject after he or she completed each trial. The survey data were then coded into quantitative values between 0 to 100 (it can be seen for most domains except for the performance, that the lower the value, the more favorable the rating. For the performance category, a further transformation using 100 minus the performance was used to make the performance rating

consistent with the other categories). From descriptive statistics, it can be found that across all other conditions, non-IFR pilots have a higher perceived workload than IFR pilots; V-CAS has lower perceived workload than conventional control; PRFD is perceived to have lower workload than HITS, and for BSBG and EBG, the workload score is very close, therefore no pattern can be identified. A further in-depth repeated-measures ANOVA analysis revealed that the between-subject factor (pilot rating) is not a significant factor for TLX workload scores (with $F=0.596$ and a p value of 0.458); neither one of the within-subject factors were found significant (for control type, $F= 3.359$ and $p=0.097$; for terrain portrayal, $F=0.163$ and $p = 0.695$; and for guidance symbology, $F= 3.264$ and $p=0.101$).

Discussion

Results from this study surprised us in several ways. One, from the objective flight performance measures, pilot rating (IFR versus non-IFR) is not a statistically significant factor for flight performance metrics, including deviation RMSE and proportion of time within standards. Although the effect is not statistically significant, IFR pilots did perform slightly better for most of the performance measures from the descriptive statistics; One particular interest of this study is to investigate the effects of the advanced concepts on flight performance, that is, the difference between V-CAS and baseline (conventional) for flight control, the difference between EBG and baseline (BSBG) for terrain portrayal, and the difference between NASA Ghost HITS and baseline (PRFD). Similarly to flight performance results, subject perception on workload did not differ significantly among different conditions, although IFR participants did show a slightly lower perceived workload and higher situation awareness level and the V-CAS group has a lower level of workload than the conventional flight control group.

The different concepts yielded only minor changes in flight performance and workload. There are several significant factors that probably influenced these results and these factors should be considered before applying the results beyond the context of the experiment. The first factor is the effect of prior pilot experience and training. In general, the pilots had much more experience with the conventional or baseline concepts prior to the experiment. For example, all the pilots' previous training and operations would have been conducted using conventional, reversible flight control systems. While the subjects were given training and time to practice with all the concepts until they demonstrated adequate proficiency and felt prepared to perform the evaluations, it is unlikely that they had reached maximal performance with the advanced concepts. In the case of the V-CAS control, it is clear that significant negative transfer from previous experience and training was an issue.

A second factor is related to the flight task itself. In this study, evaluation pilots were able to allocate their full attention to the task of flying the approach. It is possible that the approach task used in this study was not demanding enough to reveal the potential operational benefits of the advanced concepts. With more resource-demanding tasks, we expect the differences between concepts would be more significant.

A final factor to consider is limitations of the specific implementation details used in this experiment. The advanced display and control concepts are the result of many low-level design and implementation details. It is possible that a minor, easily remedied deficiency, in any of these details can color the evaluation of the entire integrated concept. While the concepts had been refined in earlier simulation and flight trials, limitations of the flight test program prevented evaluation and tuning of individual elements for the particular flight evaluation platform used in this investigation.

The ultimate goal of SATS is to replace pilot training time and in-flight workload with the new and advanced technology, with the above factors in mind, it is early to conclude the true effect of advanced technology on pilot training and performance. More research is needed to give a more comprehensive picture of this effect.

Reference

- Bergman, G. A. (1976), An airplane performance control system: a flight experiment. *Human Factors*, 18(2), 173-182.
- Billings, C. E. (1997). *Aviation automation: the search for a human-centered approach*. Mahwah, NJ: Lawrence Erlbaum Associates.
- Comstock, J. R., Jr., Glaab, L. J., Prinzel, L. J. and Elliott, D. M. (2001), Can effective synthetic vision system displays be implemented on limited size display spaces? *Proceedings of 11th international symposium on aviation psychology*, Columbus, Ohio.
- Glaab, L.J, M.A. Takallu, 2002, Preliminary effect of synthetic vision systems displays to reduce low-visibility loss of control and controlled flight into terrain accidents, SAE 2002-01-1550.

- Hughes, M. F. and Takallu, M. A. (2002), Terrain portrayal for head-down displays experiment. *The Proceedings of international advanced aviation conference*, August, 2002. Retrieved online at URL <http://avsp.larc.nasa.gov/pdfs/csrp33.pdf>.
- Hunn, B. P. and Camacho, M. J. (1999), Pilot performance and anxiety in a high-risk flight test environment, *The proceedings of the human factors and ergonomics society 43rd annual meeting*, September 27 - October 1, 1999, Houston, Texas, USA.
- Jarvis J. Arthur III J. J., Prinzel III, L., J., Kramer, L. J., Parrish, R. V., and Bailey, R. E. (2004), Flight simulator evaluation of synthetic vision display concepts to prevent controlled flight into terrain (CFIT), *NASA/TP-2004-213008*, retrieved July 2004, at URL <http://avsp.larc.nasa.gov/pdfs/csrp45.pdf>.
- Keppel, G. (1991). *Design and analysis: A researcher's handbook* (Third Edition). Englewood Cliffs, NJ: Prentice-Hall.
- Pennington, J. E. (1979), Single pilot scanning behavior in simulated instrument flight, *NASA Technical Memorandum 80178 (NASA-TM)*, Langley Research Center. Hampton, Virginia.
- Stewart, E. C. (1994) A piloted simulation study of advanced controls and displays for general aviation airplanes. NASA Center for Aerospace Information (CASI) *NASA-TM-111545; NAS 1.15:111545; 19th Congress of ICAS*, Anaheim, CA, United States, 18-23 Sep. 1994.
- Takallu, M., Wong, D., Bartolone, A., Hughes, M., and Glaab, L., Interaction between various terrain portrayals and guidance/tunnel symbology concepts for general aviation synthetic vision displays during a low en-route scenario, *Proceedings of the 23rd digital avionics systems conference*, 2004.
- Uenking, M. D. and Hughes, M. F. (2002), The Efficacy of using synthetic vision terrain-Textured images to improve pilot situation awareness, *2002 SAE World Aviation Congress and Display*. NASA Langley Research Center, 2002-11-5. Retrieved online at URL <http://library-dspace.larc.nasa.gov/dspace/jsp/bitstream/2002/10604/1/NASA-2002-wacd-mdu.pdf>.