

NASA/CR—2006-214410

AIAA—2006—4603



Centaur Test Bed (CTB) for Cryogenic Fluid Management

*Steven Sakla, Bernard Kutter, and John Wall
Lockheed Martin Space Systems Company, Denver, Colorado*

September 2006

NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI Program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Reports Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:


- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include creating custom thesauri, building customized databases, organizing and publishing research results.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA STI Help Desk at 301-621-0134
- Telephone the NASA STI Help Desk at 301-621-0390
- Write to:
NASA STI Help Desk
NASA Center for AeroSpace Information
7121 Standard Drive
Hanover, MD 21076-1320



Centaur Test Bed (CTB) for Cryogenic Fluid Management

*Steven Sakla, Bernard Kutter, and John Wall
Lockheed Martin Space Systems Company, Denver, Colorado*

Prepared for the
42nd Joint Propulsion Conference and Exhibit
cosponsored by the AIAA, ASME, SAE, and ASEE
Sacramento, California, July 9–12, 2006

Prepared under Purchase Order NNC05QA89P

National Aeronautics and
Space Administration

Glenn Research Center
Cleveland, Ohio 44135

Trade names and trademarks are used in this report for identification only. Their usage does not constitute an official endorsement, either expressed or implied, by the National Aeronautics and Space Administration.

Level of Review: This material has been technically reviewed by expert reviewer(s).

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076-1320

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161

Available electronically at <http://gltrs.grc.nasa.gov>

Centaur Test Bed (CTB) for Cryogenic Fluid Management

Steven Sakla, Bernard Kutter, and John Wall
Lockheed Martin Space Systems Company
Denver, Colorado 80201

Abstract

Future missions such as NASA's space exploration vision and DOD satellite servicing will require significant increases in the understanding and knowledge of space based cryogenic fluid management (CFM), including the transfer and storage of cryogenic fluids. Existing CFM capabilities are based on flight of upper stage cryogenic vehicles, scientific dewars, a few dedicated flight demonstrations and ground testing. This current capability is inadequate to support development of the CEV cryogenic propulsion system, other aspects of robust space exploration or the refueling of satellite cryo propulsion systems with reasonable risk. In addition, these technologies can provide significant performance increases for missions beyond low-earth orbit to enable manned missions to the Moon and beyond.

The Centaur upper-stage vehicle can provide a low cost test platform for performing numerous flight demonstrations of the full breadth of required CFM technologies to support CEV development. These flight demonstrations can be performed as secondary mission objectives using excess LH₂ and/or LO₂ from the main vehicle propellant tanks following primary spacecraft separation at minimal cost and risk.

Acronyms

CEV	Crew Exploration Vehicle
CLV	Crew Launch Vehicle
CTB	Centaur Test Bed
DOD	Department of Defense
EDS	Earth Departure Stage
g	Earth's Gravity
INU	Inertial Navigation Unit
LAD	Liquid Acquisition Device
LEO	Low Earth Orbit
LH ₂	Liquid Hydrogent
LO ₂	Liquid Oxygen
LOI	Lunar Orbit Insertion
LSAM	Lunar Surface Access Module
N ₂ H ₄	Hydrazine
PMD	Propellant Management Device
RCS	Reaction Control System
SM	Service Module
TEI	Trans Earth Injection

I. Introduction

The high performance, reliable Centaur upper-stage vehicle has a long history of performing flight experiments using excess LO₂ or LH₂ propellant following completion of primary mission objectives (i.e., spacecraft separation). Most Atlas/Centaur missions have excess propellants, ranging from hundreds to thousands of pounds. This excess LH₂ or LO₂ propellant can provide large quantities of working fluid for CFM demonstrations. This ability to utilize excess propellant rather than providing dedicated

performance and cryo dewars enables the Centaur to enact cost effective CFM demonstrations with minimal performance impact and low risk to the primary mission. Implementing the Centaur Test Bed (CTB) on the LO₂ aft bulkhead separates the cryo demonstration from the primary payload, easing integration. Some examples of recent Centaur based CFM experiments include pulsed chilldown of the feedlines and main engine, low-g propellant settling and LO₂ unbalanced venting. Space exploration initiatives will require new capabilities such as long-term cryogenic storage, propellant acquisition and propellant transfer. The use of the CTB can provide the overall best value for performing in-flight experiments in a low-g environment through “rideshare” opportunities by flying these experiments as secondary payloads to significantly advance CFM technology in support of NASA’s space exploration initiatives and satellite refueling missions.

II. CTB Overview

The CTB concept is composed of the addition of a “receiver” bottle to the Centaur aft bulkhead, a control panel, and plumbing connecting the bottle to the LO₂ or LH₂ tanks, (fig. 1). This receiver bottle would enable the transfer of LO₂ or LH₂ from the Centaur main tanks to the CTB, storage of the cryogenics on the CTB, transfer of the cryogenics back to the Centaur tanks and the venting of the cryogenics overboard.

The Centaur cryogenics are accessed via the installation of tubing connected to the LO₂ or LH₂ feedlines. During the nominal mission, a redundant valve isolates the CTB system from the Centaur’s propulsion hardware to minimize risk to the primary mission. Following spacecraft separation these valves are opened allowing the controlled transfer of cryogenics to the CTB.

The Centaur aft bulkhead contains sufficient space for the installation of a CTB as large as 48 by 30 by 30 in. A CTB of this scale is large enough to adequately test most CFM requirements. Existing flight hardware of similar size is already integrated on Centaur.

For missions requiring the demonstration of alternative cryogenics, e.g., LCH₄, another bottle containing the cryogen could be added to the Centaur aft bulkhead. This additional bottle would be connected to the CTB, providing the source cryogen for orbital demonstration.

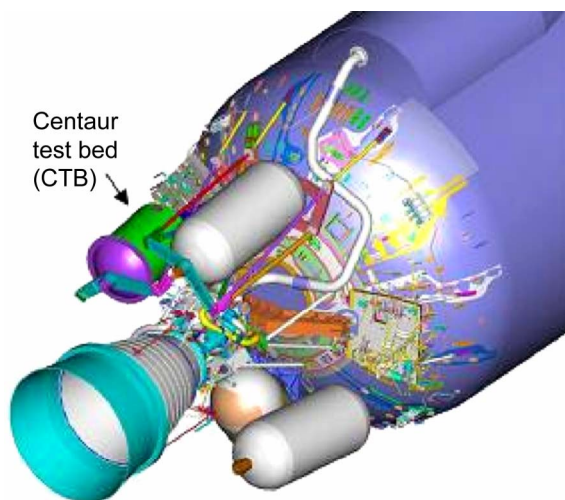


Figure 1.—The Centaur Test Bed (CTB) concept offers affordable, flexible CFM demonstration satisfying NASA’s near-term CFM requirements.

III. CTB Benefits

The CTB is designed to advance all manner of CFM and cryo transfer technologies under zero-G or definable low acceleration. The technologies that CTB can address include:

- Liquid acquisition and propellant management devices
- Mass gauging
- Cryo transfer efficiency
- Fluid stratification and mixing
- Liquid inflow geysering
- System chilldown
- No vent fill
- Transfer coupling control
- System operation
- Long duration storage technologies
- Pressure control
- Active and passive cooling

IV. Large Scale Demonstrations

The Centaur team has taken advantage of the unparalleled recent cryo flight experience, (fig. 2), including 100 flights since 1990, to refine Lockheed Martin's CFM understanding and the operation of cryogenic systems. This learning has benefited from the numerous unique mission profiles and augmented by dozens of post mission demonstrations. A partial list of the broad range of Centaur flight CFM experience is shown in table 1. These demonstrations are used to evolve Atlas and Centaur's capability in a pragmatic, minimal risk manner.

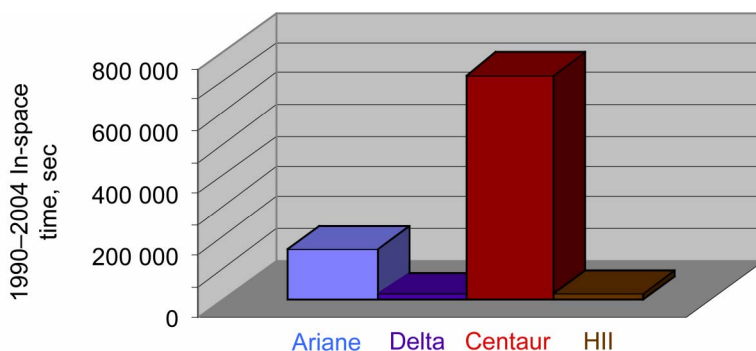


Figure 2.—Centaur's long history, high-flight rate, and long-duration-mission capability results in unparalleled cryo-fluid management experience.

TABLE 1.—CENTAUR HAS CONDUCTED NUMEROUS FLIGHT DEMONSTRATIONS OF CFM RELEVANT TO CRYO TRANSFER

Liquid control (10 ⁻⁵ to 6 G's)	Long coast impact (17 hr.)
Feed system warming and chardown	Pressurization sequencing
Propellant pullthrough	Slosh characterization
Ullage/wall thermal effect	Vent sequencing
Ullage and liquid stratification	Pressure collapse
Propellant utilization	Bubbler versus ullage pres.
Mass gauging	Unbalanced venting

For CFM technologies requiring large scale demonstration, the Centaur itself provides an ideal platform. CFM technologies, such as circulation, spray bars, insulation systems, and liquid acquisition, (fig. 3), can be integrated directly to the Centaur and demonstrated as a ride share, or on dedicated mission. System interaction in particular will benefit from the large scale the Centaur has to offer.

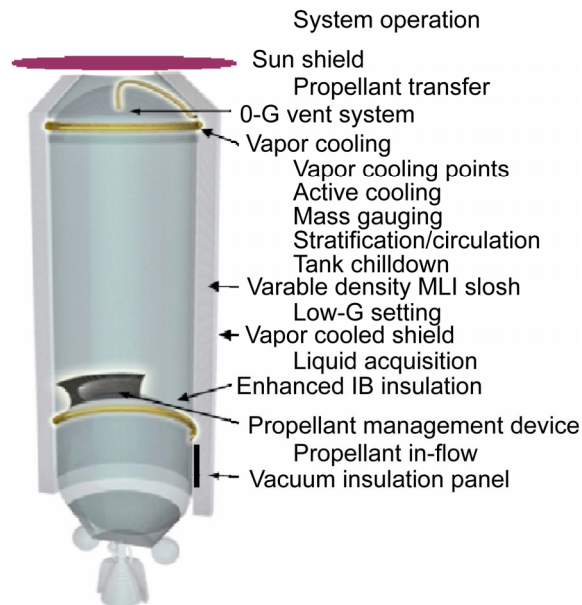


Figure 3.—Centaur can provide the platform for large scale CFM demonstrations.



Figure 4.—CTB control panel.

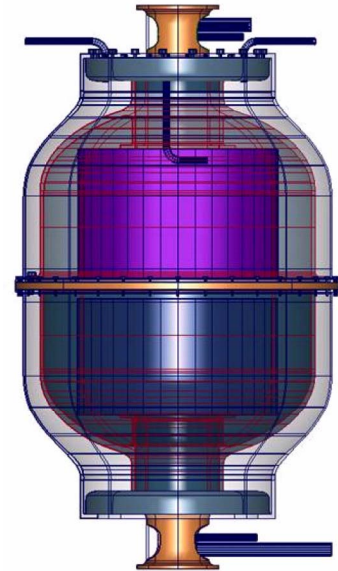


Figure 5.—CTB receiver bottle.

V. CTB Design Overview

The CTB's primary components consist of a control panel as shown in figure 4 and a receiver bottle shown in figure 5. The control panel contains all of the necessary solenoid valves, pyro isolation valves and instrumentation to support the in-flight experiment. The CTB control panel module and receiver bottle would be qualified and acceptance tested as a complete system prior to installation on the vehicle. The receiver bottle consists of an inner and outer shroud. The outer shroud is used as a vapor-cooled shield to minimize boil-off losses during cryo transfer process and is also used for initial chilldown the receiver bottle prior to cryo fluid transfer.

VI. Leveraging Existing Designs

The design concept of the CTB leverages off of existing Centaur hardware and design practices in an effort to minimize design and mission risk. The CTB control panel is a modular system containing instrumentation and valving to control the flight experiment. This control panel is similar in design to the existing pneumatics panel which has been in flight service for several years. The receiver bottle is similar in size and weight to existing GHe storage and N_2H_4 storage bottles currently in use on the Centaur. Therefore, the bottle design and support methods for the receiver bottle are within the design, development and flight experience of the Atlas/Centaur program. Use of existing, flight-qualified cryogenic solenoid valves would also be employed in the CTB control architecture.

The recently upgraded Centaur avionics system contains sufficient battery power to support a >5 hr. CTB flight demonstration test following separation of the primary customer's spacecraft. This avionics system also has sufficient switching and control capability to support up to 10 additional solenoid control valves, numerous instrumentation transducers and pyrovalve control switches.

VII. Conclusion

The high performance, reliable Centaur upper-stage vehicle has a long history of performing flight experiments. This successful history along with sufficient real-estate and structural margins on the Centaur aft bulkhead can be used to provide a significant technological benefit in the advancement of CFM technologies in a micro-g environment. Furthermore, these in-flight experiments can be performed at a much lower cost than a dedicated spacecraft or mission by using “rideshare” opportunities and flying the CTB as secondary payload. The CTB can provide near-term technology benefits for NASA to advance its space exploration goals to the Moon and beyond. They can also benefit the DOD or perhaps commercial customer’s to demonstrate refueling of orbiting satellite’s to greatly extend satellite service life or enhance mission objectives.

REPORT DOCUMENTATION PAGE			<i>Form Approved</i> <i>OMB No. 0704-0188</i>	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE September 2006	3. REPORT TYPE AND DATES COVERED Final Contractor Report	
4. TITLE AND SUBTITLE Centaur Test Bed (CTB) for Cryogenic Fluid Management			5. FUNDING NUMBERS WBS 492994.05.01.01.03.02	
6. AUTHOR(S) Steven Sakla, Bernard Kutter, and John Wall				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Lockheed Martin Space Systems Company P.O. Box 179 Denver, Colorado 80201			8. PERFORMING ORGANIZATION REPORT NUMBER E-15689	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA CR-2006-214410 AIAA-2006-4603	
11. SUPPLEMENTARY NOTES Project manager, David J. Chato, Propellant Systems Branch, NASA Glenn Research Center, organization code RTP, 216-977-7488.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category: 34 Available electronically at http://gltrs.grc.nasa.gov This publication is available from the NASA Center for AeroSpace Information, 301-621-0390.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) Future missions such as NASA's space exploration vision and DOD satellite servicing will require significant increases in the understanding and knowledge of space based cryogenic fluid management (CFM), including the transfer and storage of cryogenic fluids. Existing CFM capabilities are based on flight of upper stage cryogenic vehicles, scientific dewars, a few dedicated flight demonstrations and ground testing. This current capability is inadequate to support development of the CEV cryogenic propulsion system, other aspects of robust space exploration or the refueling of satellite cryo propulsion systems with reasonable risk. In addition, these technologies can provide significant performance increases for missions beyond low-earth orbit to enable manned missions to the Moon and beyond. The Centaur upper-stage vehicle can provide a low cost test platform for performing numerous flight demonstrations of the full breadth of required CFM technologies to support CEV development. These flight demonstrations can be performed as secondary mission objectives using excess LH ₂ and/or LO ₂ from the main vehicle propellant tanks following primary spacecraft separation at minimal cost and risk.				
14. SUBJECT TERMS Cryogenics; Centaur upper stage; Fluid management			15. NUMBER OF PAGES 12	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	

