

Characterizing SWCNT Dispersion in Polymer Composites*

Peter T. Lillehei¹, Jae-Woo Kim¹, Luke Gibbons^{1,2}, and Cheol Park¹
 NASA Langley Research Center¹, National Institute of Aerospace²,
 Virginia Polytechnic Institute and State University²




*The authors acknowledge financial support from the NASA URETI on Bio Inspired Materials (NCC-1-02037). The authors thank Dr. K. E. Wise (NIA) and Dr. E. J. Siochi (NASA LaRC) for helpful discussions on radial power spectrum density and fractal dimensions.

Abstract

The new wave of single wall carbon nanotube (SWCNT) infused composites will yield structurally sound multifunctional materials. The SWCNT network regions through dispersion within the polymer matrix in order to maximize the benefits of the nanomaterial. However, before any nanomaterials can be used in aerospace applications a means of quality assurance and quality control must be certified. Quality control certification requires a means of quantification, however, the measurement protocol mandates a method of "seeing" the dispersion first. We describe here the new tools that we have developed and implemented to first be able to "see" carbon nanotubes in polymers and second to measure or quantify the dispersion of the nanotubes.

Imaging the True Dispersion

Optical, electron and probe microscopy tools have been utilized in order to establish the effectiveness of visualizing carbon nanotubes in polymer matrices. However, the data extracted from these tools is insufficient to develop a quantifiable measure of the dispersion. What was needed was a measure of the 3-D distribution of the nanotubes. The new tools we developed allows for the collection of data from "Poly-Transparent" imaging to begin to refine our models and understanding of the nature of the true dispersion.




This figure shows the progression of some of the Dispersion Characterization tools and SWCNT Dispersion procedures. Notice how the true nature of the SWCNT dispersion becomes apparent under high AV Poly-Transparent imaging. The scale bar is 10µm. 4µm, 1µm, and 500 nm for columns 1,2,3, and 4 respectively.

Sample 1: show imaging 1-0-0-0-1-A-SWNT-0-0-0-0
 Sample 2: in situ polymerization 1-0-0-0-1-A-SWNT-0-0-0-0
 Sample 3: in situ polymerization under rotation 1-0-0-0-1-A-SWNT-0-0-0-0
 Sample 4: in situ polymerization under rotation 1-0-0-0-1-A-SWNT-0-0-0-0
 Sample 5: in situ polymerization under rotation 1-0-0-0-1-A-SWNT-0-0-0-0
 Sample 6: in situ polymerization under rotation 1-0-0-0-1-A-SWNT-0-0-0-0

Poly-transparent 3-D Images


Poly-transparent imaging causes the non-conducting polymer to become transparent and allows the imaging of the conductive SWCNTs deep within the sample. Imaging the nanotubes in their natural state illustrates the effects that mixing conditions, association, polymer chemistry, and SWCNT composition have on the overall dispersion and resulting material properties. Poly-transparent imaging permits three-dimensional imaging of the SWNT network arrangement within the host polymer. The information derived from these three dimensional modal provides the information necessary to determine a methodology to quantify the dispersion of the SWNT network within the host polymer.

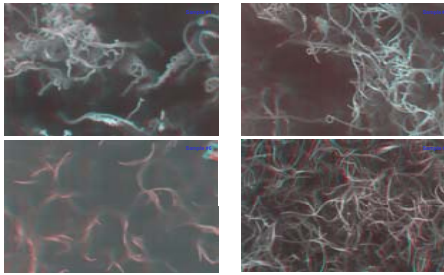

A well dispersed sample, bottom right, is now easily distinguished from a poorly dispersed sample, upper left. The true progression of the 3-D SWCNT dispersion deep within the hosting polymer matrix can be visualized and related to the processing methods and resulting material properties.


Image processing

The dispersion of the nanotubes can be measured directly from the Poly-Transparent images by performing a series of image processing techniques. First we perform a 2-D Fast Fourier Transform (FFT) analysis of the images.



RSPD plotting

Second we radially integrate over the spatial domain of the 2-D FFT to produce a plot of Radial Power Spectral Density (RSPD). The peaks in this plot correspond to dominant features within the image.




The RSPD measurements yield information relative to dominant features and ordering within the image. To this case, information associated with bundle diameter, segment length, and spacing within the nanotube network can be determined by analyzing the RSPD plot.

Fractal Dimension

The degree of ordering, or randomness, of the samples must also be determined to effectively measure the dispersion. The degree of randomness can be quantifiably characterized by determining the fractal parameter based upon the partitioning function associated with the Poly-Transparent image.


Minkowski Functions

The Minkowski functional connectivity is another image analysis tool that can be utilized to verify the local structure characteristics gathered from RSPD plots and fractal dimension analysis.



Dispersion Summary

The dispersion characteristics of the six samples can be compared by observing the RSPD plots and the fractal dimension associated with each Poly-Transparent image.



The dispersion is expressed as an average bundle size, segment length, spacing between the bundles, and the fractal dimension. From this data we can quantitatively observe the effect that the parameters such as mixing conditions, conduction, polymer chemistry, and even the SWCNT composition can have on the overall dispersion and resulting material properties of the composite samples.