

INTEGRATION AND TESTING CHALLENGES OF SMALL, MULTIPLE SATELLITE MISSIONS: EXPERIENCES FROM THE SPACE TECHNOLOGY 5 PROJECT

Timothy A. Sauerwein
Thomas Gostomski
Flight Systems Integration and Test Branch
NASA Goddard Space Flight Center
Greenbelt, MD

ABSTRACT

The ST5 technology demonstration mission led by GSFC of NASA's New Millennium Program managed by JPL consisted of three micro satellites (~ 30 kg each) deployed into orbit from the Pegasus XL launch. ST5 was a technology demonstration mission, intended to test new technologies for potential use for future missions. In order to meet the launch date schedule of ST-5, a different approach was required rather than the standard I&T approach used for single, room-sized satellites.

The I&T phase was planned for spacecraft #1 to undergo integration and test first, followed by spacecraft #2 and #3 in tandem. A team of engineers and technicians planned and executed the integration of all three spacecraft emphasizing versatility and commonality. They increased their knowledge and efficiency through spacecraft #1 integration and testing and utilized their experience and knowledge to safely execute I&T for spacecraft #2 and #3. Each integration team member could perform many different roles and functions and thus better support activities on any of the three spacecraft. The I&T campaign was completed with ST5's successful launch on March 22, 2006.

KEYWORDS: Spacecraft, integration and test, I&T schedule, ground system, environmental testing, launch site, lessons learned

I&T OVERVIEW

The ST-5 mission consisted of three micro satellites (~ 30 kg each) and was deployed into orbit from the Pegasus XL launch vehicle from Vandenberg Air Force Base (VAFB). ST-5 was a technology demonstration payload whose purpose was to test six new technologies for potential use for future space flights, and to demonstrate the ability of small satellites to perform quality science. The main technology was a science-grade magnetometer designed to take measurements of the earth's magnetic field.

The three spacecraft (S/C) were designed, integrated, and tested at NASA Goddard Space Flight Center (GSFC) with integration and environmental testing occurring in the spacecraft test complex. In order to successfully develop and launch ST5, the systems integration and test (I&T) manager determined that a different I&T approach was required to meet the project requirements rather than the standard I&T approach used for single, room-sized satellites.

There was insufficient time in the schedule to integrate and test the three spacecraft in series, as is typical for GSFC I&T. A solution was devised for S/C #1 to undergo integration and test

first, followed by S/C #2 and #3 simultaneously. The small size of these spacecraft, each one easily supported by a 1.3m by 2.6m table, made the logistical planning for this approach possible. All three spacecraft and their associated I&T support equipment took up less clean-room space than that required for larger single-spacecraft missions. Therefore, all three spacecraft could be physically accommodated at various stages of I&T in the same way as a typical single-spacecraft mission.

Mechanical Ground Support Equipment (MGSE) for spacecraft support and handling were considerably smaller and had less weight requirements than those of larger spacecraft. . For other significant I&T aspects, such as personnel staffing, I&T process and schedule, GSE and environmental testing, the increased accommodations of multiple spacecraft outweighed the reductions provided by their smaller size and weight.

In order to plan and execute three spacecraft I&T programs, personnel staffing was seen as the first area having the largest potential for cost growth. Special attention was given to assigning roles and responsibilities through the flow from S/C #1 to #2 and #3. Since S/C #1 I&T and environmental testing was performed first, followed by S/C #2 & S/C #3 I&T in tandem, it was determined that one test conductor (TC) team would integrate and test S/C #1, led by the Lead TC. One electrical technician team and one mechanical technician team

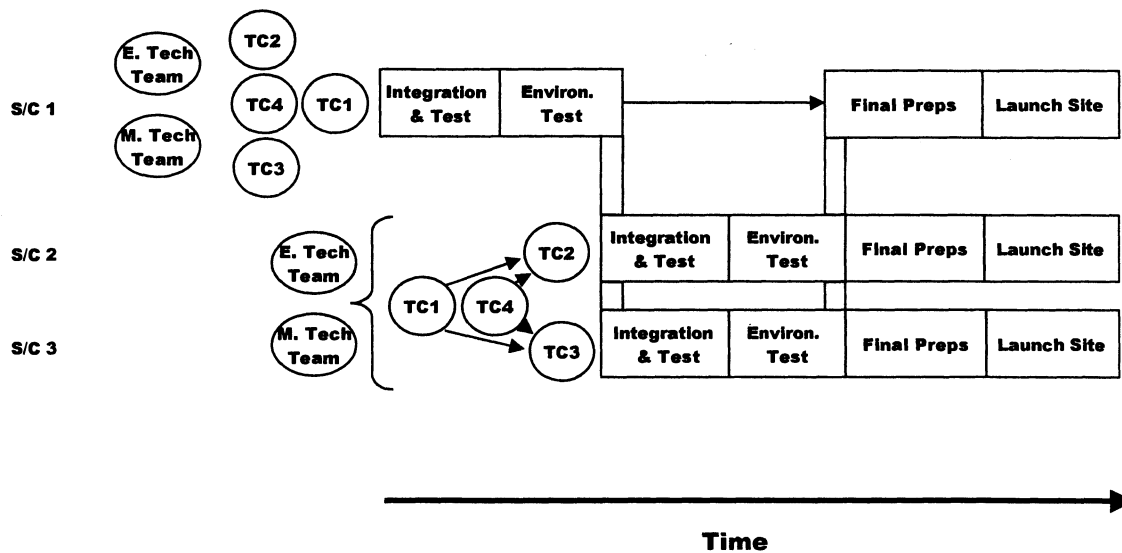


Figure 1.1 I&T flow and personnel

would physically integrate S/C #1, led by the lead electrical technician. The TCs that supported S/C #1 integration and test were then assigned as the Lead TCs for

S/C #2 and S/C #3 integration and test, with the oversight of the overall I&T effort performed by S/C #1 Lead TC, now serving as the Mission Lead TC (Figure 1.1). This enabled the Mission lead TC to perform other duties, such as supporting S/C #2 or S/C #3 activities as needed, or helping the I&T Manager plan future I&T activities.

The electrical technician and mechanical technician teams then physically integrated S/C #2 and S/C #3 in tandem, using the knowledge gained from S/C #1 integration. This made S/C #2 and S/C #3 integration more efficient. All personnel were cross-trained within their discipline (i.e., engineer, technician) and were able to serve in multiple roles. At the daily

task briefings and biweekly planning meetings, the I&T Manager kept the team focused and coordinated the overall I&T program.

I&T PROCESS AND SCHEDULE

Economy of repetition was the focus of the I&T documentation and planning process. One set of integration procedures was written for all S/C. Procedures from S/C #1 integration had to be updated, reviewed, and signed prior to S/C #2 and S/C #3 integration. An I&T team member was assigned as responsible for incorporating the red-lines, and on-site configuration management support was required to help facilitate accurate knowledge of approved documents (out of chaos?) and keep the flow of signatures on track. . It was important to have procedures ready early for the planned activities, and there was always a back-up activity planned as a contingency. It was very important to have a dedicated, on-site scheduler for working back-up replanning , sometimes more than once a day.

As shown in Figure 2.1, mechanical integration activities were performed on one spacecraft at a time. This enabled efficiencies gained by the repetition of the activity.

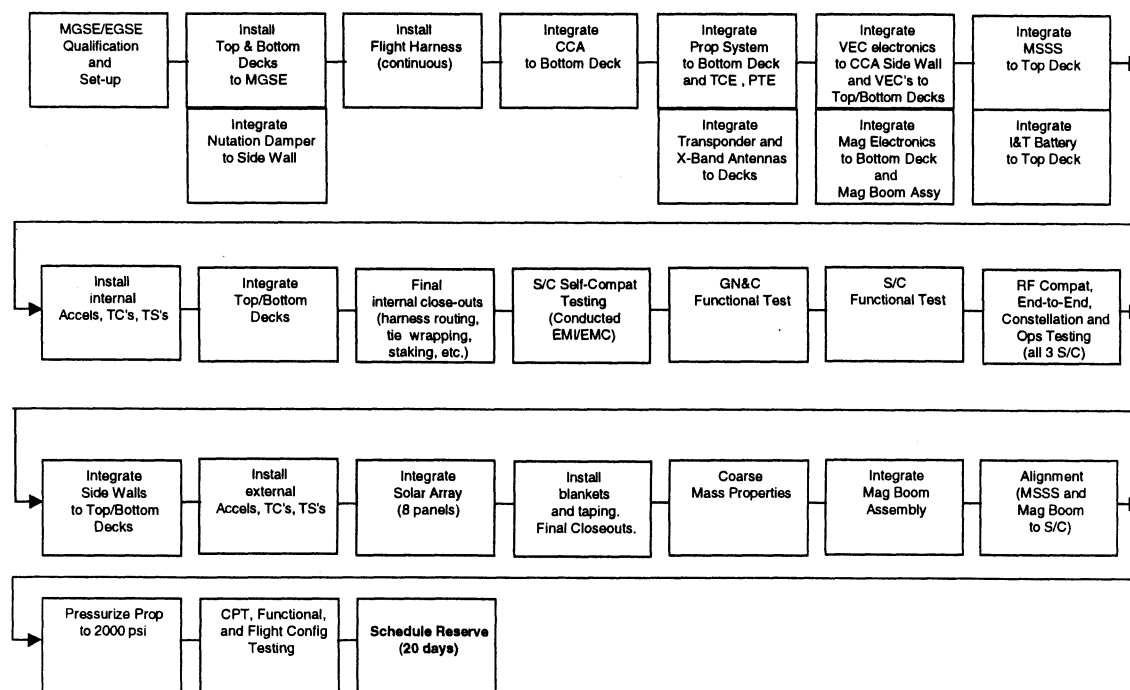


Figure 2.1 ST5 S/C #2 & S/C #3 I&T Flow showing serial mechanical & parallel electrical activities

Different electrical activities could occur concurrently to S/C #2 or S/C #3. One spacecraft would undergo the electrical integration of one box (e.g., sun sensor), while another spacecraft would undergo the electrical integration of a different box (e.g., thruster control electronics). When the electrical integration activities involving a particular box were complete, electrical integrations of the same box were repeated on the other S/C. This allowed the Product Design Lead (PDL), the engineer responsible for a specific subsystem or box, to complete all of his work at I&T at one time. This minimized the time needed to

perform the integration to multiple S/C due to the efficiencies gained through the repetition of the activity. It also allowed the I&T Team and PDLs to compare the integration test data for identically designed units back to back, and more easily notice similarities and differences in the performance of one unit from another. Test procedures were automated, as much as possible, and the same test equipment items, such as oscilloscopes, voltage and current meters, and Break Out Boxes (BOBs), were used throughout integration to keep the test results consistent from S/C to S/C.

GROUND SUPPORT EQUIPMENT/GROUND SYSTEM

One Primary Work Station (PWS) and Front End Data System (FEDS) was used for all three spacecraft to send commands and receive telemetry (Figure 3.1). Command data packets sent from the PWS w/Spacecraft Identifier (SCID) header to the FEDS which then removed the SCID header, created a new header using the correct protocol and format, and sent it to the corresponding S/C. Spacecraft telemetry was sent to a separate FEDS input channel for each spacecraft. The data is stored and then sent by the FEDS to the appropriate Work Station (WS) for display. Each WS was set up to default to a specific spacecraft, and was reconfigurable to maintain flexibility in case of WS failure. A single PWS was used and all commands were routed through the PWS and screened prior to being issued to one S/C. The remaining S/C used an Associate Workstation (AWS as shown in figure 3.1) and its commands were routed through the PWS to the S/C. Differences, such as FSW tables and some command sequences, did exist. These differences were handled at the start of a test script where the SCID was used to reference the correct FSW tables, sequences, etc., which were then were loaded. Differences existed in some coefficients (tank pressure, magnetometer current draw, etc.). These were handled at the start of a test script, where another procedure was called to load the correct specific coefficients.

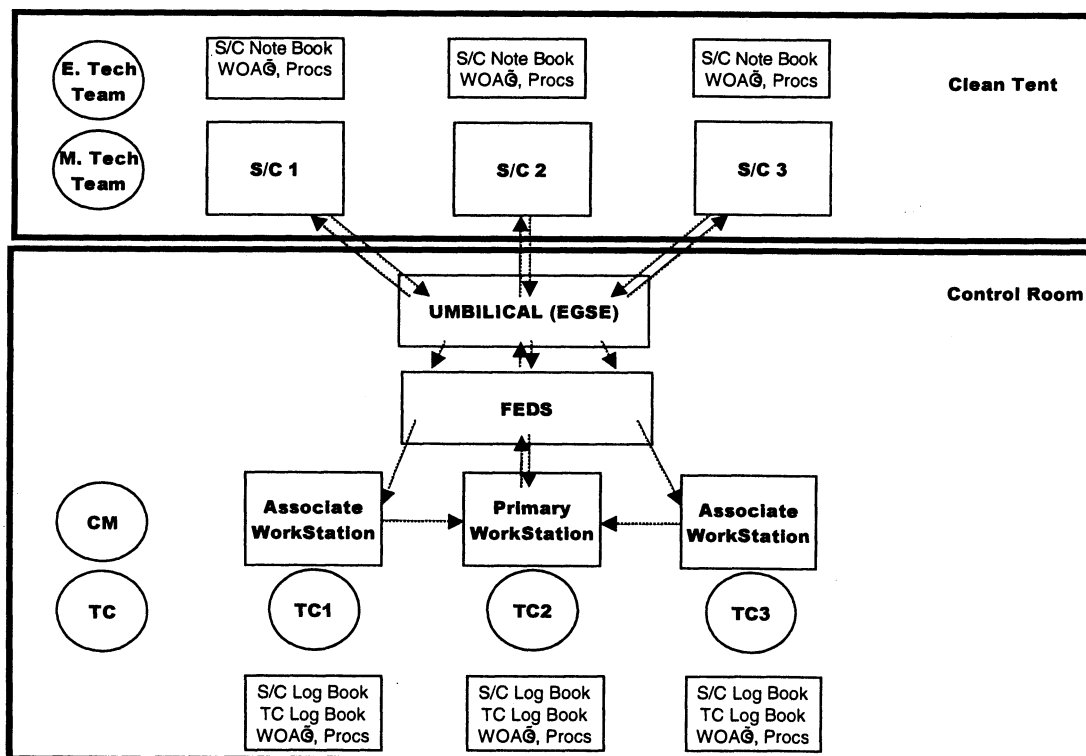


Figure 3.1 ST5 Pictorial Overview of S/C I&T –hardware and personnel perspective

An umbilical rack was developed which could handle all three S/C. The umbilical Rack allowed for commanding to a specific S/C or broadcast to all S/C. Each Umbilical had three identical sets of hardware and interfaces, one to each S/C. Each set of umbilical rack harnesses was color coded to a specific S/C and the umbilical rack front panel was color coded to a specific S/C. Two RF Racks existed and would interface to one S/C at a time. Three power subsystem GSE Racks existed, each one dedicated to each S/C.

ENVIRONMENTAL TESTING

Most tests, such as electromagnetic interference and compatibility (EMI/EMC), vibration and magnetics, were performed serially. The exception was thermal vacuum/thermal balance (TV/TB) on S/C #2 and S/C #3. An I&T Team member was assigned as lead for each test. Their responsibility was to complete the test plan and procedure, and prepare for and direct the test. Two TV/TB tests were performed, first S/C #1, then S/C #2 and S/C #3 together. S/C #2 and S/C #3 were placed in the same chamber together, but were independent and had identical test configurations. This allowed independent control, monitor, and test of each S/C. These aspects made it easier to build the GSE and physically plan the configuration of the test.

Only one spacecraft was actively tested at a time, with the other spacecraft in a quiescent state. This allowed for minimal test support and focus on one spacecraft at a time, especially important if problems arose.

LAUNCH SITE ACTIVITIES

To improve efficiency and cost-effectiveness, some activities that typically are performed at the launch site were performed at GSFC. For example, performing propulsion system and battery charging at GSFC saved time and staffing required at the launch site, therefore saving travel costs. Similar to flight integration and test, activities were staggered so that parallel processing could occur. Tasks were grouped at the launch site so that staff would only have to be present at the launch site for a minimum amount of time. Critical flight tests and activities, such as Comprehensive Performance Test (CPT) and alignment, were performed early in the Launch Site flow, to allow time to staff any unexpected needs. Other activities, such as GSE checkout, were performed early when time permitted, even if the item was not needed for some time. Spare GSE and flight hardware were brought out to the launch site, saving the delay in packing and shipping if needed.

LESSONS LEARNED

In summary, small spacecraft missions create the opportunity to launch multiple spacecraft in the same launch vehicle and operate them as one system. While this provides tremendous advantages to science, it also provides many challenges to engineering. In the field of I&T, many aspects of a campaign can be planned for efficiency and effectiveness relating to multiple, small spacecraft. Having a physical integration layout, in both the clean tent and the control room, that lends itself to multiple integration activities allows for parallel efforts and schedule efficiencies. Cross-training the I&T team to be able to perform multiple roles and functions also enables more I&T operations without doubled or tripled staffing sizes. It was also crucial to have a separate person/team responsible for each spacecraft with authority and

accountability. It is important to have an overall Lead TC, lead electrical technician, and lead mechanical technician who can see the "big picture" and facilitate backup planning. It is also important to assign a person on the I&T team who is responsible for each subsystem, including procedures, plans, and GSE. High risk testing should be performed early, if possible, to allow finding and fixing problems while there is time in the schedule to resolve them. It is also important to perform mechanical activities serially, due to the efficiency gained in repetition.

Procedures should be ready to go prior to the start of integration. There is little time to write them once integration starts and it provides more options when re-planning integration activities. A configuration management(CM) person available and dedicated to I&T is especially important when multiple spacecraft are being integrated and red-lines need to be incorporated into the procedures. A dedicated scheduler is essential to work multiple spacecraft planning and re-planning activities. With multiple spacecraft, there is always some activity to complete. Being prepared to work on multiple spacecraft simultaneously means always having a back-up plan and enabling the team to dynamically re-plan.

Test procedures should be automated to ensure consistent test results from spacecraft to spacecraft. Planning each environmental test should be led by an I&T Team member. If possible, take one spacecraft through I&T and environmental testing before building and testing more spacecraft to gain efficiencies from learning and repetition.

Use the same test equipment, such as oscilloscopes, meters, and BOBs throughout integration to ensure consistency in the test results from S/C to S/C. Have identical items such as GSE, procedures, harnessing to the greatest extent possible and uniquely identify items, such as harnessing and GSE for a particular S/C. Pay special attention to being consistent. Developing a physical integration layout, in both the clean tent and the control room, lends itself to multiple integration activities. This layout should be organized to allow for ease of maintaining separate S/C activities. At the launch site as in flight I&T, perform critical flight testing and activities early so that if problems arise there is sufficient time to fix the problem. Minimize activities at the Launch Site, perform as much work as you can "at home."

Plan for slack in the schedule so that the team does not burn out. If efforts get behind, push to catch up to the schedule, then the team can work at a regular pace and feel good. It is a relief, almost like a break, when one S/C's activities are done for a period of time such that the team is only working on one S/C.

As a result of following these practices, the three (3) ST-5 spacecraft were successfully integrated and tested, shipped to the launch site, and ready for launch according to the I&T schedule that was established three years previously.