



Marshall Space Flight Center

# Ceramics for Molten Materials Transfer

Evan Standish<sup>1</sup>, Doru M. Stefanescu<sup>1</sup>, and Peter A. Curreri<sup>2</sup>


<sup>1</sup>*Dept. of Materials Science and Engineering, The Ohio State University, Columbus OH*

<sup>2</sup>*NASA - Marshall Space Flight Center, Huntsville AL*

*AIAA Aerospace Sciences Meeting 2009*

*January 5 – 8, Orlando, FL*

## acknowledgments



Marshall Space Flight Center

---


The authors wish to acknowledge discussions and collaborations with Prof. Donald Sadoway, MIT, Dr. Laurent Sibille, ASRC, and Orlando Melendez, KSC, Prof. Jonathan Whitlow, FIT, on lunar applications of the electrowinning process.

Concepts for this paper were developed under the Lunar Oxygen Production by Electrowinning project led by KSC under the Management of William Larson.

The support of many program management leaders was essential especially Joe Howell, Carole Mclemore, John Fikes and Chuck Owens who managed the MSFC In Situ Resource Utilization effort.

The efforts of Jerry Sanders, JSC, as the NASA In Situ Resource Utilization lead have been particularly essential for continued progress in the study of lunar resource utilization.

# Outline



Marshall Space Flight Center



- Introduction
- Electrowinning cell feeding
- Material removal from the electrowinning cell
  - Removal of gasses
  - Removal of solids
  - Removal of liquids



# High Temperature Metal Oxide Electrolytic Cell

Marshall Space Flight Center

- **Liquid oxide bath from regolith**
- **Inert Anode**
- **Conductive Cathode in contact with liquid metal**
- **Selective extraction of elements**
- **Oxygen production**

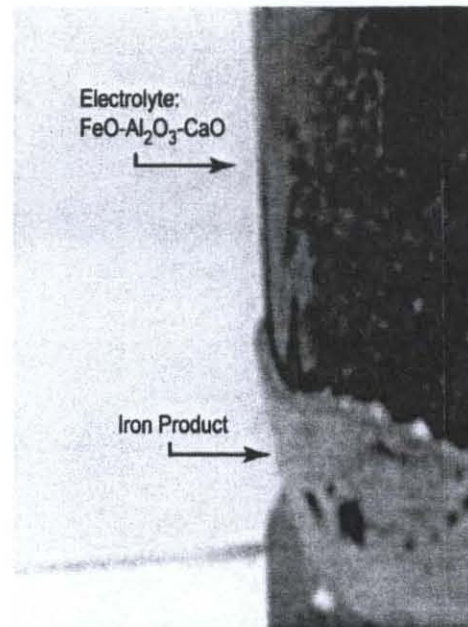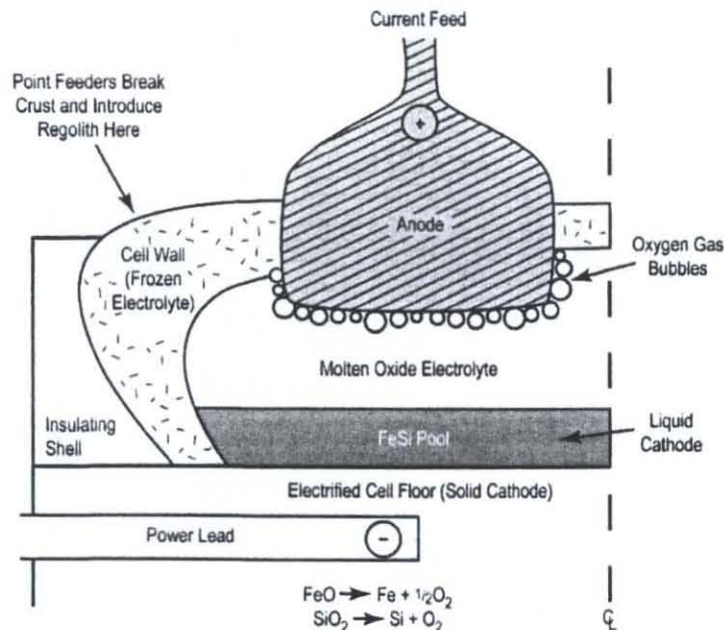

## Products

Element	Potential
	0.44
	-0.90
<b>Al</b>	<b>-1.67</b>
<b>Mg</b>	<b>-2.35</b>
<b>Ca</b>	<b>-2.84</b>

**Electrolysis is one method to selectively extract metals and silicon**


(Donald Sadoway, Massachusetts Institute of Technology, 2004)



# Introduction

Marshall Space Flight Center

Gas: inert gas  
Solid: charging materials

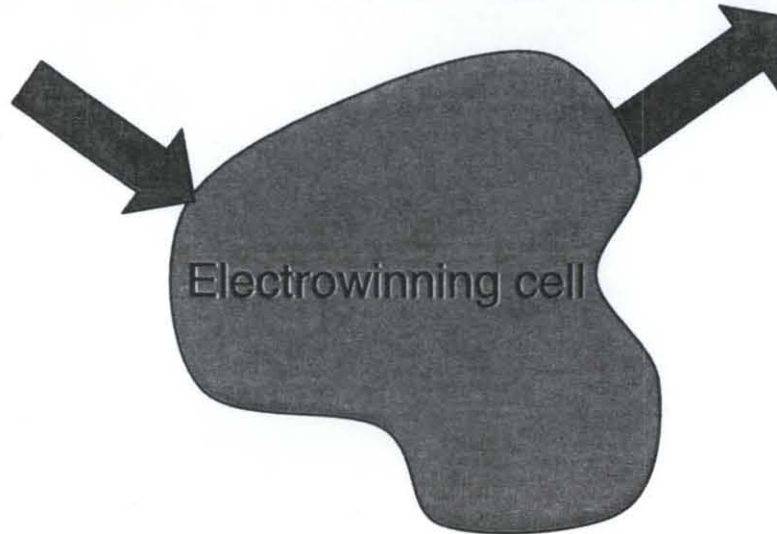


Gas: oxygen, others?  
Liquid: electrolyte, metal  
Solid: metal

Working hypothesis:

## Anticipated processes and characteristics

Process	Products	Temperature	Process duration
High temp. (HTEW)	Molten metal & alloys, molten oxides, gases	>1400°C	4 - 24hrs
Low temp. (LTEW)	Solid metal & alloys, molten mix of fluorides, chlorides & oxides	~1000°C	?


# Outline



Marshall Space Flight Center

- Introduction
- Electrowinning cell feeding
- Material removal from the electrowinning cell
  - Removal of gasses
  - Removal of solids
  - Removal of liquids


# Electrowinning Cell Feeding




Marshall Space Flight Center

## Feed device for metal compound

- ❖ Description of technology
  - delivery duct delivers metal compound to circulating electrolyte, enhancing dissolution
  - metal compound can be delivered above or under the surface of the electrolyte
- ❖ History – 2006 patent
- ❖ Application of technology – electrowinning processes with metal-based anodes below 940 °C
- ❖ Limitations for application to lunar missions – none apparent

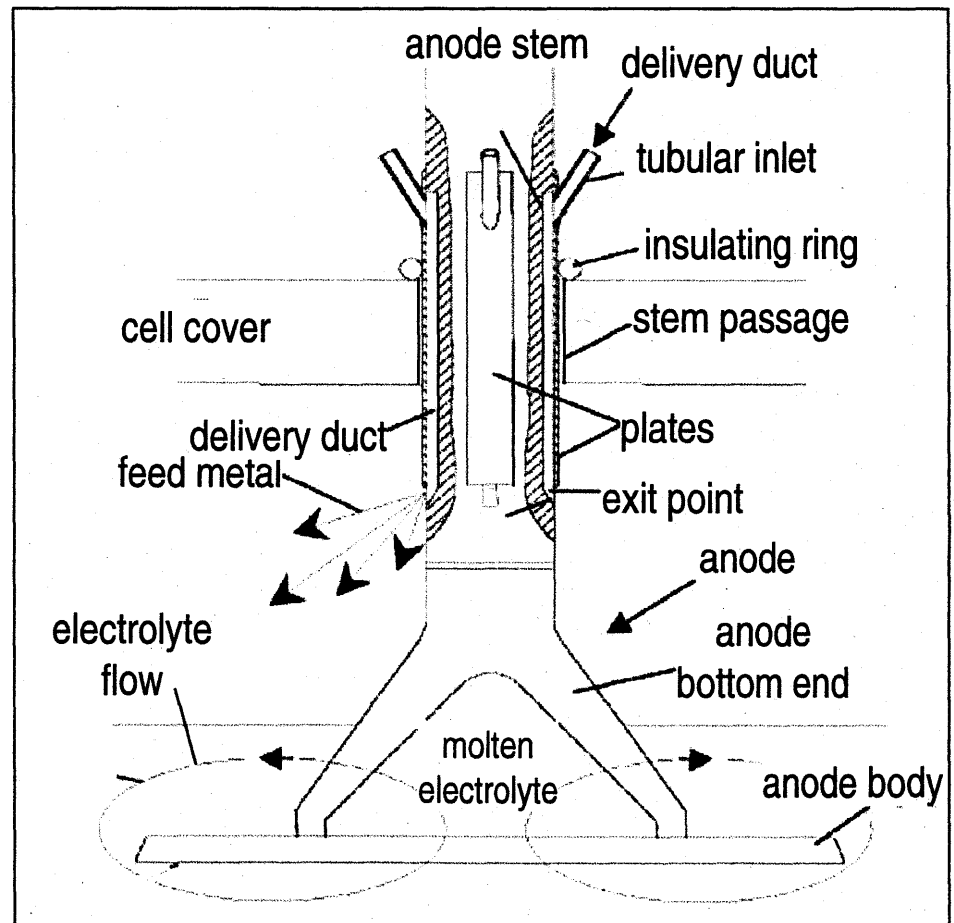


# Electrowinning Cell Feeding



Marshall Space Flight Center


## Feed device for hygroscopic metal compounds

- ✘ Description of technology
  - allows the use of hydrated or oxygen containing feed-stock for cells that require freedom from oxygen containing compounds
  - furnace adjacent to cell (see fig.) used to melt and chlorinate feed-stock
  - pumps used to maintain melt circulation in furnace
  - melt pumped through channels to the electrolytic cell; excess electrolyte returned to furnace
- ✘ History – 2001 patent
- ✘ Application of technology – described for production of Li and Mg
- ✘ Limitations for application to lunar missions – irrelevant unless the lunar environment contains free water or oxygen

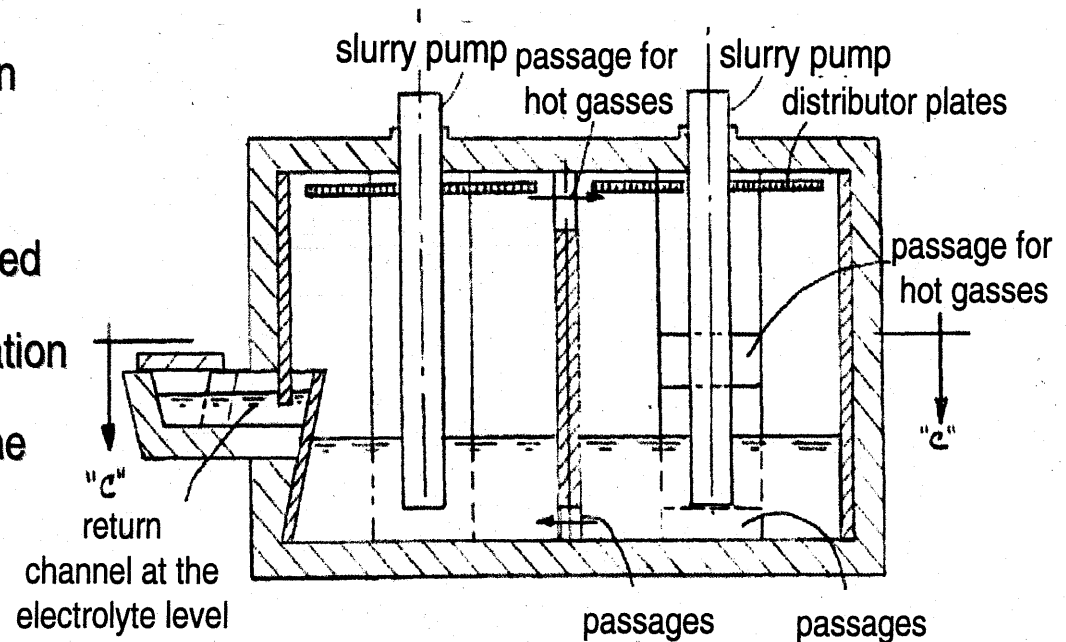




# Outline



Marshall Space Flight Center

- Introduction
- Electrowinning cell feeding
- Material removal from the electrowinning cell
  - Removal of gasses
  - Removal of solids
  - Removal of liquids

# Removal of Gasses




Marshall Space Flight Center

## Oxygen removal from containers

- ✘ Description of technology
    - flooding of the environment with nitrogen or argon gas
    - oxygen residual ~ 1%
  - ✘ History – described in patent by Maget et al.
  - ✘ Application of technology – used in the pharmaceutical industry
  - ✘ Limitations for application to lunar missions
    - large capital expenditure
    - requires large quantities of nitrogen or argon
- ✘ Description of technology
    - limitation of free volume in the cell
    - evolved oxygen pressure use for self-removal
  - ✘ History – to design
  - ✘ Application of technology – none known
  - ✘ Limitations for application to lunar missions – none apparent

# Removal of Gasses



Marshall Space Flight Center

## Gas Extraction from Closed Cells

- ✧ Description of technology
  - removal of gasses particularly oxygen from closed containers
  - apparatus senses the oxygen

FIG. 1 is a schematic side elevation view, partially in section, showing the principal components of the electrochemical oxygen extractor.

FIG. 2a illustrates the configuration for a prior art zinc-air battery operated with oxygen from air, where the air is supplied simultaneously to the battery and the electrochemical cell.


FIG. 2b illustrates the configuration of the present invention for a zinc-air battery extracting oxygen from a container, wherein the oxygen flows solely toward the air intake port of the zinc-air battery.

FIG. 3a is a schematic diagram showing the electrochemical oxygen extractor in a closed system configuration.

FIG. 3b is an equivalent diagram showing the electrochemical oxygen extractor in an open system configuration.

### missions

- some infrequent maintenance may be required
- need appropriate sensors for high temperature processes

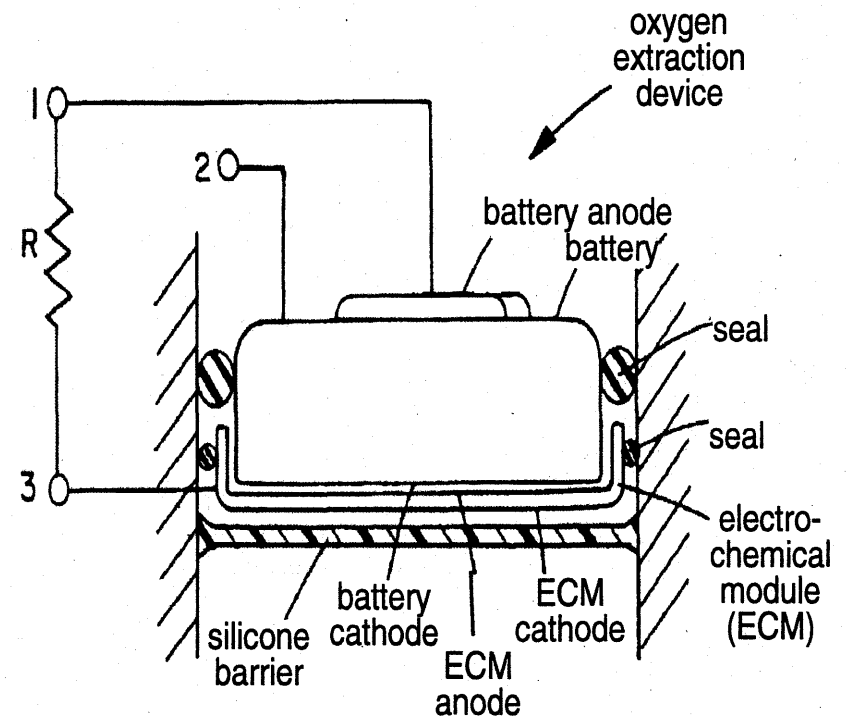


Electrochemical oxygen extractor

# Removal of Gasses




Marshall Space Flight Center

- Description of technology
  - Metal based anode with electrically conductive structure parallel to the cathode
  - Parallel electrically active anode members (see fig.) on which oxygen is evolved during electrolysis
  - Electrolyte is circulated through the gaps driven by the escape of the oxygen
- History – 2003 patent
- Application of technology – described for aluminum electrowinning cell
- Limitations for application to lunar missions – none apparent

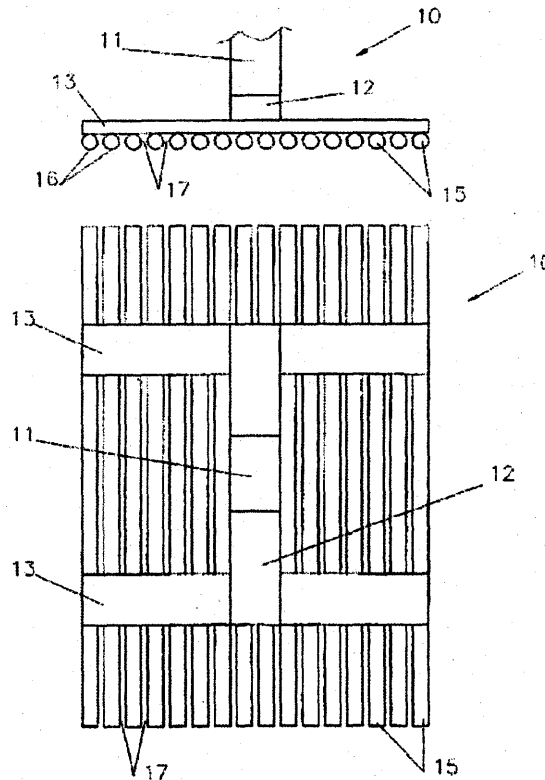

Oxygen Extracting Anodes

# Material Removal from the Electrowinning Cell



Marshall Space Flight Center

## Removal methods for solids and liquids


### ✠ removal of solids

- o freezing of the electrolytic cell and removal of solids
- o removal of solid metal sheet from the liquid electrolyte

### ✠ removal of liquids

- o molten liquid pumping systems
- o gravity separation systems
- o pressurized removal systems

# Removal of Solids




Marshall Space Flight Center

## Freezing of the Electrolytic Cell and Removal of Solids

- ✦ **Description of technology**
  - used in experiments of electrowinning of molten titanium from titanium dioxide
  - at the end of each run the cell temperature was reduced below  $1600^{\circ}\text{C}$ , the anode was lifted above the electrolyte surface and the system cooled to room temperature
  - once cooled, the contents of the cell were removed
  - internal dimensions of the cell: diameter-80 mm, height -120 mm.
- ✦ **Application of technology – High and low temperature electrowinning**
- ✦ **Limitations for application to lunar missions**
  - Potential use for an initial lander mission to return sample to earth and analyze them

# Removal of Solids




Marshall Space Flight Center

## Removal of Solid Metal Sheet from the Liquid Electrolyte

- ✘ Description of technology – 2 steps:
  - remove cathode from electrolysis cell after specified time (thickness of metal deposit)
  - remove solid metal sheet from cathode
- ✘ Limitations for application to lunar missions - cathode removal
  - for an initial lander mission - cathode returned to earth for analysis of metal deposit
  - for a pilot plant where metal deposit is used on lunar surface
    - to minimize crew intervention use an automated cathode exchange mechanism (see next slide)
    - metal deposit stripped from cathode using a patented stripping mechanism (see subsequent slide)
    - cathode exchange mechanism and the cathode stripping mechanism needs to be coupled
  - may require some crew intervention working with hot electrode to exchange electrodes and moving electrodes from the electrolysis cell to a stripping chamber unless they are coupled


# Removal of Solids



Marshall Space Flight Center


## Cathode Exchange Mechanism

- ✦ Description of technology
  - cathode carousel is computer driven and can be commanded to place a specific cathode at the engagement position
  - cathode injection arm can rotate about vertical axis and translate in vertical direction
  - injector arm rotates to cathode engagement position and translates down to engage an electrode
  - after engagement it translates up with electrode and rotates to electrode insertion position
  - it then translates down to insert electrode into electrolysis cell
  - reverse motions are applicable to eject the electrode from the cell and place it back on the carousel
  - electrical connections for electrolysis is on injector arm - each electrode does not need a separate electrical connection

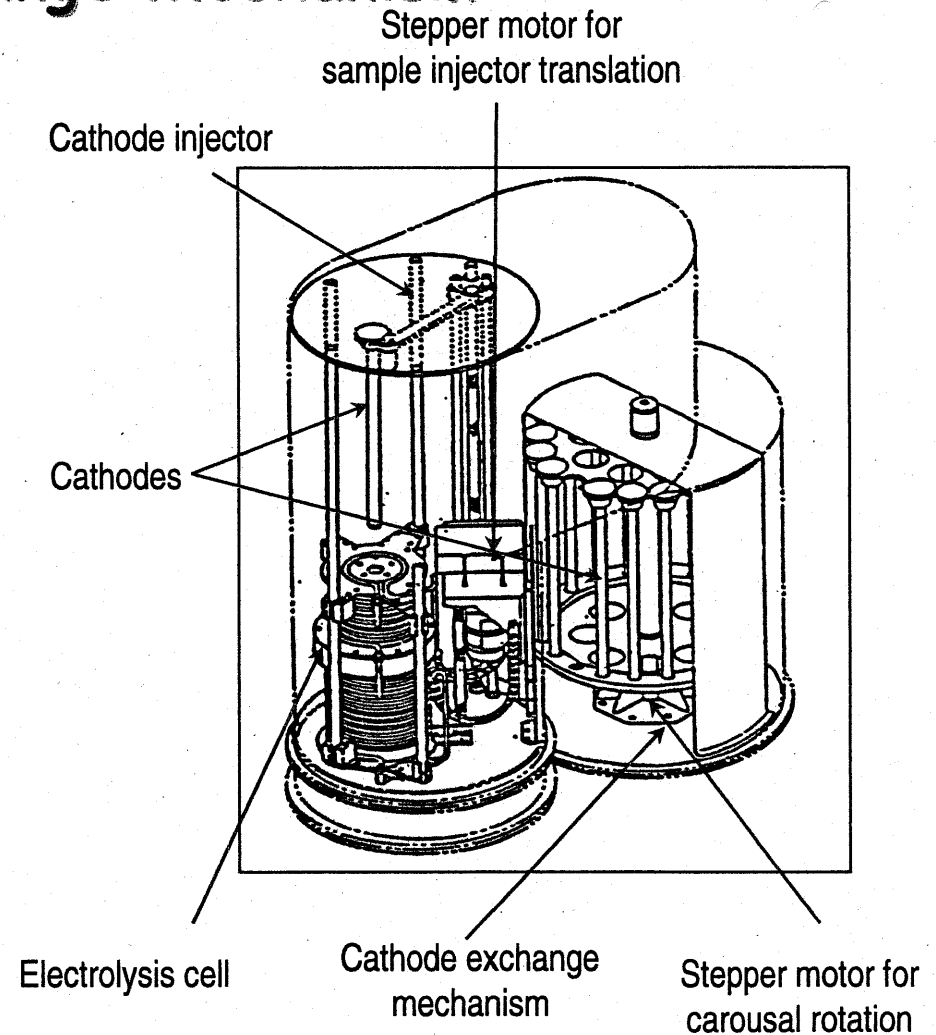



# Removal of Solids




Marshall Space Flight Center

## Cathode Exchange Mechanism

### ✦ History

- o The sample exchange mechanism has been successfully flown on the shuttle as part of the Crystal Growth Furnace (CGF) and Advanced Automated Directional Solidification Furnace (AADSf)
- o CGF could accommodate 6 samples and AADSf could accommodate 3 samples
- o Total weight of sample exchange mechanism was approximately 15 lbs
- o Weight of each sample assembly is approximately 4 lbs


# Removal of Solids




Marshall Space Flight Center

## Stripping Mechanism 1

- ✦ Description of technology
  - in modern production plants for Cu, Ni or Zn the cathode is usually made of a different metal than the metal to be produce
  - metal to be produced is removed in plate-like sheets (typically over 5 mm thick) from surface of permanent cathodes
  - permanent cathodes are continuously circulated between the electrolytic tanks and removal station
  - interval between removals is typically from one to seven days.
- ✦ History – 2003 patent

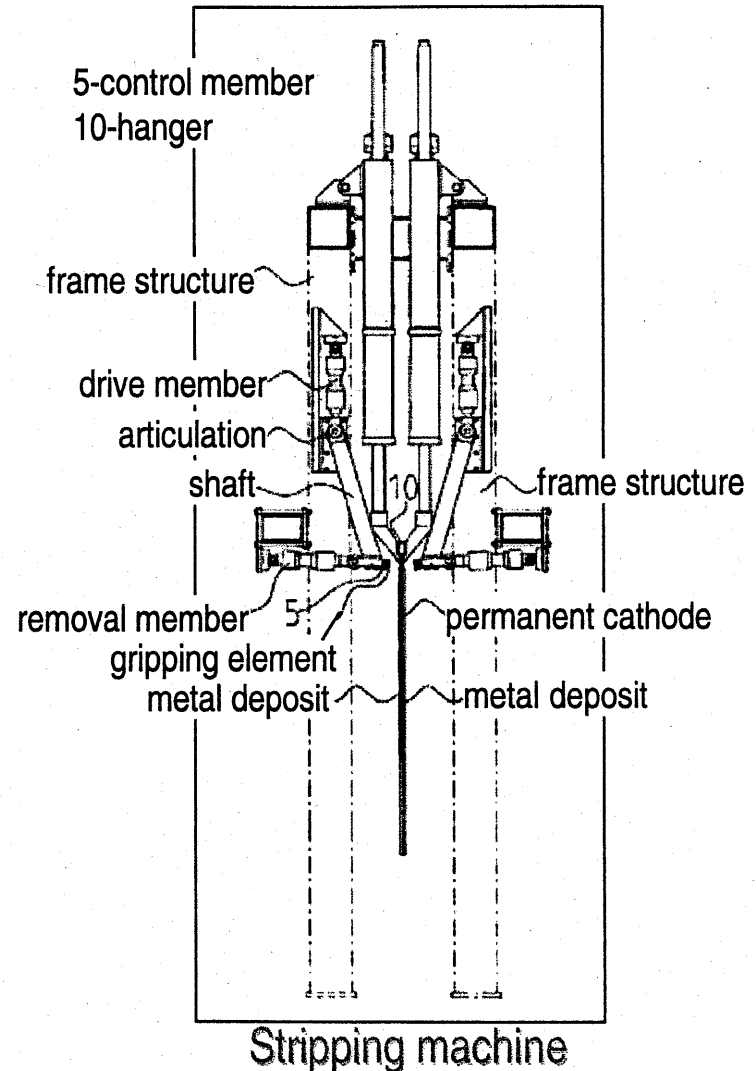


# Removal of Solids



Marshall Space Flight Center

## Stripping Mechanism 2

- ✘ Description of technology
  - metal to be produced is removed in plate-like sheets (typically over 5 mm thick) from surface of permanent cathodes
  - grooves are produced in the metal plates to facilitate breaking and removal
- ✘ History – 2003 patent

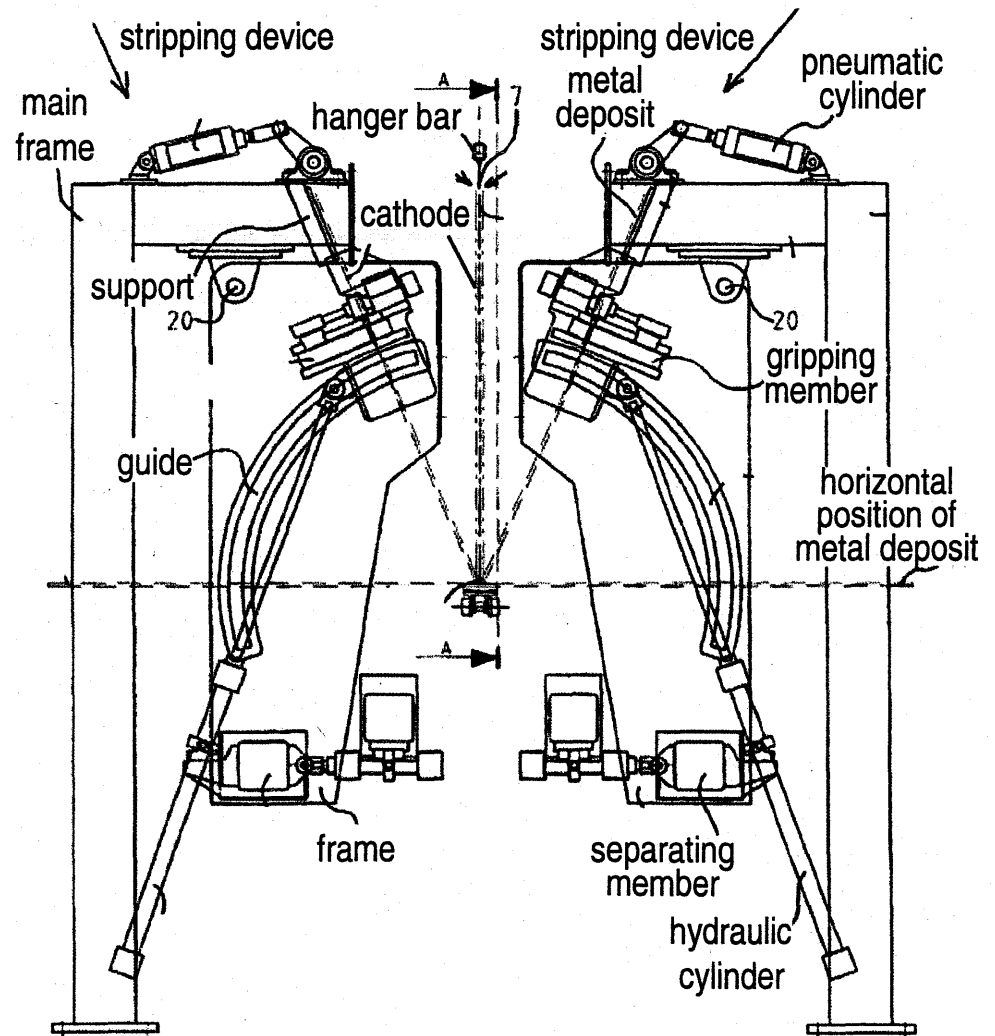

# Removal of Liquids




Marshall Space Flight Center

## Molten Liquid Pumping Systems

### ✦ Description of technology

- pump pushes liquid reactants upward and out of the cell
- submerged intake allows separation of two different fluids by adjusting device height
- advantages: large volume transfer per unit time, less superheat required
- types of pumping systems
  - positive-displacement pressure pump
  - centrifugal pump
  - electromagnetic pump

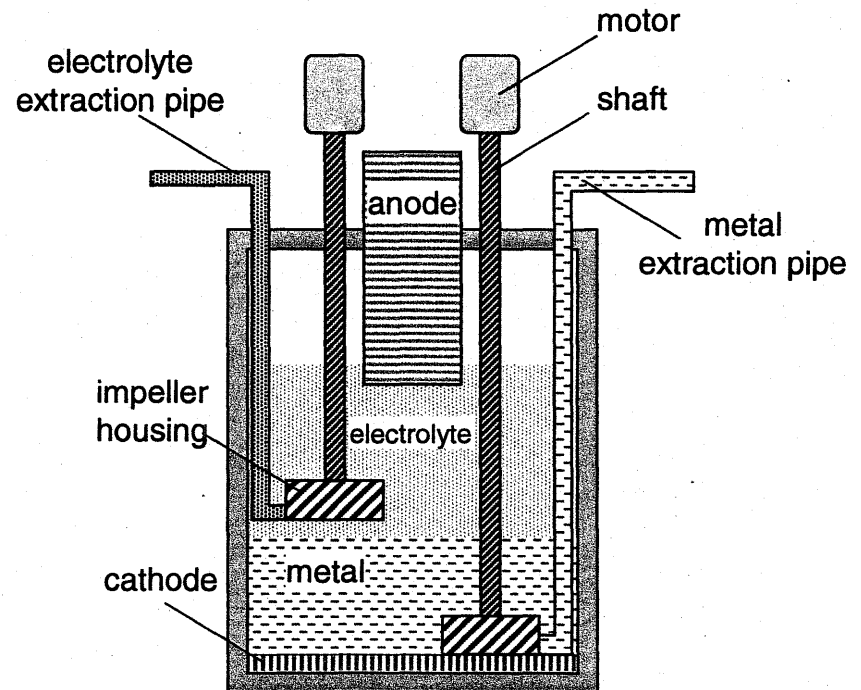


Arrangement for two centrifugal pumps for transfer of electrolyte and molten metal

# Removal of Liquids




Marshall Space Flight Center

## Molten Liquid Pumping Systems -electromagnetic pumps-

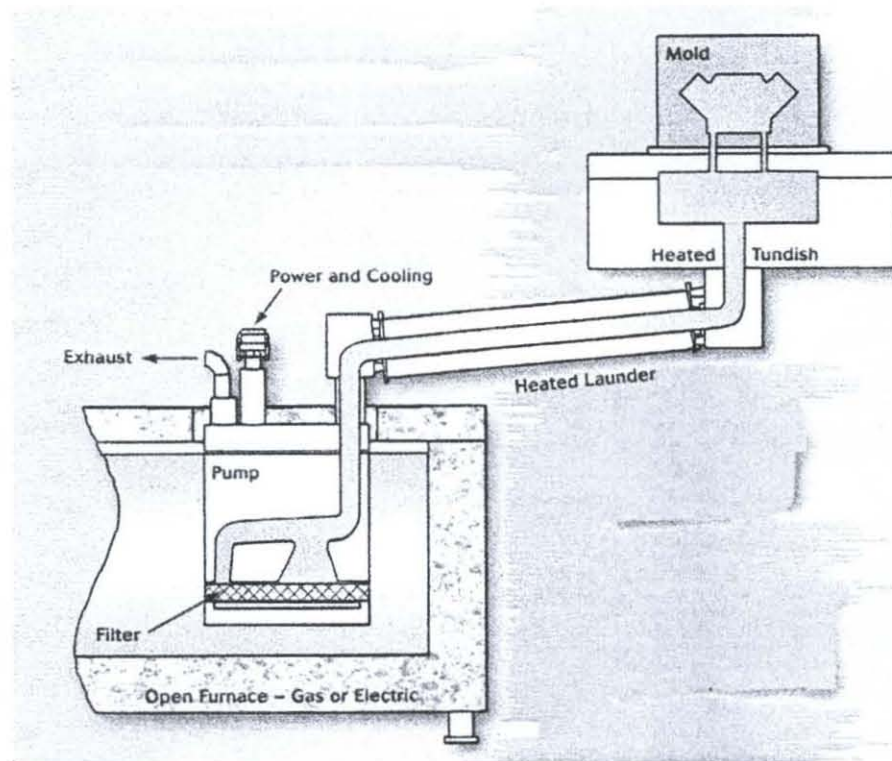


Arrangement for electromagnetic pump used in casting

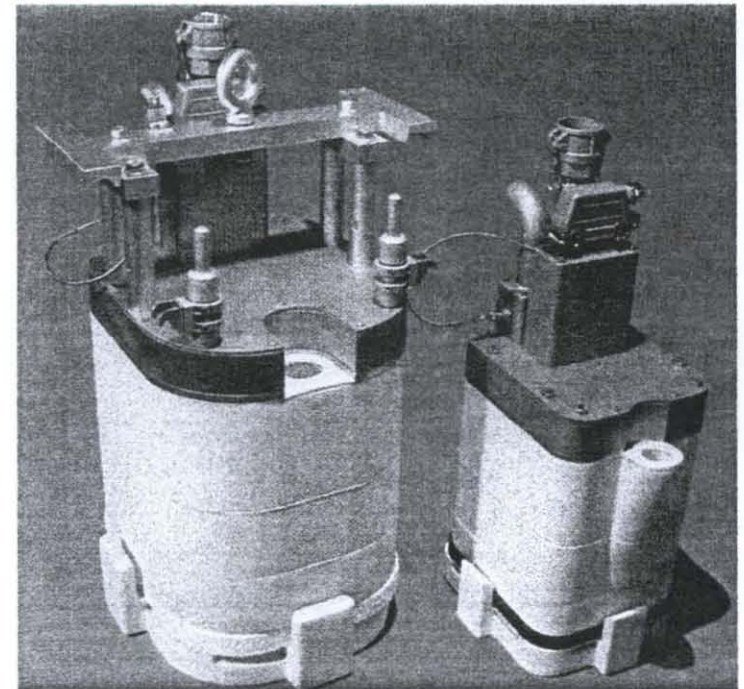

Industrial electromagnetic pumps

(CMI Novacast Inc.)

# Removal of Liquids



Marshall Space Flight Center

## Molten Liquid Pumping Systems

- ❖ Technology application, scale and results
  - commonly used with Al, Mg, Zn and Pb molten alloys
  - size scaling is not a problem; e.g, one foundry has poured a 9,000 kg casting using a transfer pump
  - temperature scaling: centrifugal pump used to pump 72,600 kg molten Cu for 55 min
- ❖ Application of technology – high temperature electrowinning
- ❖ Limitations for application to lunar missions
  - for mechanical pumps - spare parts to be procured from earth
  - electromagnetic pumps have no moving parts but only good for metals


# Removal of Liquids




Marshall Space Flight Center

## Gravity Separation Systems

- ✦ Description of technology
  - pipes submerged in the reactants at levels appropriate for the two products
  - removal of materials controlled by plugging the extraction pipes, or by translating the pipes vertically above the surface of the electrolyte
  - acts as a level control mechanism
  - filters could be used on metal extraction pipe to insure complete separation from electrolyte or oxide inclusions
- ✦ History - technology will be specially design for the current project
- ✦ Limitations for application to lunar missions
  - high viscosity of materials and low lunar gravity

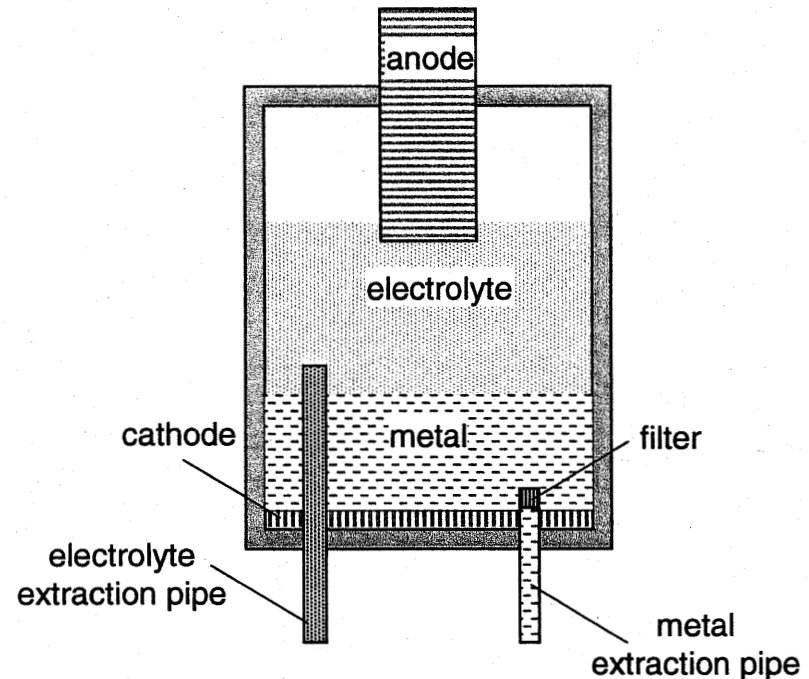


# Removal of Liquids



Marshall Space Flight Center

## Pressurized Removal Systems

- ✘ Description of technology
  - pressure is applied on top of the liquids in the cell to remove electrolyte and molten metal
  - pressure can be exercised either by the residual oxygen that is produced in the electrolytic cell, or by an inert gas to be pumped from outside
- ✘ History – used for medium and large scale (tons/hr) molten metal transfer in foundries (see next slide)
- ✘ Limitations for application to lunar missions
  - availability of a pressurizing gas (residual oxygen for production cells or external inert gas for small demonstration cells)

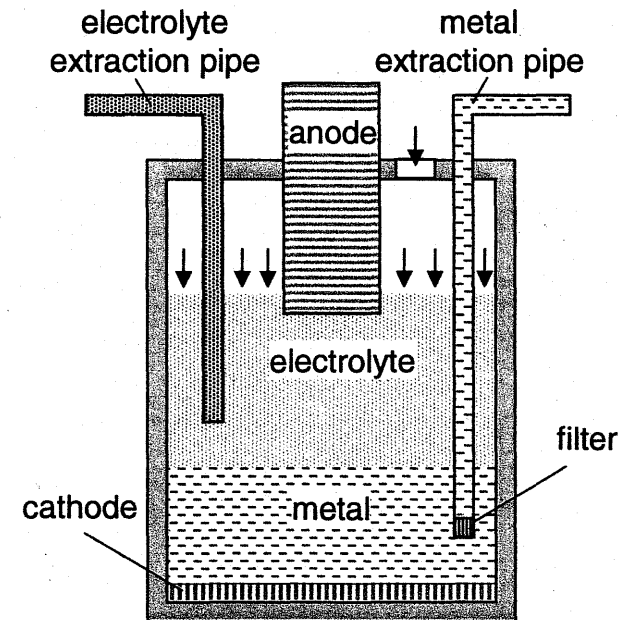





# Removal of Liquids



Marshall Space Flight Center

## Pressurized Removal System for Cast Iron

- ✘ operating temp.  $\sim 1450^{\circ}\text{C}$
- ✘ can operate for 24 hrs before stopping for stopper rod maintenance
- ✘ industrial records show operation times before relining of 10 to 24 months
- ✘ no technical size limitation
- ✘ pressure above molten iron establishes level of iron in furnace and discharge rate

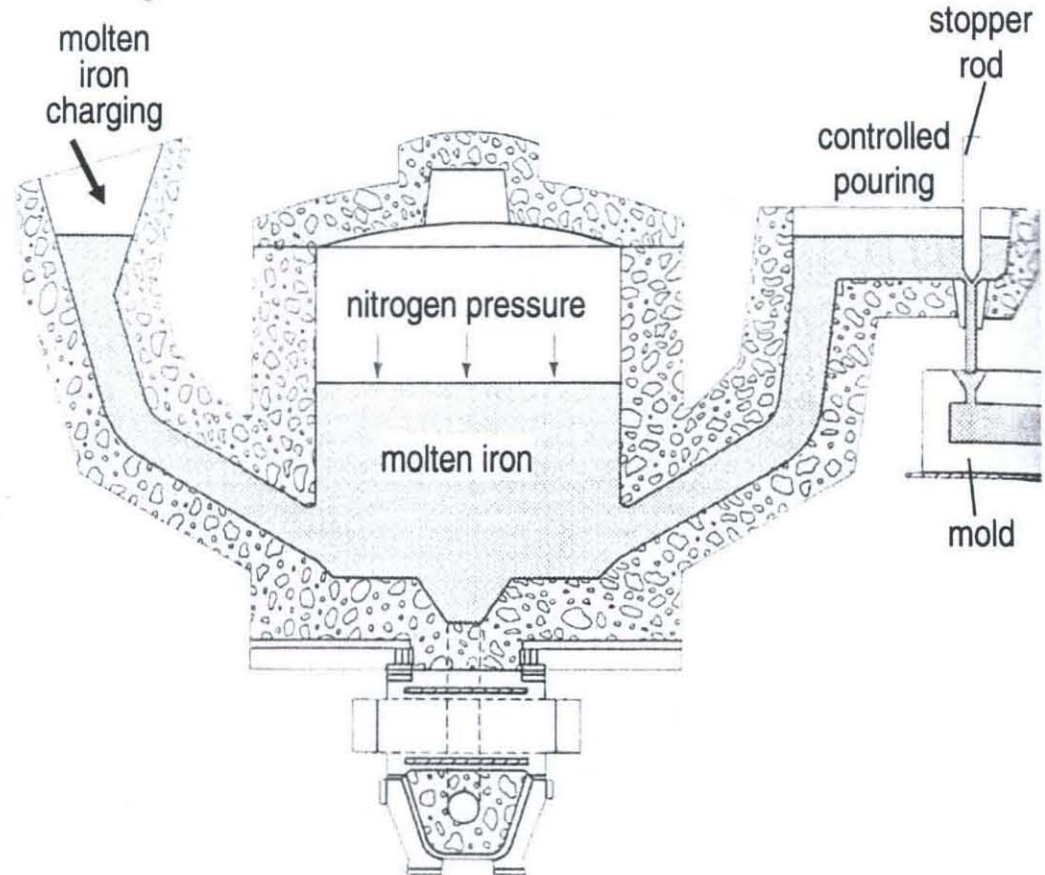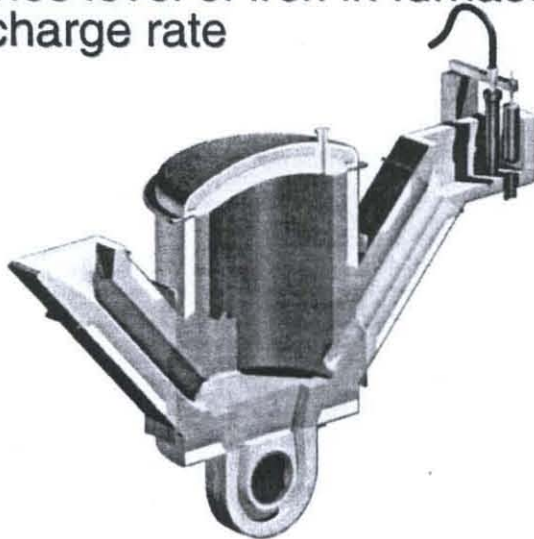


# Removal of Liquids




Marshall Space Flight Center

## Pressurized Removal Systems for Cast Iron

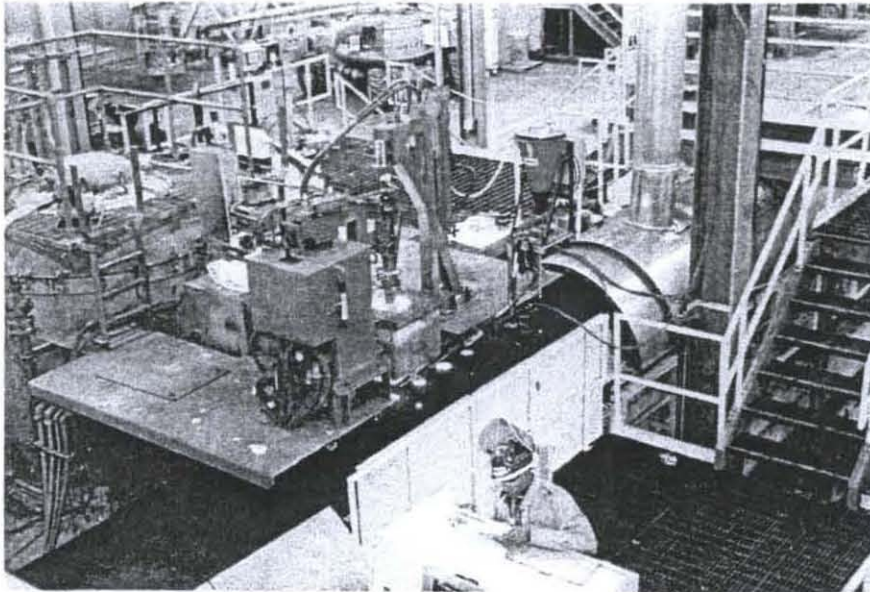


25,000 lb pressure-pour furnace for cast iron

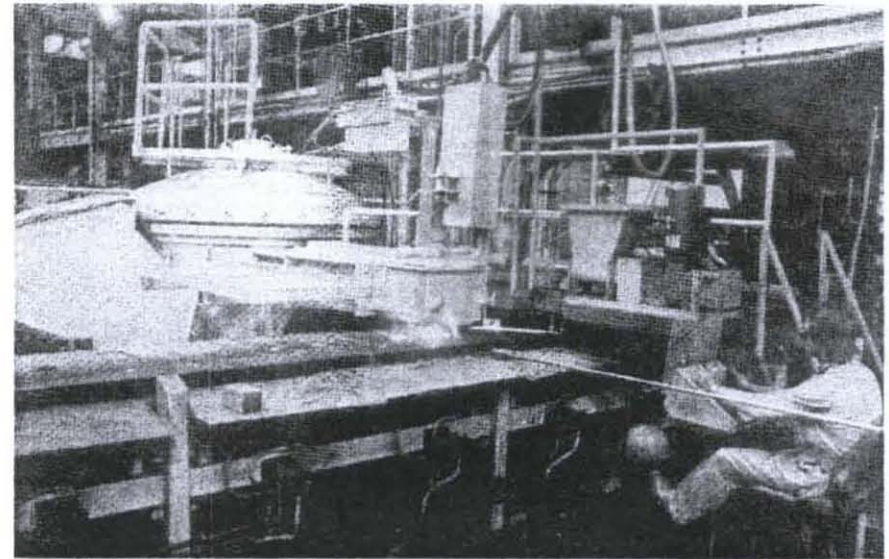



7,500 lb pressure-pour furnace for cast iron  
(Waupaca foundry, WI)

# Schematic Representation of the Demonstration Unit for Molten Materials Transfer and Handling from an Electrowinning cell.



Marshall Space Flight Center

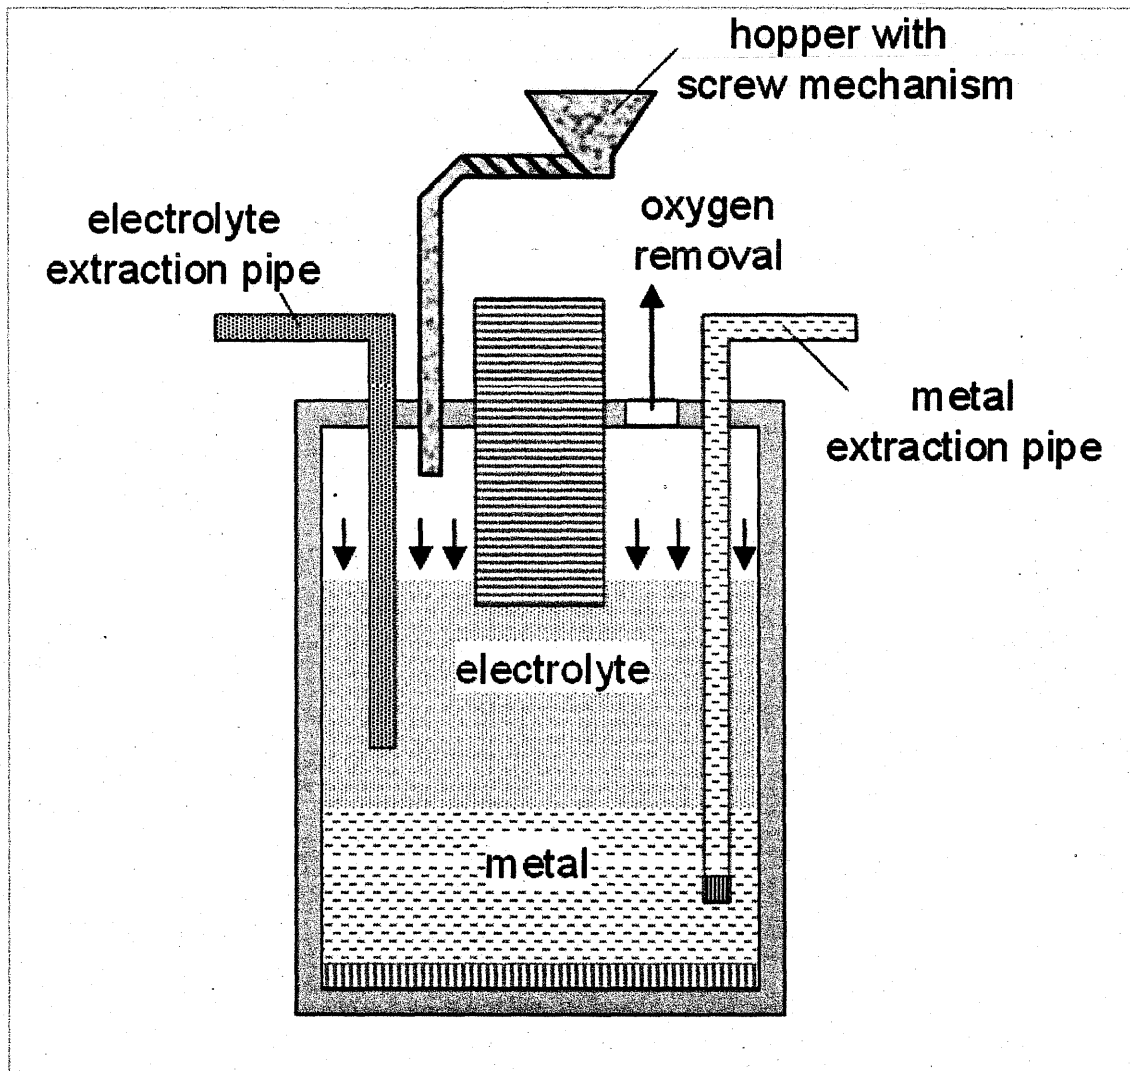



## CONCLUSIONS

Marshall Space Flight Center

---

The paper reviews the main issues associated with molten materials transfer and handling on the lunar surface during the operation of a high temperature electrowinning cell used to produce oxygen, with molten iron and silicon as byproducts.

A combination of existing technologies and purposely designed technologies show promise for lunar exploitation.


An important limitation that requires extensive investigation is the performance of refractory currently used for the purpose of molten metal containment and transfer in the lunar environment associated with electrolytic cells.

The principles of a laboratory scale unit at a scale equivalent to the production of 1 metric ton of oxygen per year are introduced. This implies a mass of molten materials to be transferred consistent with the equivalent of 1kg regolith/hr processed.




# Back Up Slides

# Production of O<sub>2</sub> from Lunar Regolith (1 kT O<sub>2</sub>/yr basis)




Marshall Space Flight Center

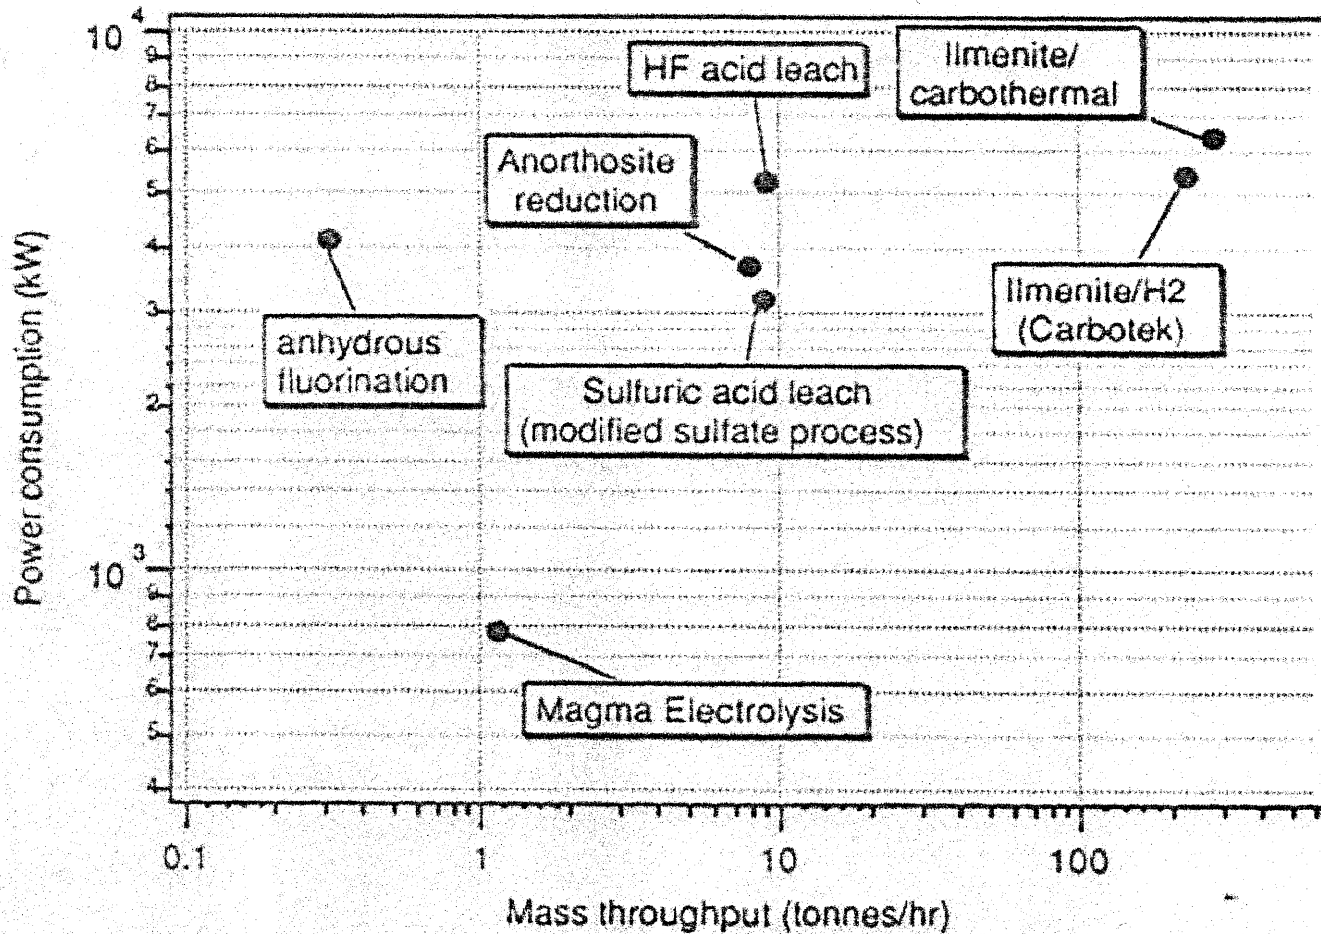

(From L.W. Mason, in Space 92, p.1139, ASCE (1992))

# Engineering with Lunar Elements




Marshall Space Flight Center

Lunar Elements Only						Material Class	Lunar Elements Plus ~ 5% or Less Earth Imports					
High Capacity				Limited Capacity			High Capacity				Limited Capacity	
Al	Mg	Fe	Ti	Cr	Ni	Structural Metals	Al	Mg	Fe	Ti	C	
What	AM10	1020	99.2	S Steel	Z-Ni			7075	ZK60	404	6-4	SS
EC	0	1095	99	410	Permalloy		7178	AZ80A	2	AlV	440C	
1060	M1A	1340	Ti-	430	Permendur		MA67		434	5-2.5	446	
1100	A3A	5140	8Mn	Nichrome	r		MA87		0	AlSn		
3003		A24	4-4	e	200				864	7-4		
5005		2	Al/Mn		201				0	AlMo		
5050		X70	n		211				6B	6-2-4-2		
5052		9260			212					AlSn/ Zr/Mo		
5056		501			Inconel							
5083					600							
5086					702							
5154					721							
5357					722							
6063												
6101												
6151												
Cast												
A13												
43												
214												
220												
356												
360												
Al												
Mag												
35												

Waldin and Crisswell

# Engineering with Lunar Elements 2



Marshall Space Flight Center

Al <sub>2</sub> O <sub>3</sub> in Al, Mg Fe, Glass in Mg, TiSSi <sub>3</sub> in Ti	Al <sub>2</sub> O <sub>3</sub> in Ni SiO <sub>2</sub> in Ni	Reinforced metals		
Cast Basalt Dark Glass Foamed Glass		Structural non metals		
Al <sub>2</sub> O <sub>3</sub> , CaO, MgO, TiO <sub>2</sub> , SiO <sub>2</sub> , Spinel, Mixed ceramics, "S" fiber, TiSSi <sub>3</sub>	Cr <sub>2</sub> O <sub>3</sub> , K <sub>2</sub> TiO <sub>3</sub>	Thermal materials, refractorys, insulation, fibers		
		Electric / magnetic Materials		
Fe, Al, Mg	Ni-Cr	Conductors		
Kanthal A-1		Resistance alloys		
Si	AlP, FeS <sub>2</sub> , NiO, CoO	Semiconductors		
Same as thermal except TiSSi <sub>3</sub> ) + titanates		Dielectrics / ins.		
Fe, Si—steels (M15, M5-8) Fe <sub>3</sub> O <sub>4</sub> , MgFe <sub>2</sub> O <sub>4</sub> , sandust	Permalloy Permendur Cr <sub>3</sub>	Magnetics		
Fe <sub>3</sub> O <sub>4</sub> , TiO		Electrodes		
Same as refractorys except CaO + garnets		Abrasives		SiC(30%) TiC(20%)
O <sub>2</sub> , O <sub>3</sub>	SO <sub>2</sub> , SO#, CrO <sub>3</sub>	Fluid / Volatiles, Cryogenic ambient mp < 500 CNaH	H <sub>2</sub> O (11%), H <sub>2</sub> O <sub>2</sub> (6%), H <sub>2</sub> SO <sub>4</sub> , H <sub>2</sub> SO <sub>3</sub> , H <sub>3</sub> PO <sub>4</sub>	H <sub>2</sub> S(6%), H <sub>3</sub> P(9%) NaOH

Waldin and Crisswell