

SECURITY INFORMATION

CONFIDENTIAL

Copy 1
RM SE53F30

RECEIVED JUL 23 1955

CLASSIFICATION CANCELLED
Authority: NSA
ANNOUNCEMENT 83
20090026297 By

Restriction/Classification
Cancelled

USAF Cont
AS 15
40 1/6/55



Source of Acquisition
CASI Acquired

RESEARCH MEMORANDUM

for the

Air Material Command, U. S. Air Forces

PRELIMINARY TRANSIENT PERFORMANCE DATA

ON THE J73 TURBOJET ENGINE

III - ALTITUDE, 45,000 FEET

By John E. McAulay and Lewis E. Wallner

Lewis Flight Propulsion Laboratory
Cleveland, Ohio

CLASSIFIED DOCUMENT

Restriction/Classification Cancelled

of the espionage laws, Title 18, U.S.C., Secs. 793 and 794, the transmission or revelation of which in any manner to unauthorized person is prohibited by law.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WASHINGTON

JUL 23 1955

CONFIDENTIAL

FILE COPY
To be returned to
the files of the National
Advisory Committee
for Aeronautics
Washington, D.C.

CLASSIFICATION CANCELLED
 CONFIDENTIAL
 Authority: NACA PUBLICATIONS
 ANNOUNCEMENTS NO. _____
 By _____
 Date _____

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

for the

Air Materiel Command, U. S. Air Forces

PRELIMINARY TRANSIENT PERFORMANCE DATA ON THE J73 TURBOJET ENGINE

III - ALTITUDE, 45,000 FEET

By John E. McAulay and Lewis E. Wallner

SUMMARY

A program was undertaken to determine the J73 turbojet engine compressor stall and surge characteristics and combustor blow-out limits encountered during transient engine operation. Data were obtained in the form of oscillograph traces showing the time history of several engine parameters with changes in engine fuel flow. The data presented in this report are for step and ramp changes in fuel flow at an altitude of 45,000 feet and flight Mach numbers of 0 and 0.8.

INTRODUCTION

One phase of the altitude-performance investigation of the J73 turbojet engine conducted at the NACA Lewis laboratory consisted in determining the compressor stall and surge characteristics and the combustor blow-out limits encountered during and immediately following rapid changes in engine fuel flow.

The data were obtained on oscillograph traces which showed the time history of several engine parameters following a change in fuel flow. The preliminary data presented herein were obtained at an altitude of 45,000 feet and flight Mach numbers of 0 and 0.8. Similar data are presented in preliminary form in references 1 and 2 for altitudes of sea level, 15,000, and 35,000 feet at several flight Mach numbers.

The preliminary data which appear in this report consist of reproductions of oscillograph traces obtained at various operating conditions. A check on the accuracy of the calibration values listed on the oscillograph traces has been made but no analysis of the data is presented.

CLASSIFICATION CANCELLED
 CONFIDENTIAL
 Authority: NACA PUBLICATIONS
 ANNOUNCEMENTS NO. _____
 By _____
 Date _____

APPARATUS

Engine and Installation

The J73 turbojet engine used in this investigation has a thrust of approximately 9000 pounds, a rated engine speed of 7950 rpm, and an exhaust-gas temperature of 1185° F (1645° R). The engine is normally equipped with an hydraulic control system which was inoperative during this phase of the investigation. For these tests, the fuel system was so modified that fuel flow was a function of fuel-valve position only. Other engine components are a 12-stage axial-flow compressor with variable inlet guide vanes, an annular-type combustor with 10 cannular-type chambers, a two-stage axial-flow turbine, and a fixed-area exhaust nozzle.

The engine was mounted in a 14-foot diameter altitude chamber. A group of automatic throttle valves was incorporated at both inlet and exhaust ends of the test chamber to provide control of simulated altitude and ram-pressure ratio.

Instrumentation

The transient responses of the engine variables were recorded on a multiple channel, direct-inking, magnetic motor oscillograph. The oscillograph chart speed was 5 units per second.

The location of the measuring stations are shown in figure 1. The sensing devices used for indicating variations in the performance parameters are given in table I. Inasmuch as the total-pressure profile at the engine inlet was flat, it was possible to select almost any total- or static-pressure sensor to record on an oscillograph trace or its corresponding calibration gage without introducing errors. In the case of compressor-outlet total pressure, the sensor selected for both the oscillograph and the calibration gage was approximately the average total pressure at that station, as indicated from earlier steady-state data. Appropriate correction factors were employed where necessary for gage error and sensor location.

PROCEDURE

The oscillograph traces were calibrated by operating the engine at several widely different engine operating points and recording the corresponding pen deflections on the oscillograph trace. Fuel changes were introduced over a range of initial engine speeds at the conditions shown in the following table:

Altitude, ft	Flight Mach number	Inlet guide vane position	Type of fuel change	Engine-inlet temperature, °F
45,000	0	Open	Step	60
	.8	Open	Step	35, 75
	.8	Open	Ramp	35, 75
	.8	Closed	Step	35

The variable inlet guide vanes, which normally move from closed to open position at an engine speed of 6800 rpm as speed was increased, were maintained in a fixed closed or open position during all transients of this phase of the investigation.

The size of the fuel step or ramp changes was increased until limited by either compressor surge or combustor blow-out or until it was felt that large steps in fuel flow would expose the engine to excessively high temperature. Only the traces which were considered pertinent in determining an operating limit are presented. Thus, in general, at any given initial engine speed two traces are shown. One gives the maximum step or ramp change in fuel flow obtained without encountering compressor surge or stall. The other gives the minimum step or ramp change in fuel flow which produced compressor surge or stall.

During the period of transient engine operation, both the engine-inlet total pressure and the exhaust pressure varied from the initial value. However, the engine operating limit usually occurred before the engine-inlet total pressure or the exhaust pressure changed appreciably. The time history of the behavior of the engine-inlet total pressure during transient engine operation is shown on the oscillograph traces, but the variation of exhaust pressure is not shown. In general, the maximum increase in exhaust pressure was 7 percent of the initial value.

DISCUSSION

The conditions for each oscillograph trace (figs. 2 to 73) presented herein are given in table II. On each set of oscillograph traces the figure legend specifies the engine conditions at the beginning of the change in fuel flow. Each trace is identified by a label below which is given the calibration factor for the trace. As indicated by the calibration factor, all traces are considered linear except the fuel-flow trace which follows the square-law relation. On each trace is shown the initial value of the engine variable. In the case of fuel flow, one or more additional values are given. The arrows on each figure indicate the direction in which the variable is increasing.

Caution should be used in applying the calibration factors to the traces. Although the horizontal or time scale is linear, the vertical

scale on all traces is a circular arc. In obtaining the rate of change of any variable or in calculating elapsed time, this curvature must be considered.

Lewis Flight Propulsion Laboratory
National Advisory Committee for Aeronautics
Cleveland, Ohio, July 1, 1953

REFERENCES

1. Sobolewski, Adam E., and Lubick, Robert J.: Preliminary Transient Performance Data on the J73 Turbojet Engine. I - Altitude, Sea Level and 15,000 Feet. NACA RM SE53F22, 1953.
2. Lubick, Robert J., and Sobolewski, Adam E.: Preliminary Transient Performance Data on the J73 Turbojet Engine. II - Altitude, 35,000 Feet. NACA RM SE53F29, 1953.

TABLE I. - INSTRUMENTATION



Measured quantity	Engine station	Steady-state instrumentation	Transient instrumentation	
			Sensor	Range over which frequency response is essentially flat, cps
Fuel flow	-	Rotameter	Aneroid-type pressure sensor, with strain-gage element, connected to measure pressure drop across variable orifice in fuel line	Undetermined
Dynamic pressure at engine inlet	1	Bourdon-type gage	Aneroid-type pressure sensor with strain-gage element	0-10 At sea-level static
Engine-inlet total pressure	1	Bourdon-type gage	Aneroid-type pressure sensor with strain-gage element	0-10 At sea-level static
Compressor-outlet total pressure	2	Bourdon-type gage	Aneroid-type pressure sensor with strain-gage element	0-10 At sea-level static
Compensated exhaust-gas temperature	3	Five paralleled thermocouples connected to self-balancing potentiometer recorder	Six paralleled 20-gage, chromel-alumel, butt-welded thermocouples and electric network to compensate for thermocouple lag	0-30 At sea-level static when used with properly adjusted compensator
Uncompensated exhaust-gas temperature	3	Five paralleled thermocouples connected to self-balancing potentiometer recorder	Six paralleled 20-gage, chromel-alumel, butt-welded thermocouples	0-1 At sea-level static
Engine speed	-	Chronometric tachometer	Direct-current generator with output proportional to engine speed	0-5

CONFIDENTIAL

NACA RM S553F30


CONFIDENTIAL

5

TABLE II - OSCILLOGRAPH-TRACE CONDITIONS



Figure	Altitude, ft	Flight Mach number	Inlet guide vane position	Type of fuel change	Engine inlet temperature, °F		Initial engine speed, rpm		
					Nominal	Actual	Nominal	Actual	
2	45,000	0	Open	Step	60	57	6400	6420	
3						57		6428	
4						57		6428	
5						57		6438	
6						58		6420	
7						58		6412	
8						58		6417	
9						58		6415	
10						58		6680	
11						58		6645	
12						58		7050	
13						56		7060	
14						57		7022	
15						57		7030	
16						58		7022	
17						57		7500	
18						57		7480	
19	57	7515							
20	0.8	0.8		Step	35	32	5500	5471	
21						32		5503	
22						36		5488	
23						36		5465	
24						36		5700	
25						32		6100	
26						32		6040	
27						31		6400	
28						31		6405	
29						30		6540	
30						32		6570	
31						32		6520	
32						30		6525	
33						30		7050	
34						33		7050	
35						33		7075	
36						30		7420	
37	30	7490							
38	30	7480							
39	30	7480							
40	75	5800	5780						
41	74	6300	6280						
42	74	6280	6280						
43	74	6800	6800						
44	74	6850	6850						
45	74	7250	7250						
46	74	7250	7250						
47	Ramp			Ramp	35	32	6600	6600	
48						32		6570	
49						32		6590	
50						32		6575	
51						32		6570	
52						32		6600	
53						75		5500	5580
54						71		5500	5500
55						71		6100	6080
56						71		6060	6060
57						71		6070	6070
58						73		6170	6170
59						72		6620	6620
60						72		6600	6600
61						73		6680	6680
62						72		6600	6600
63						72		6600	6600
64	72	7100	7120						
65	72	7170	7170						
66	Closed			Step	35	31	5500	5500	
67						31		5500	
68						31		6055	
69						31		6055	
70						30		6505	
71						30		6505	
72						30		7115	
73						30		7115	

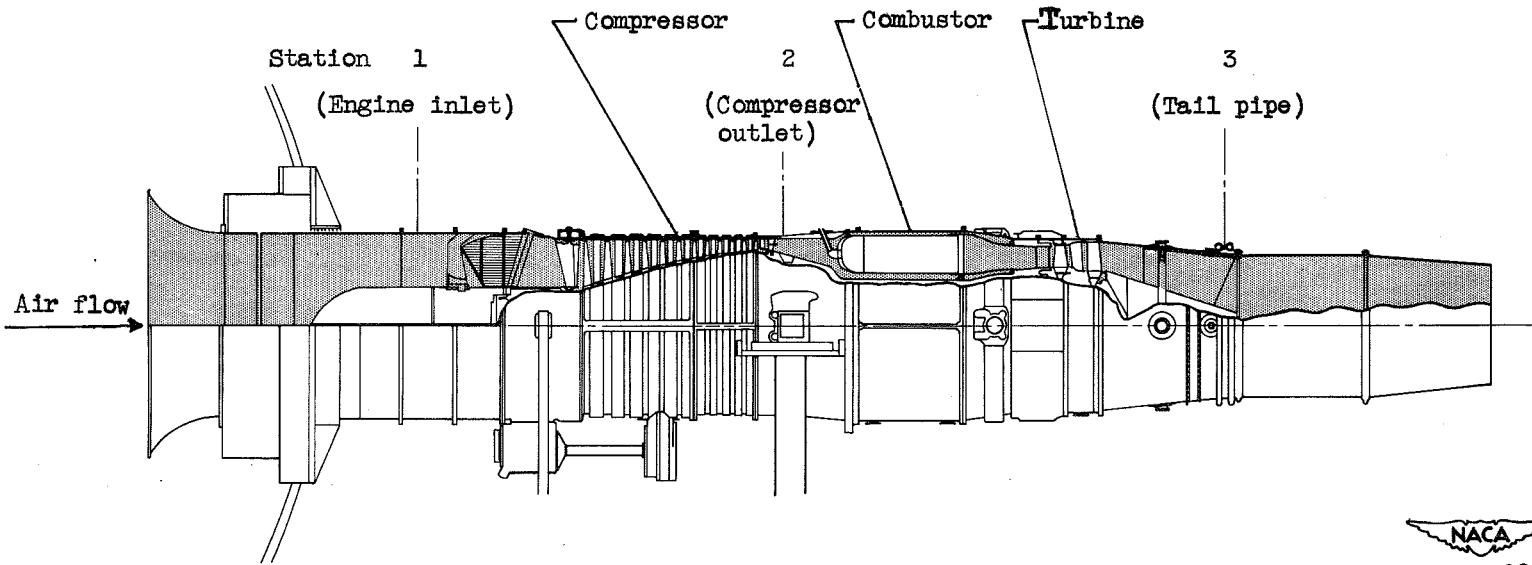

NACA
CD-3088

Figure 1. - Side view of turbojet engine installation showing stations at which instrumentation was installed.

Page intentionally left blank

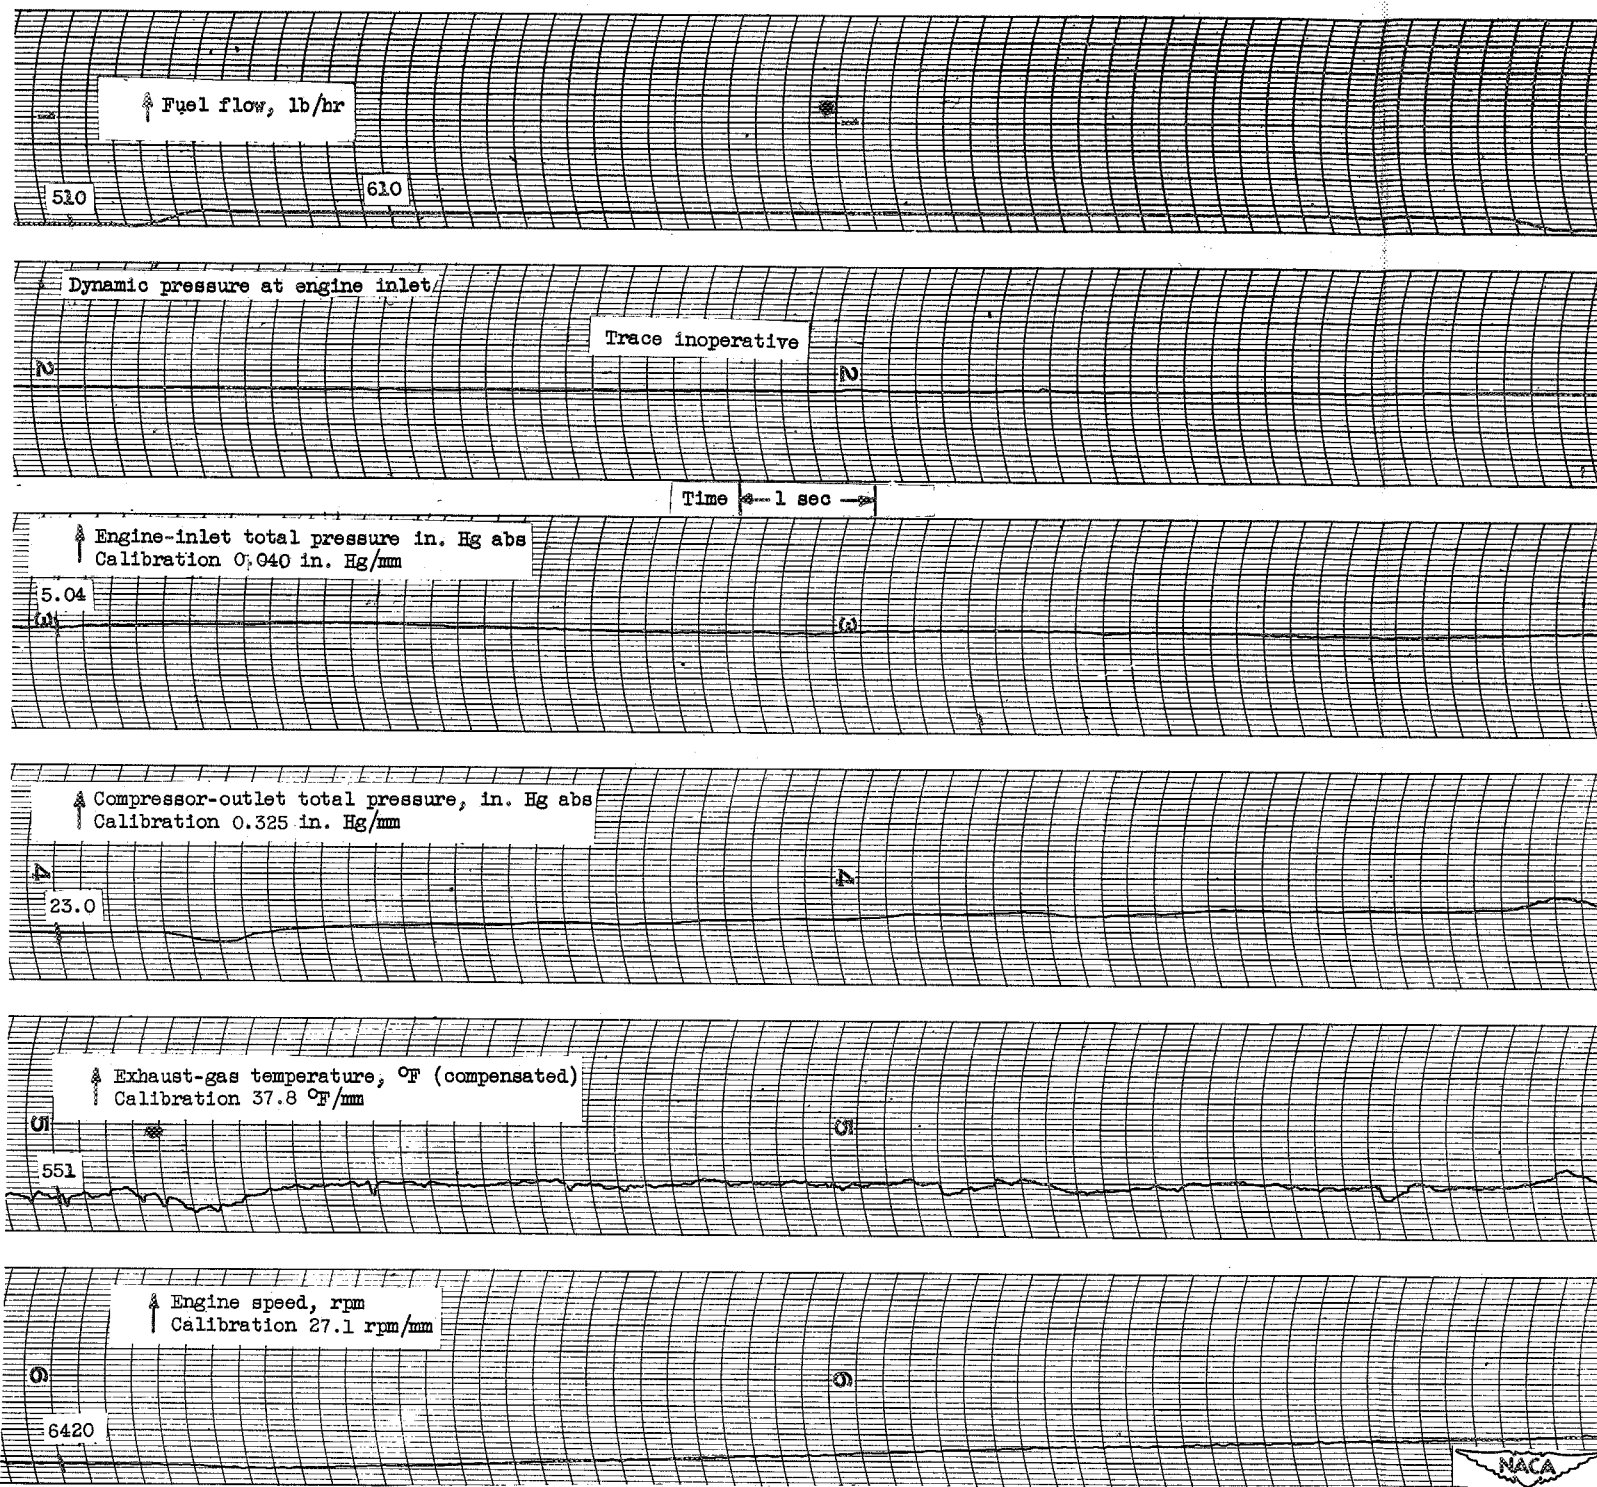


Figure 2

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 57° F; inlet guide vanes position, open.

Page intentionally left blank

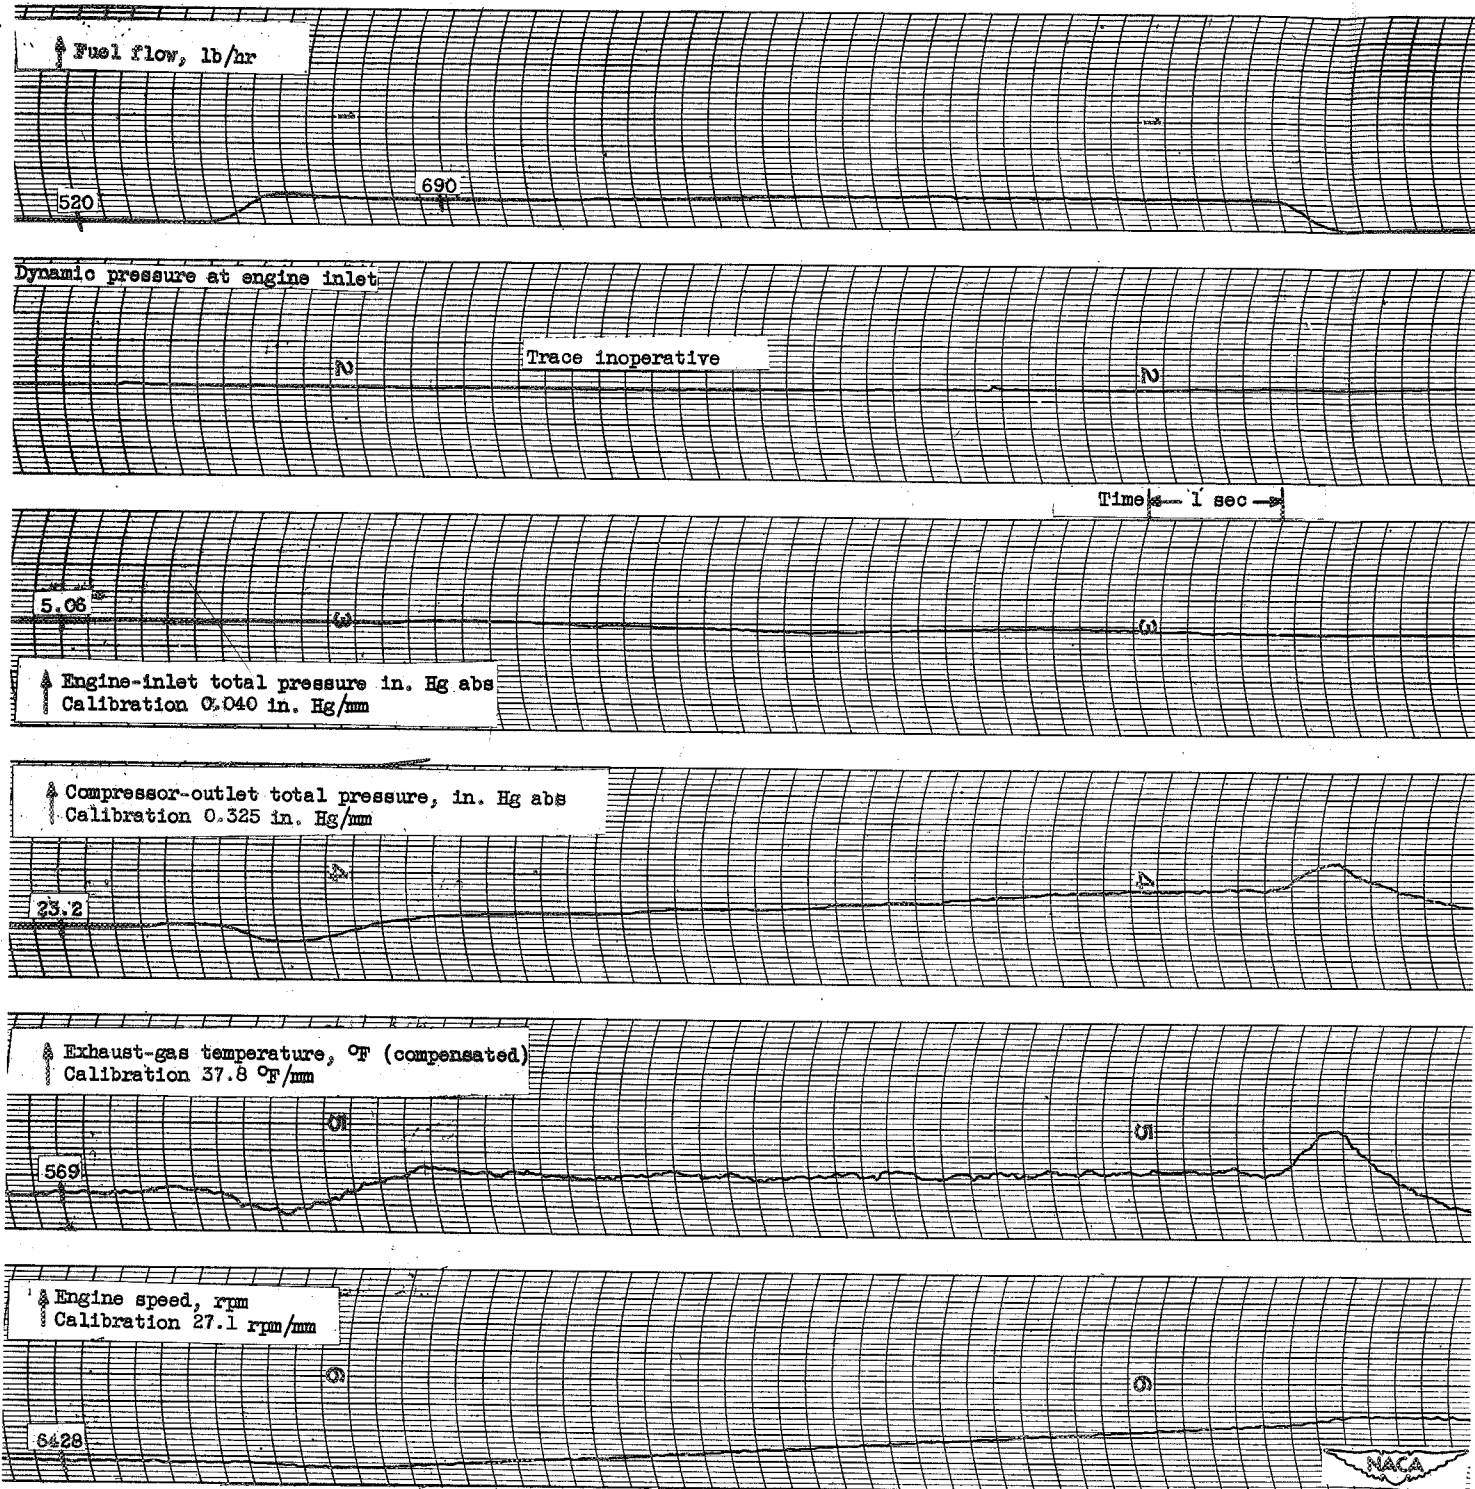


Figure 3
 Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 57° F; inlet guide vanes position, open. L 907

Page intentionally left blank

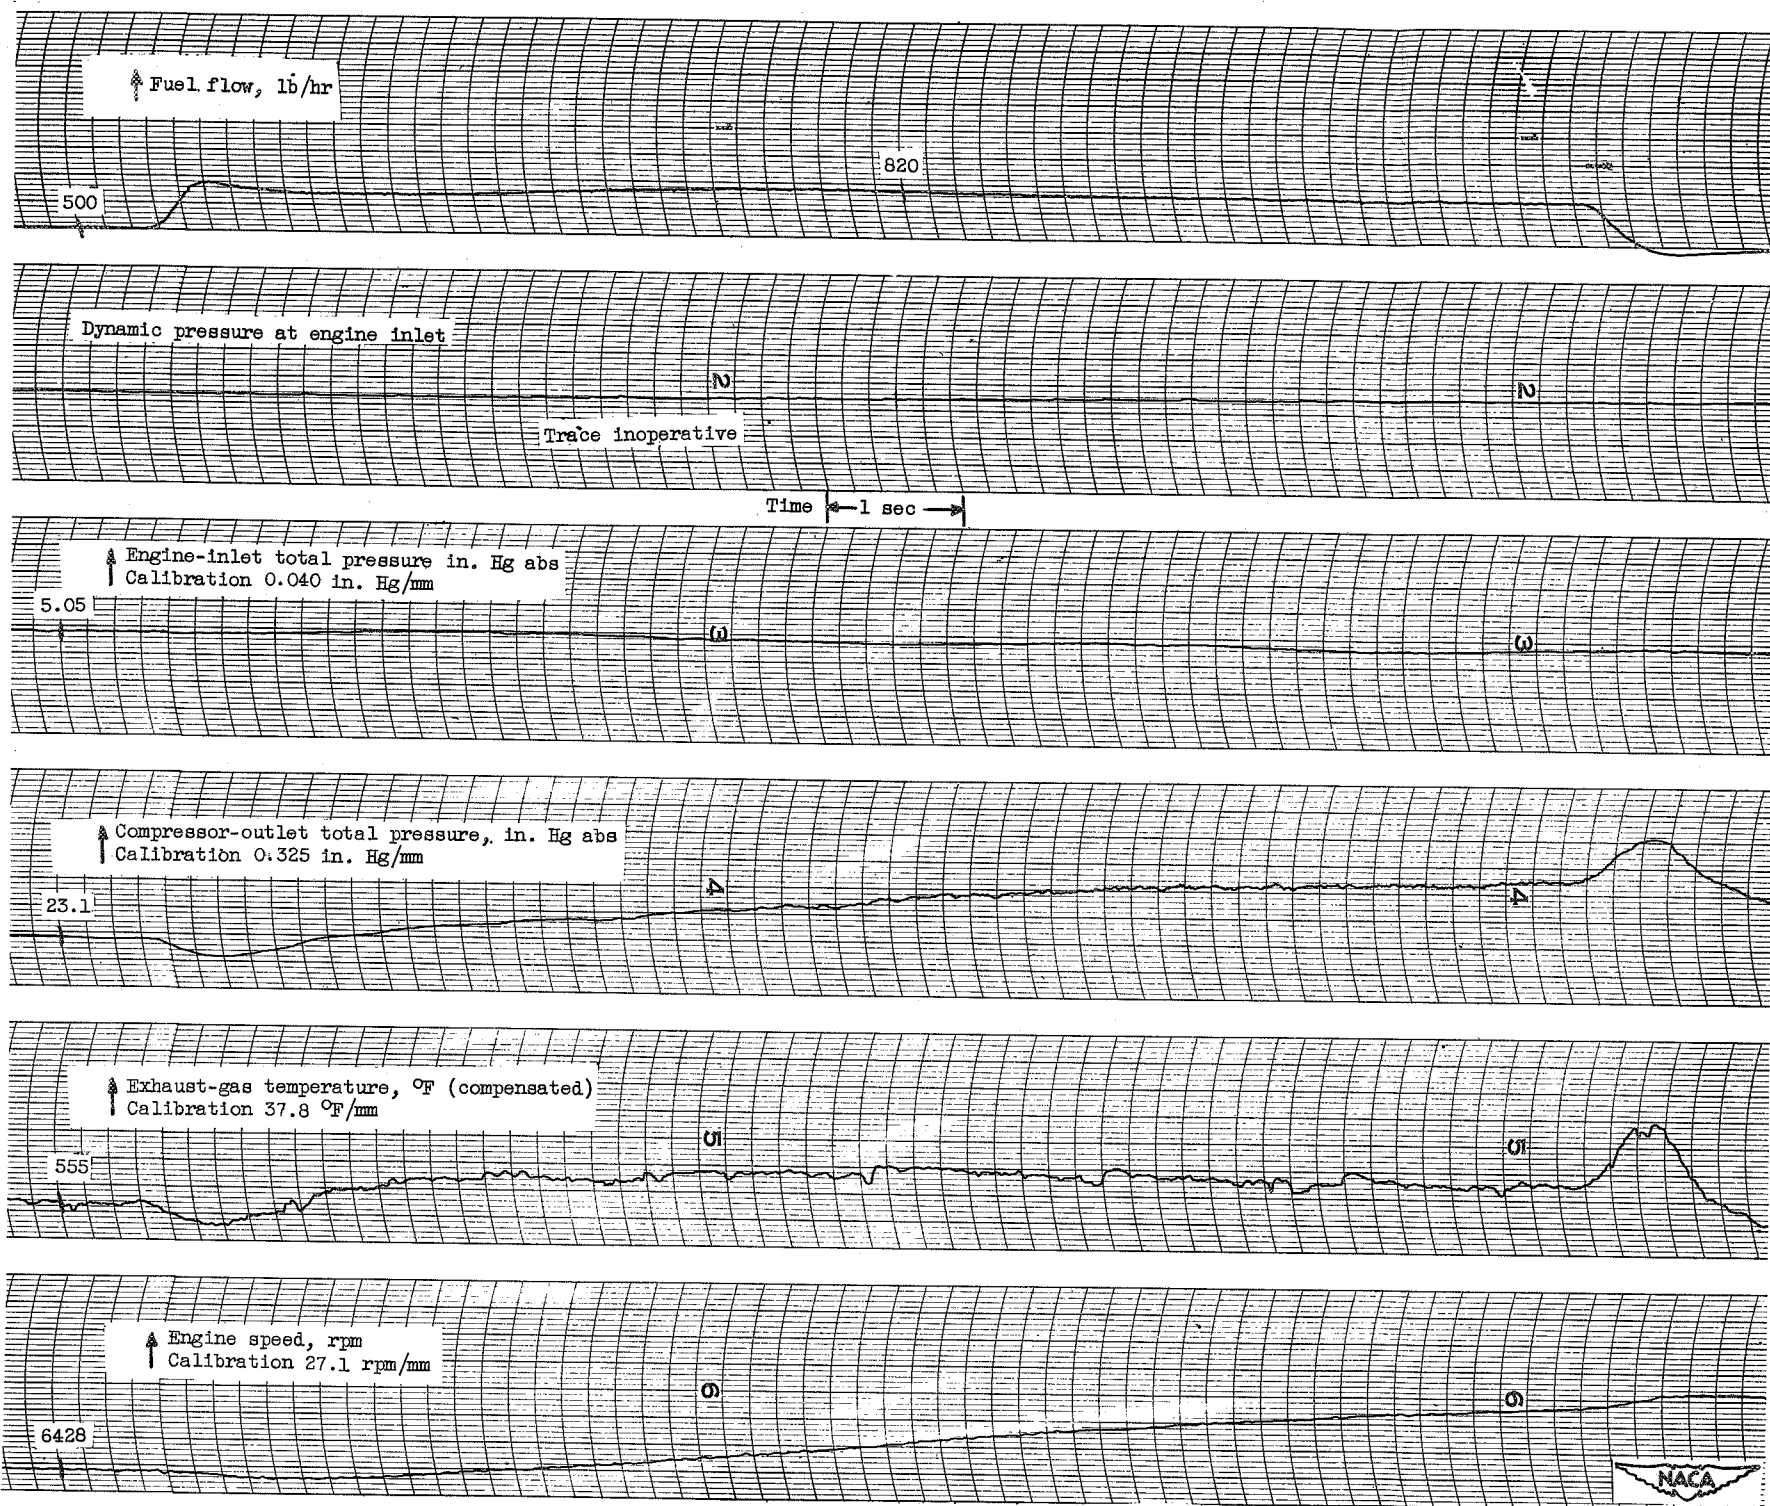


Figure 4
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 57° F; inlet guide vanes position, open.

Page intentionally left blank

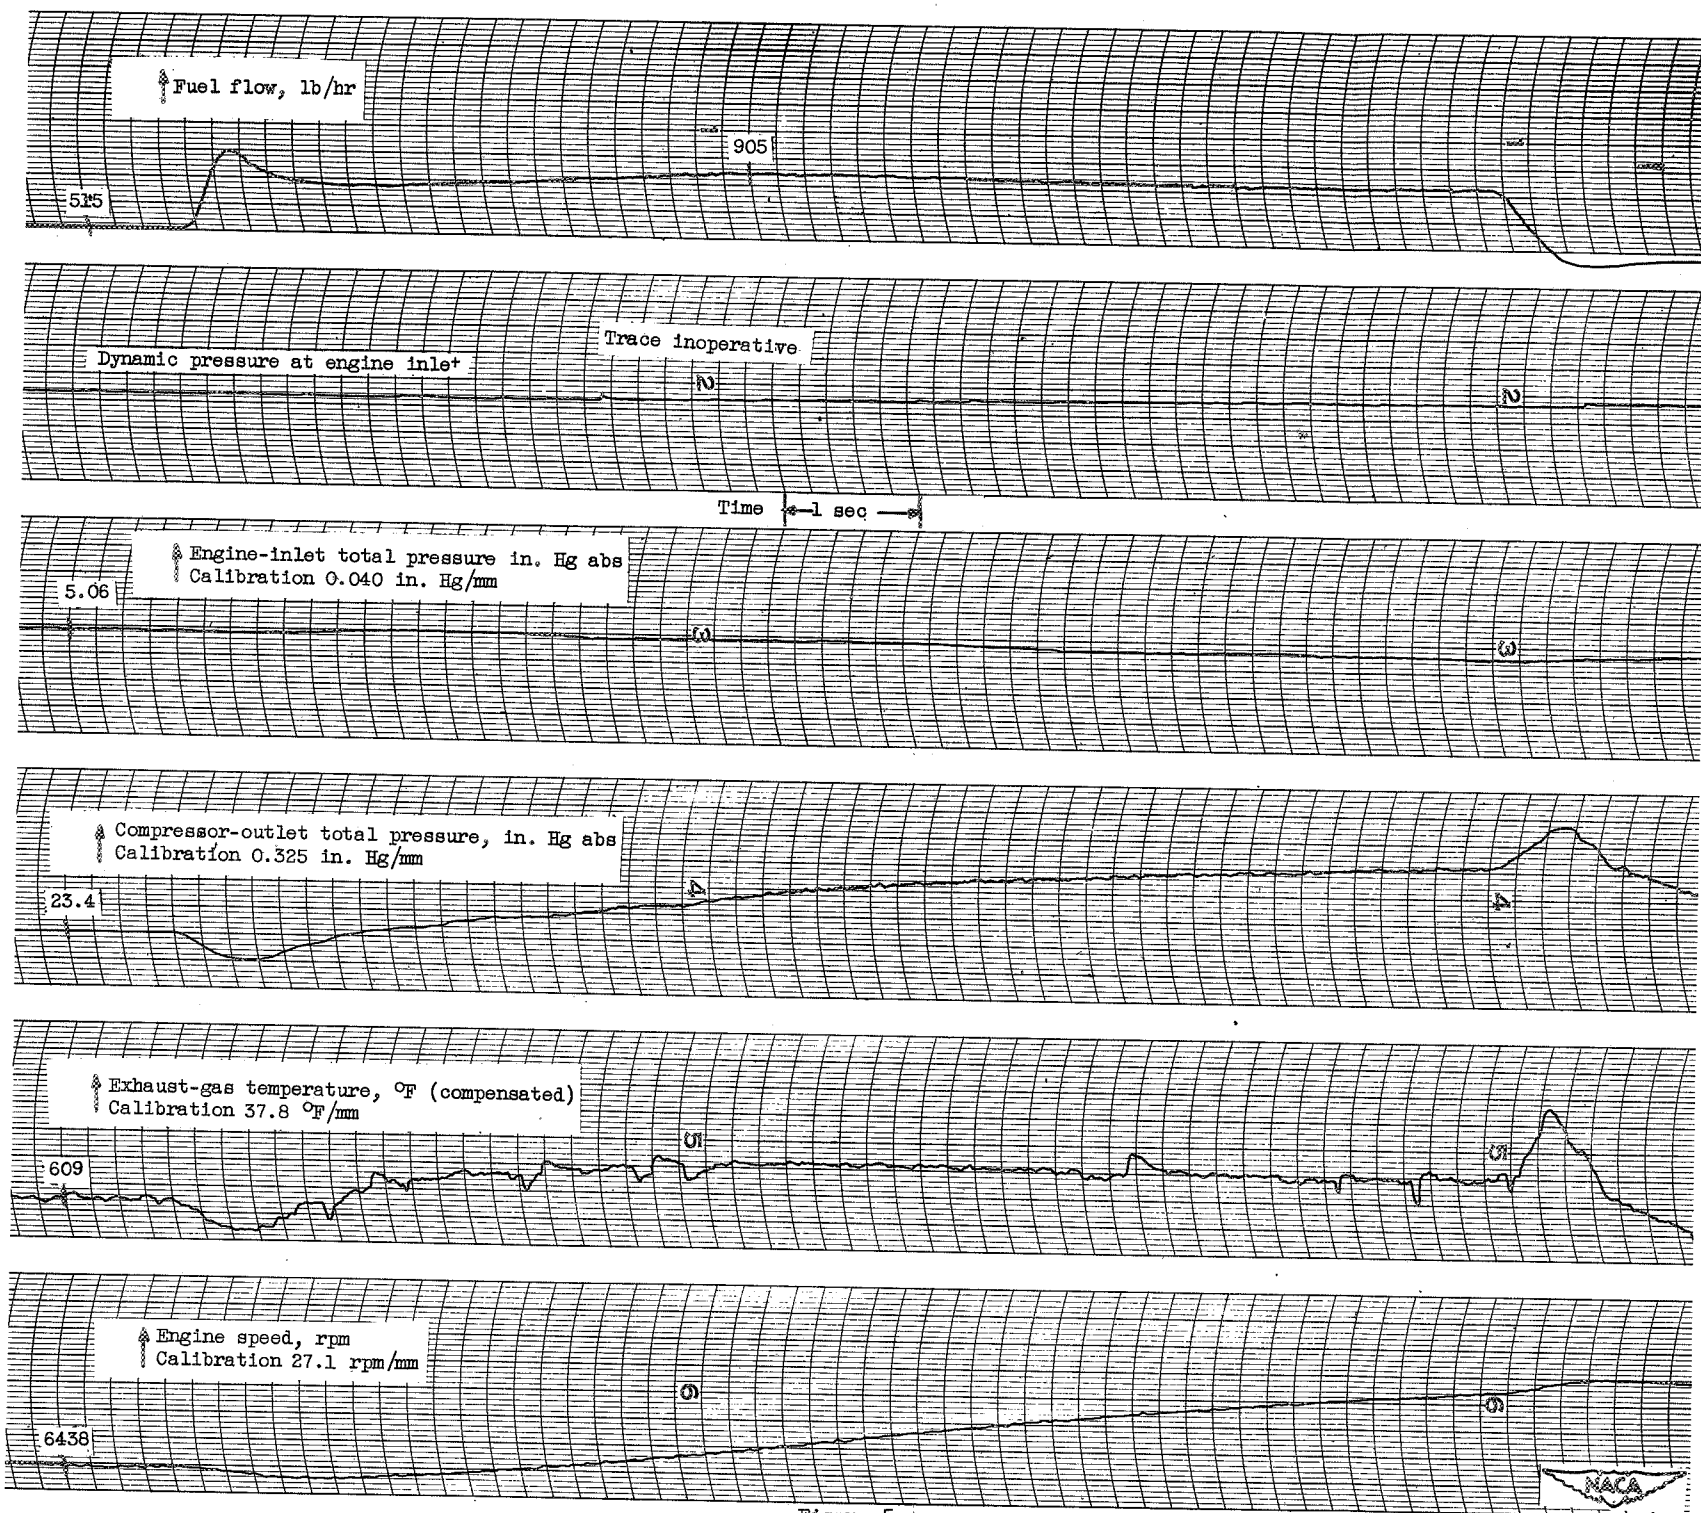


Figure 5
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 57° F; inlet guide vanes position, open.

Page intentionally left blank

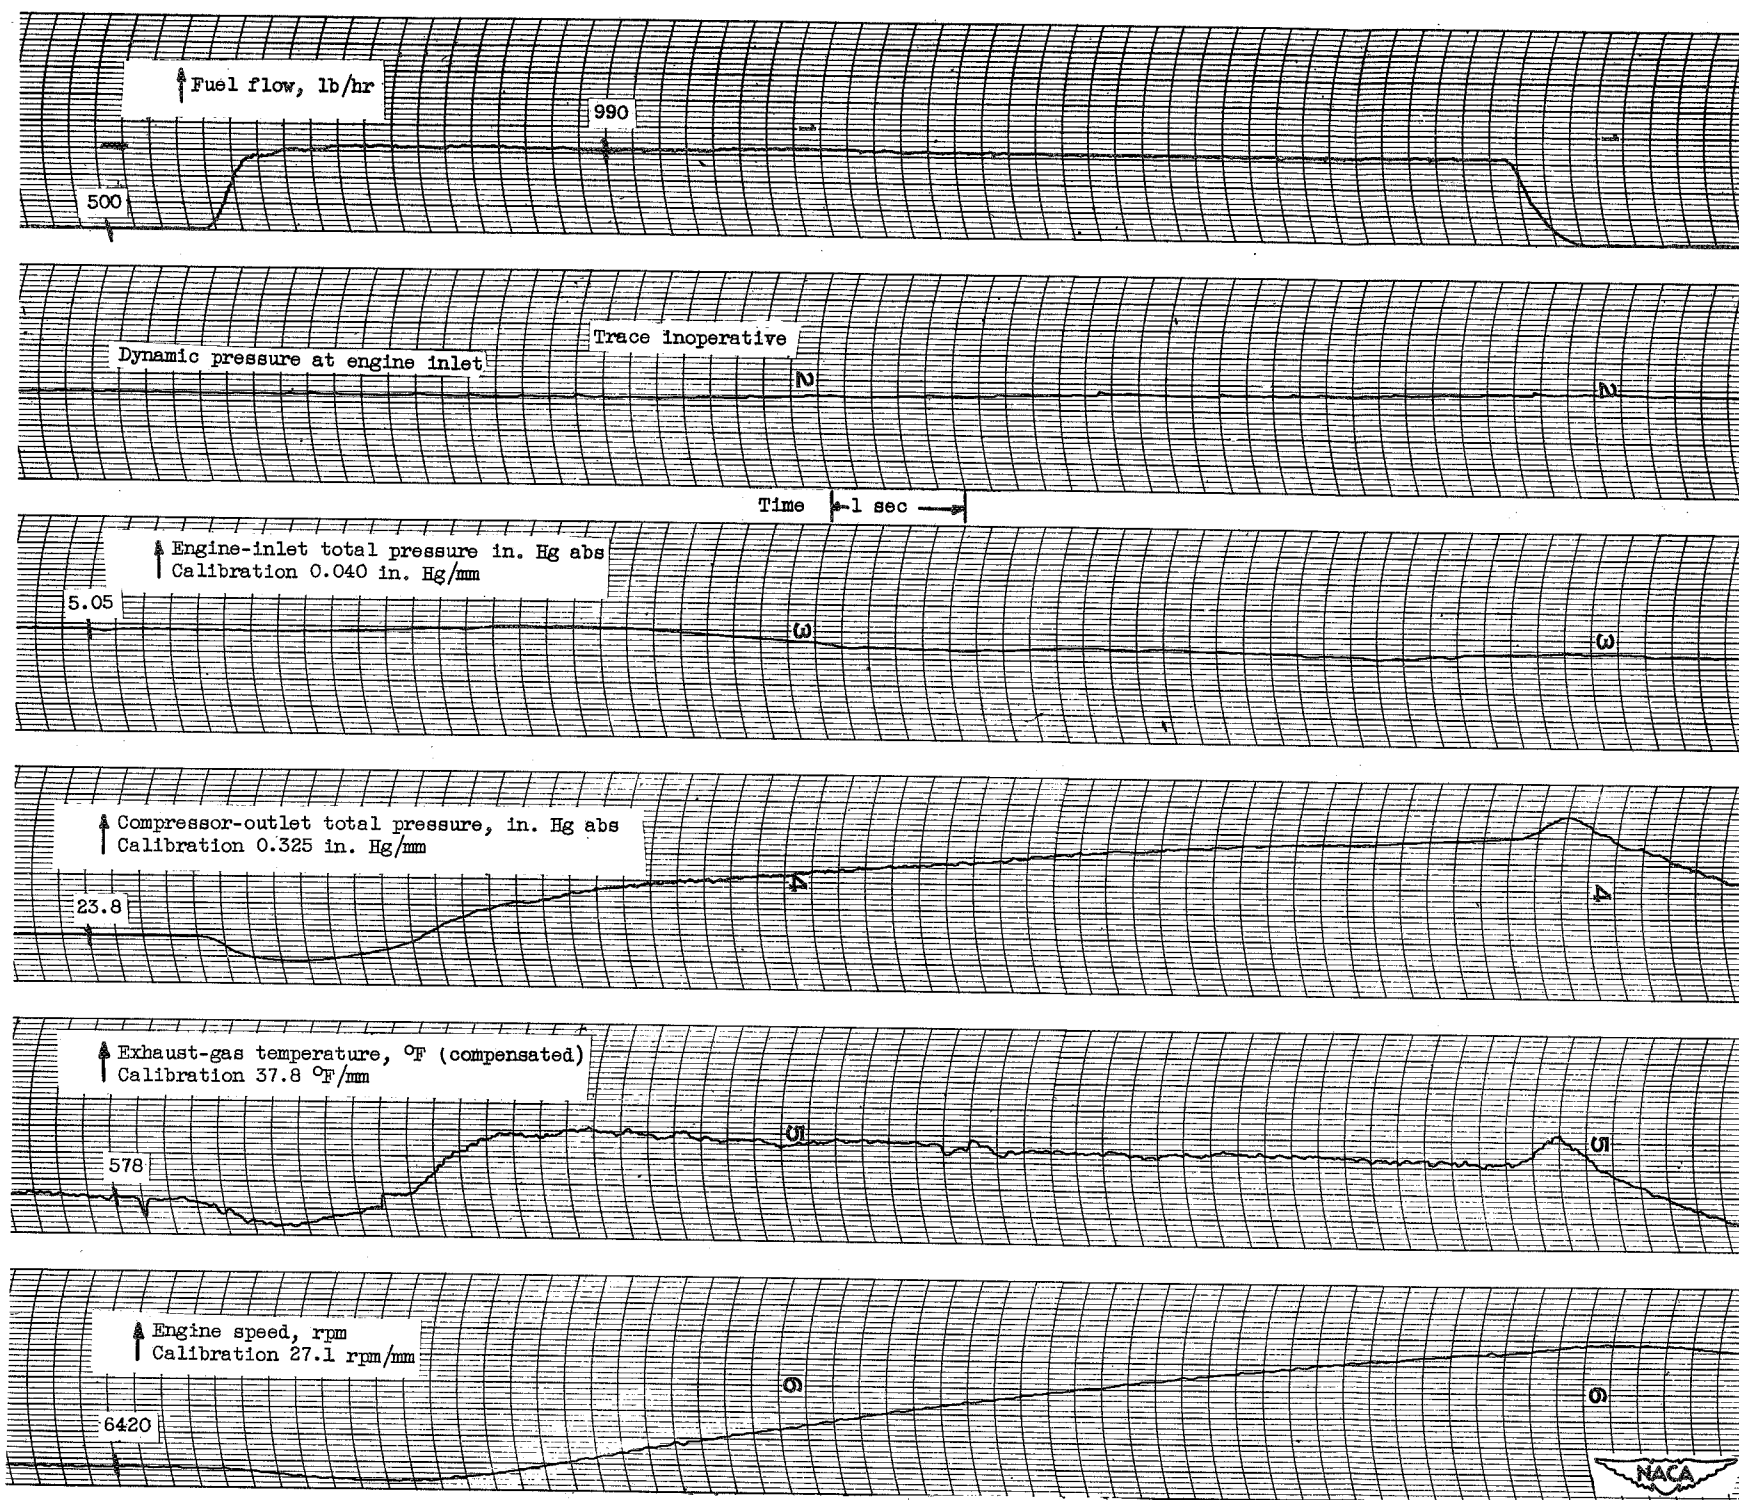


Figure 6
 Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 58° F; inlet guide vanes position, open.

Page intentionally left blank

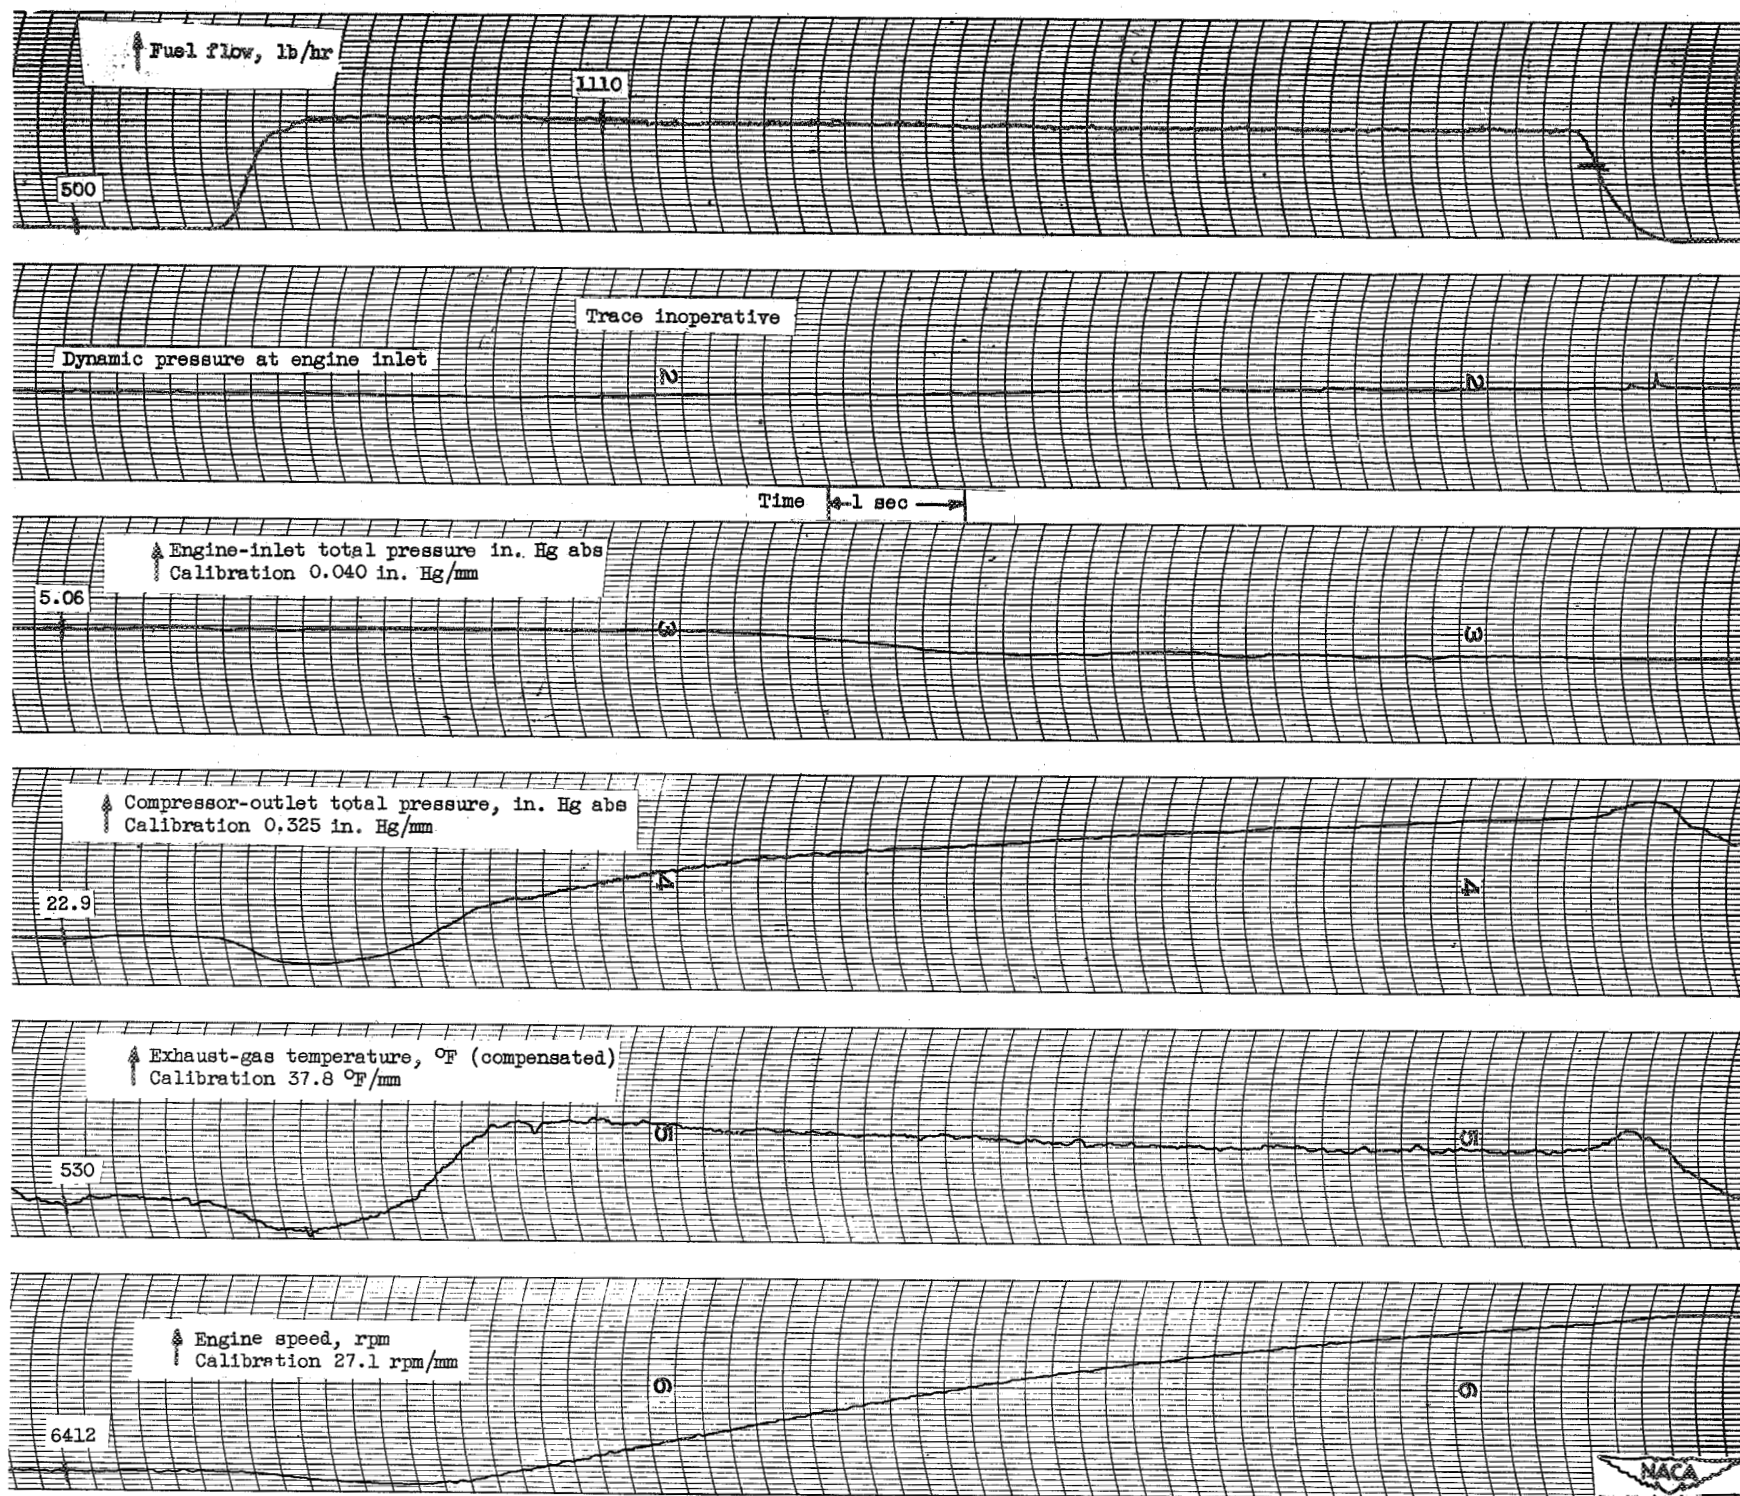


Figure 7

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 58° F; inlet guide vanes position, open.

Page intentionally left blank

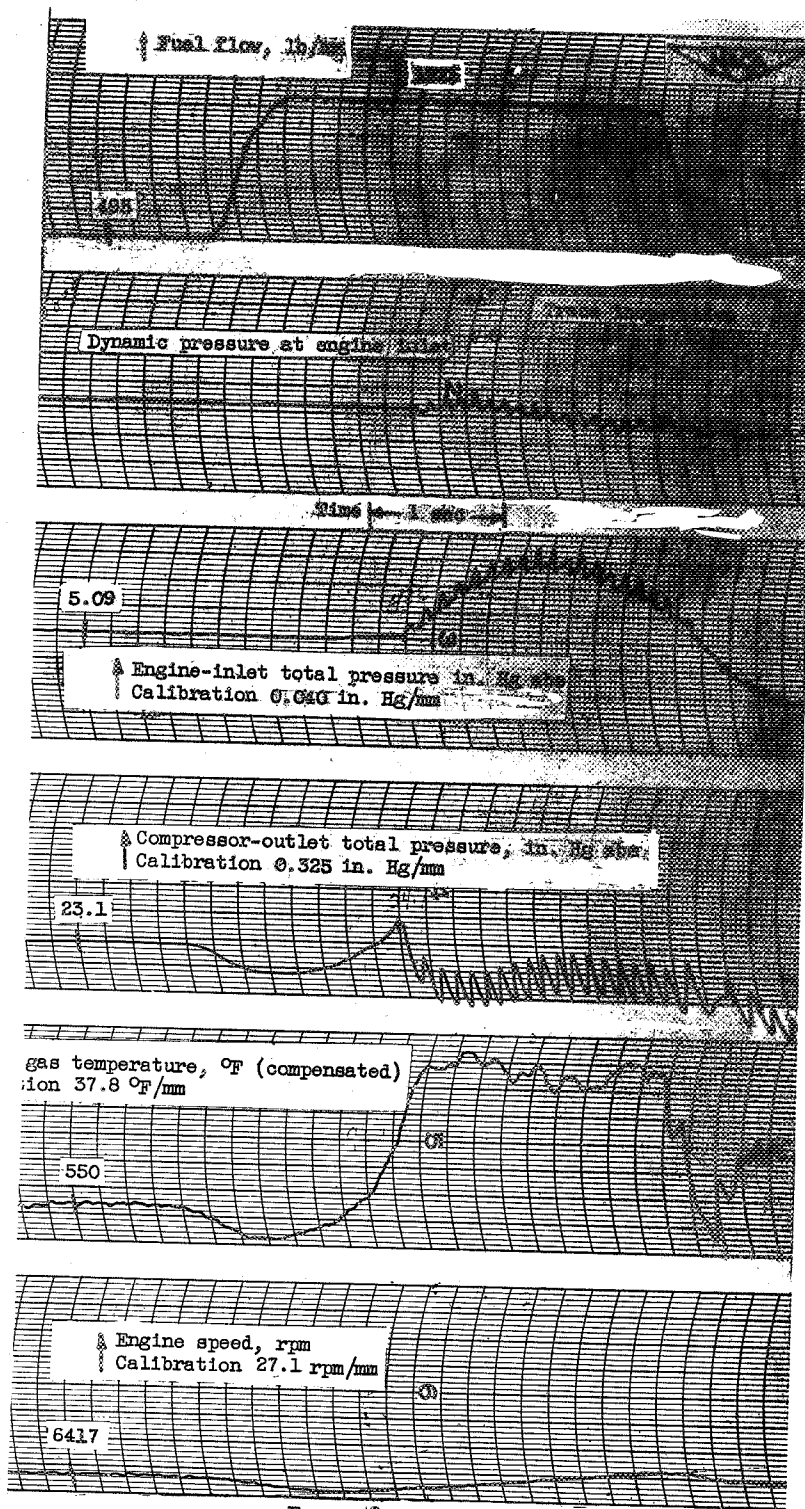


Figure 8
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 58° F; inlet guide vanes position, open.

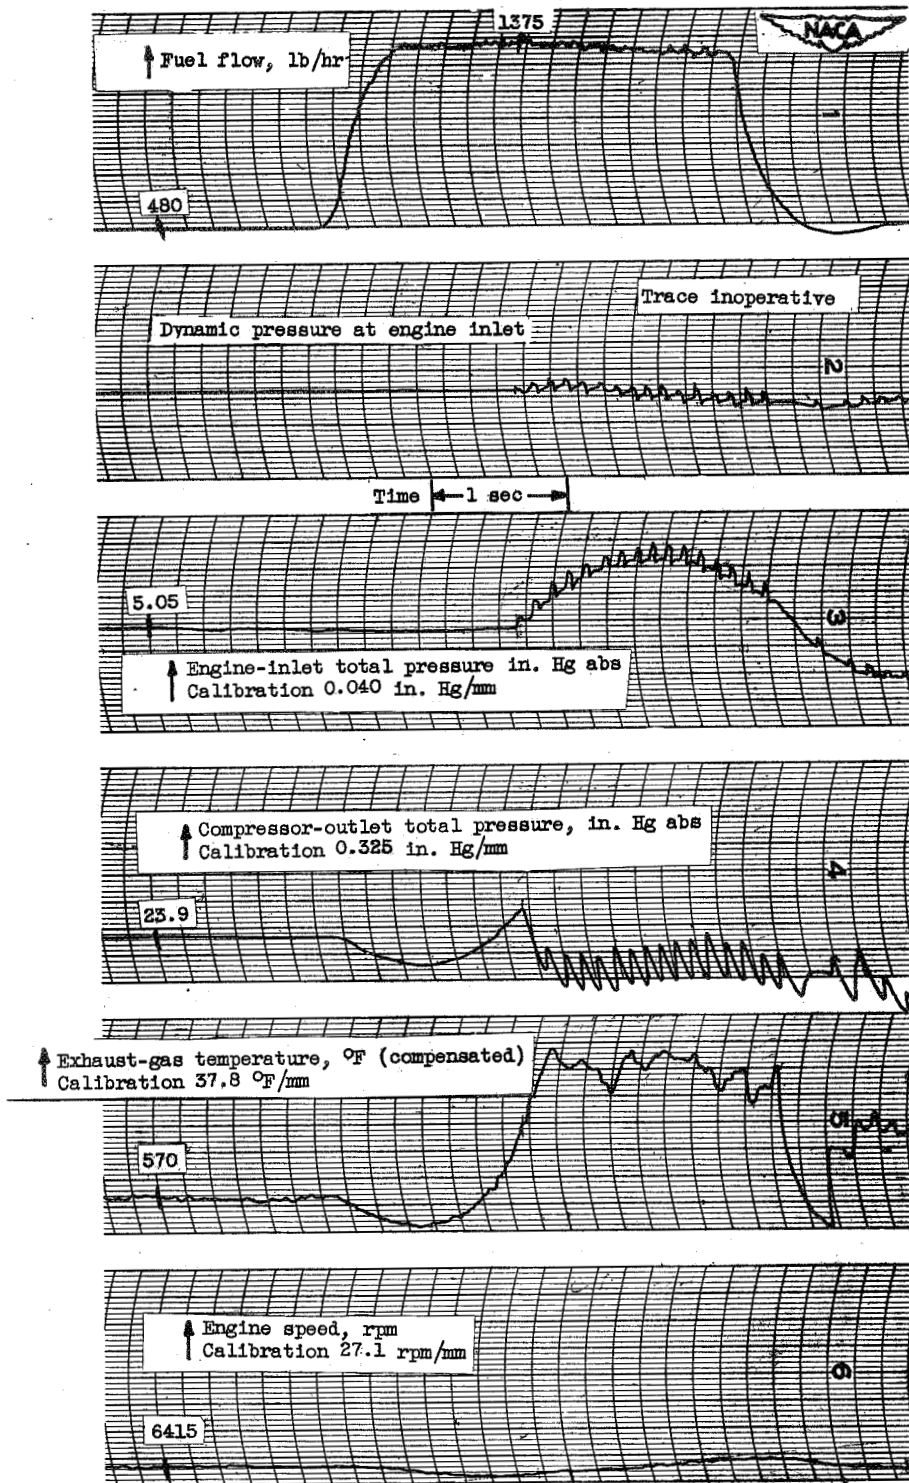


Figure 9

Oscillograph traces showing variations of different engine parameters during a step change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 58° F; inlet guide vanes position, open.

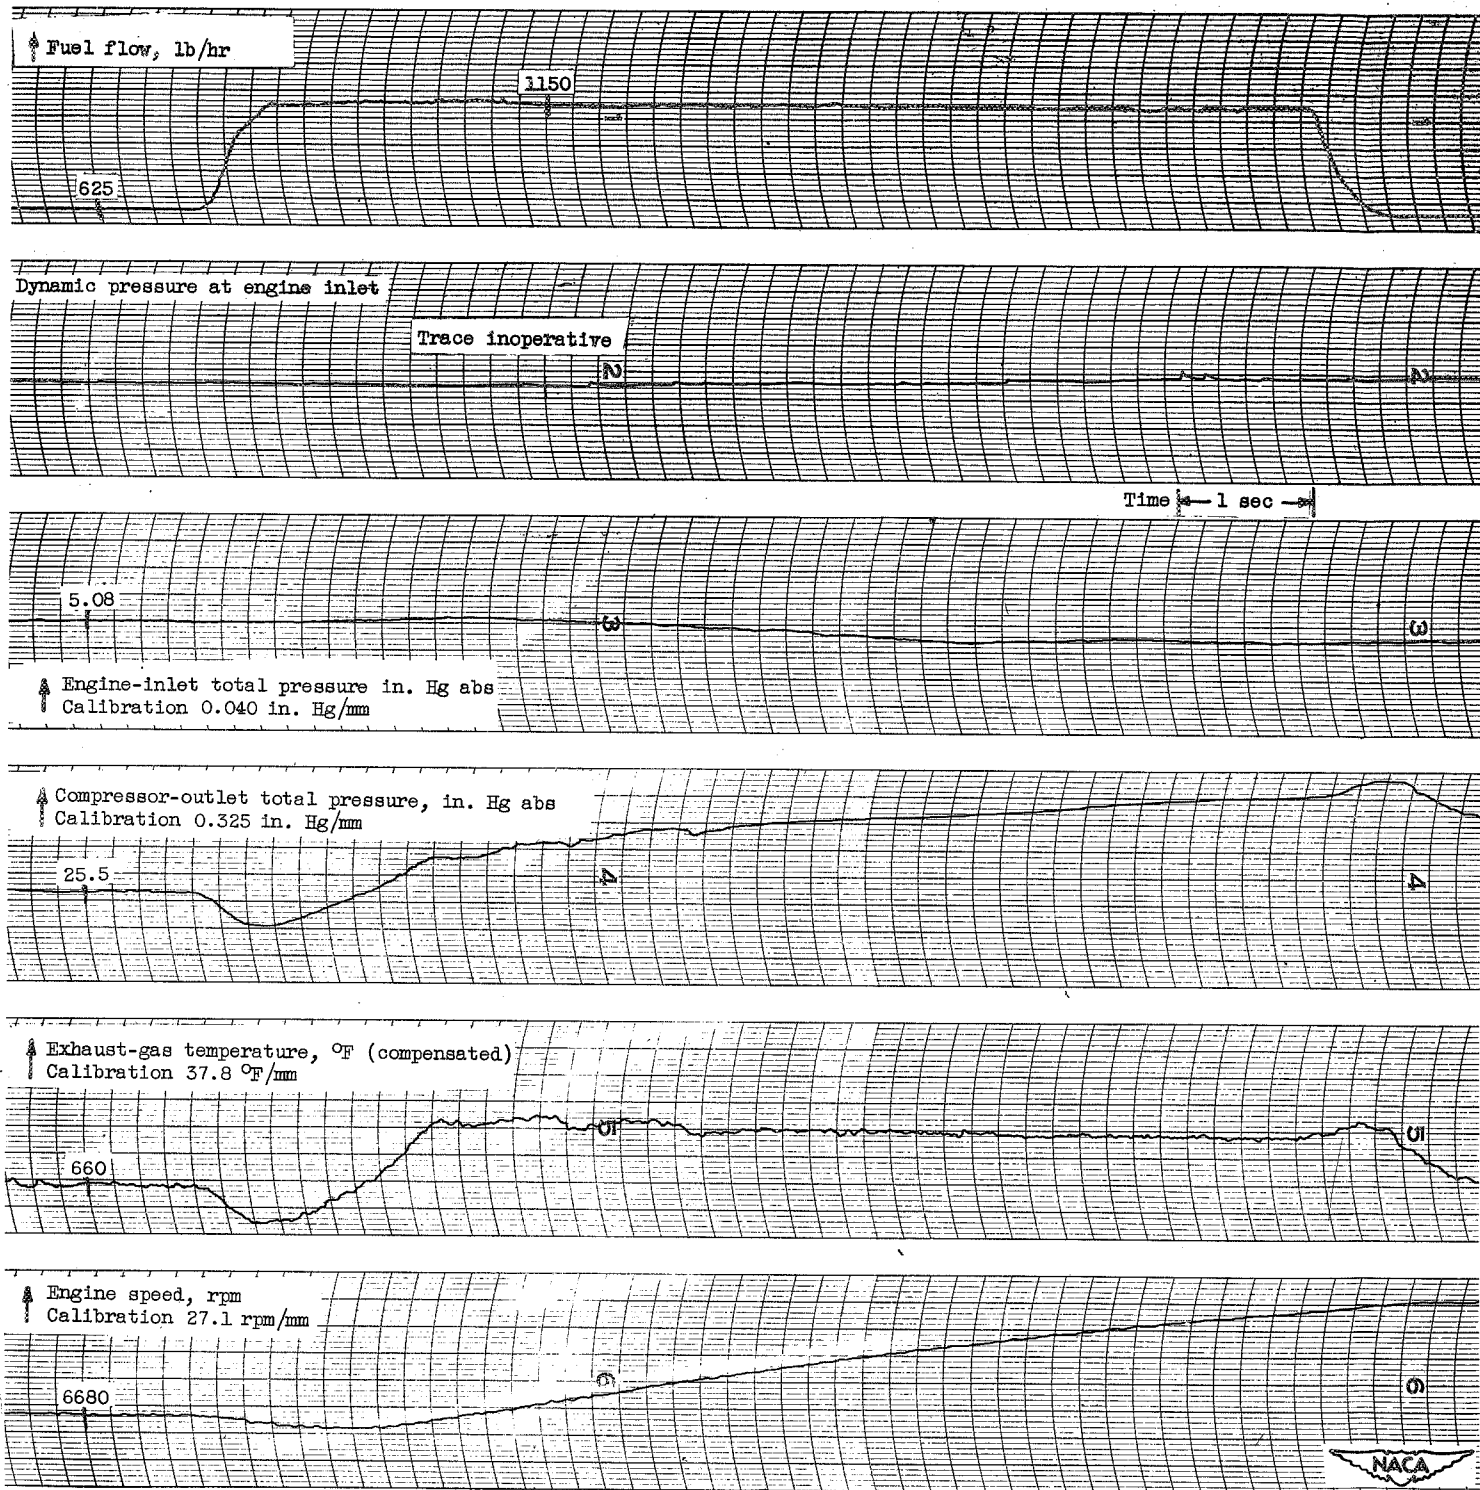


Figure 10

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 58° F; inlet guide vanes position, open.

Page intentionally left blank

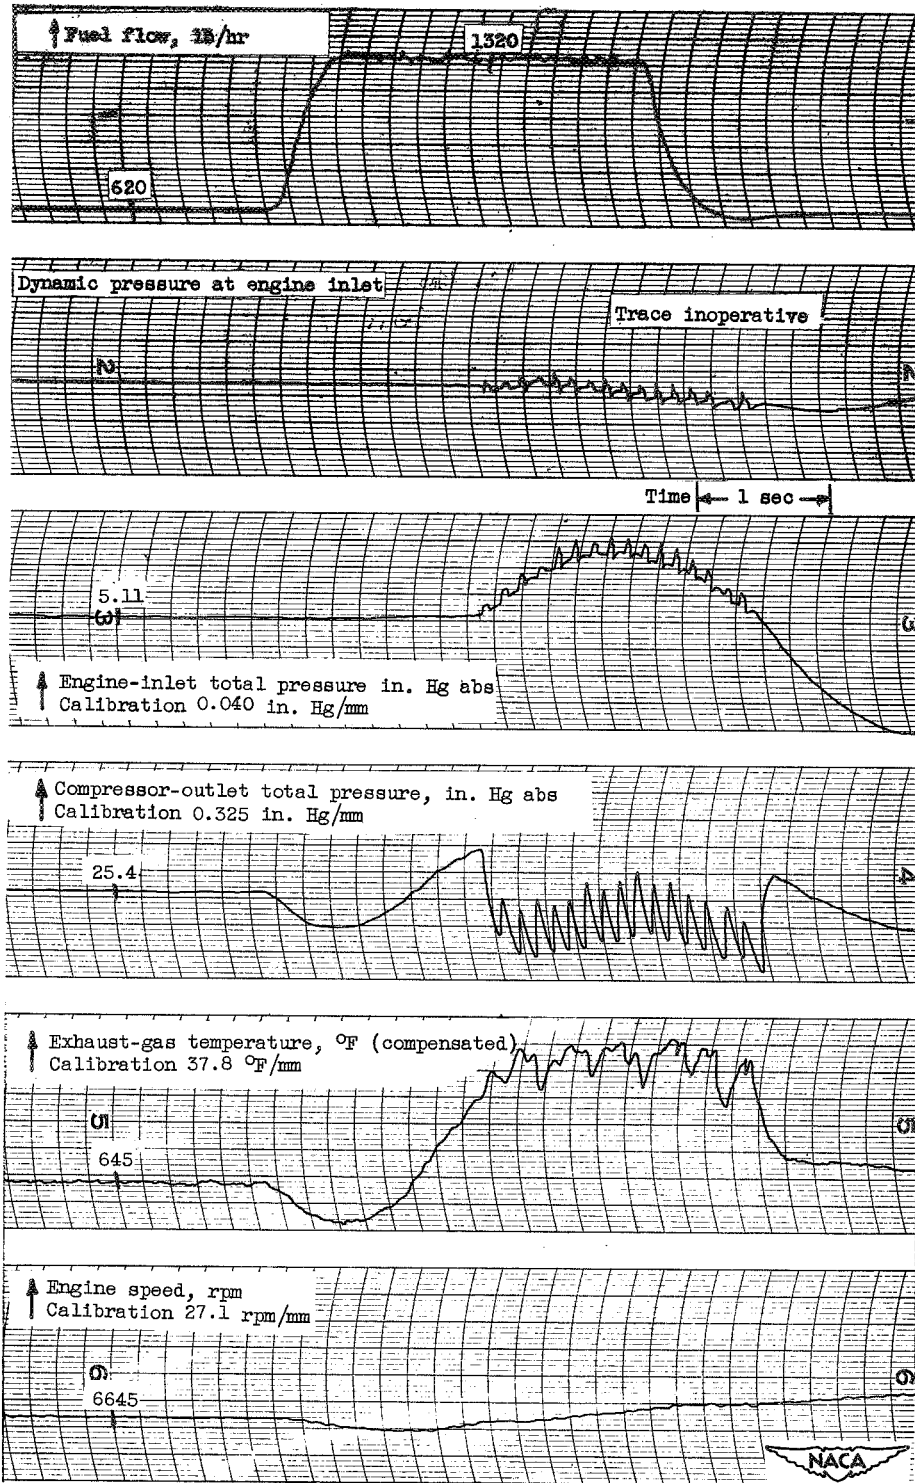


Figure 11

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 58° F; inlet guide vanes position, open.

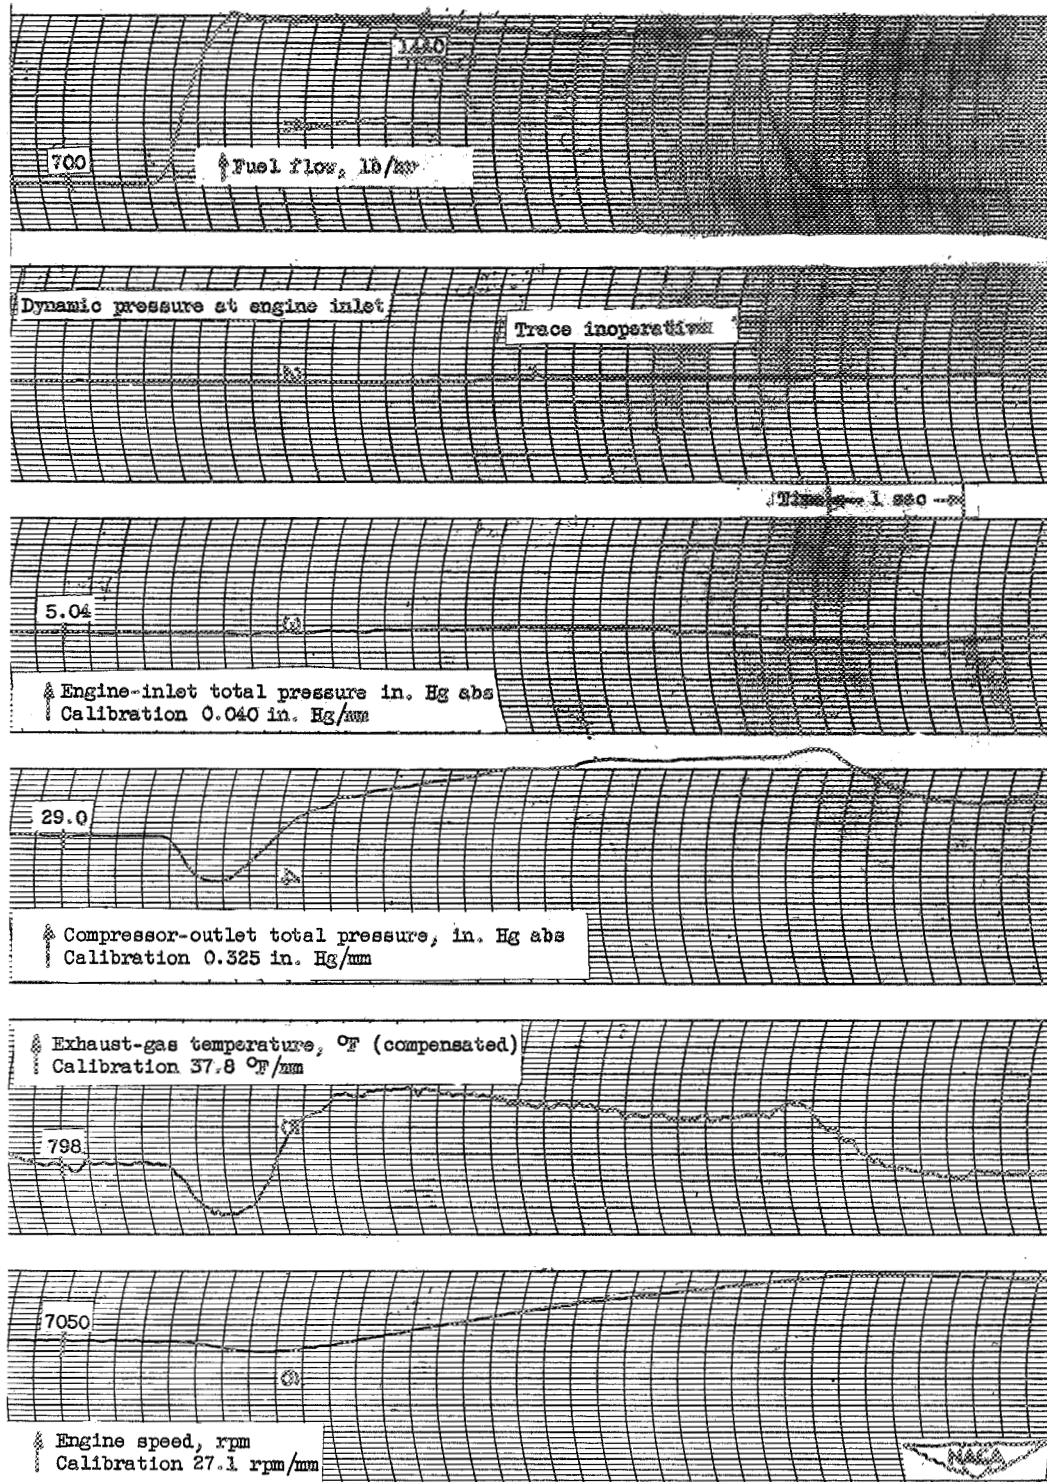


Figure 12

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 58° F; inlet guide vanes position, open.

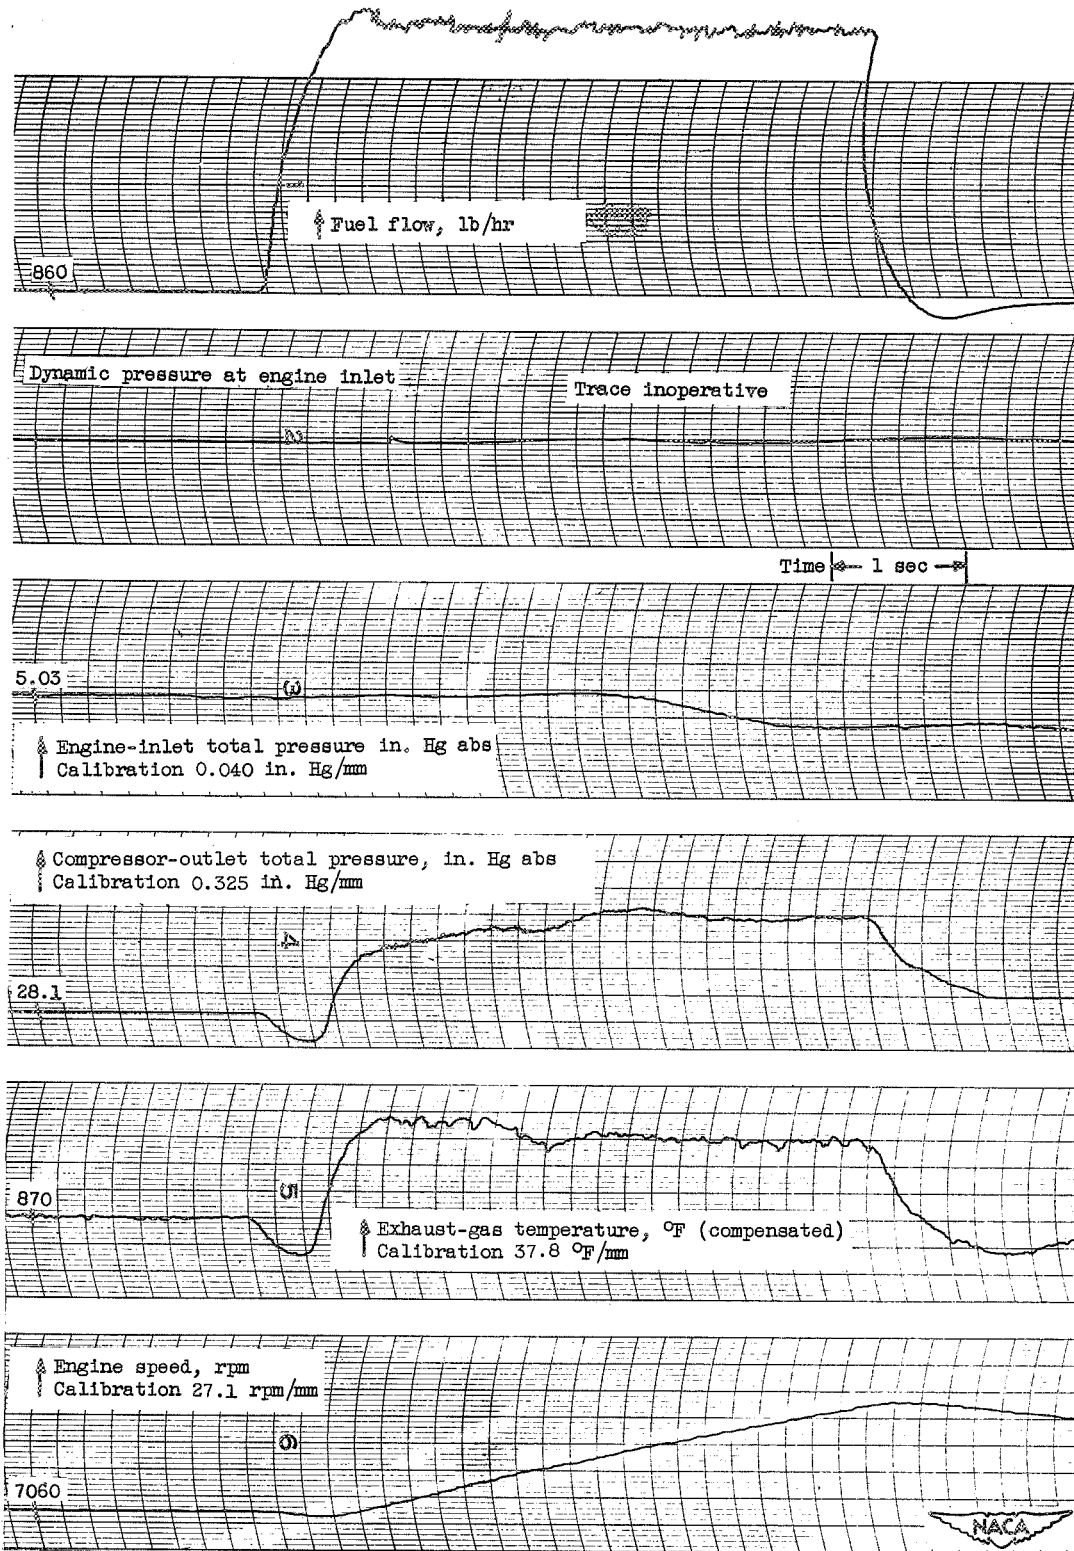


Figure 13
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 56° F; inlet guide vanes position, open.

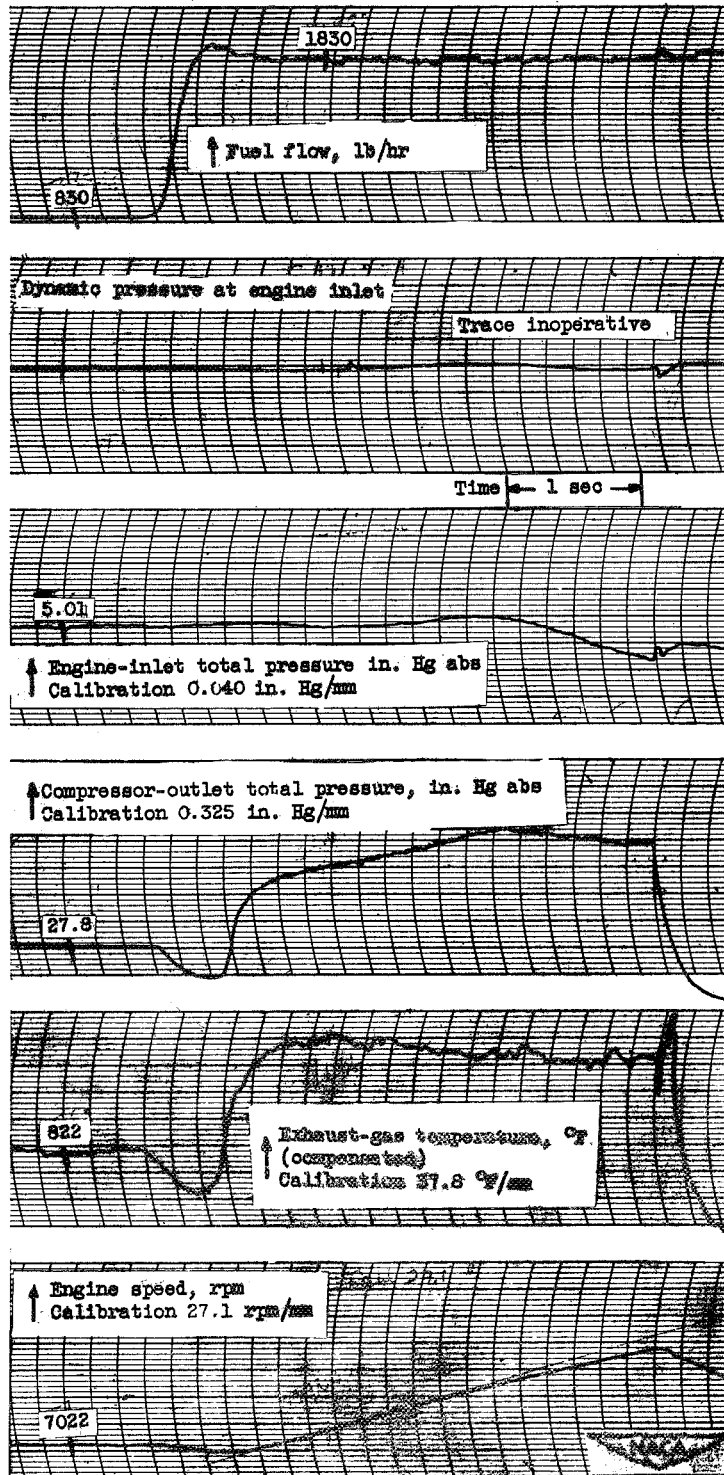


Figure 14
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 57° F; inlet guide vanes position, open.

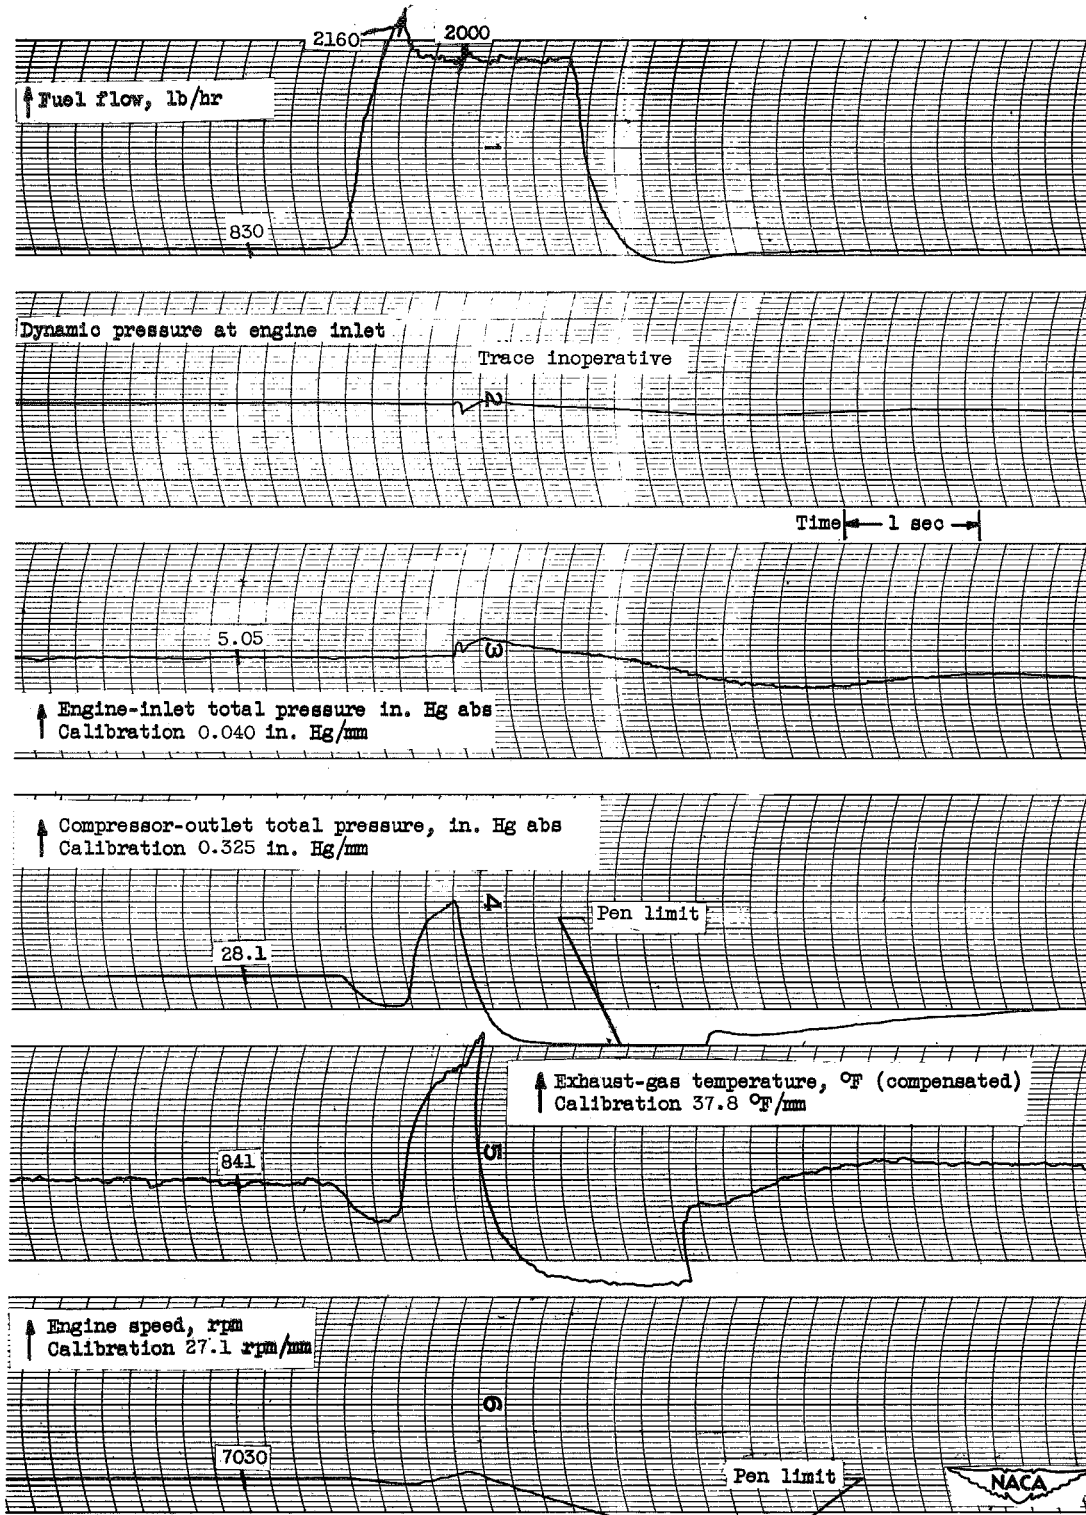


Figure 15

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 57° F; inlet guide vanes position, open.

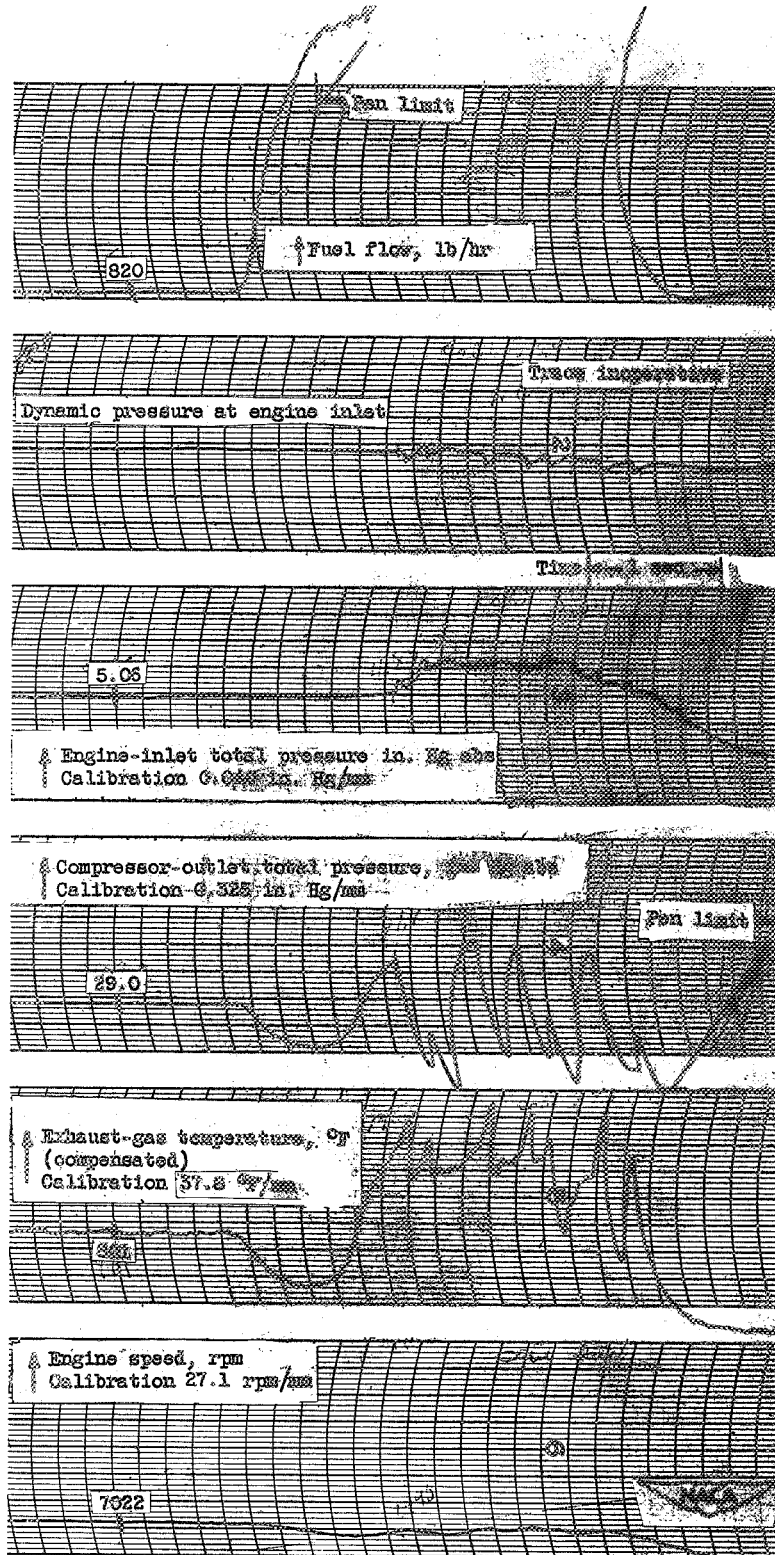


Figure 16

Oscillograph traces showing variations of different engine parameters during a step change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 58° F; inlet guide vanes position, open.

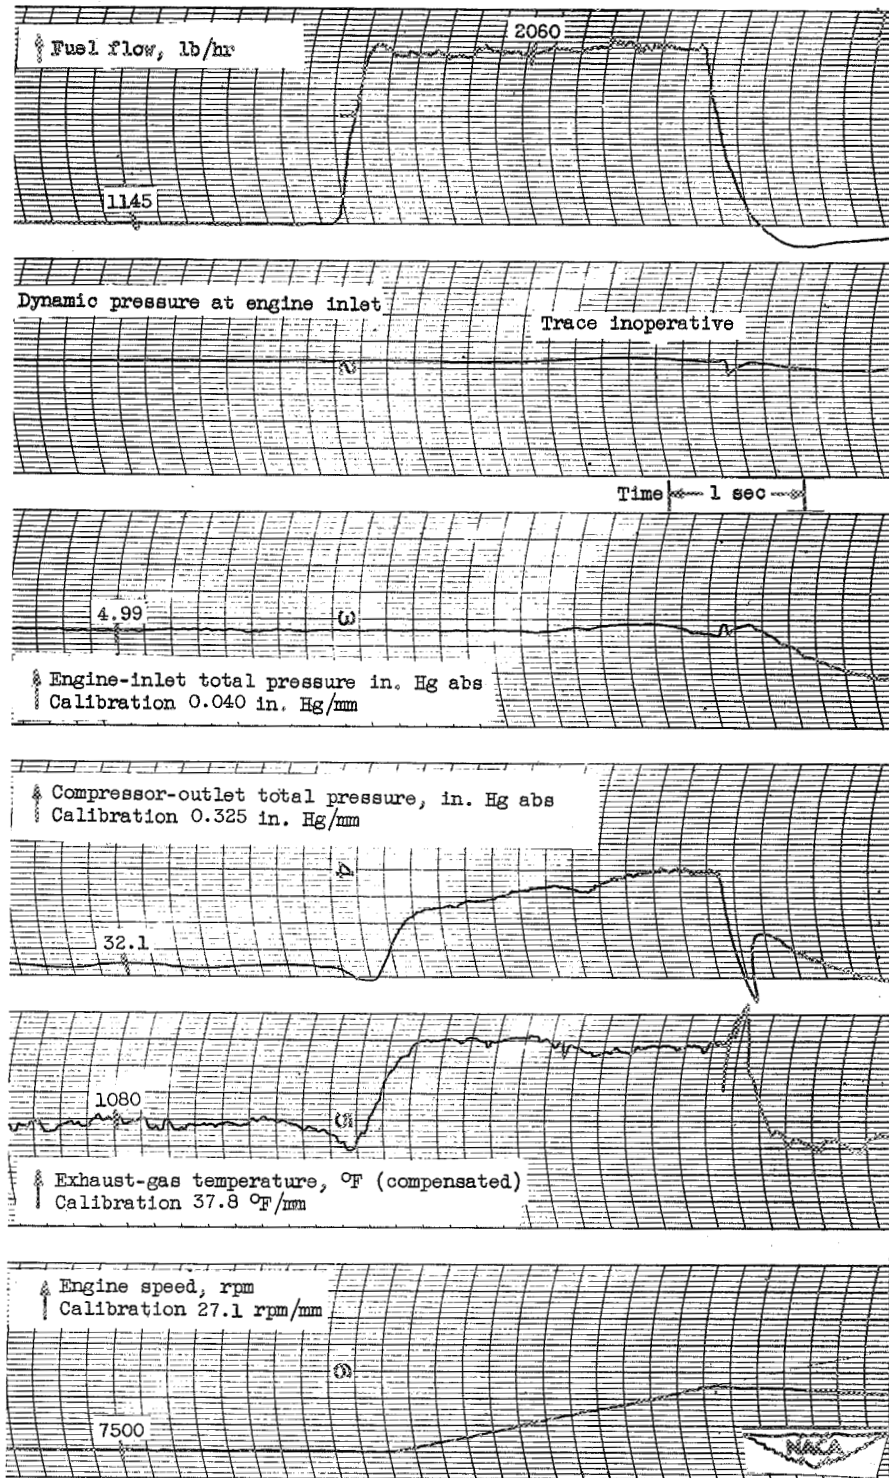


Figure 17
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 57° F; inlet guide vanes position, open.

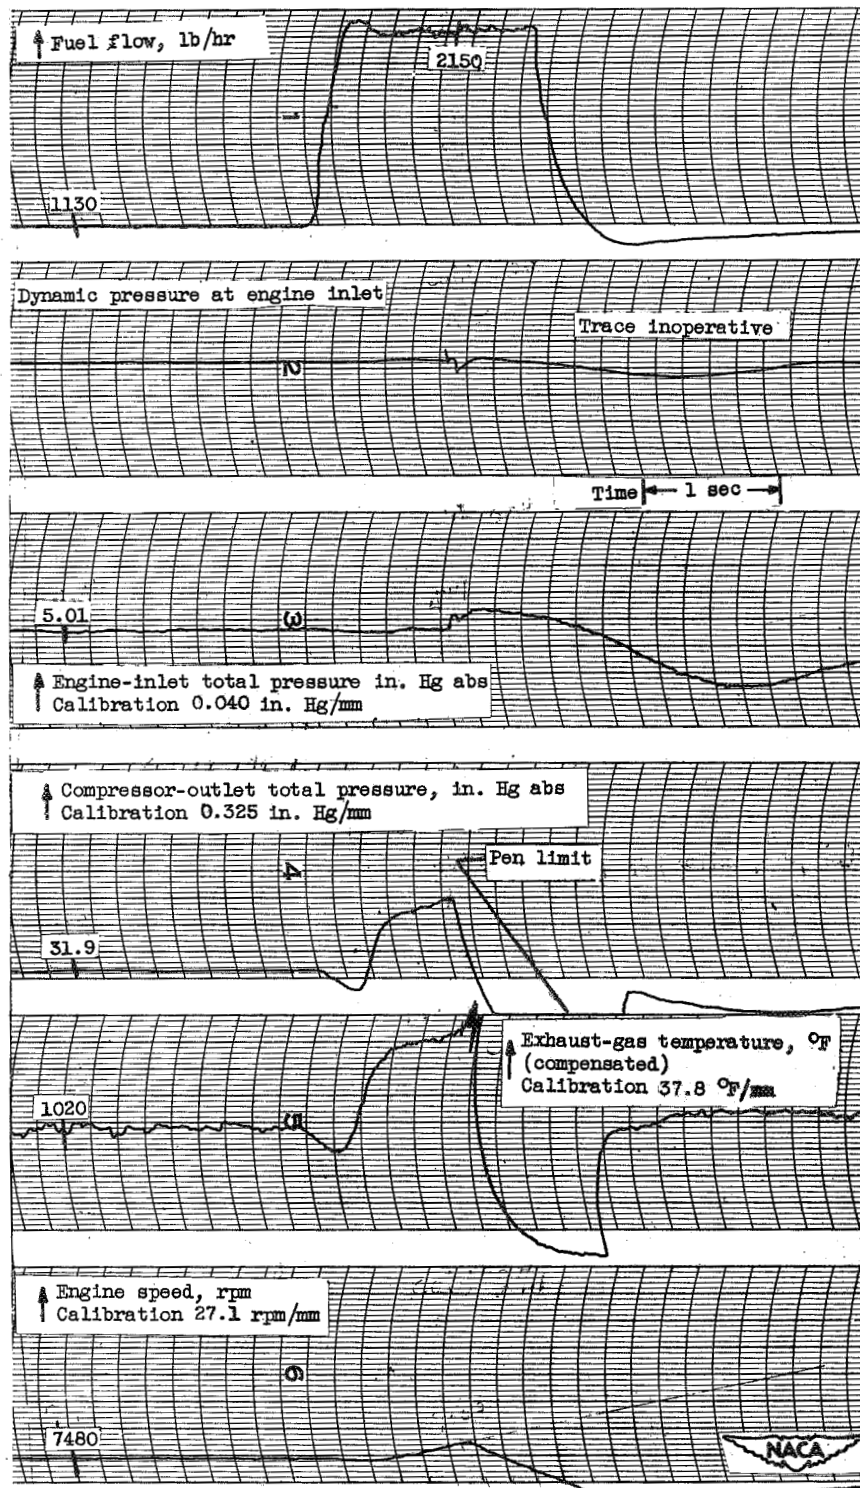


Figure 18
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 6.0; engine-inlet air temperature, 57° F; inlet guide vanes position, open.

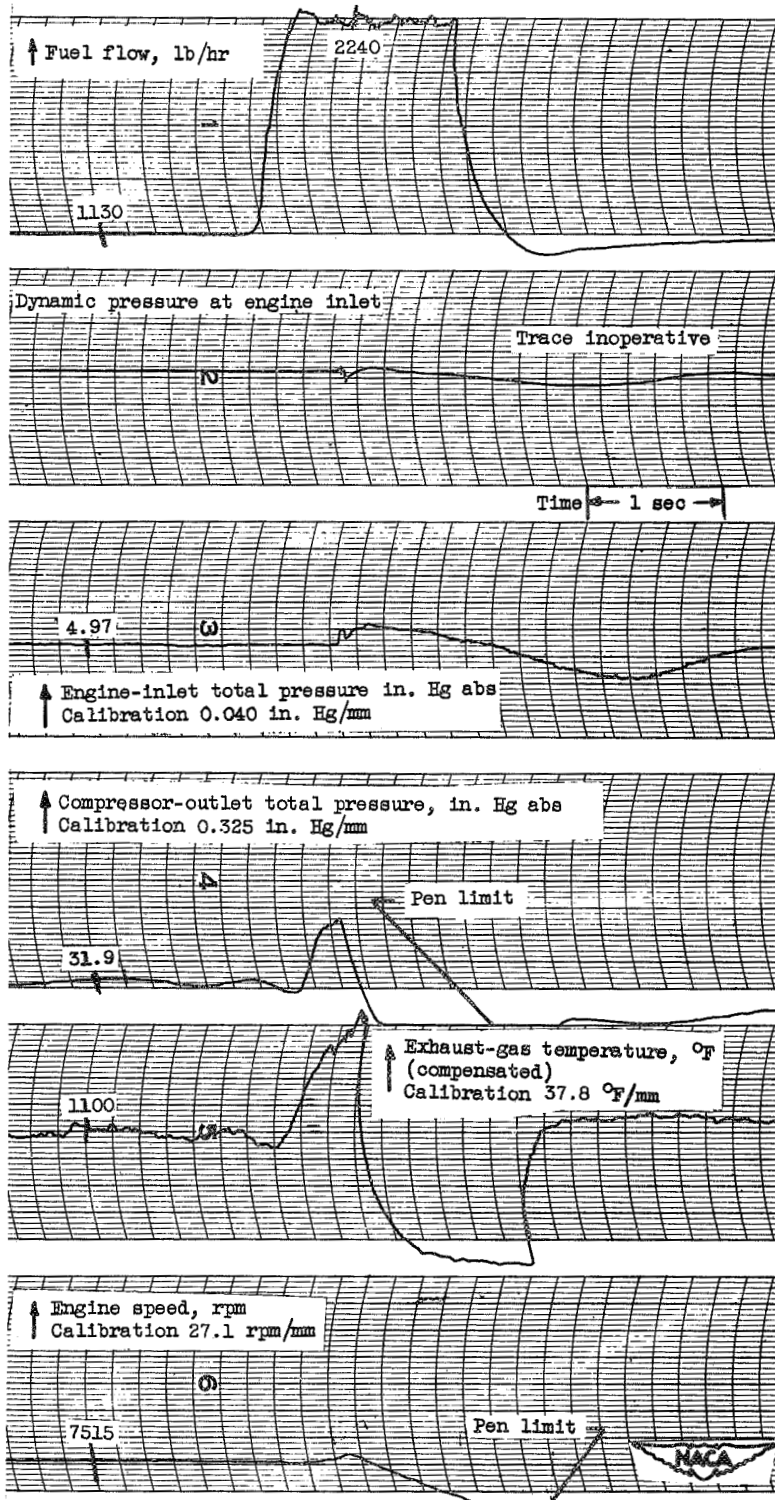


Figure 19
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.0; engine-inlet air temperature, 57° F; inlet guide vanes position, open.

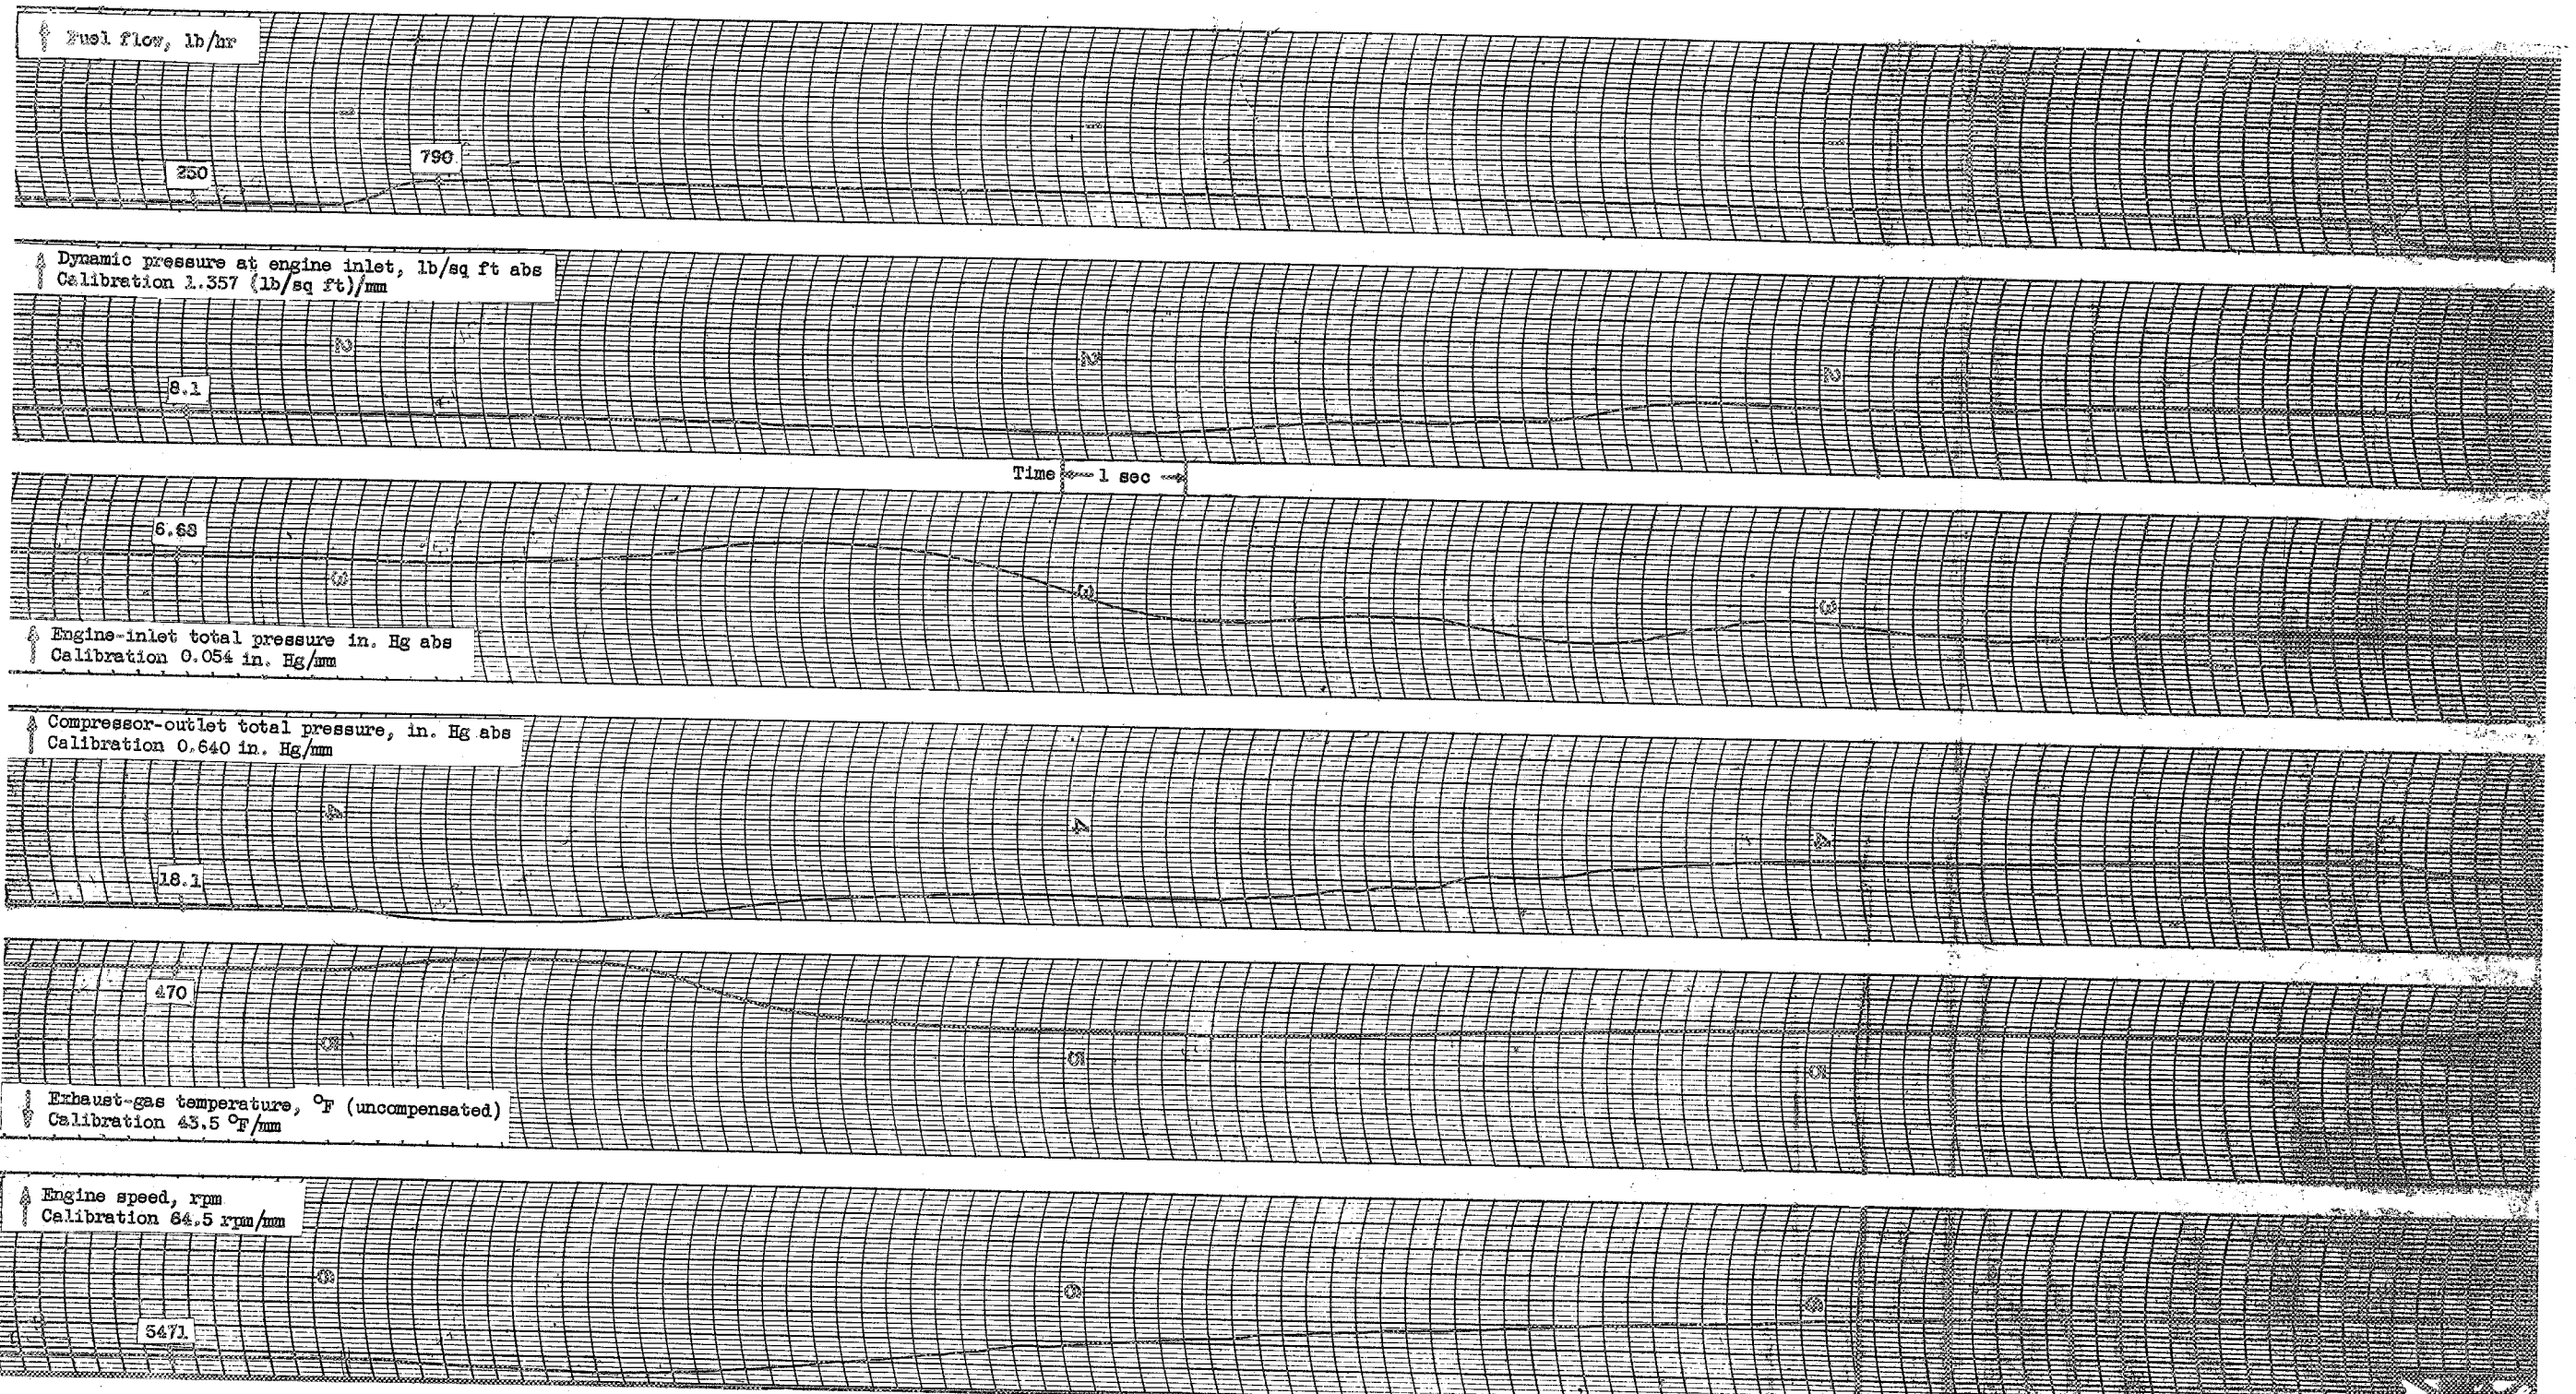


Figure 20
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

Page intentionally left blank

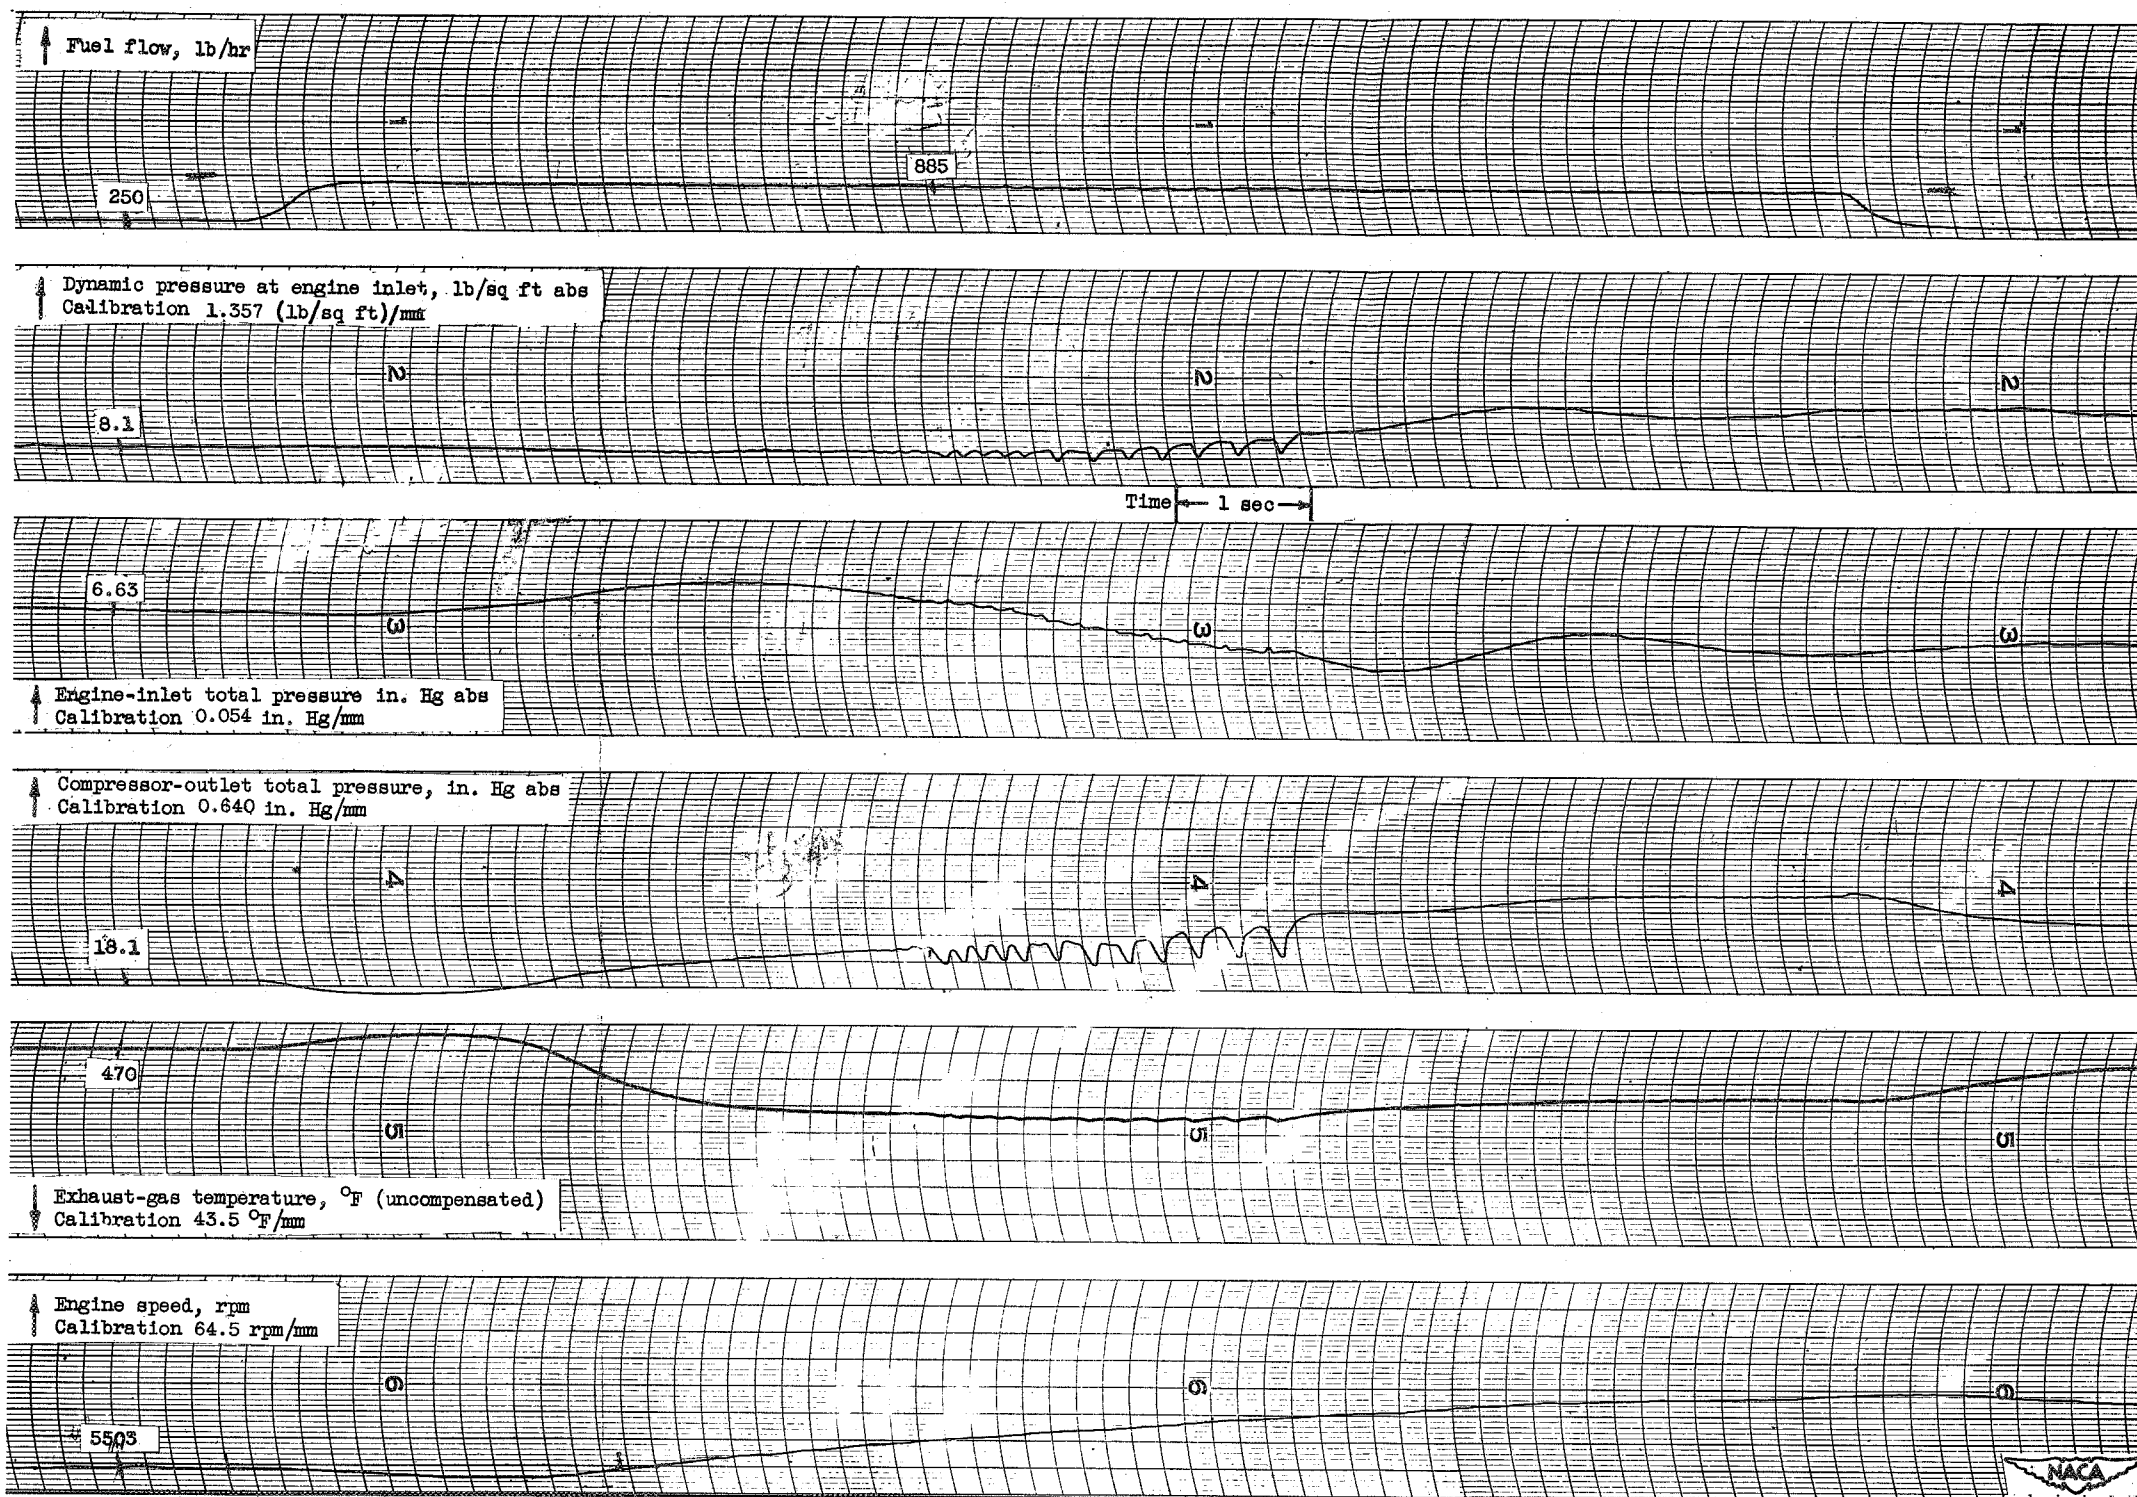


Figure 21
 Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

Page intentionally left blank

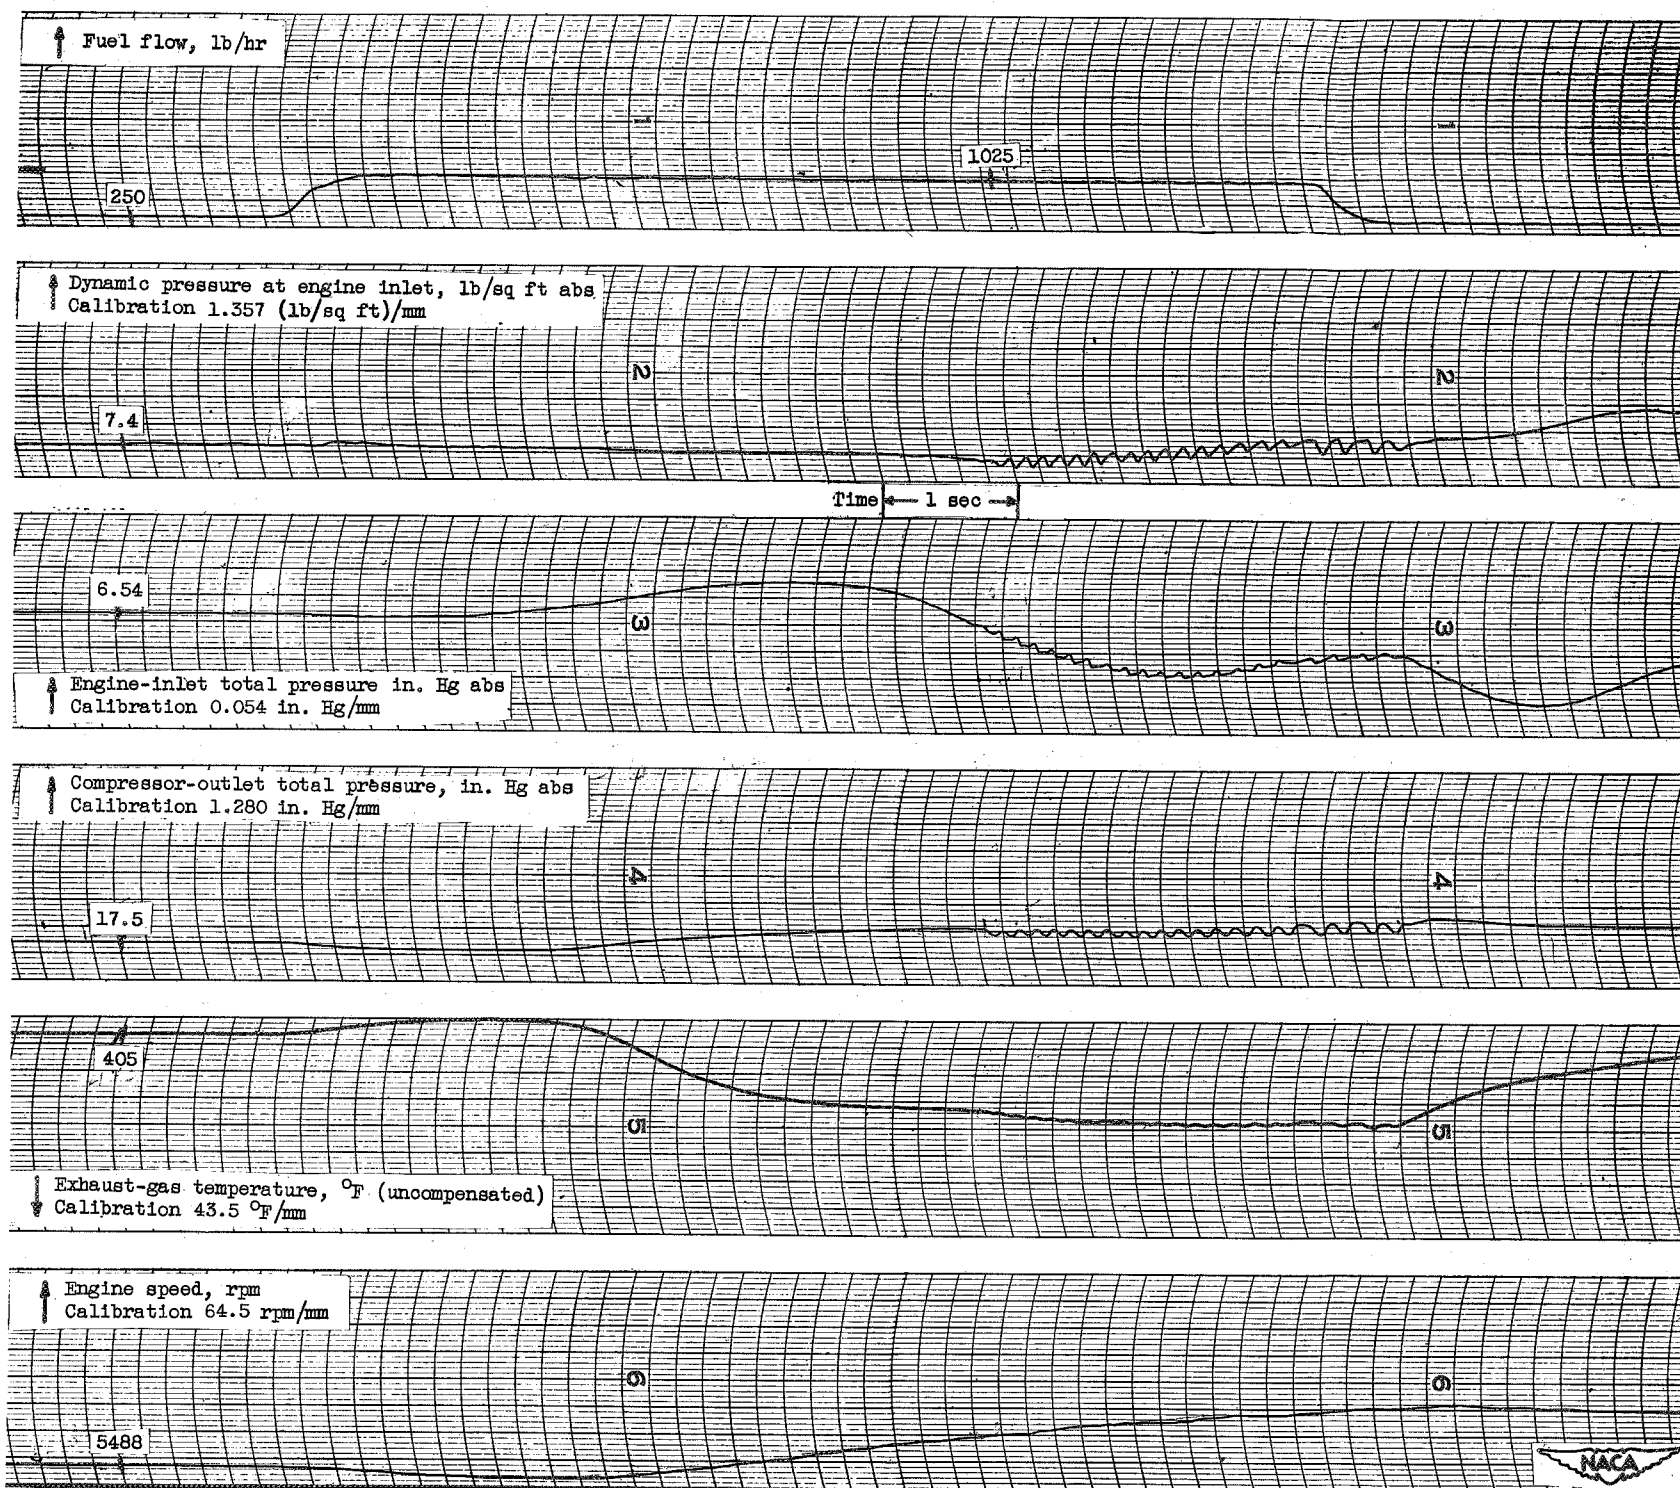


Figure 22
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 36° F; inlet guide vanes position, open.

Page intentionally left blank

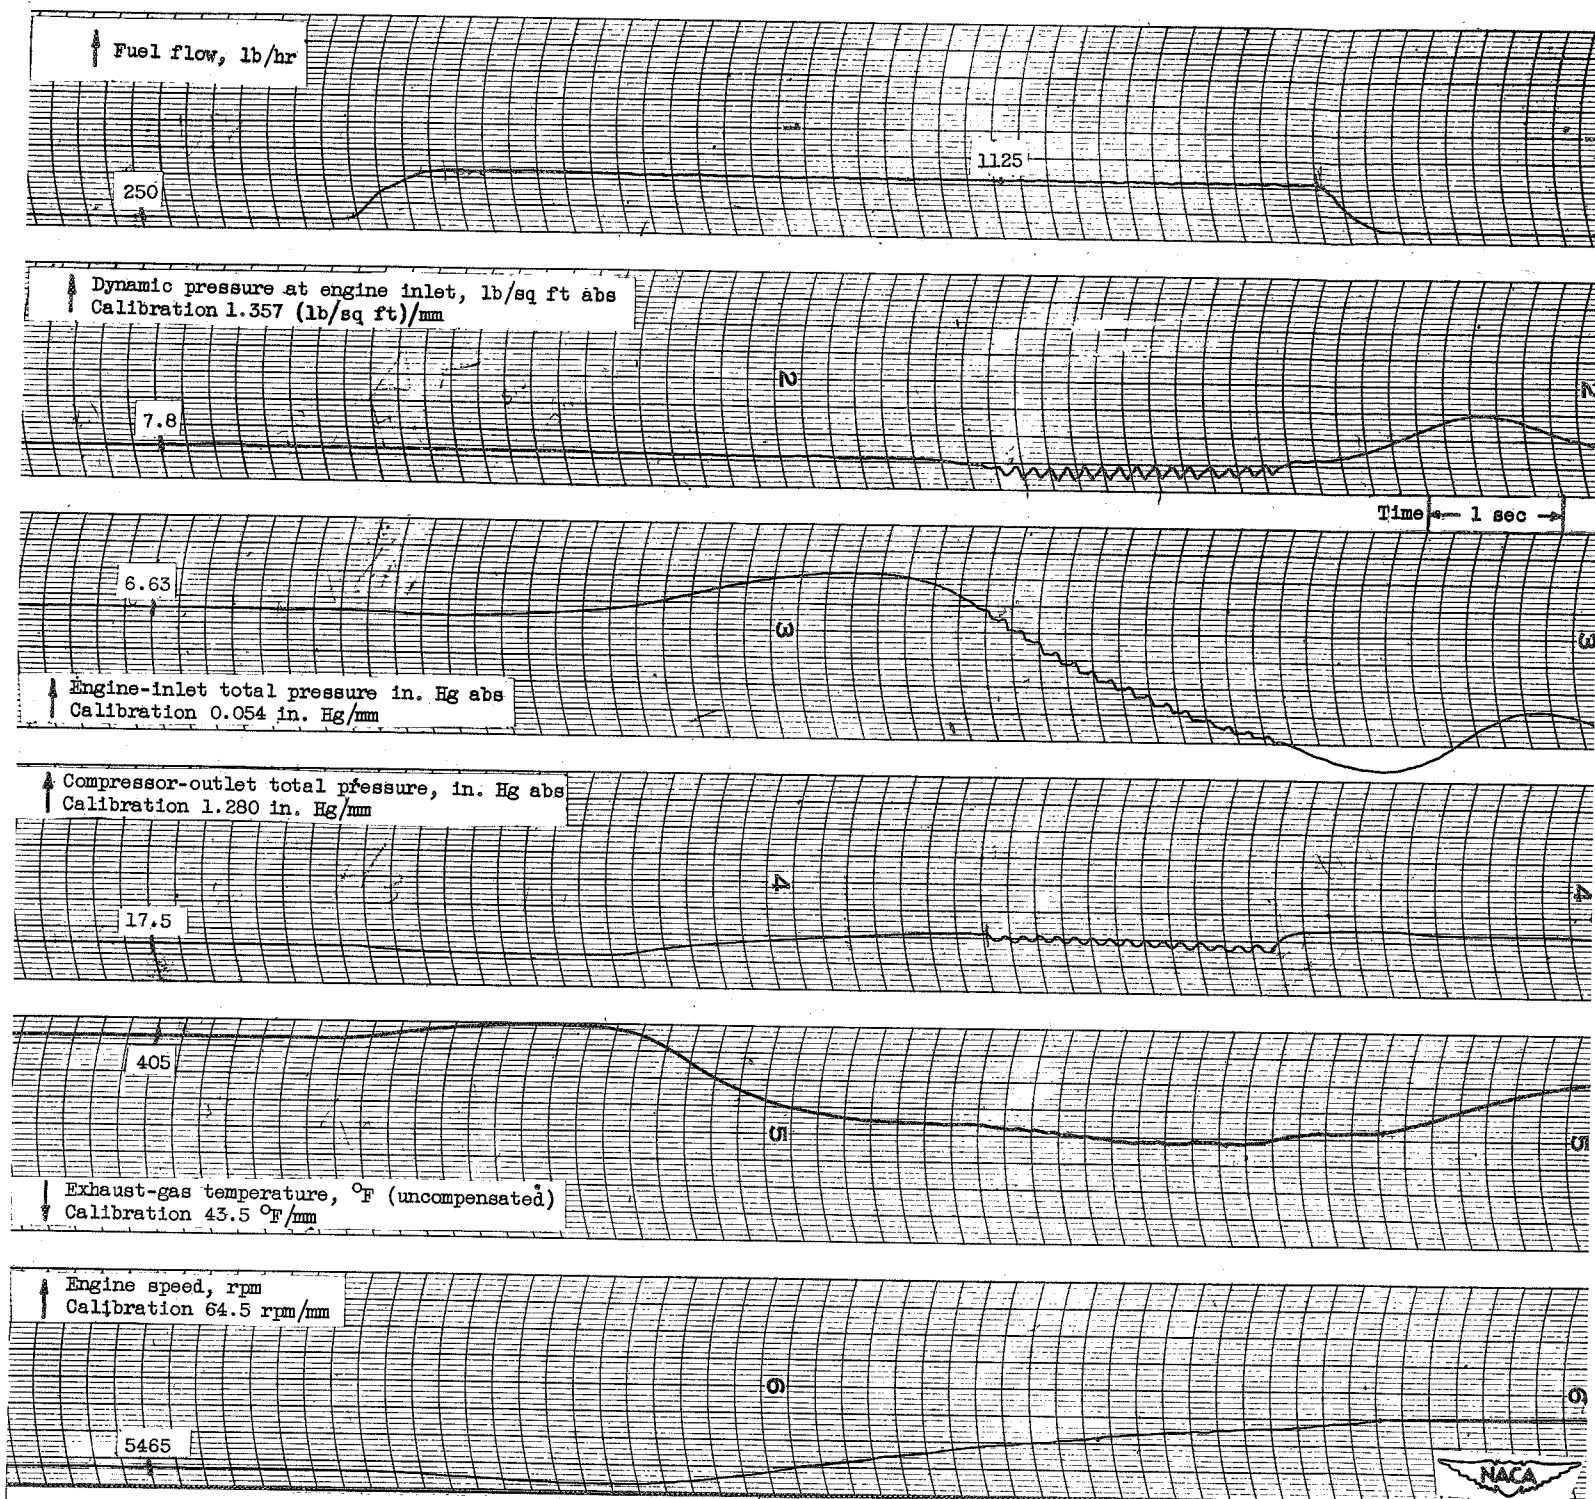


Figure 23

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 36° F; inlet guide vanes position, open.

Page intentionally left blank

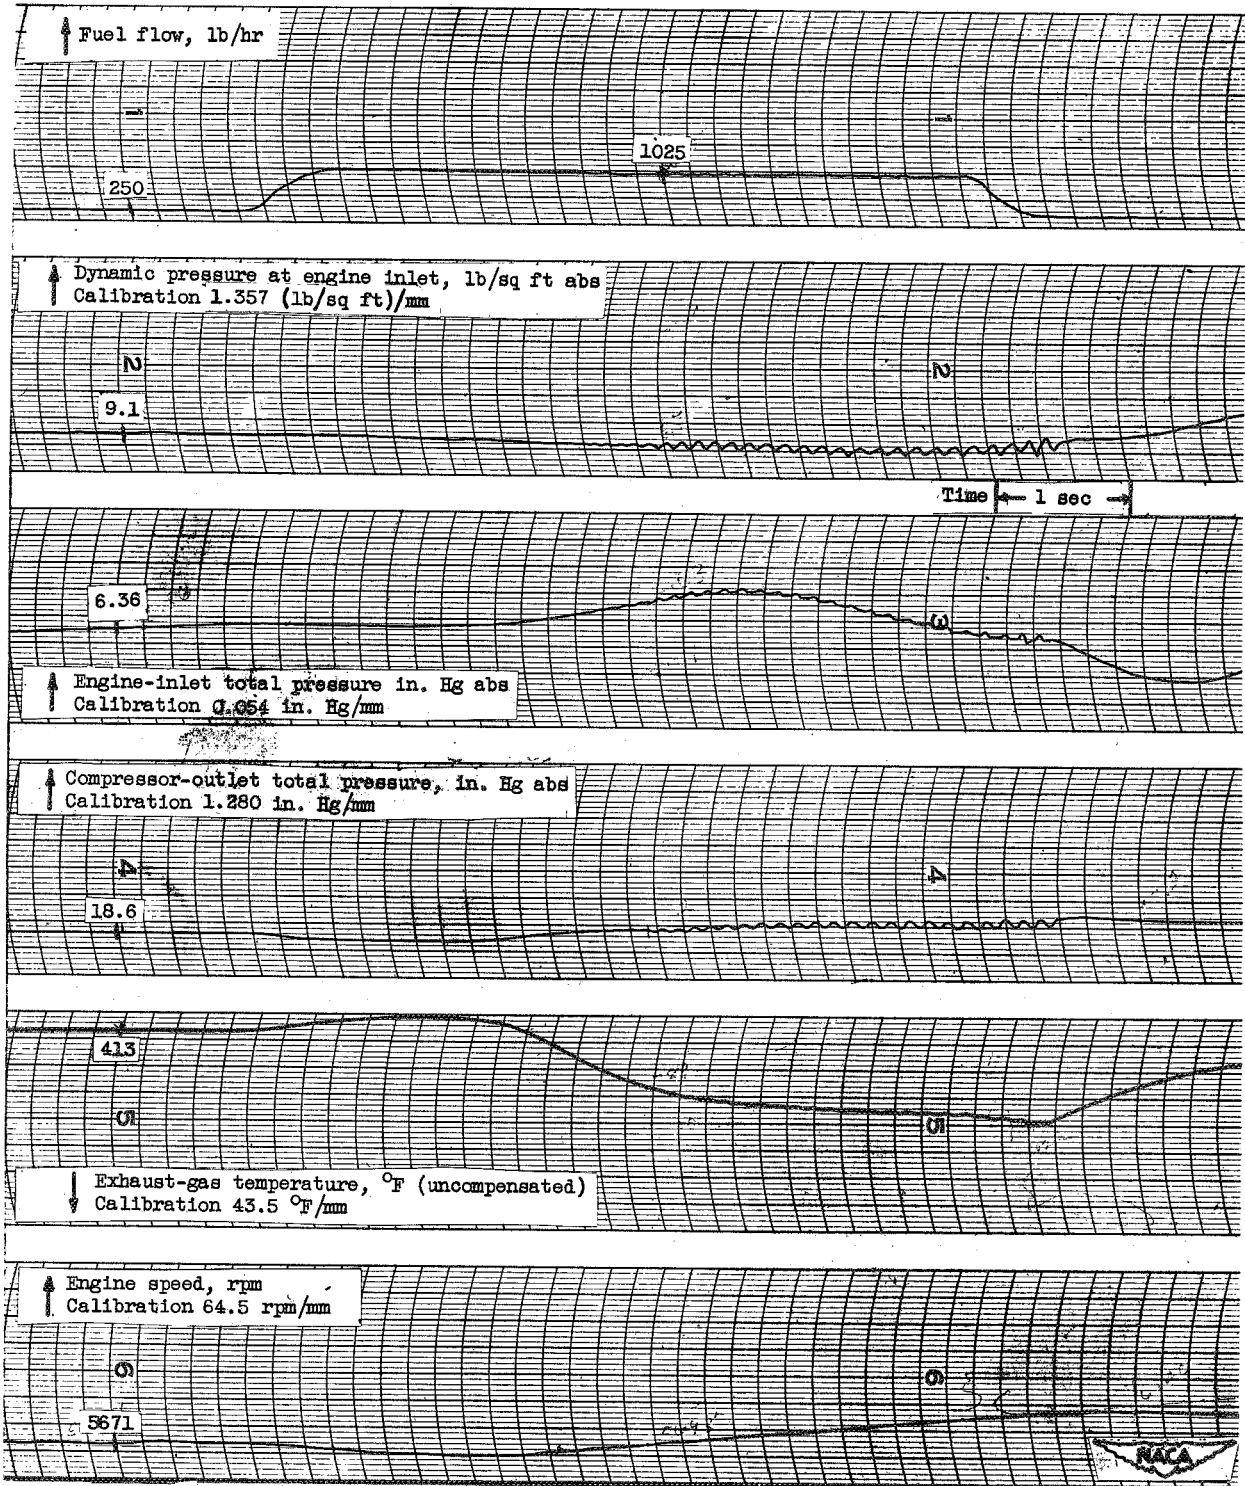


Figure 24
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 36° F; inlet guide vanes position, open.

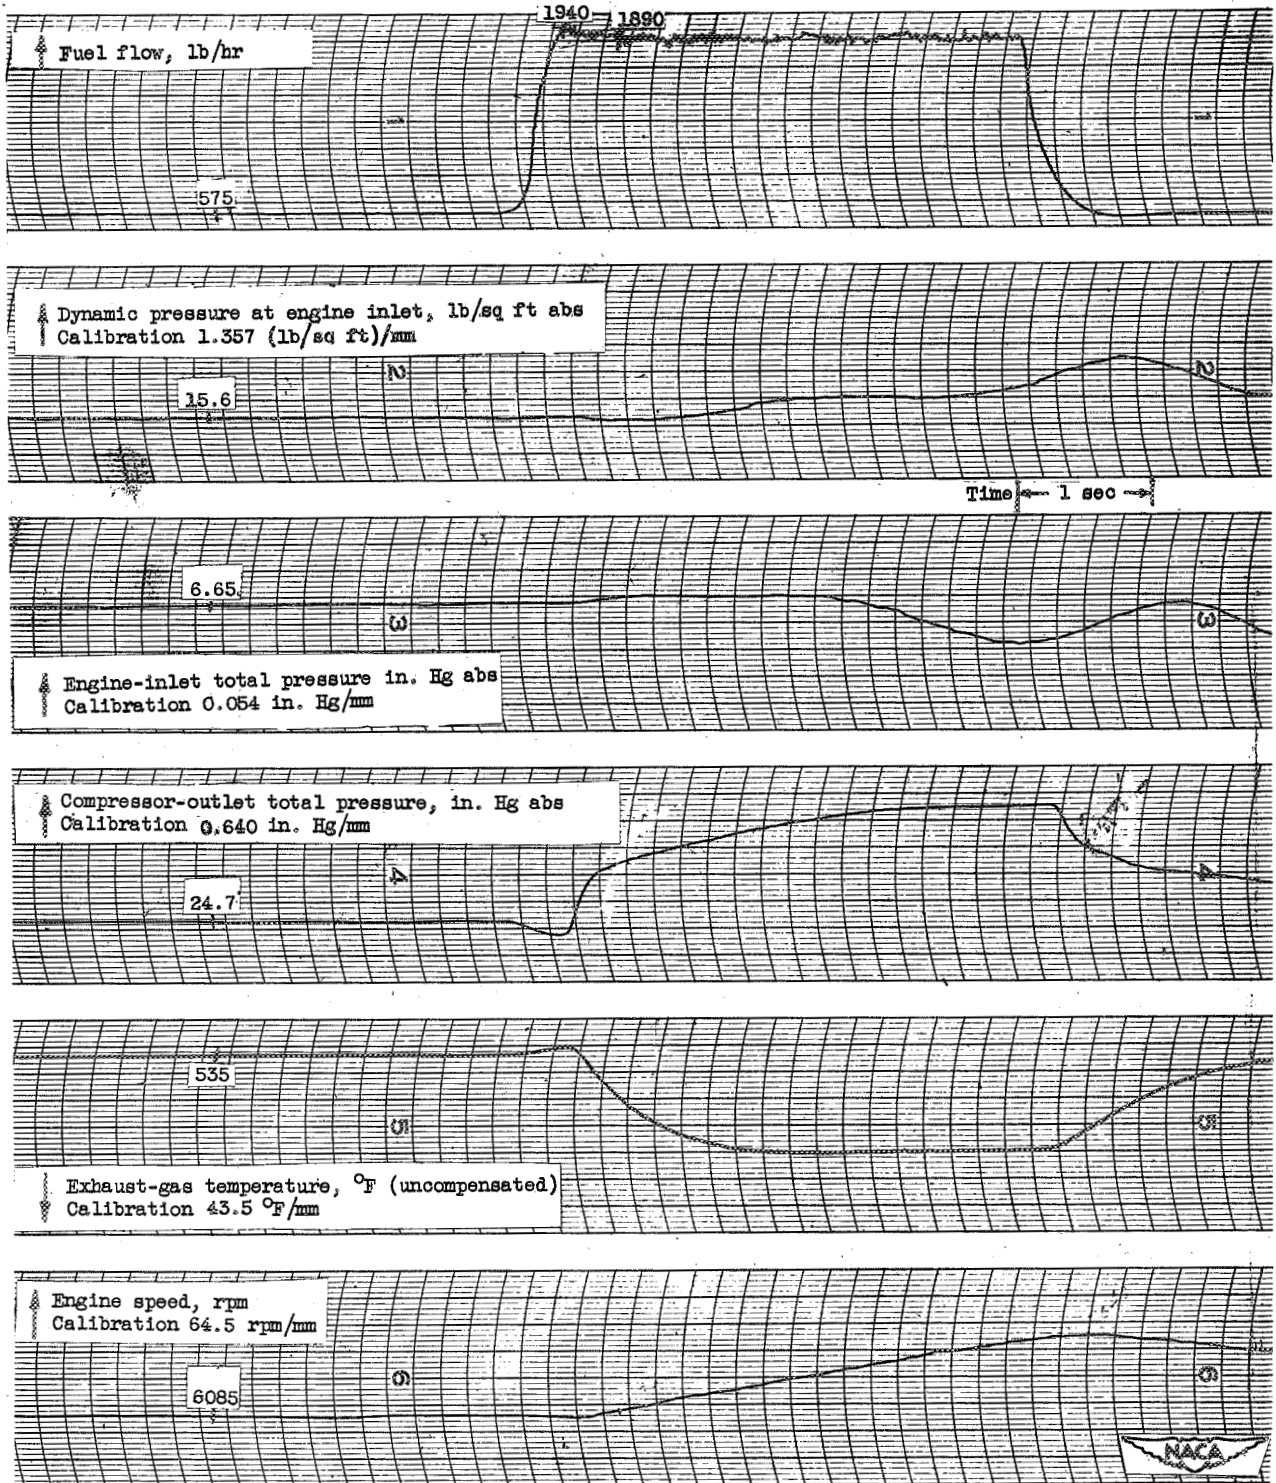


Figure 25
 Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

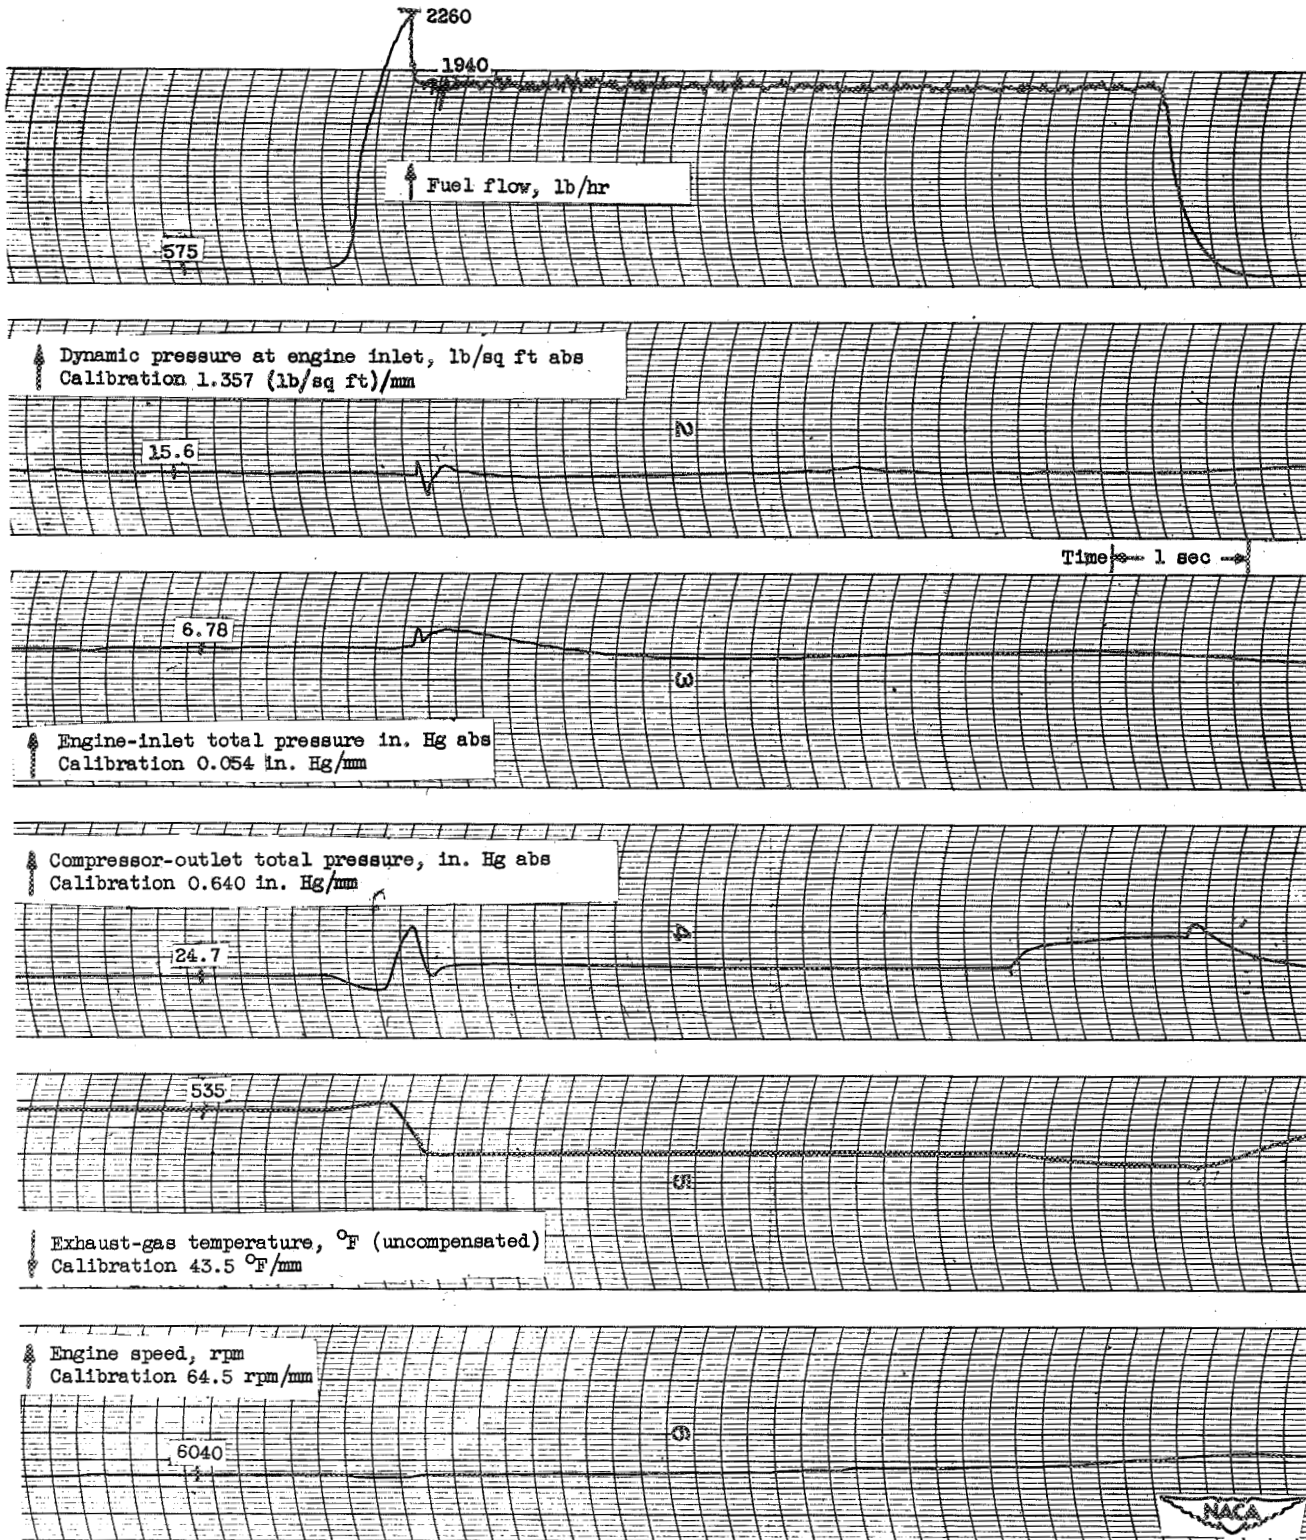


Figure 26
Oscillograph traces showing variations of different engine parameters during a step change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

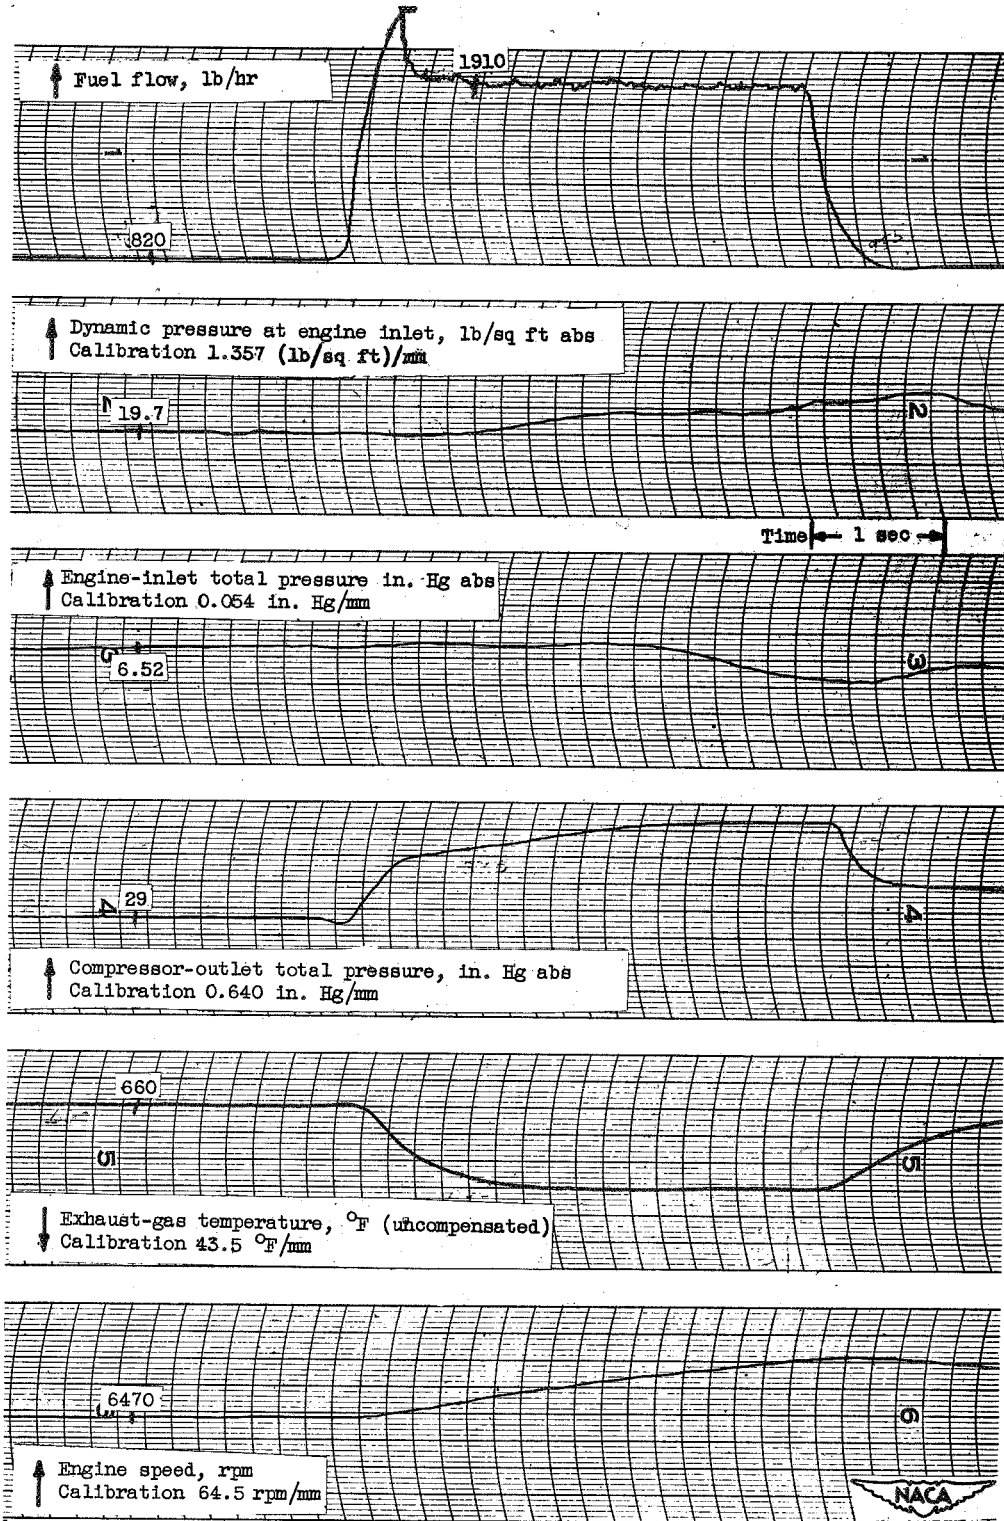


Figure 27

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 31° F; inlet guide vanes position, open.

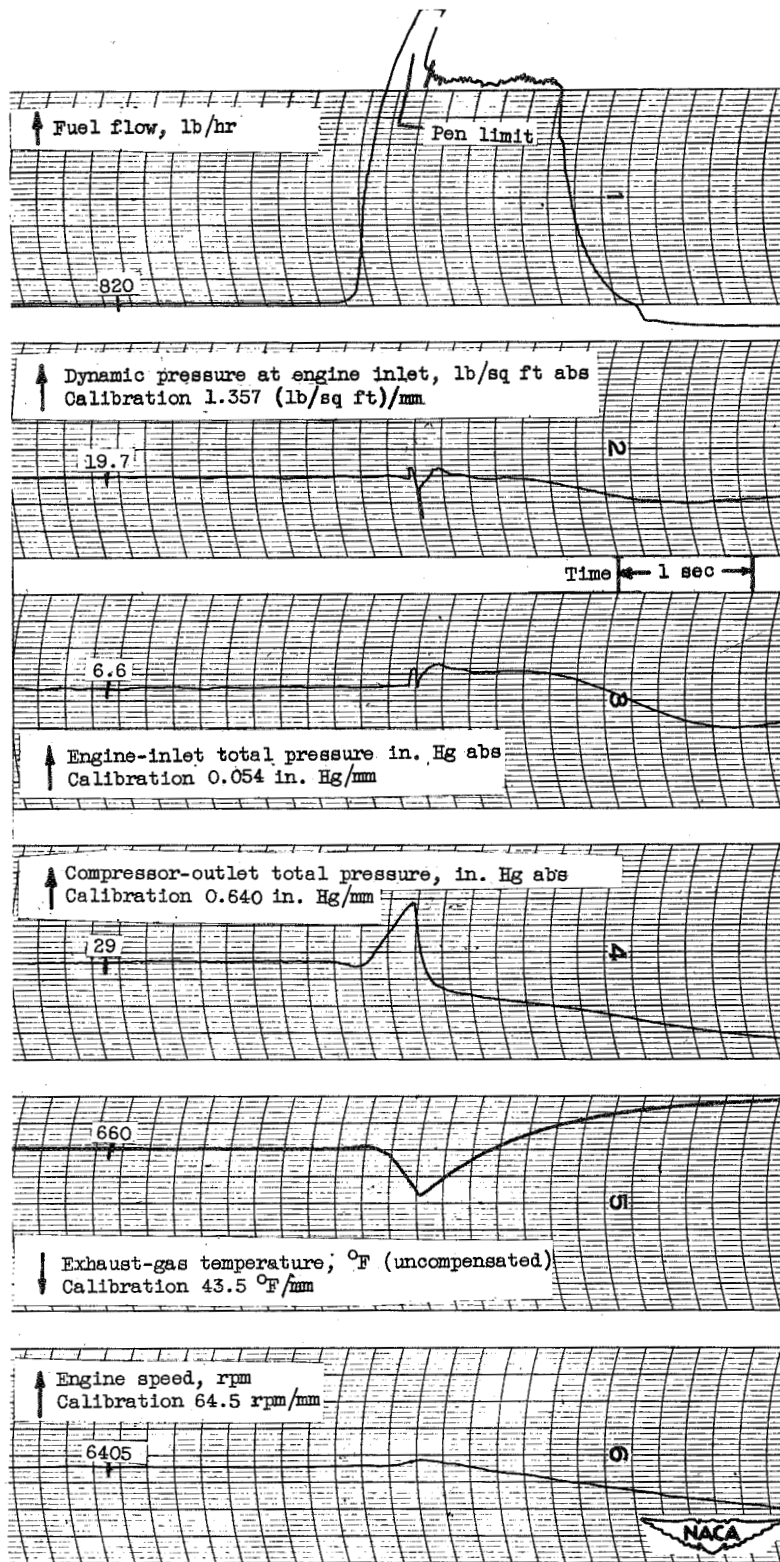


Figure 28
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 31° F; inlet guide vanes position, open.

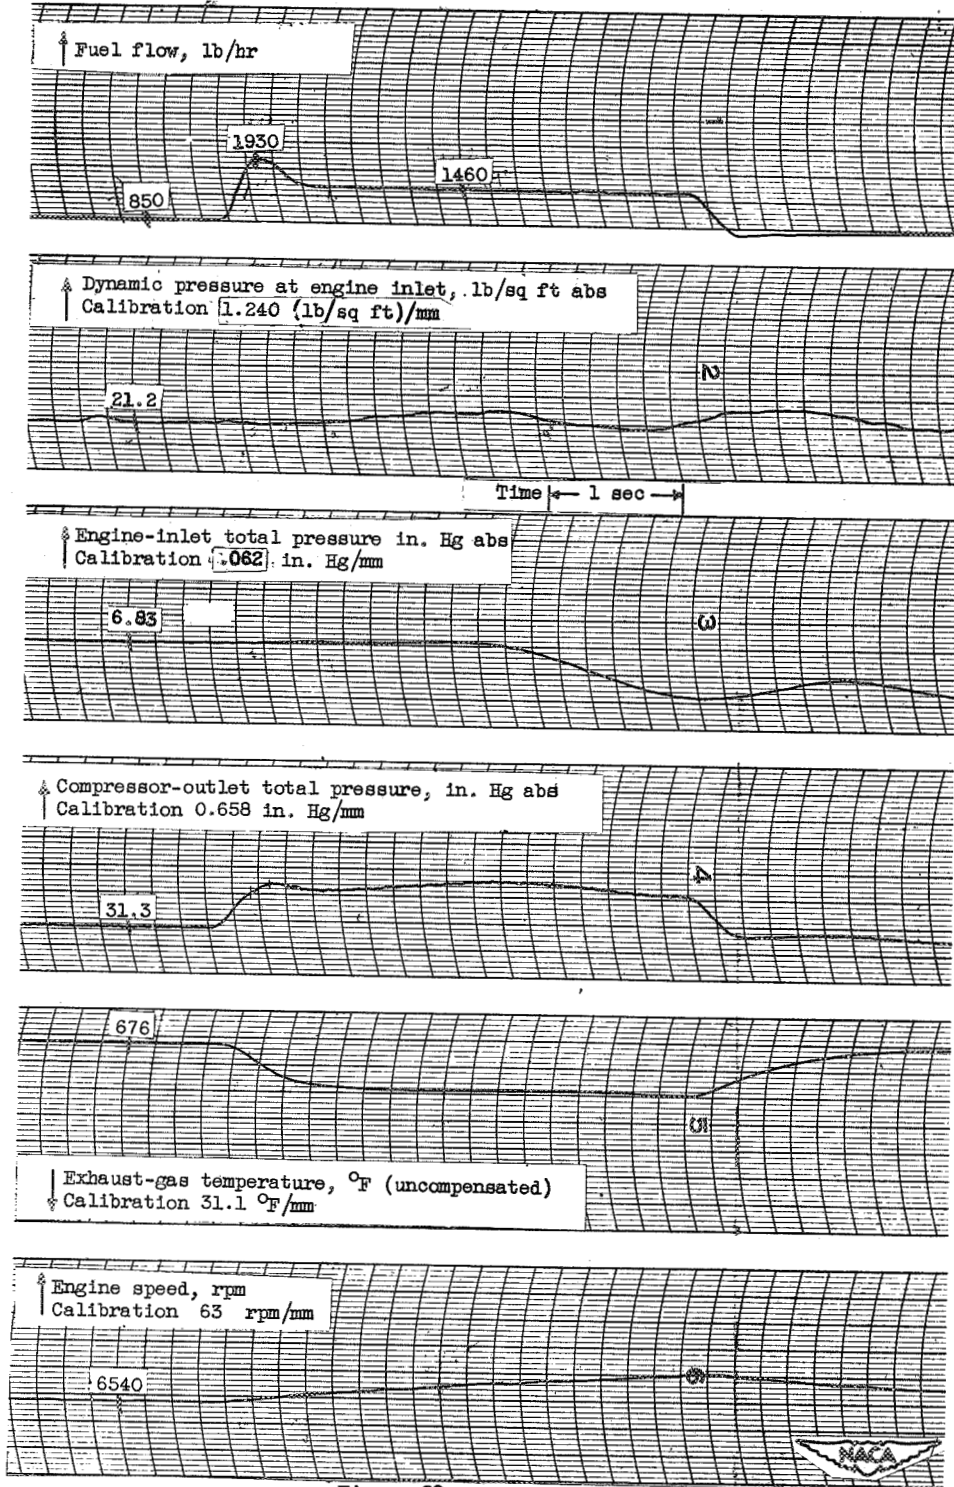


Figure 29

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30 ° F; inlet guide vanes position, open.

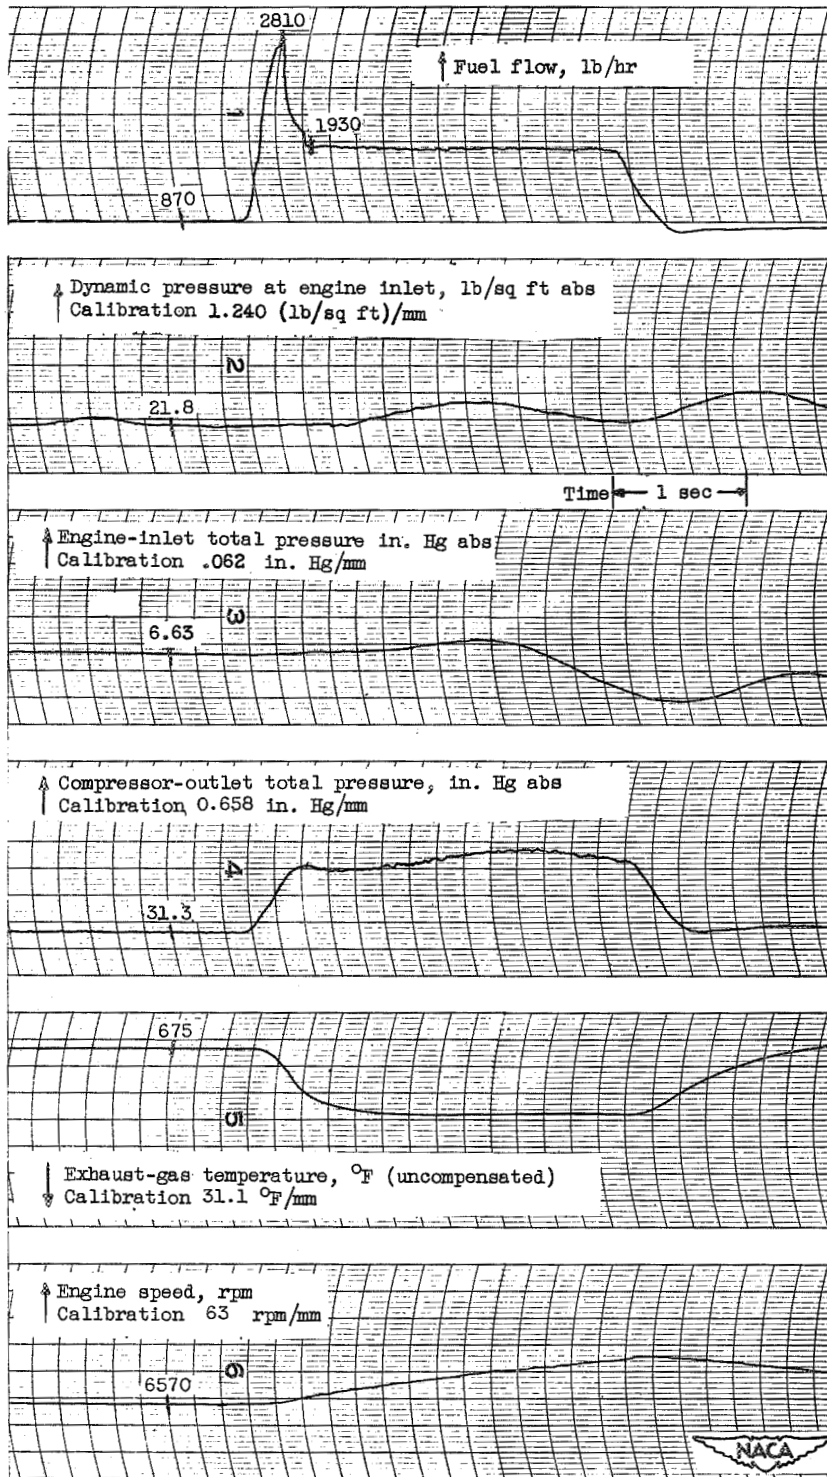


Figure 30

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

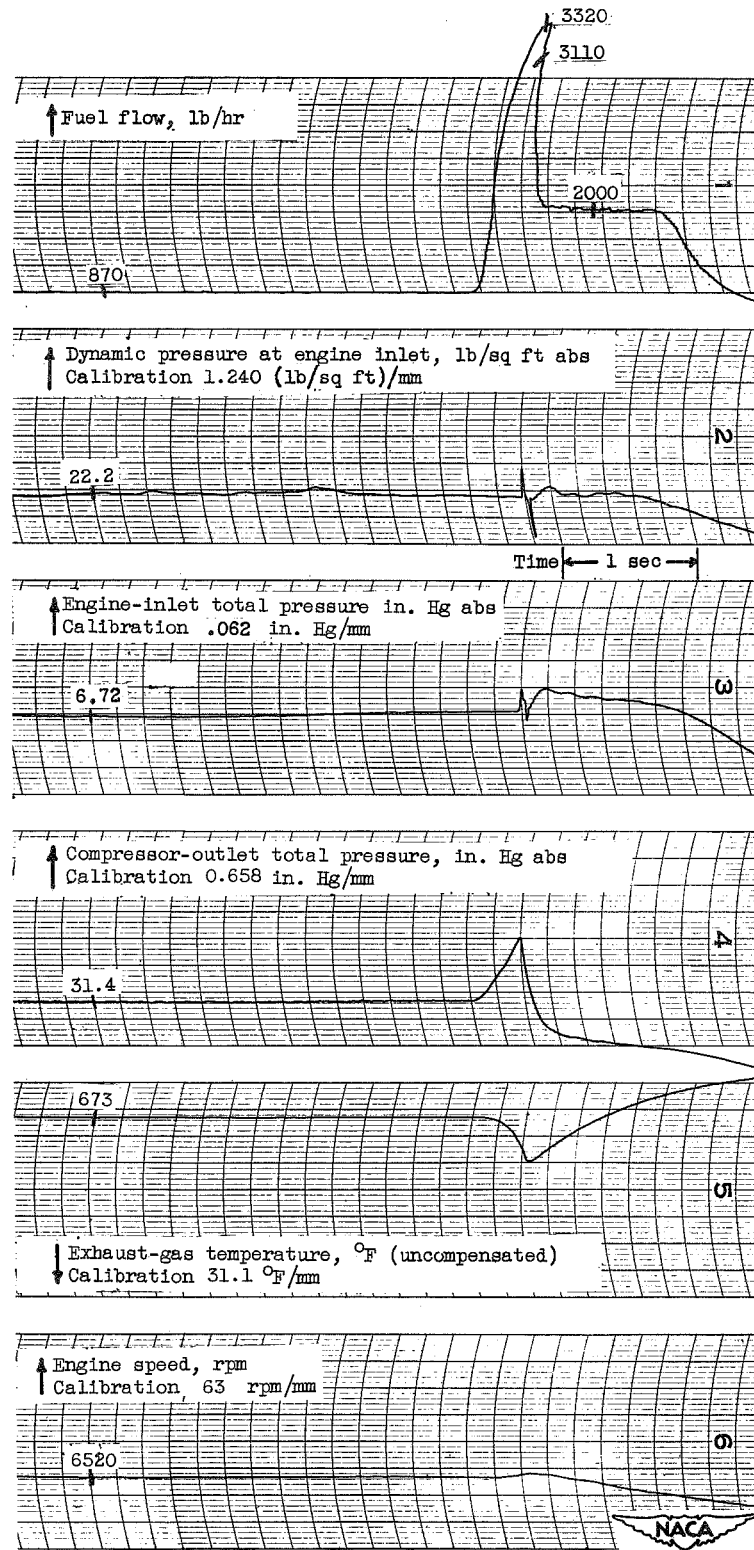


Figure 31

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

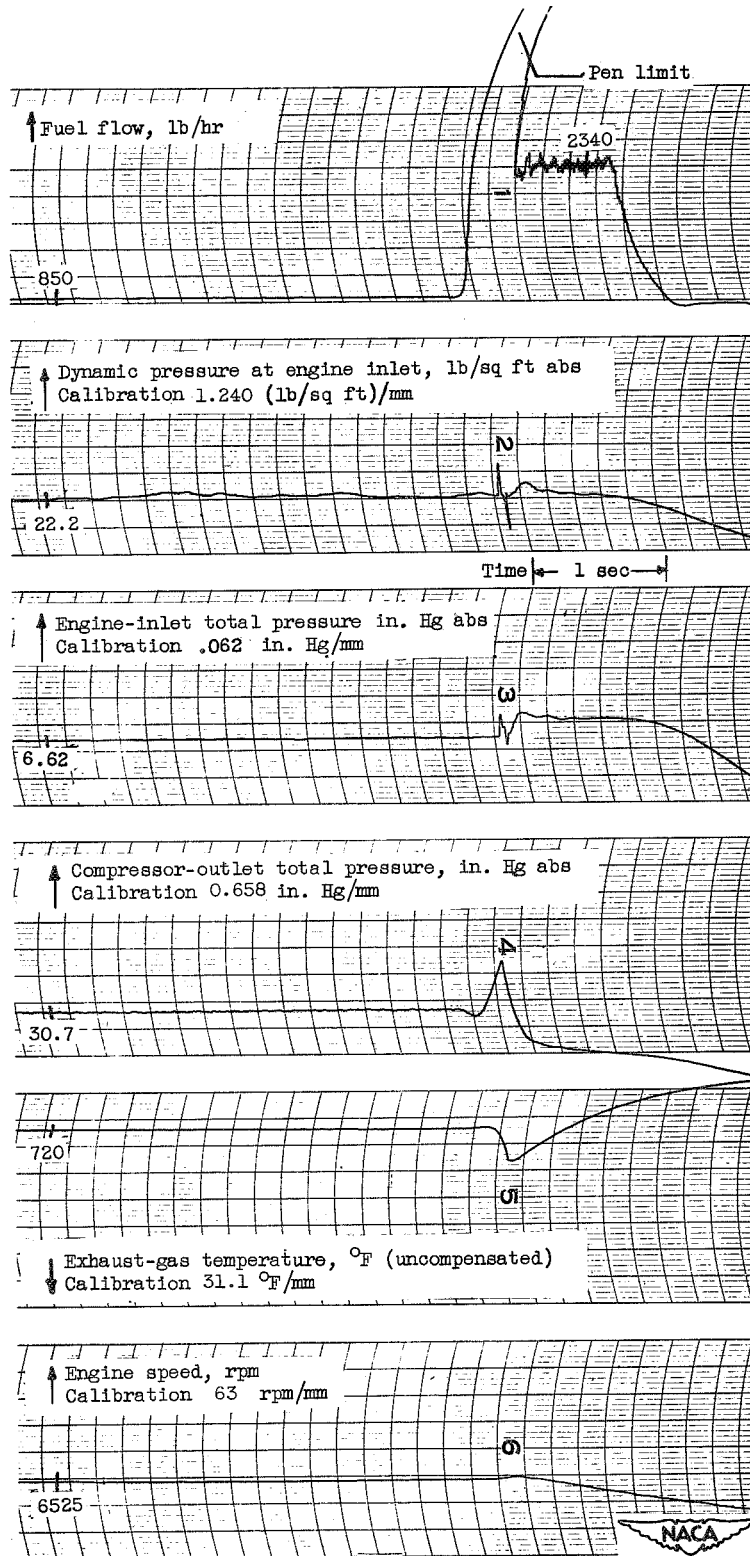


Figure 32

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, open.

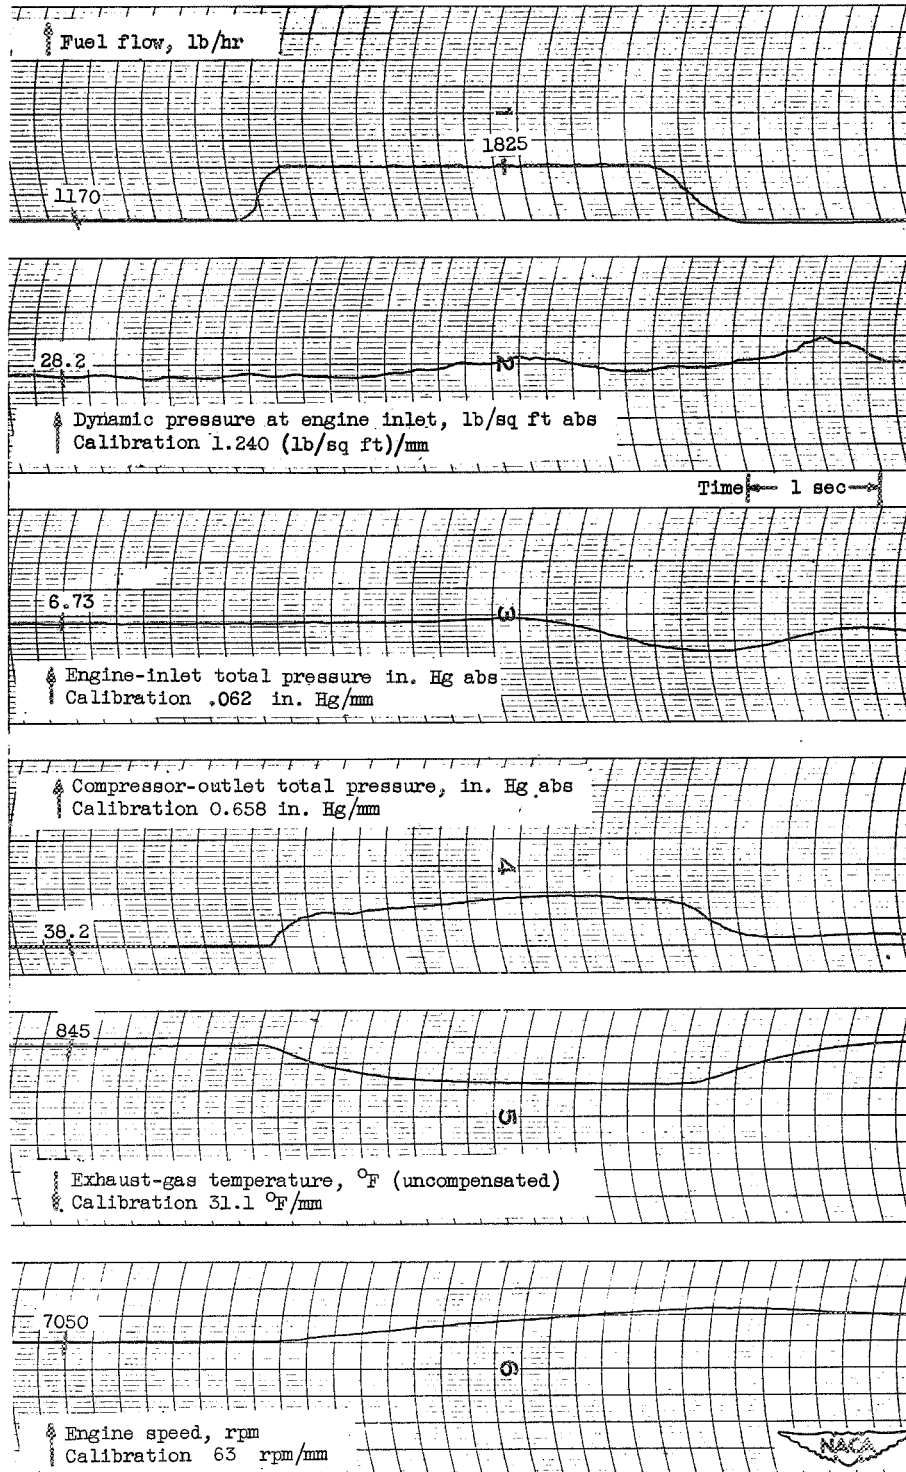


Figure 33

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, open.

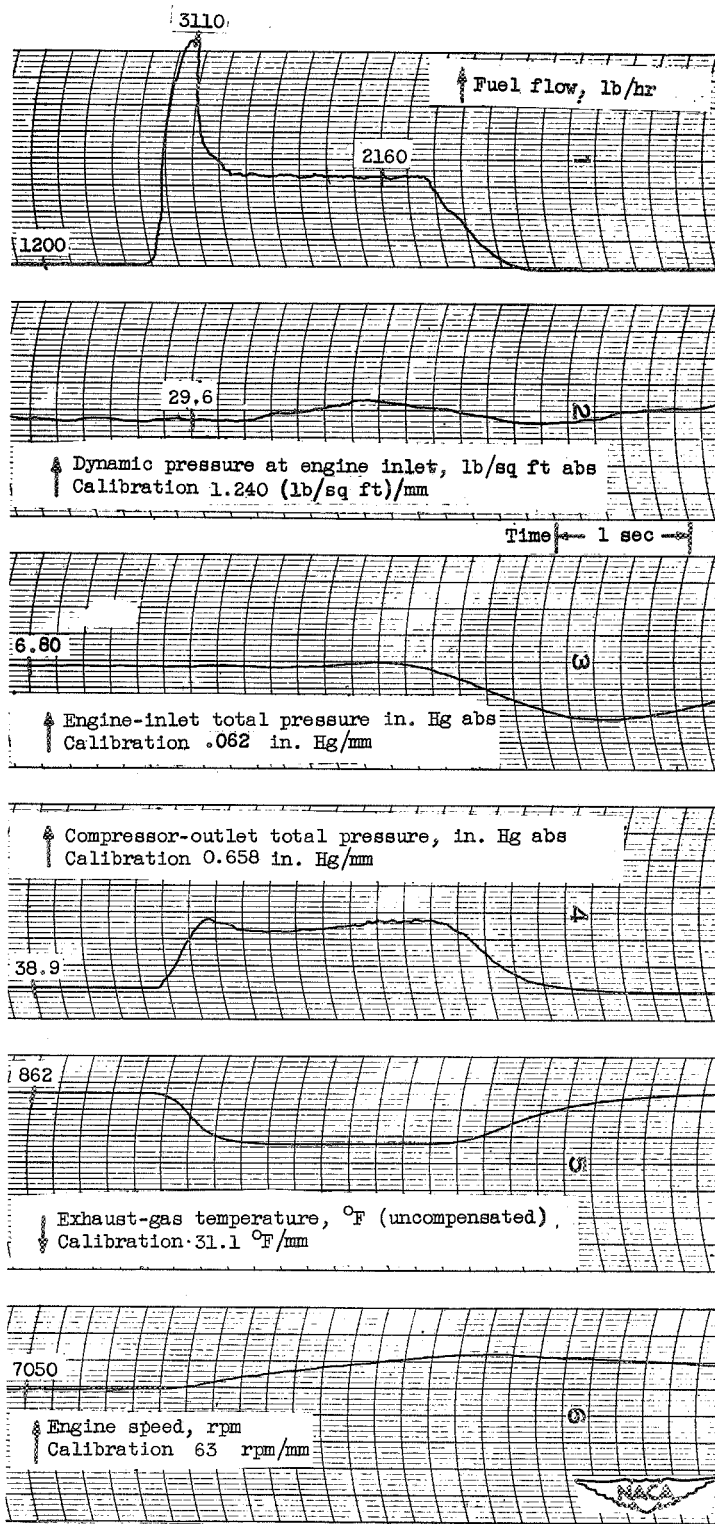


Figure 34

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 33 ° F; inlet guide vanes position, open.

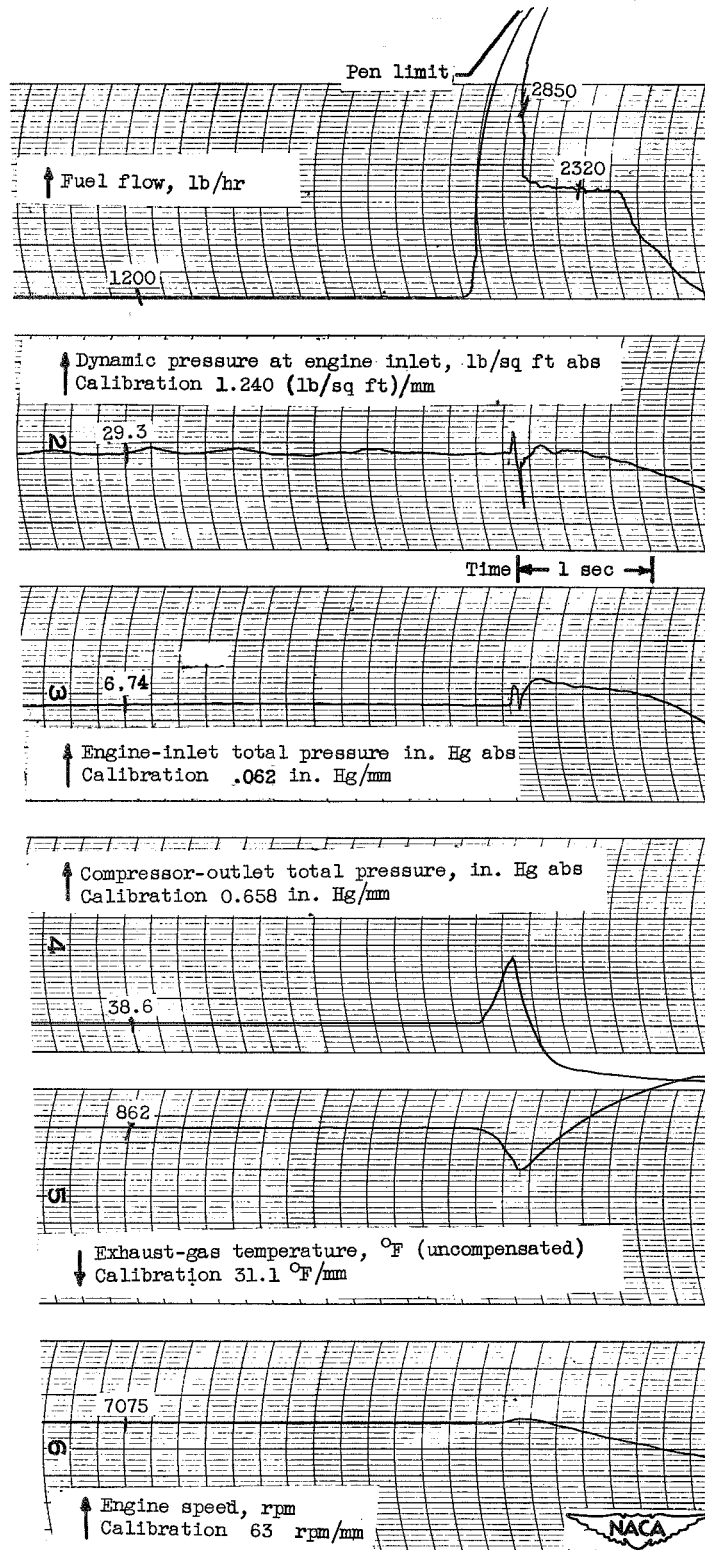


Figure 35

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 33° F; inlet guide vanes position, open.

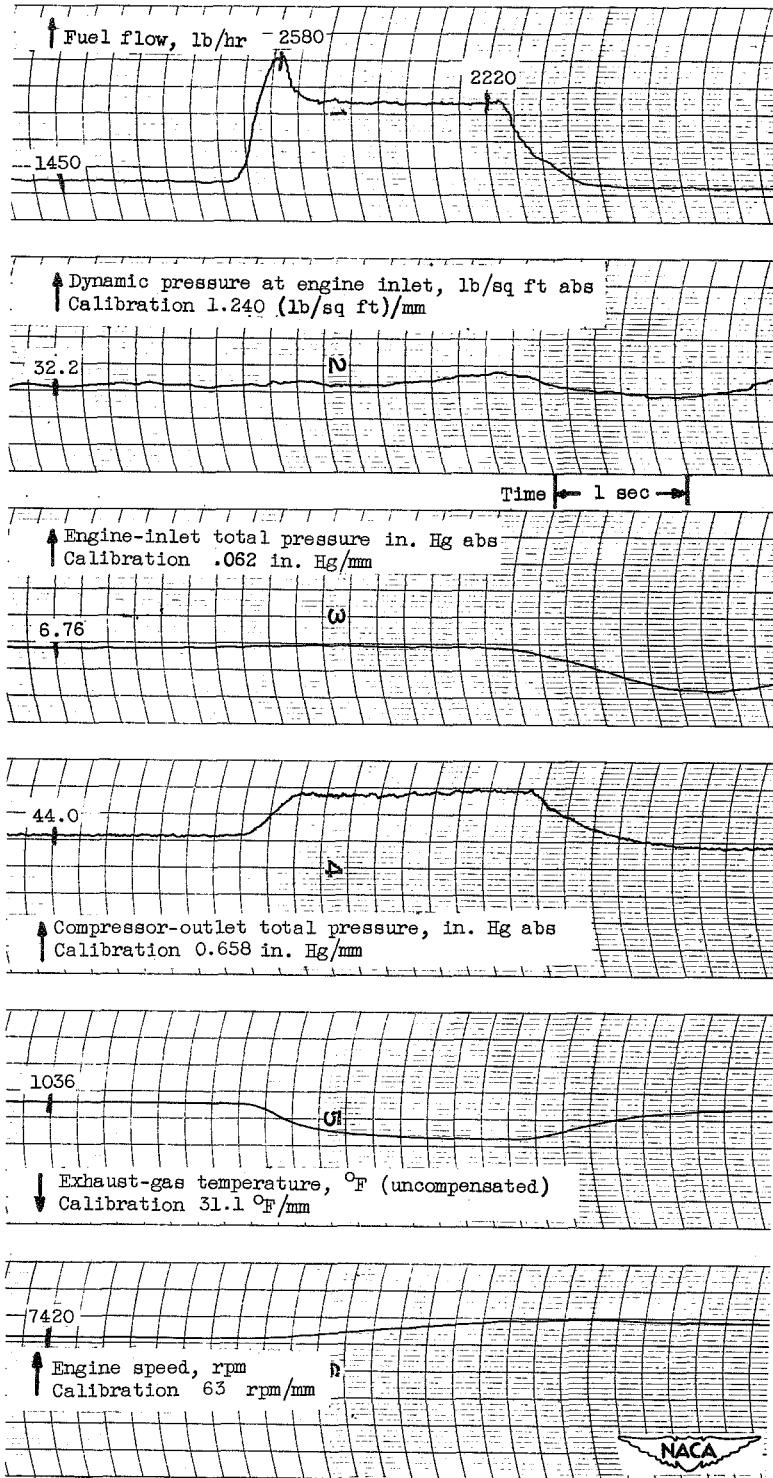


Figure 36

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, open.

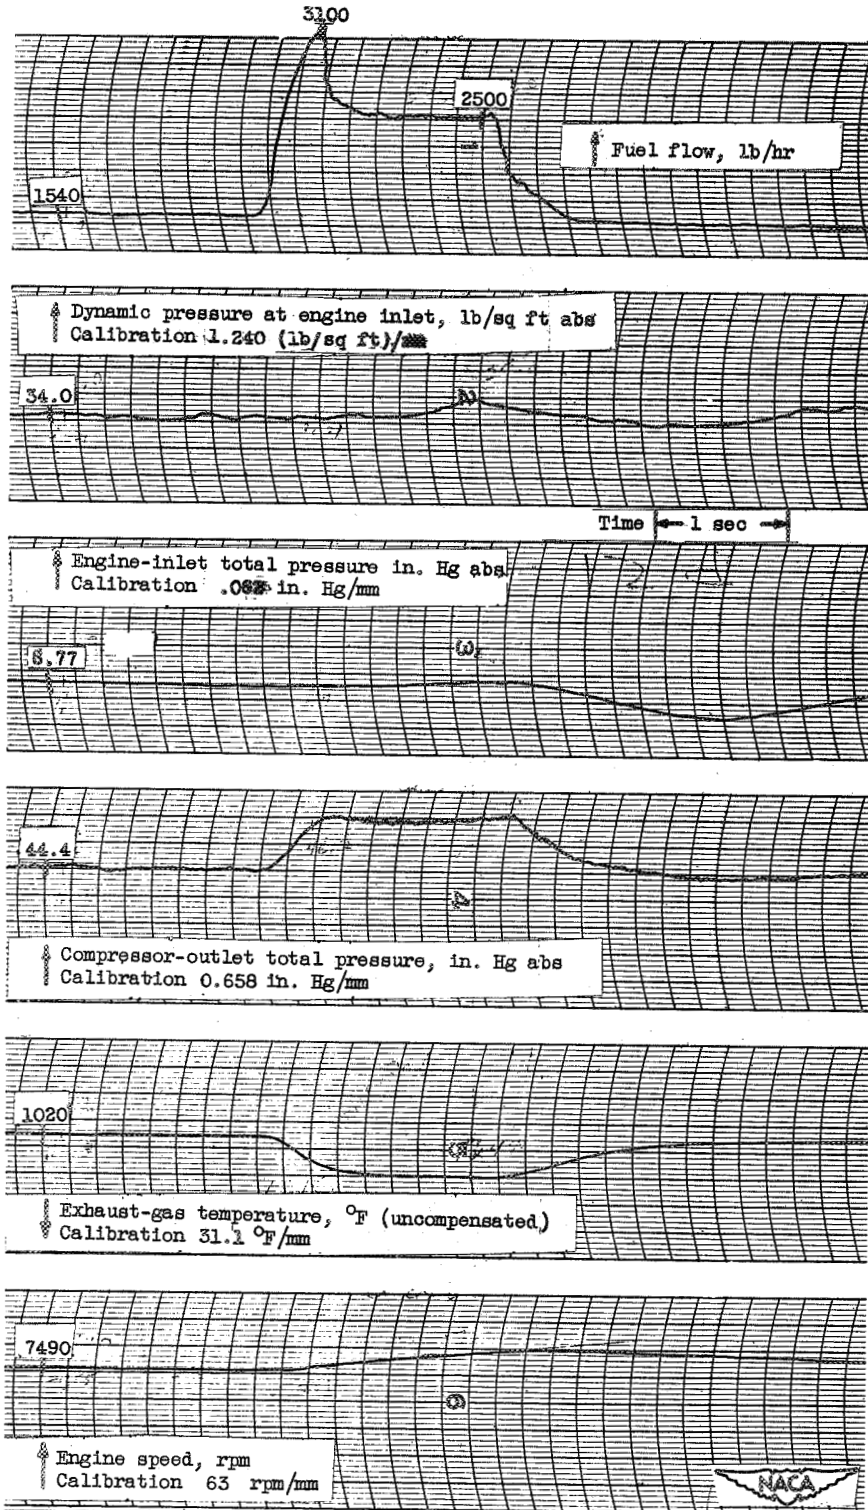


Figure 37

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, open.

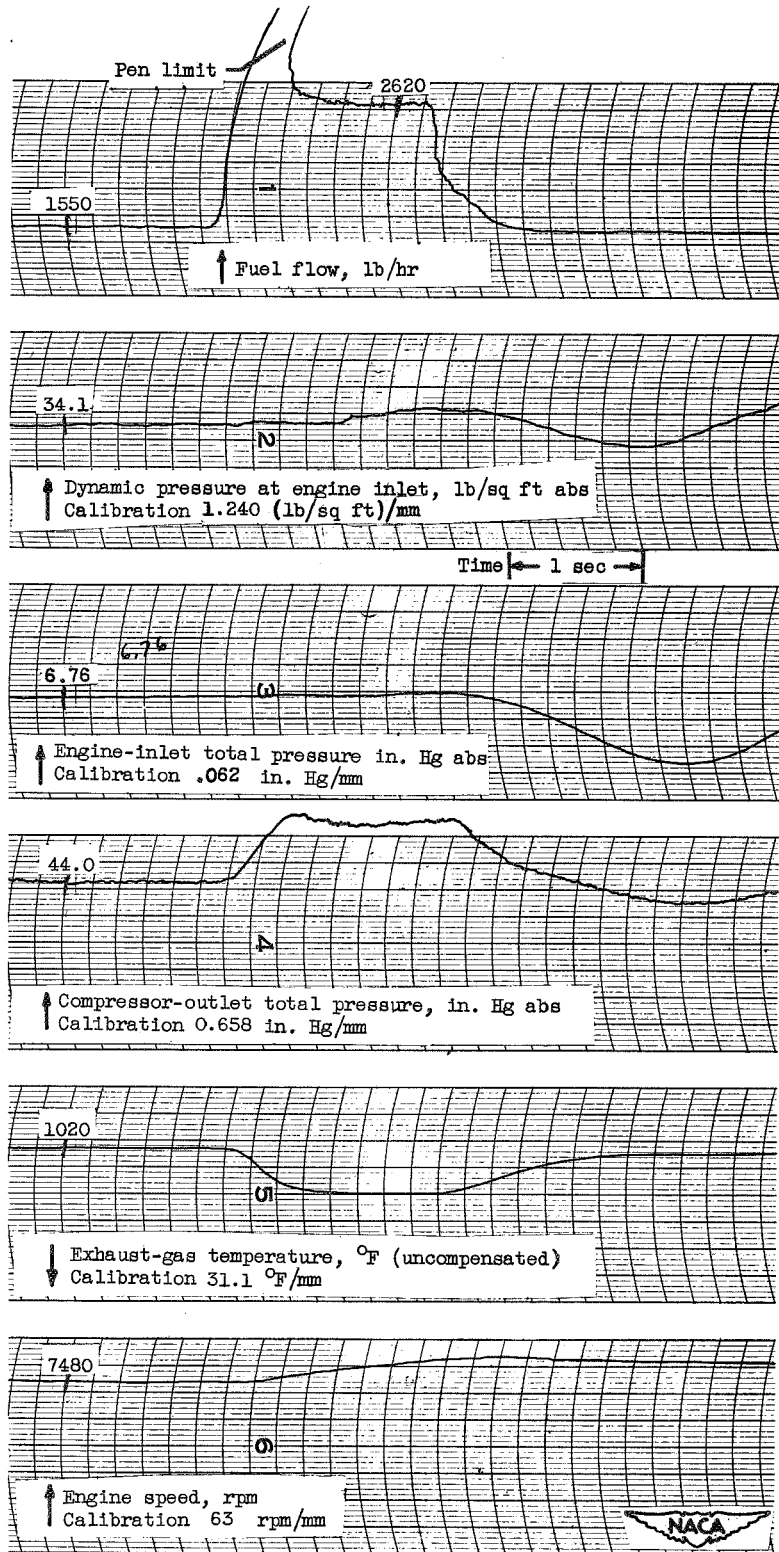


Figure 38

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, open.

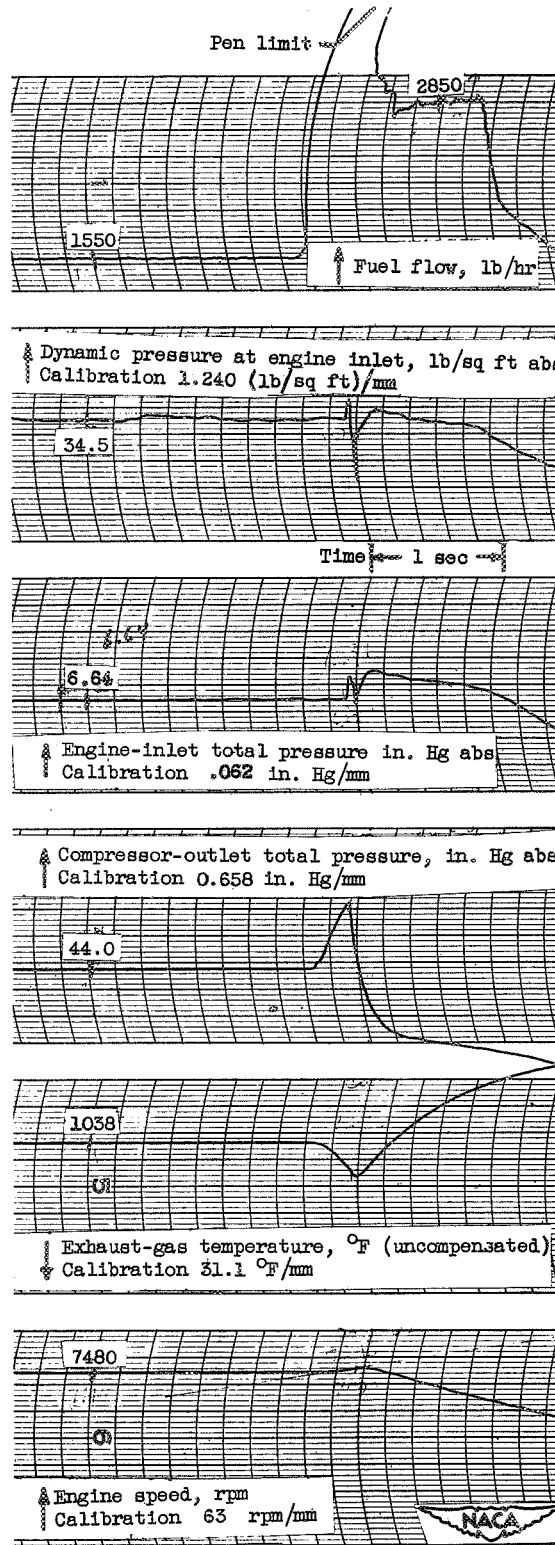


Figure 39

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, open.

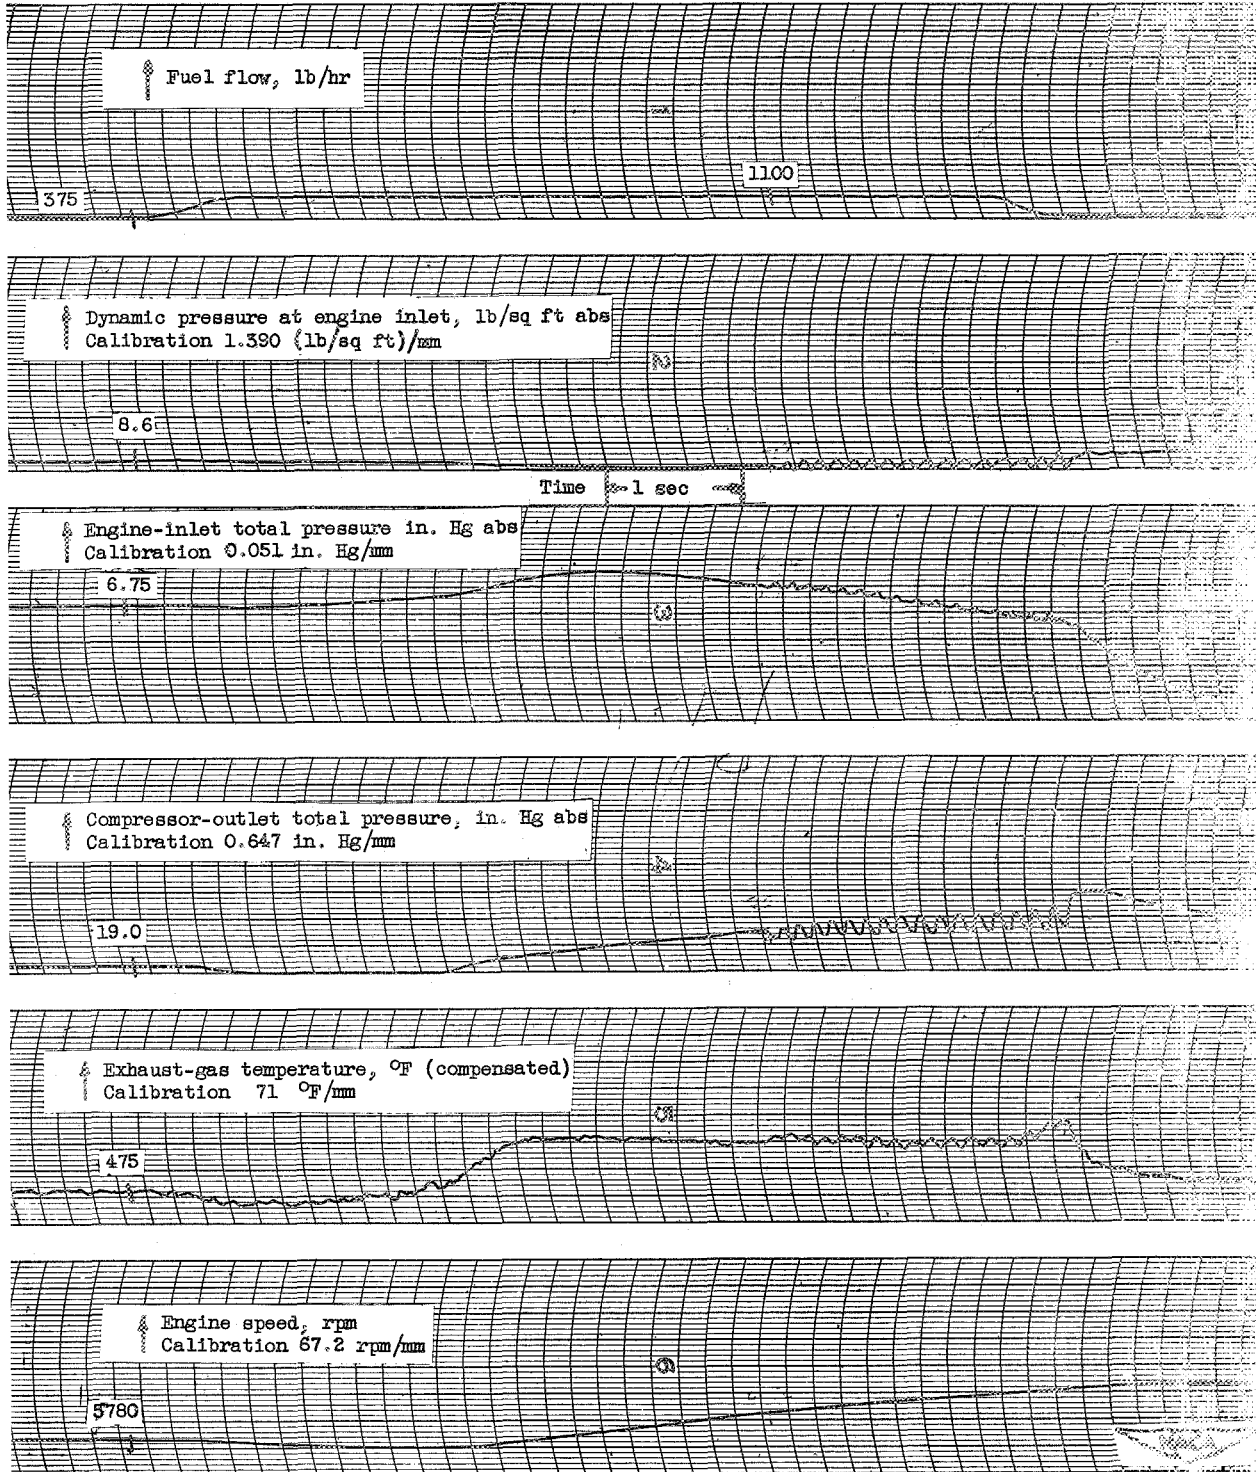


Figure 40
 Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 75° F; inlet guide vanes position, open.

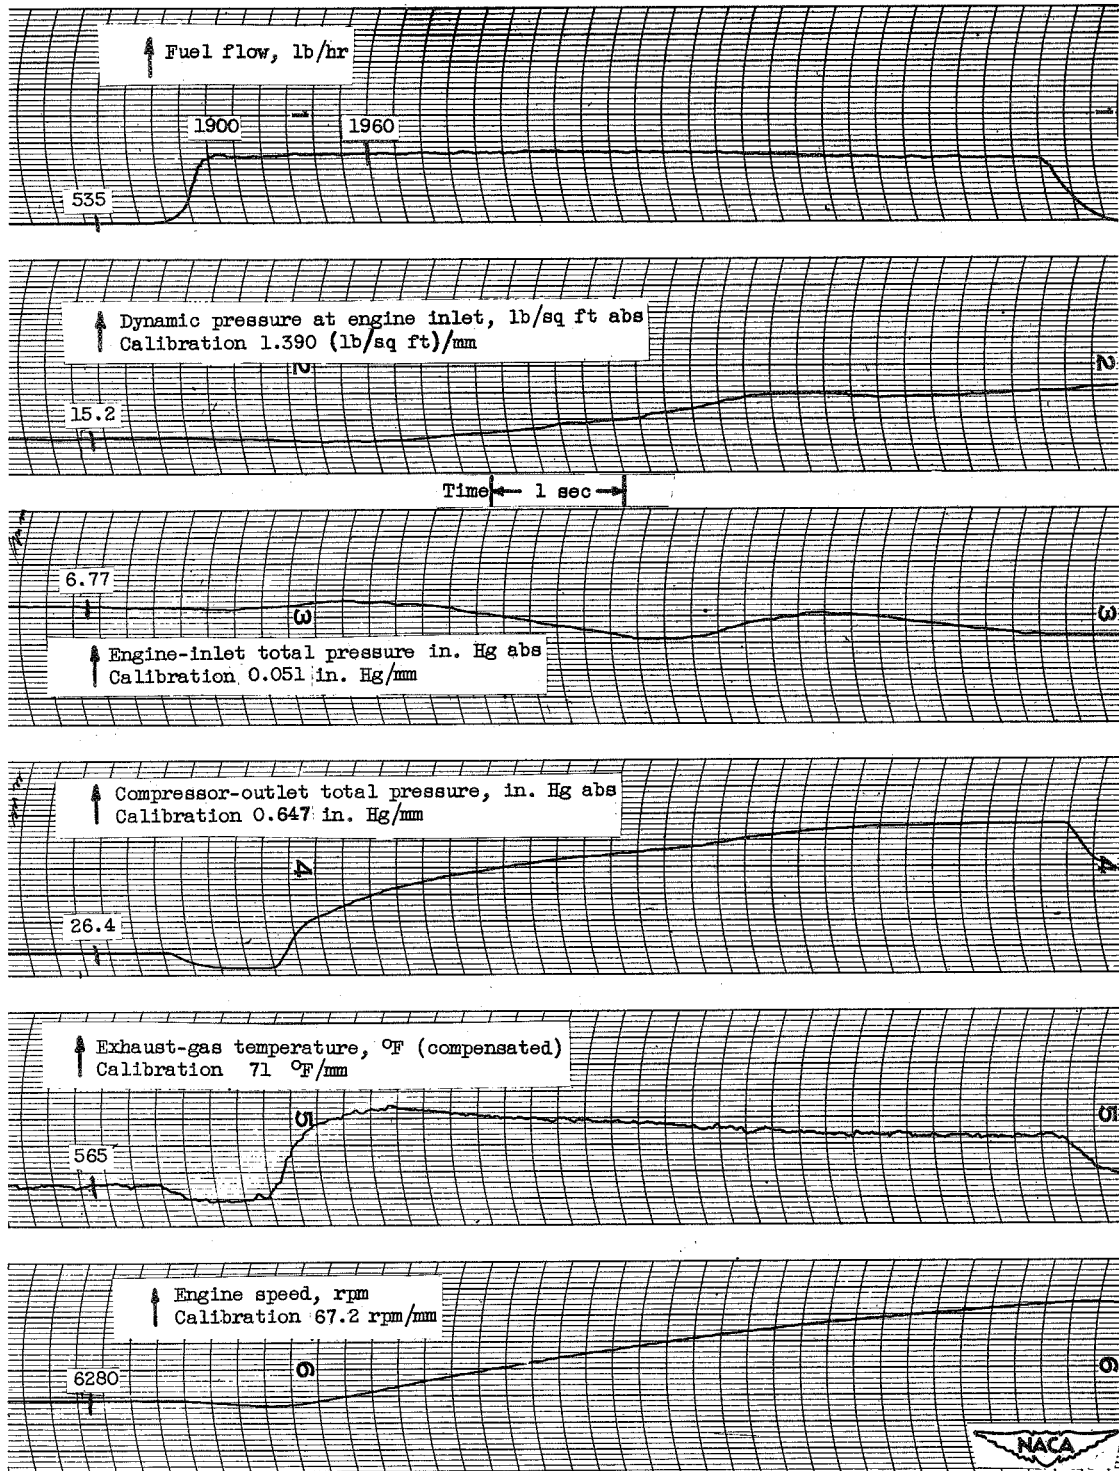


Figure 41

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 74° F; inlet guide vanes position, open.

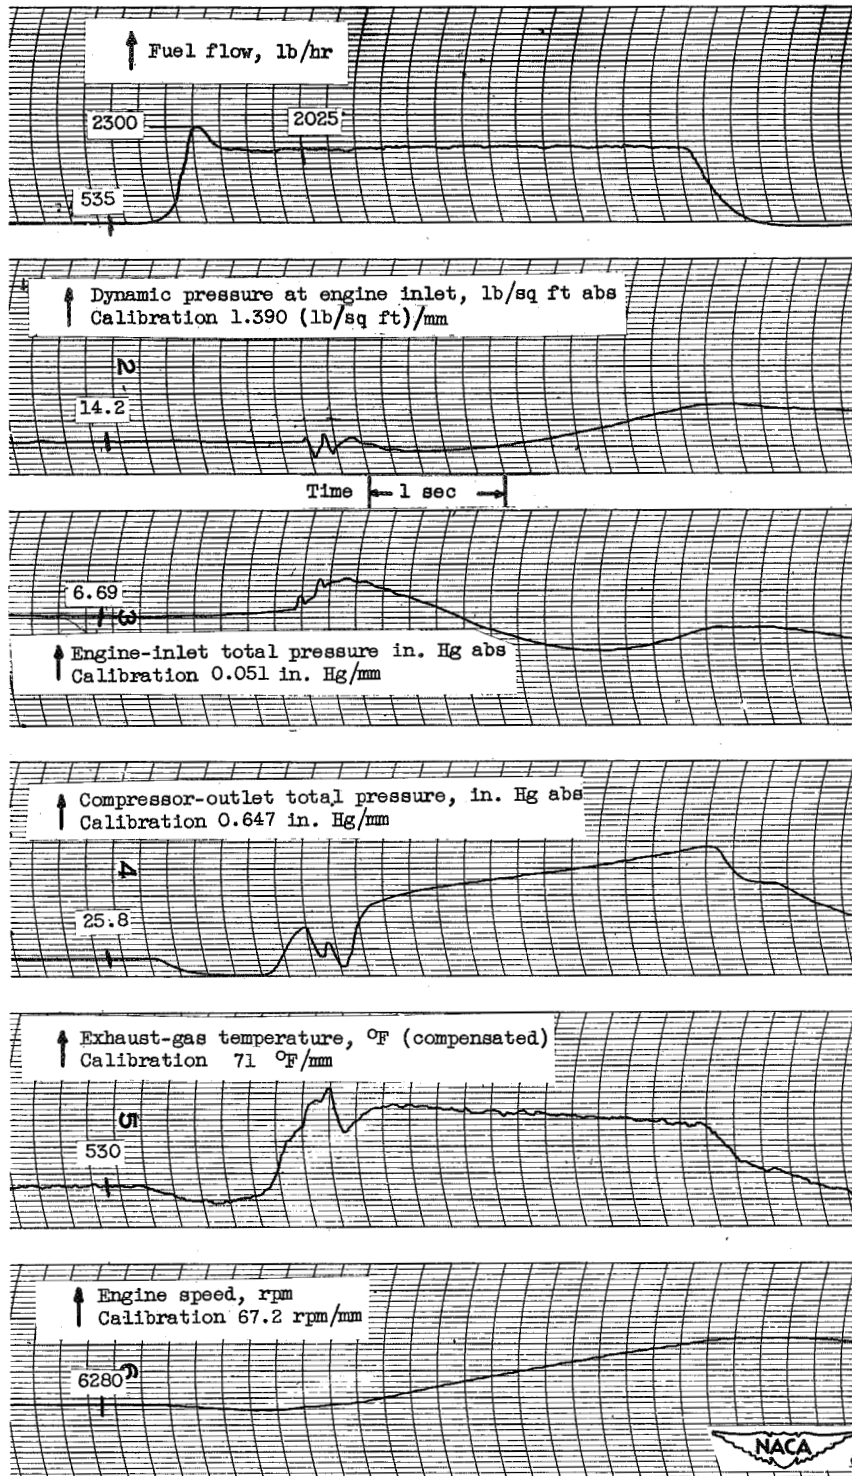


Figure 42

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 74° F; inlet guide vanes position, open.

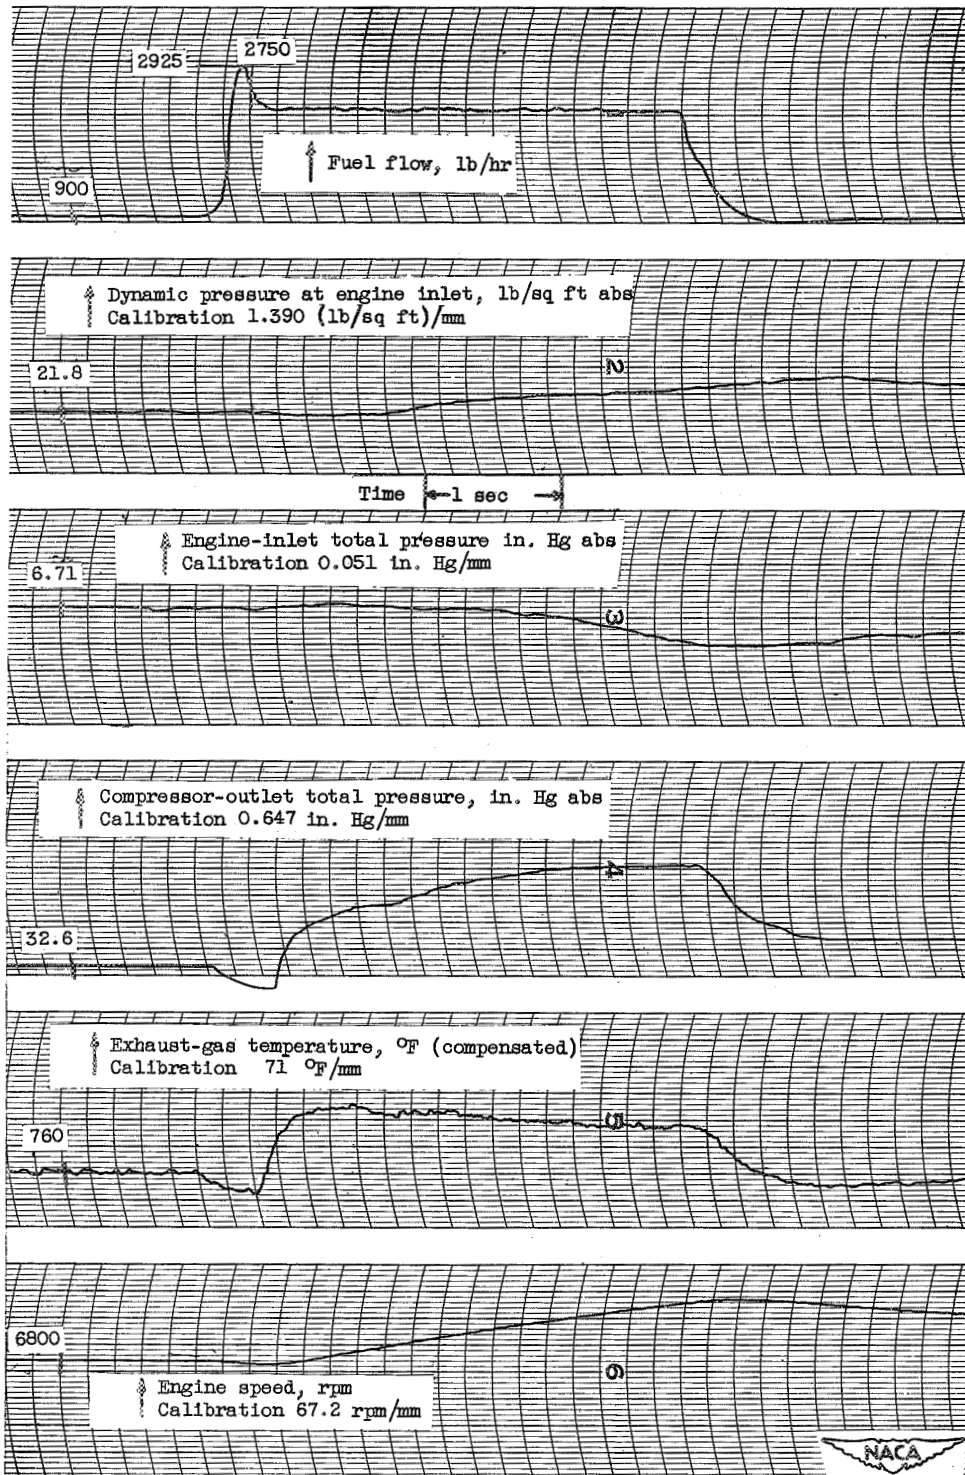


Figure 43

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 74°F ; inlet guide vanes position, open.

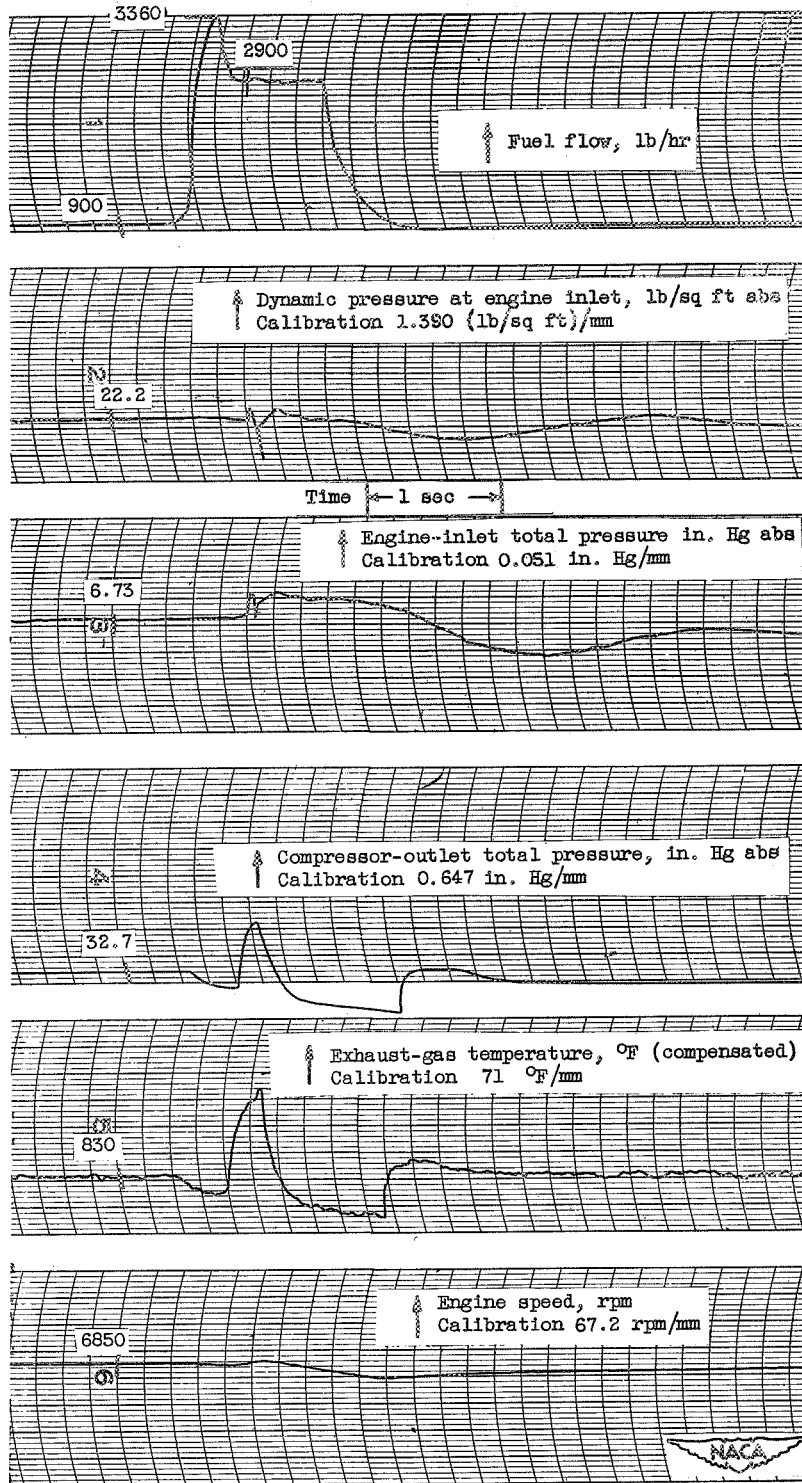


Figure 44
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 74° F; inlet guide vanes position, open.

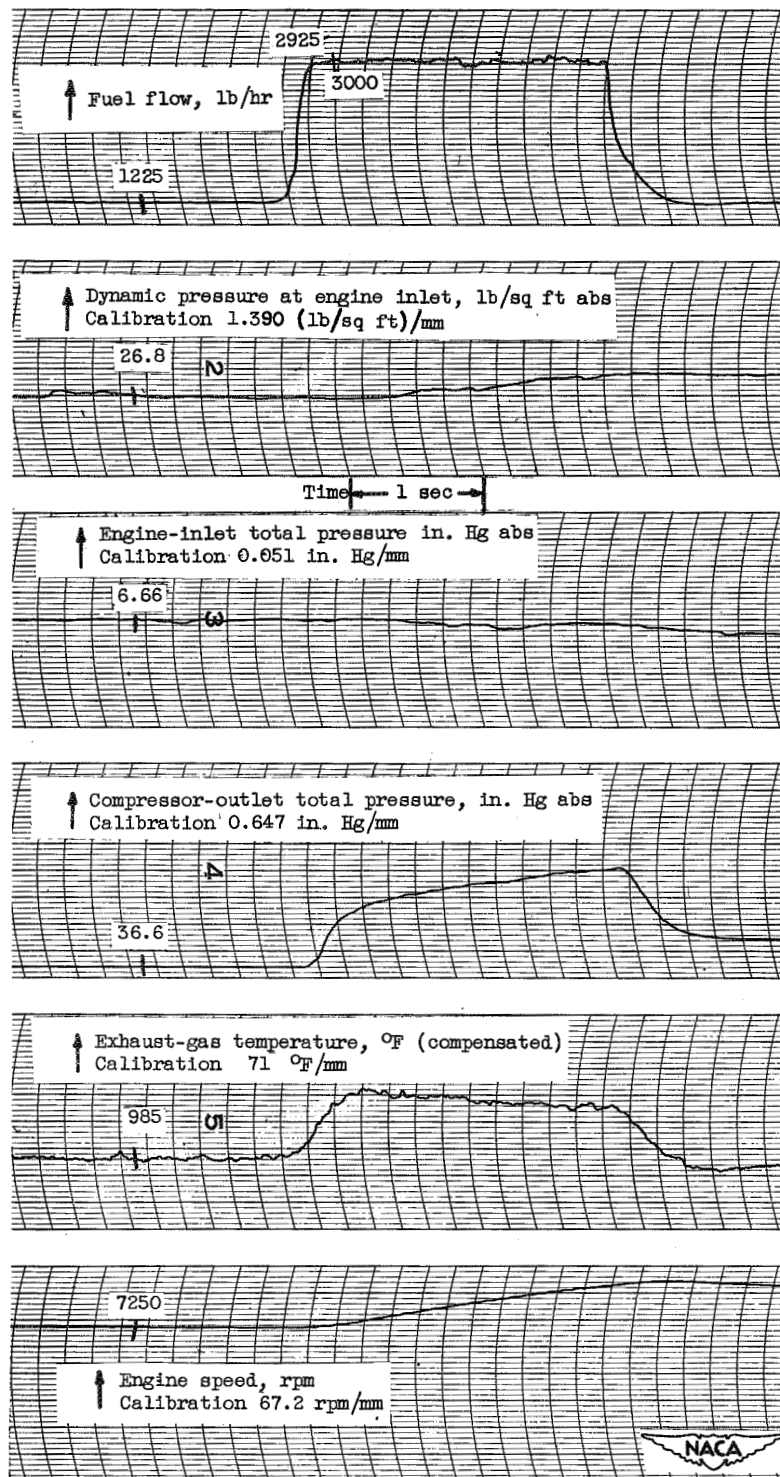


Figure 45

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 74° F; inlet guide vanes position, open.

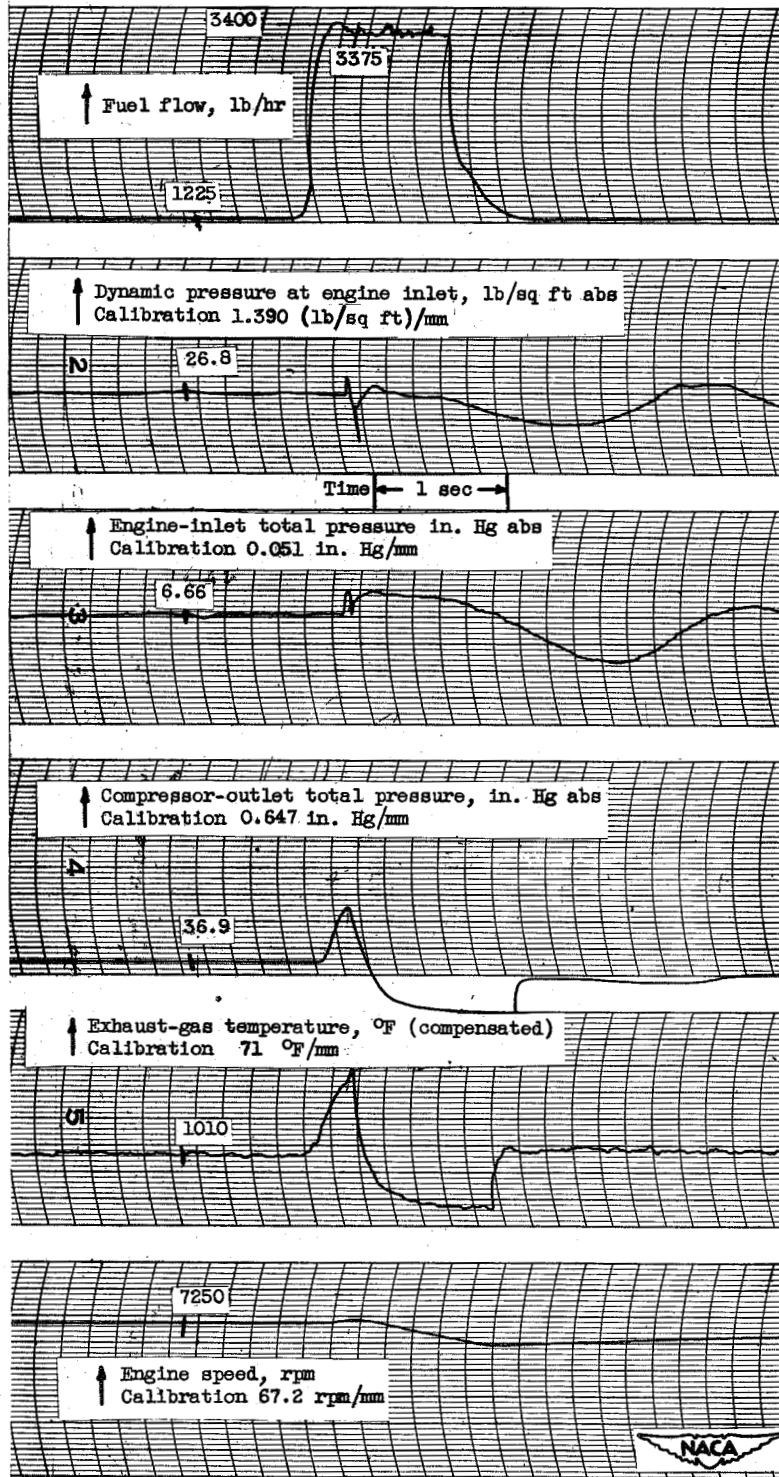


Figure 46

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 74° F; inlet guide vanes position, open.

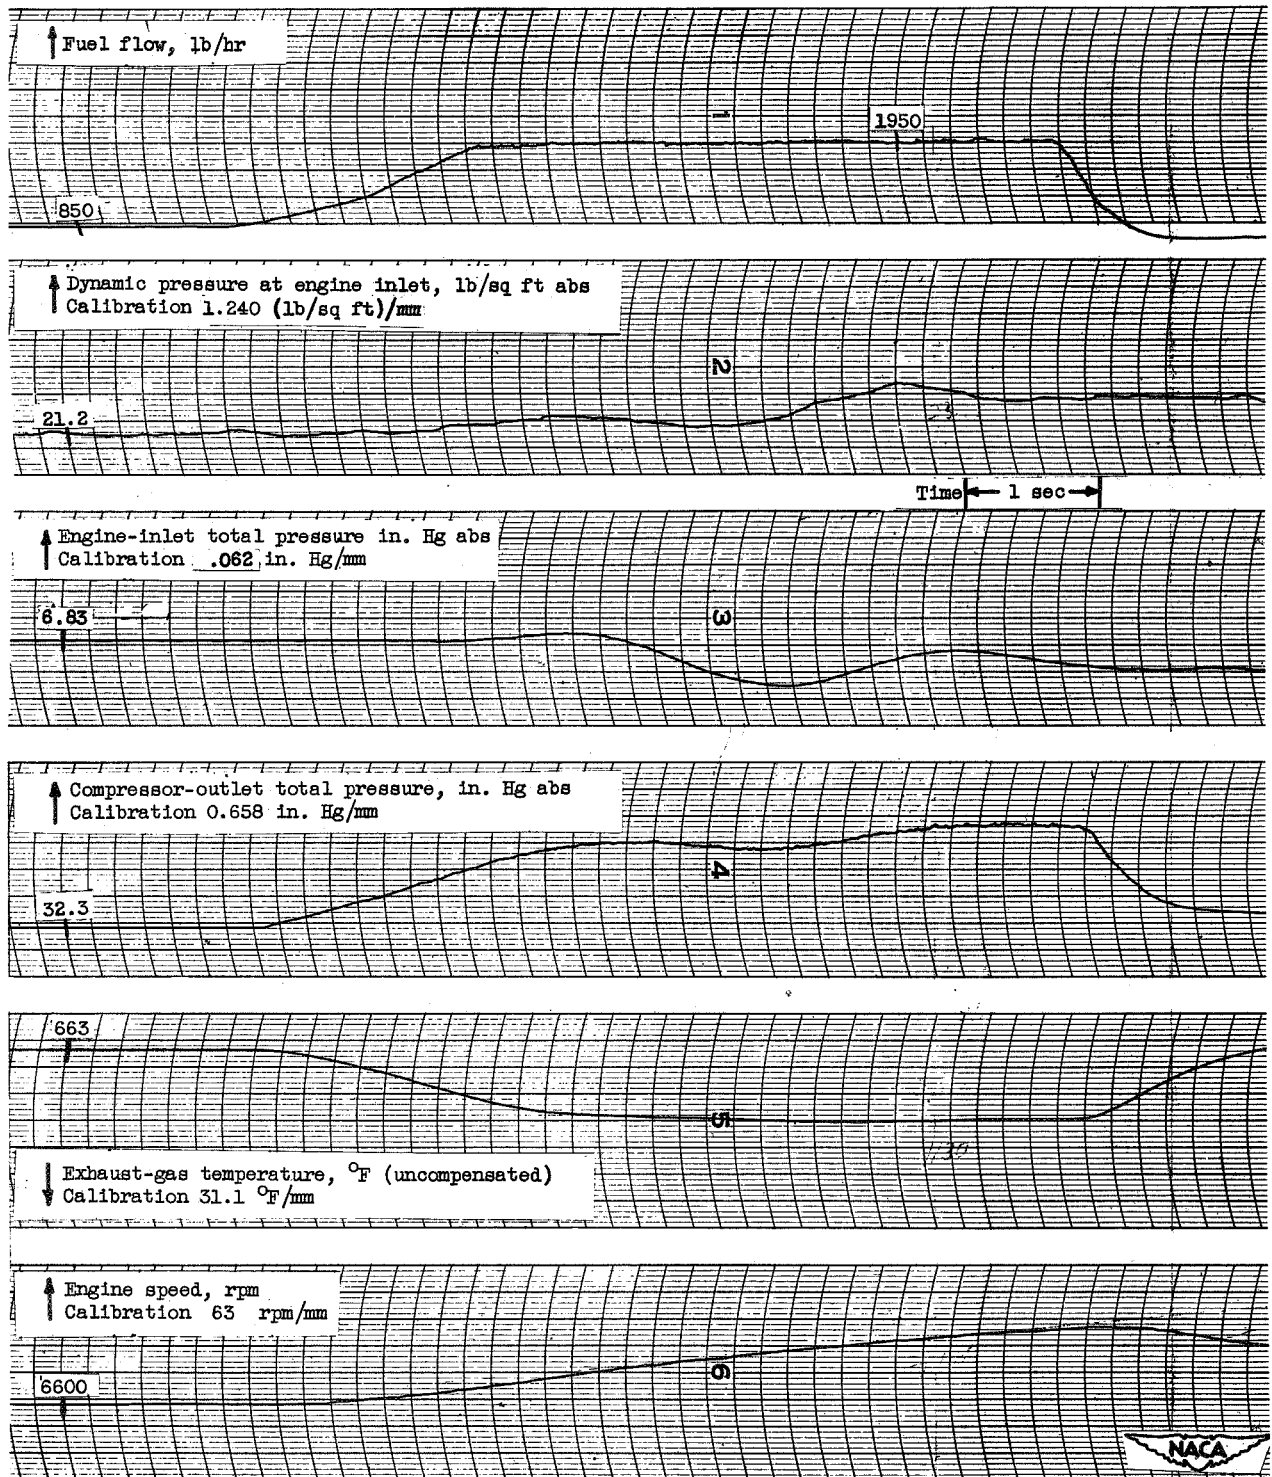


Figure 47

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

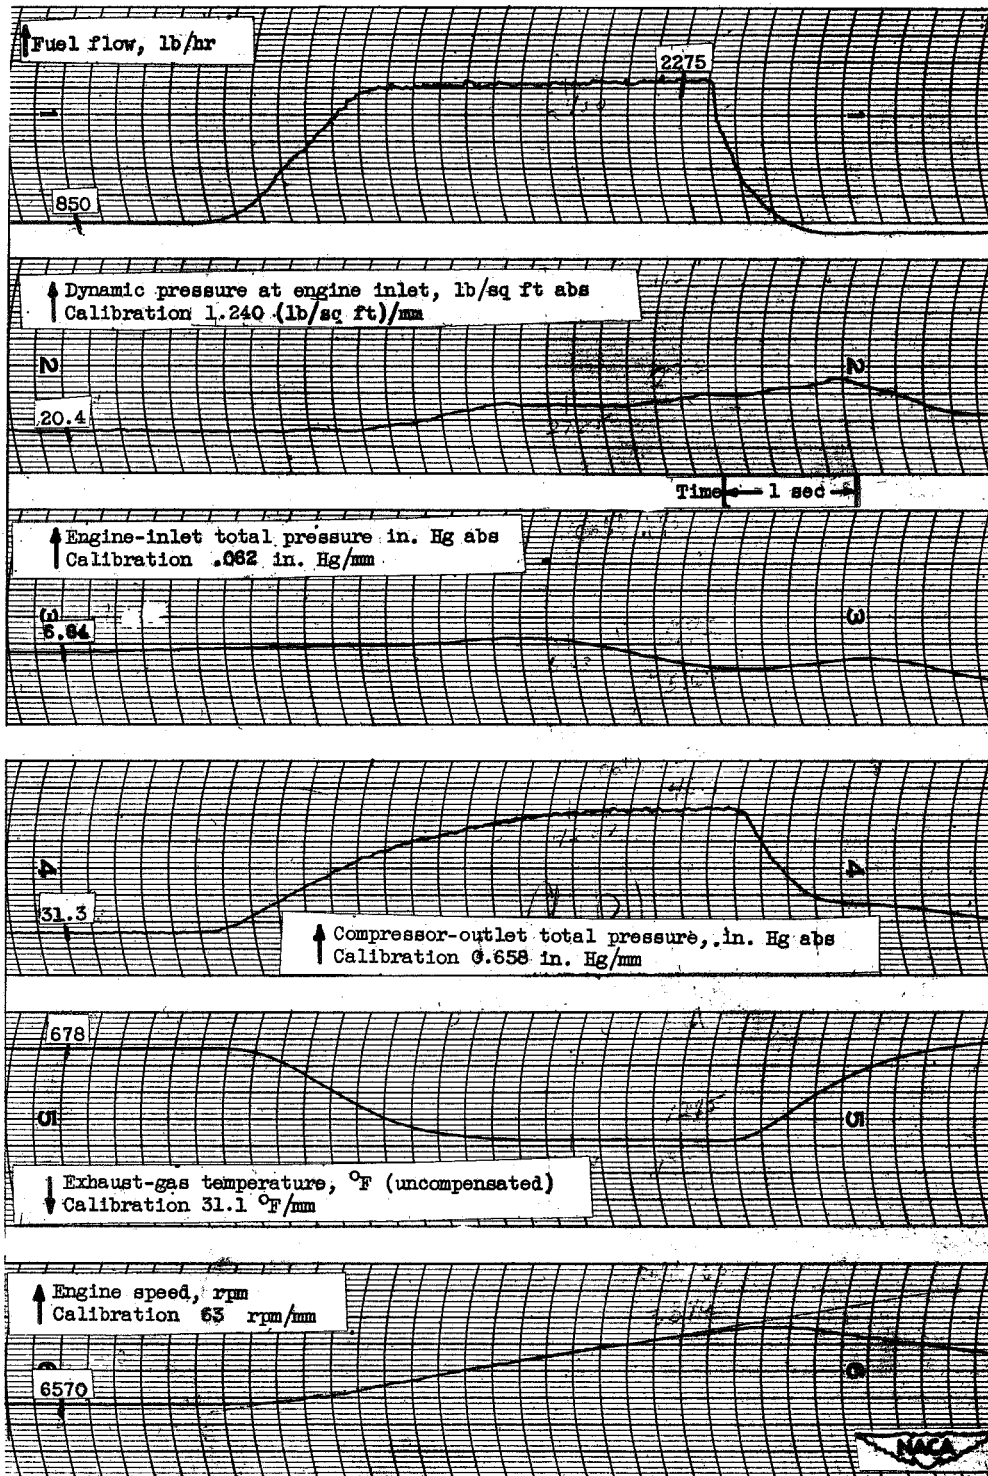


Figure 48

Oscillograph traces showing variations of different engine parameters during a ramp change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

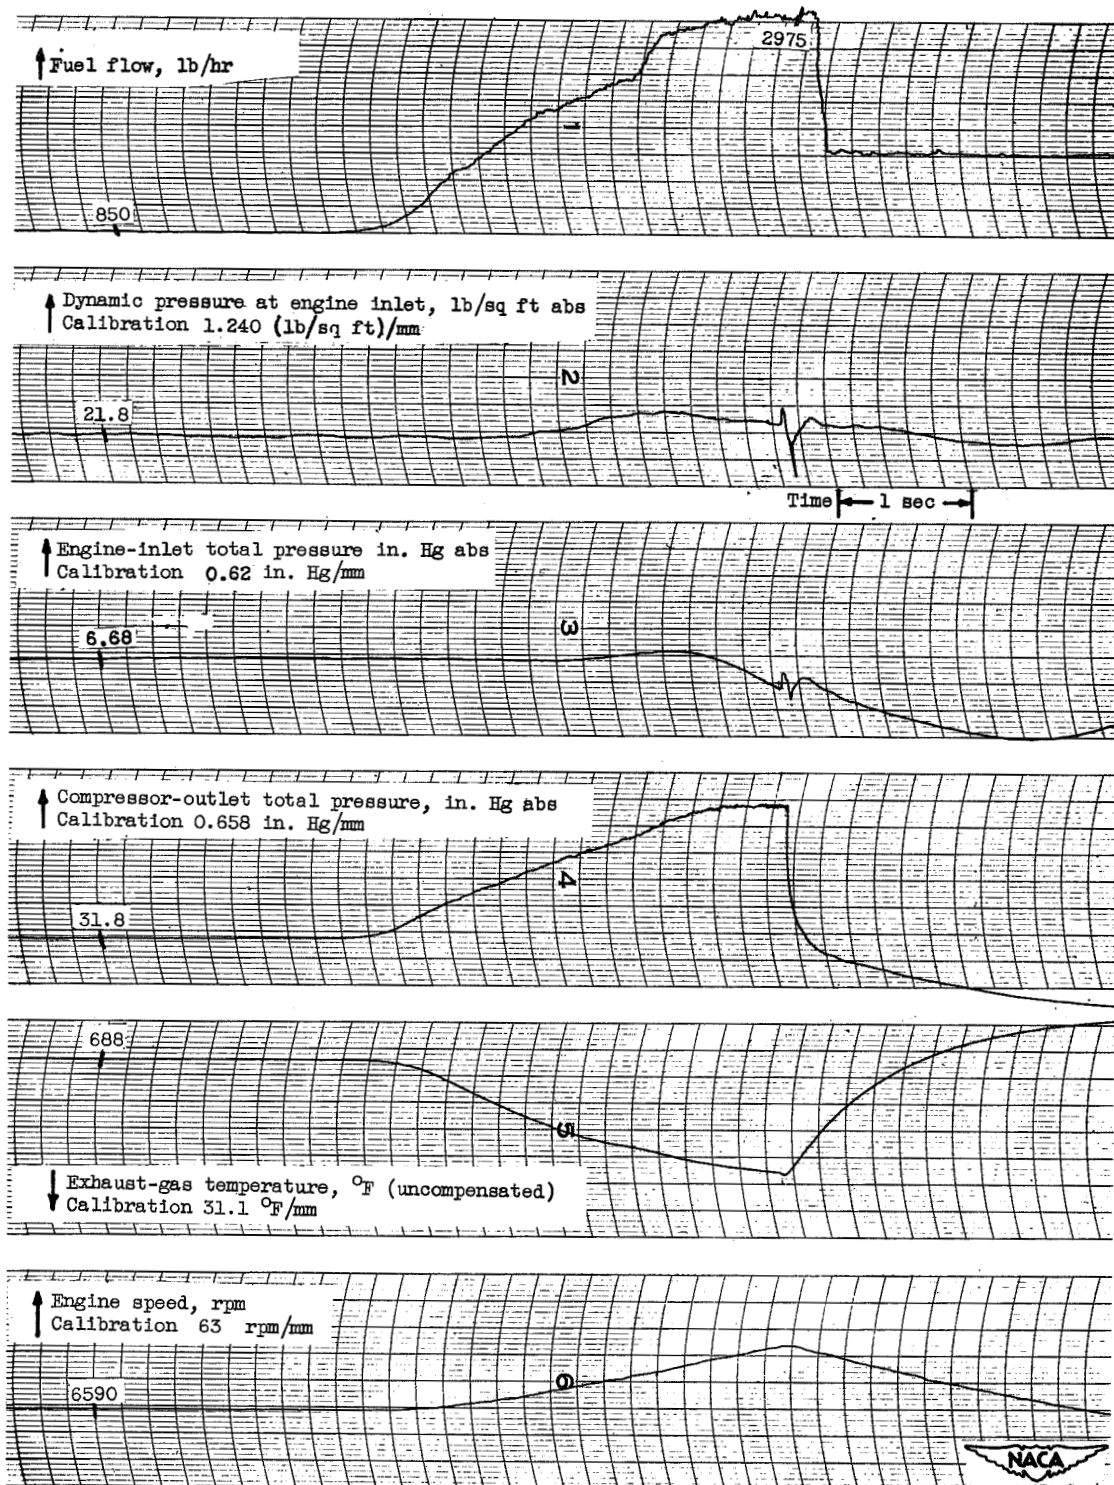


Figure 49

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

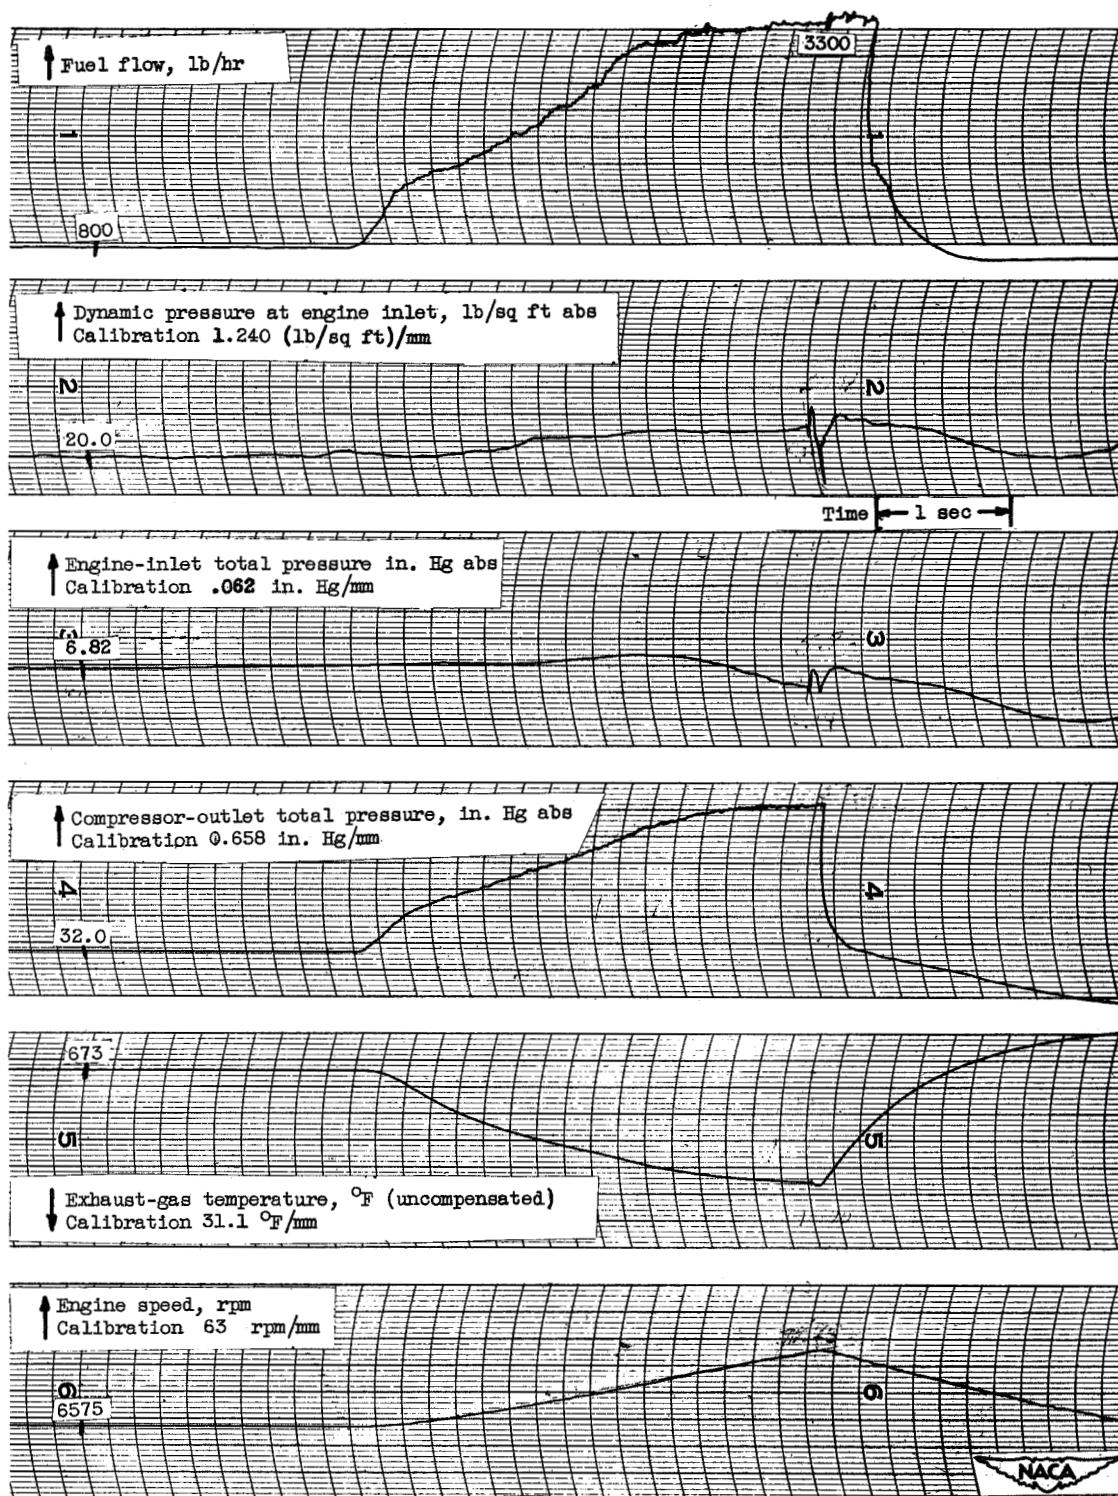


Figure 50

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

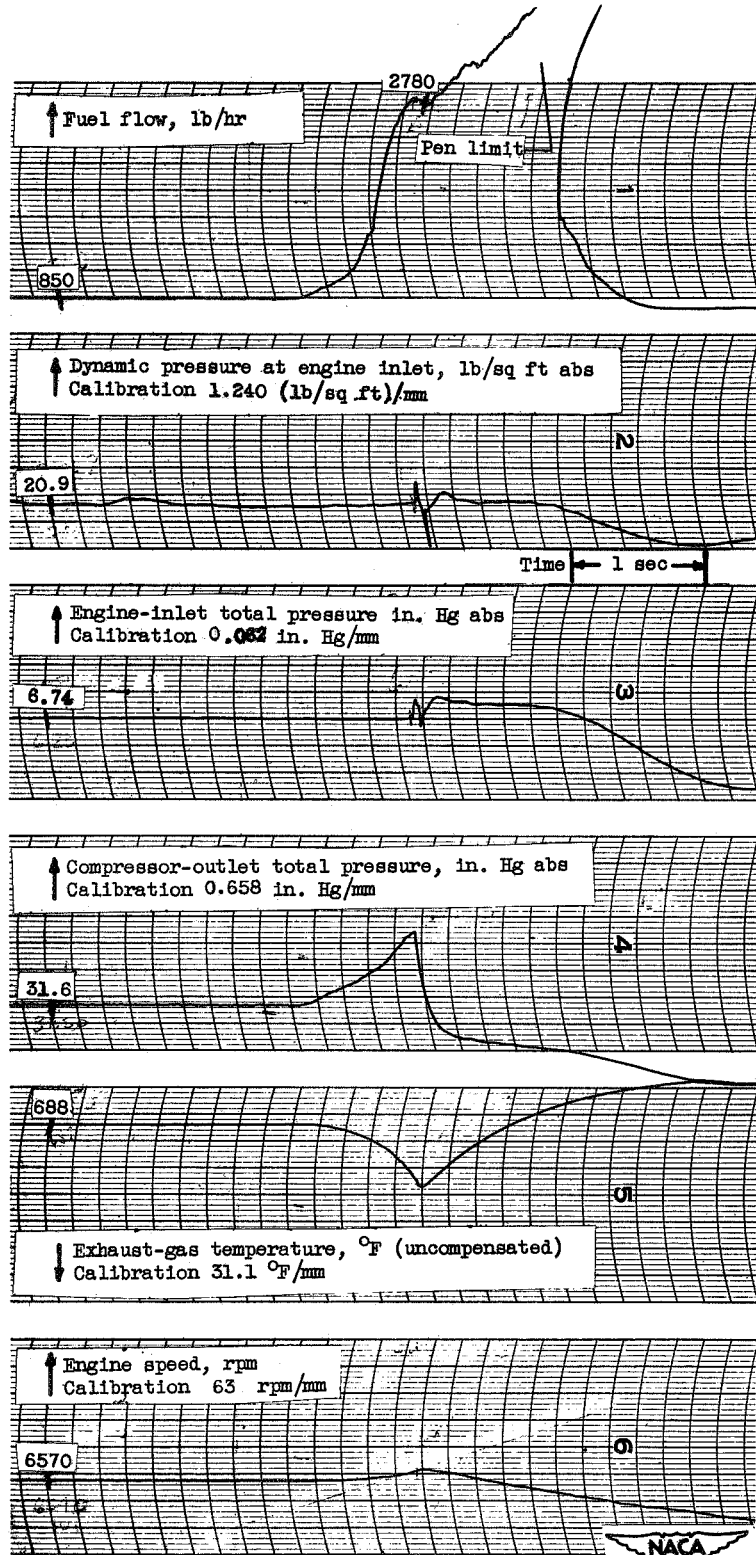


Figure 51

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

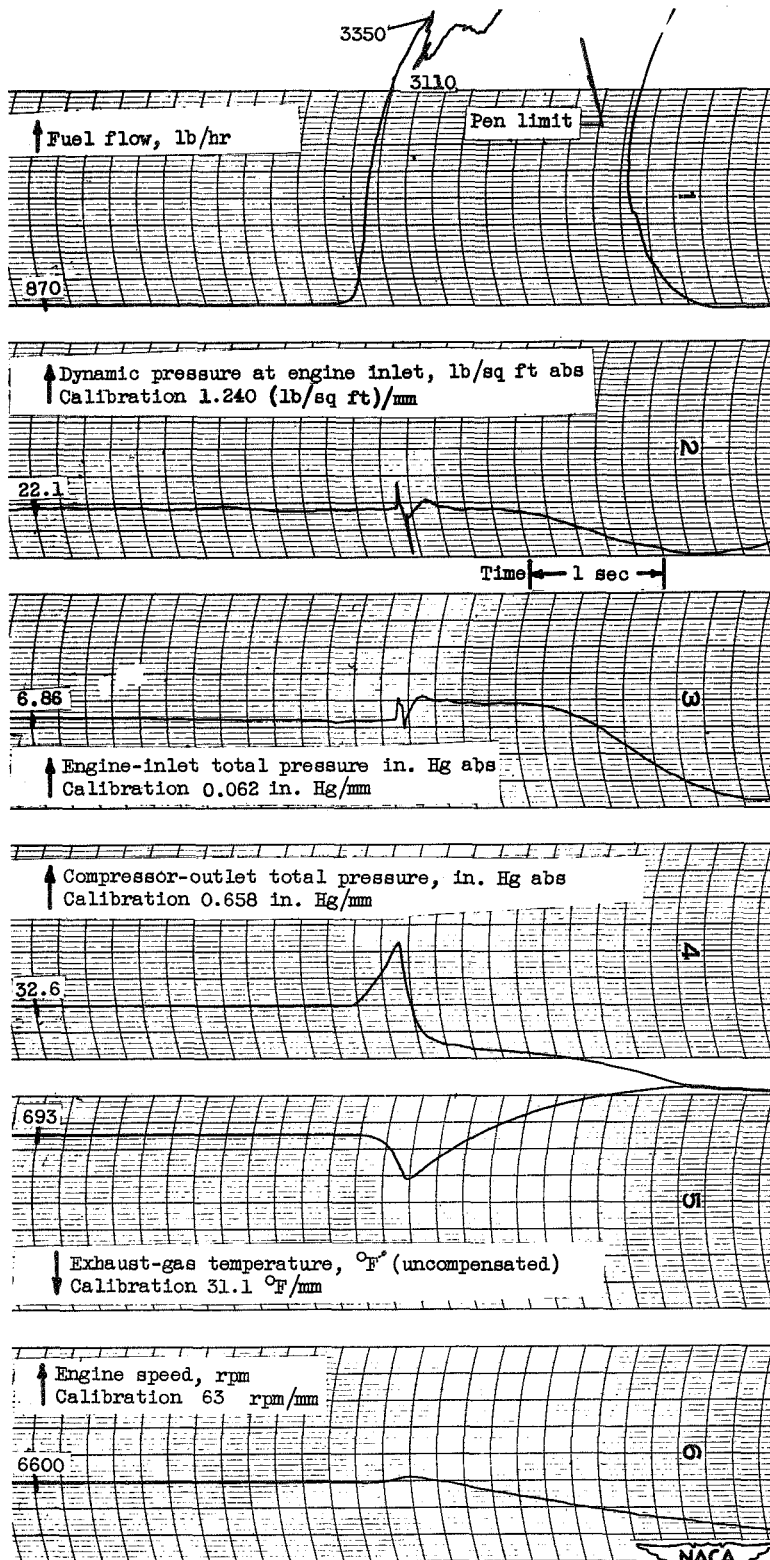


Figure 52

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 32° F; inlet guide vanes position, open.

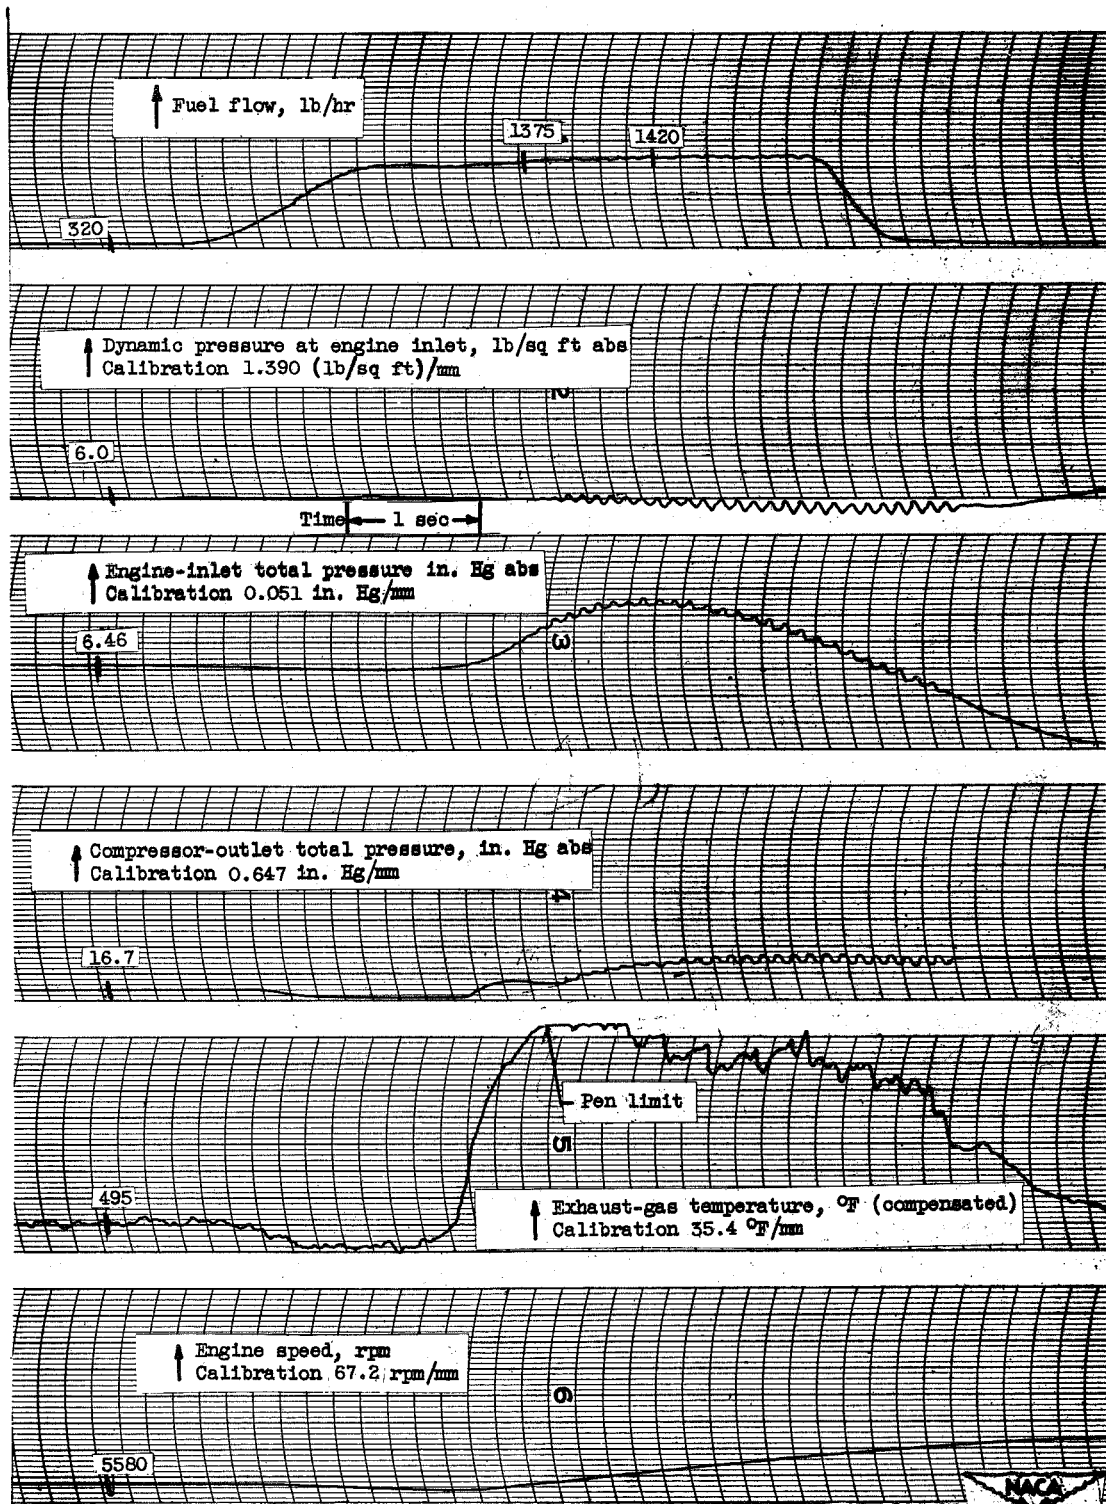


Figure 53

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 71° F; inlet guide vanes position, open.

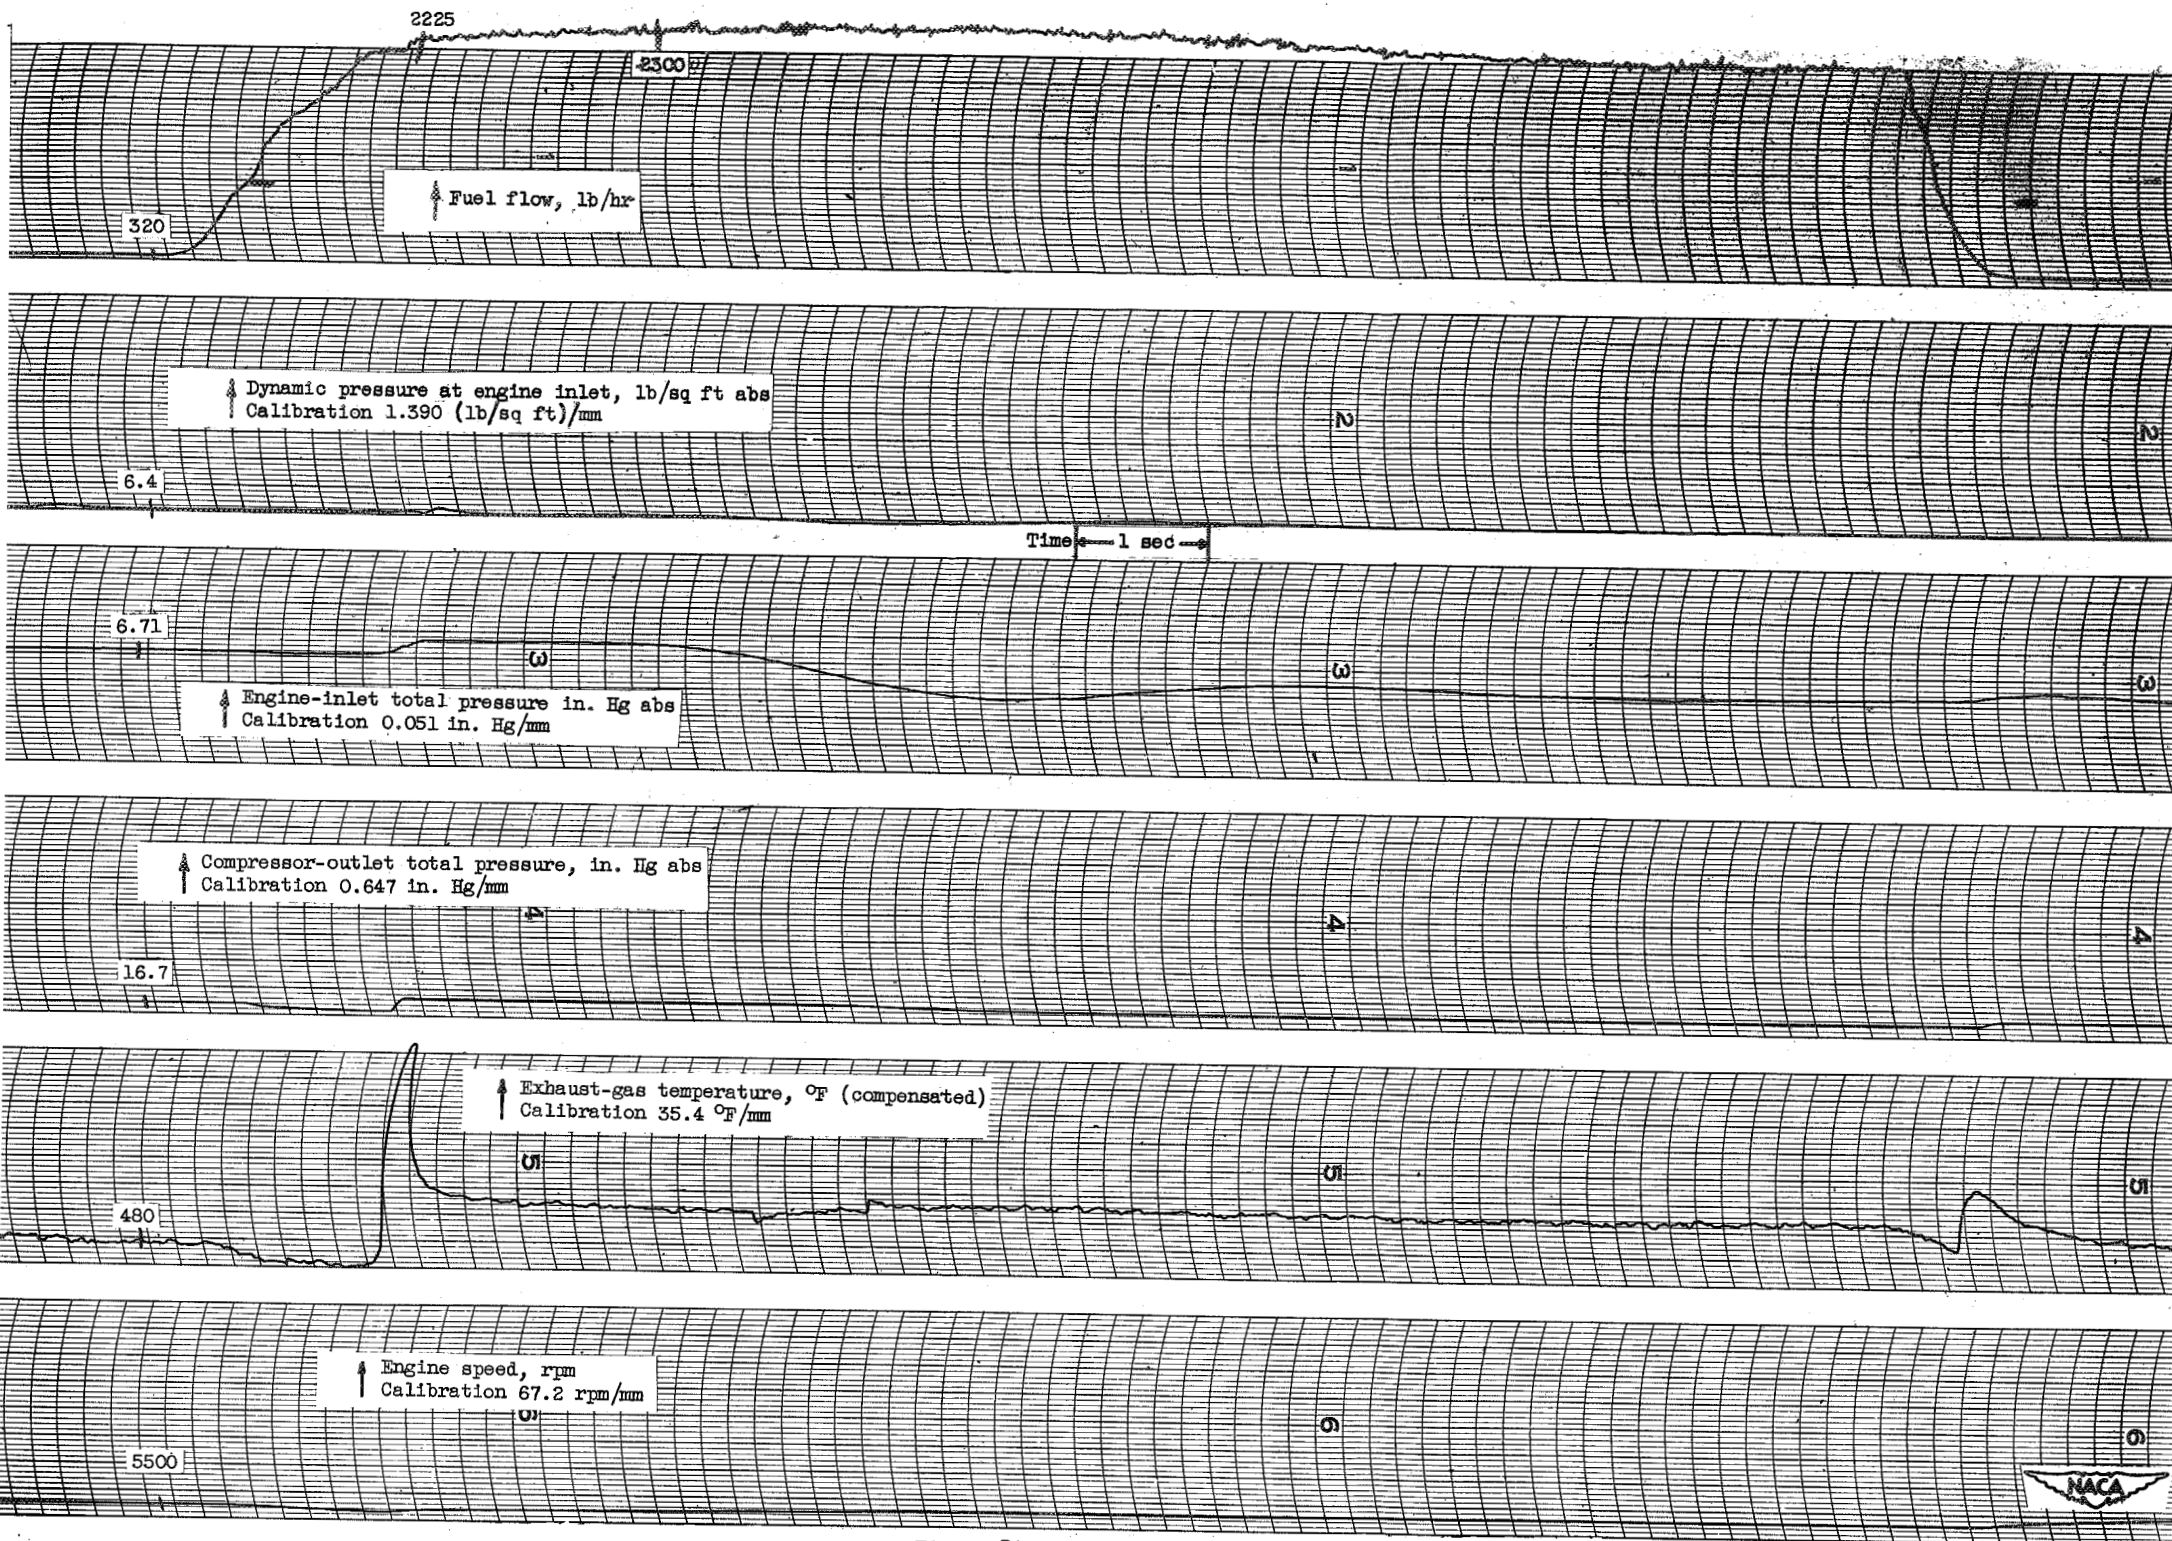


Figure 54
 Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 71° F; inlet guide vanes position, open.

Page intentionally left blank

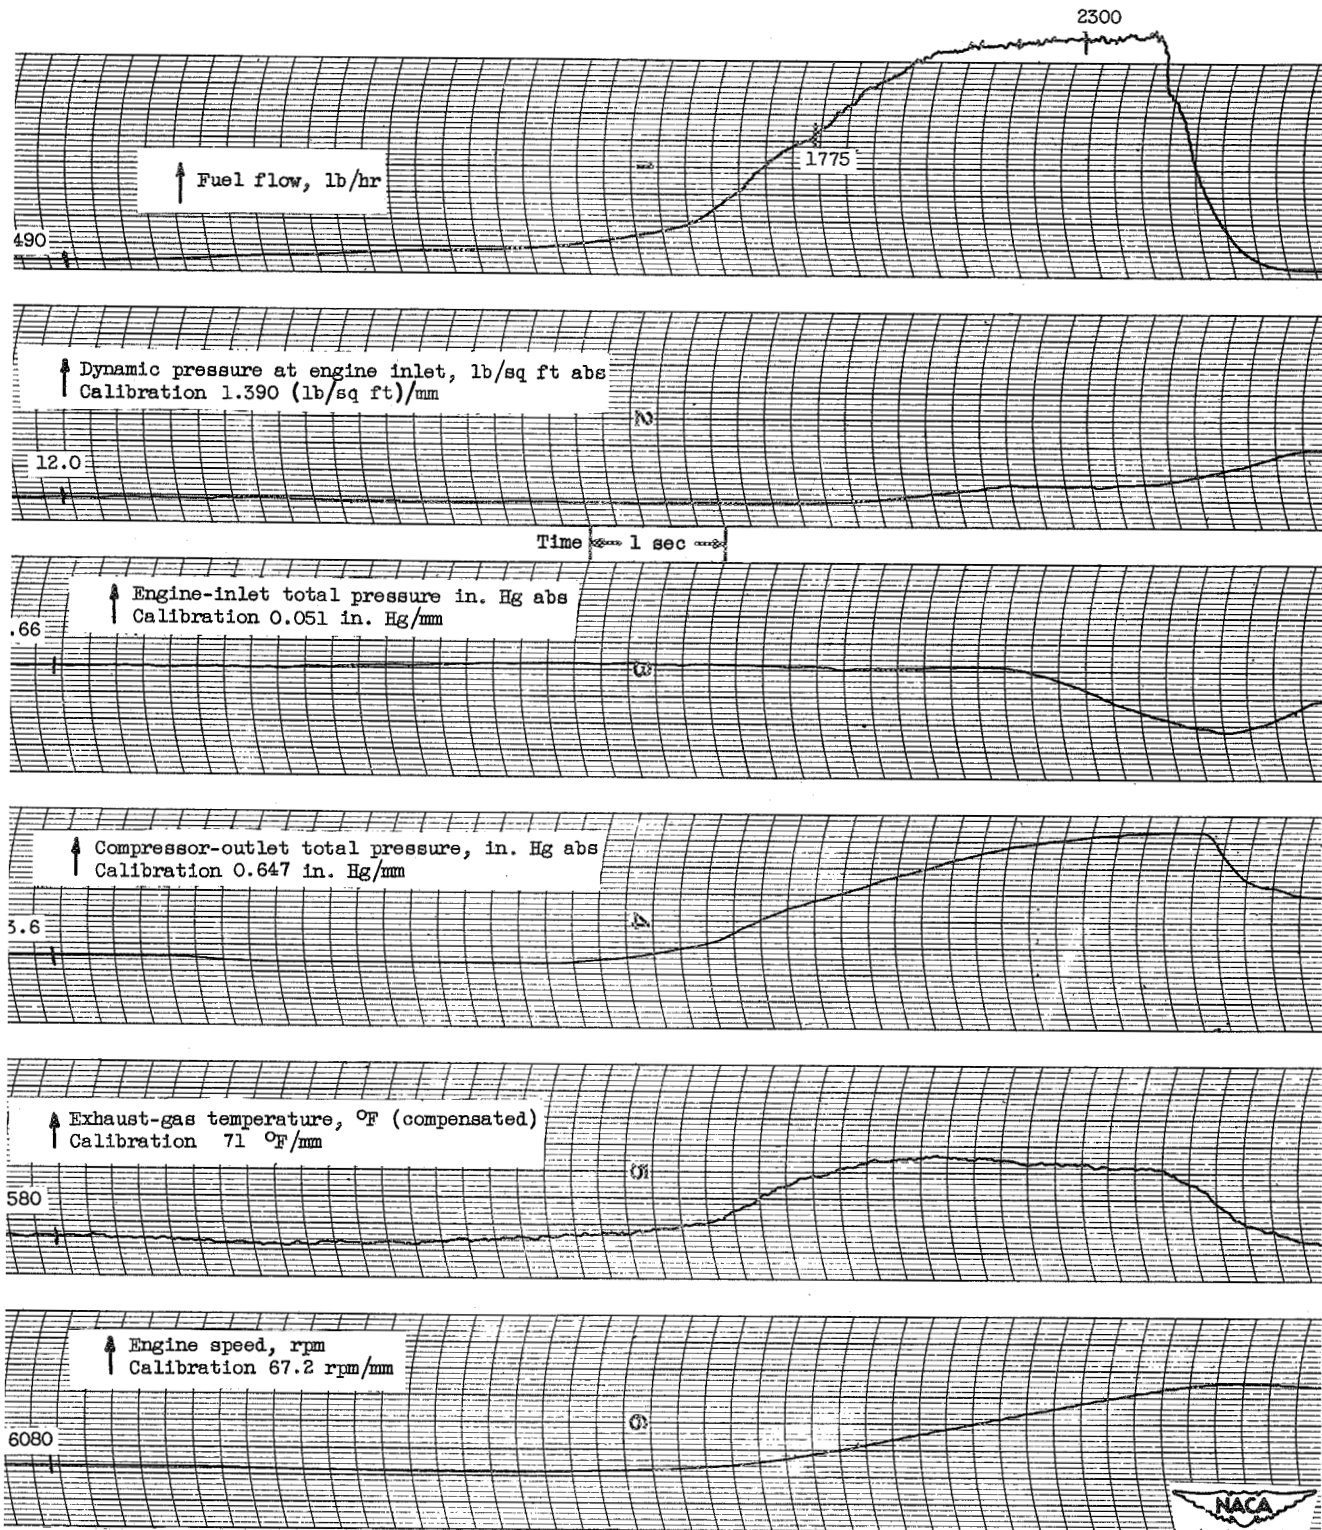


Figure 55

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 71° F; inlet guide vanes position, open.

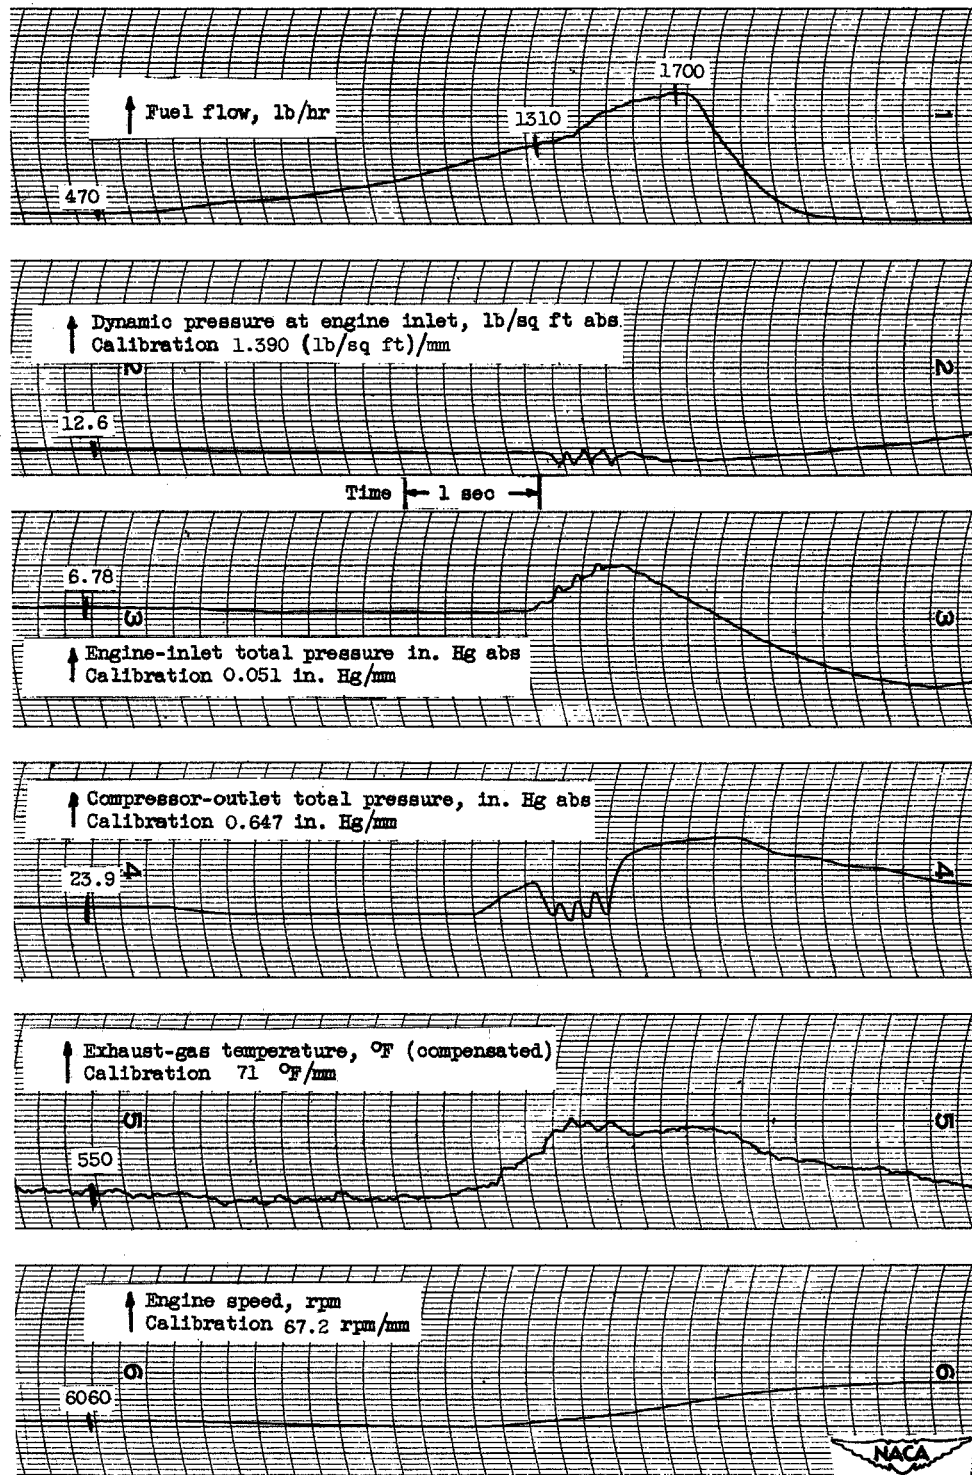


Figure 56

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 71° F; inlet guide vanes position, open.

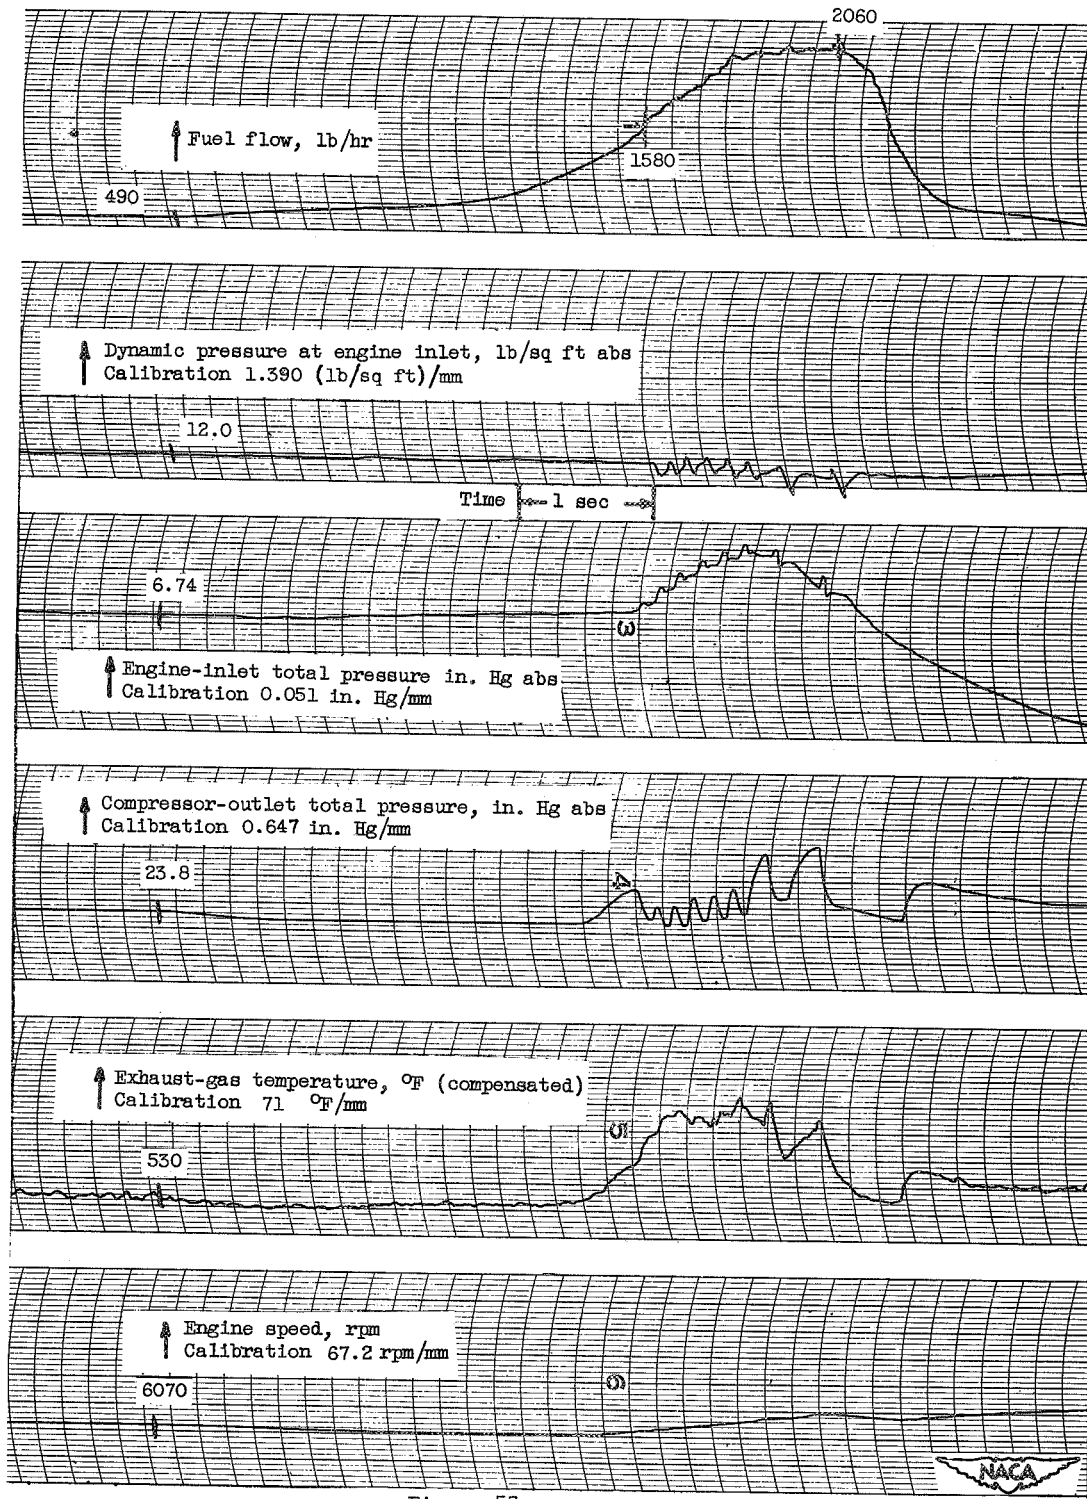


Figure 57

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 71° F; inlet guide vanes position, open.

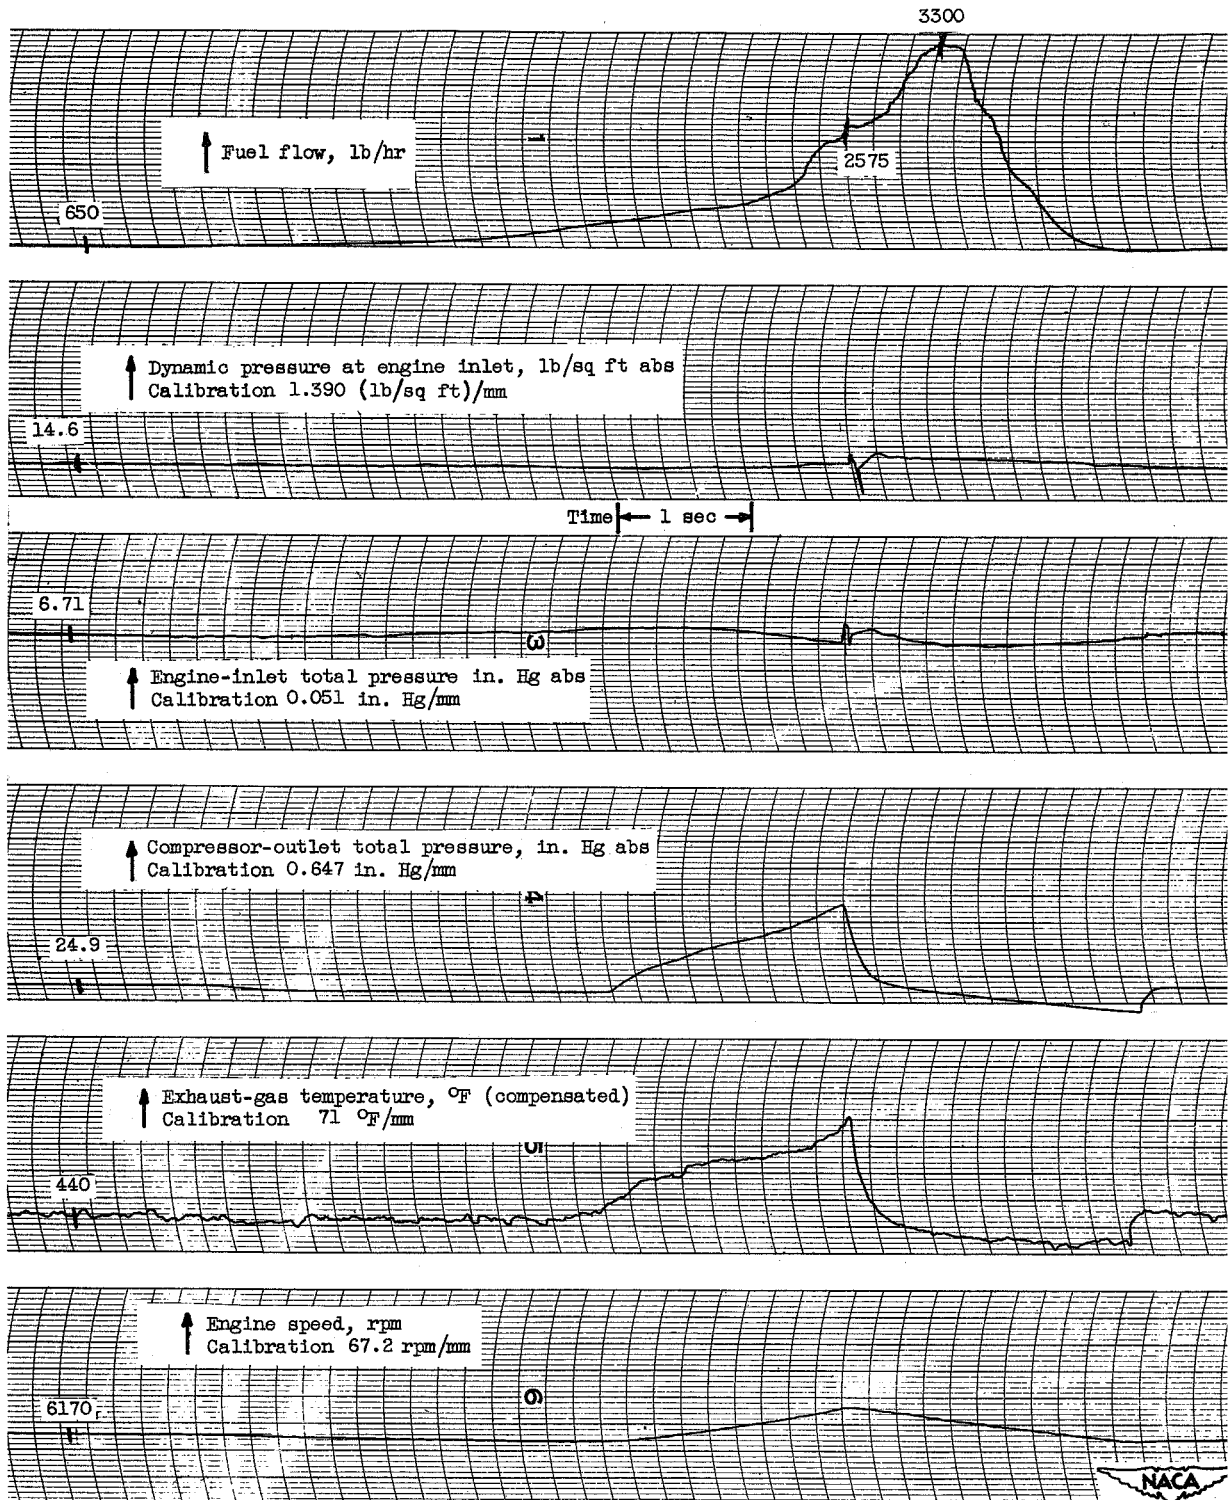


Figure 58

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 73° F; inlet guide vanes position, open.

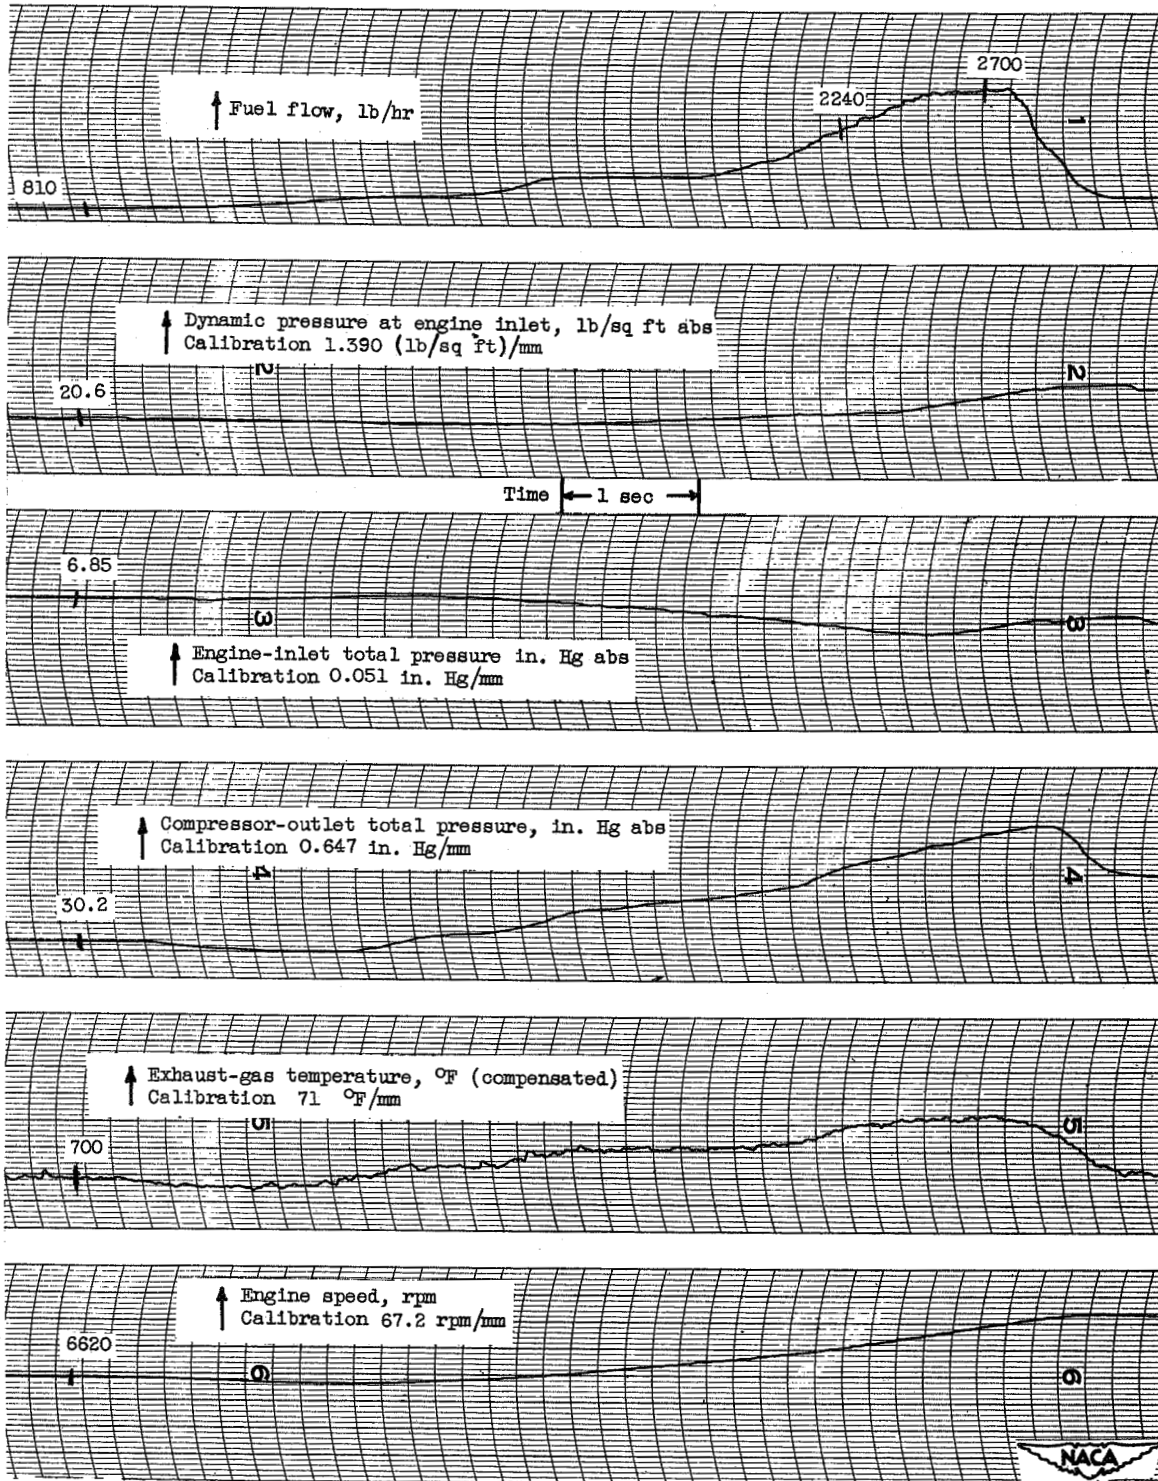


Figure 59
Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 72° F; inlet guide vanes position, open.

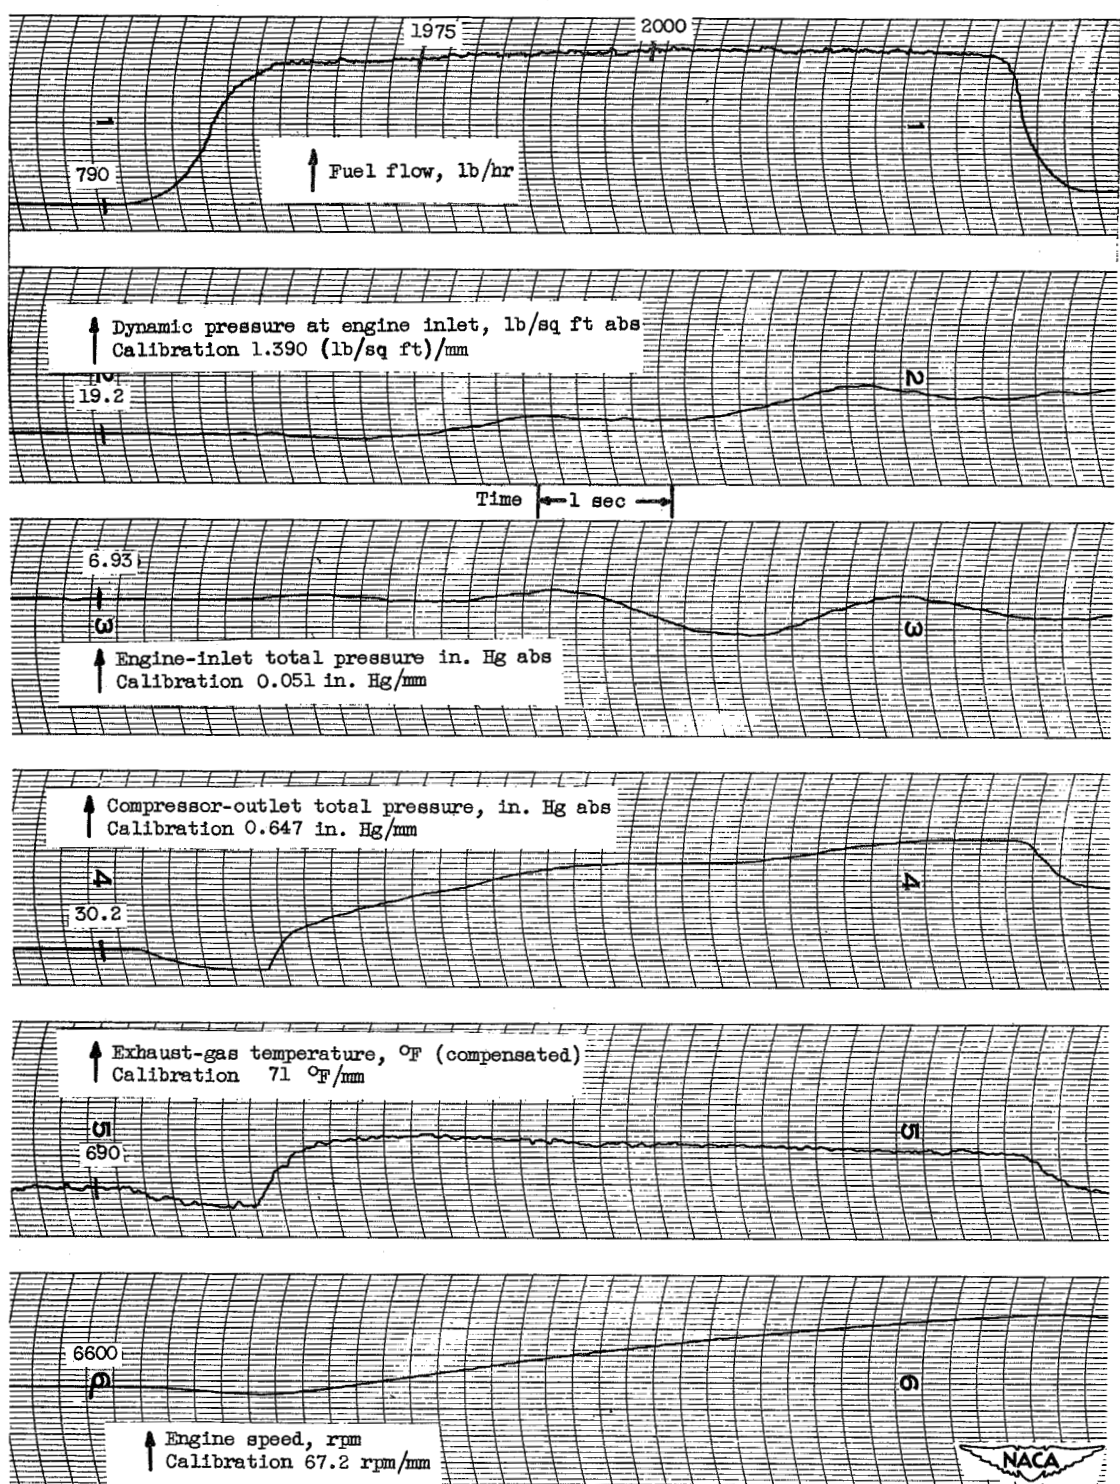


Figure 60

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 72 °F; inlet guide vanes position, open.

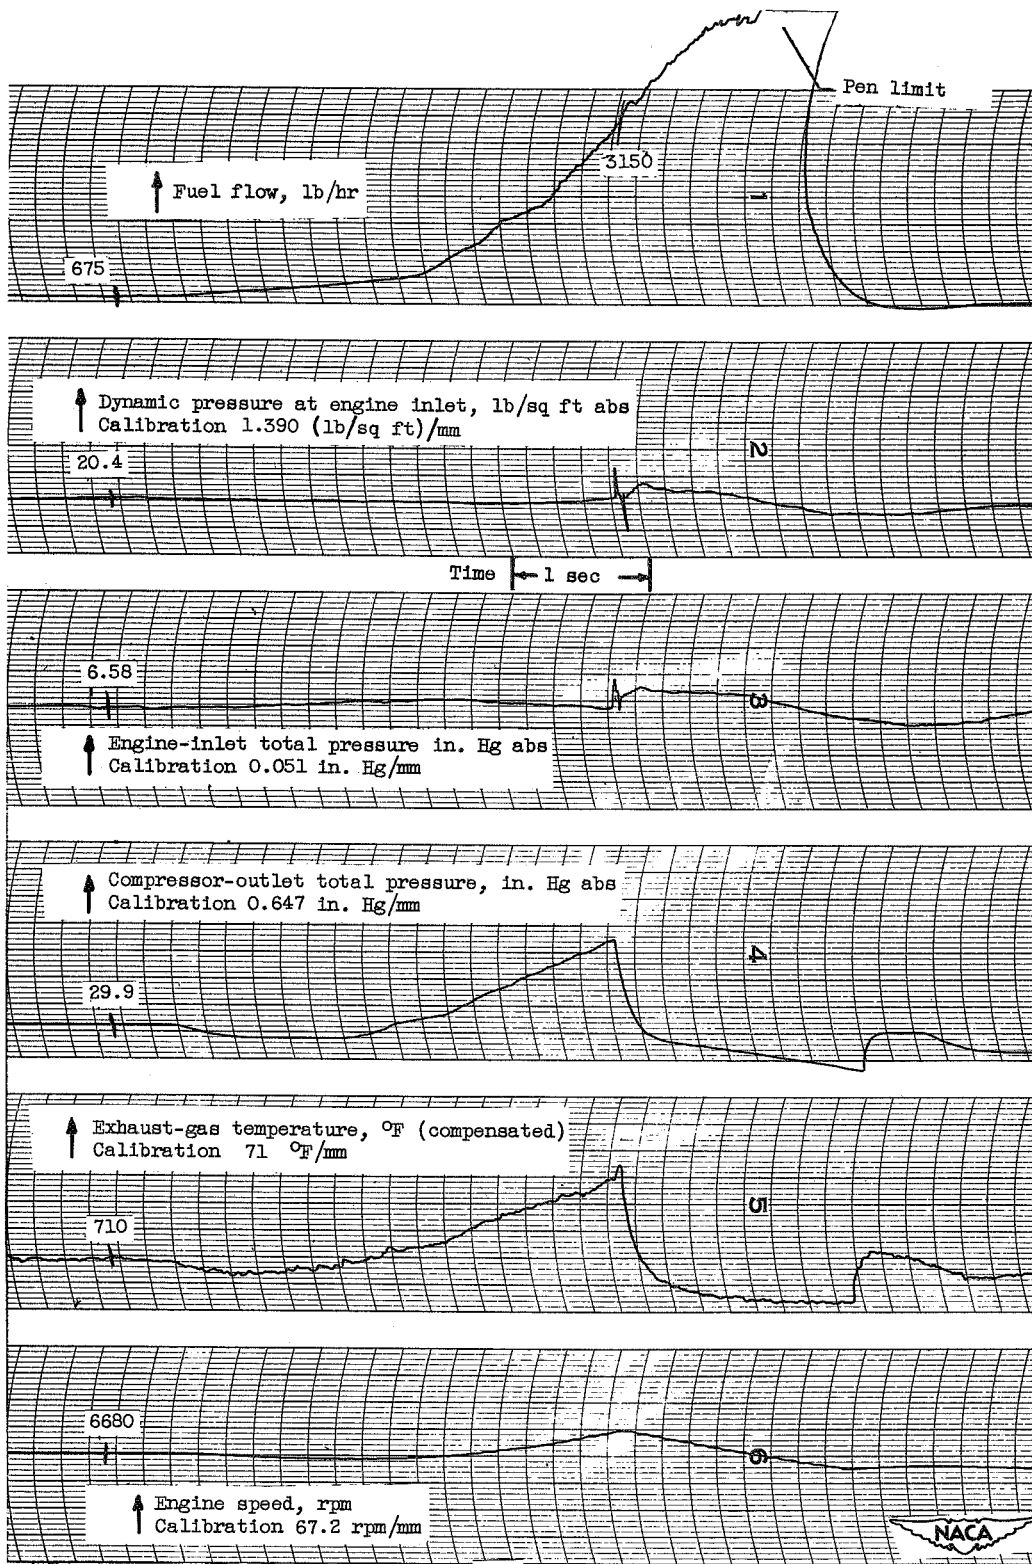


Figure 61

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 73 ° F; inlet guide vanes position, open.

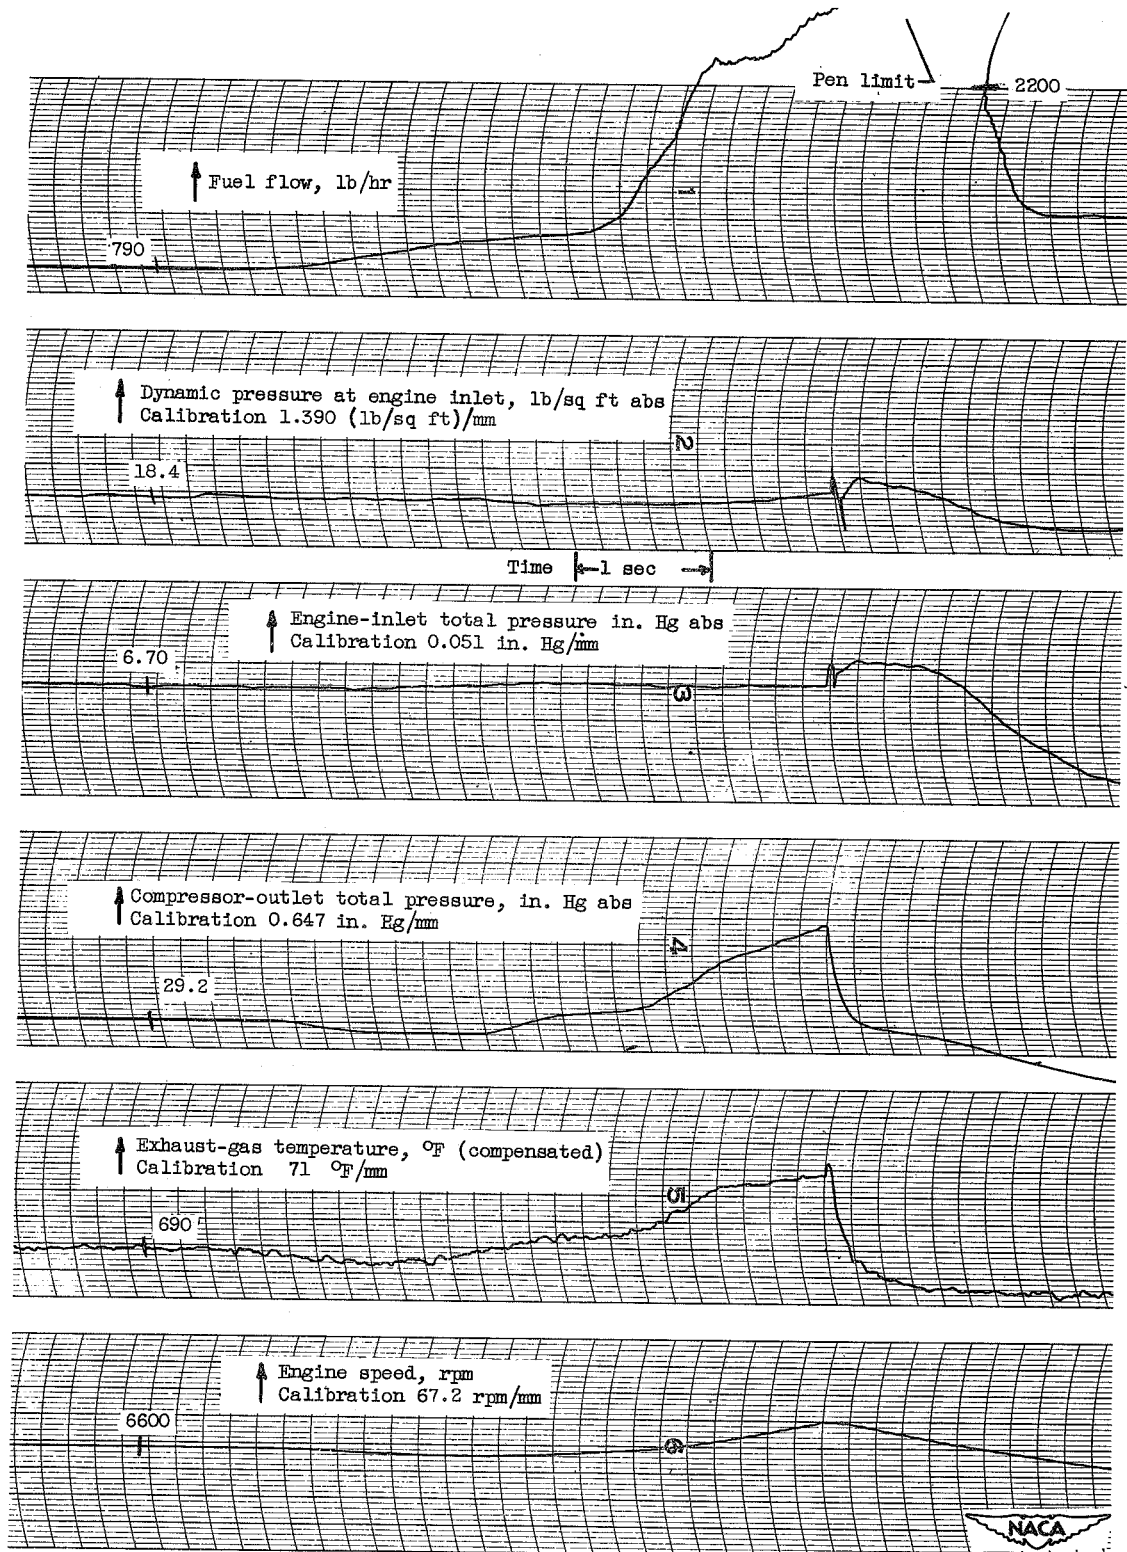


Figure 62

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 72° F; inlet guide vanes position, open.

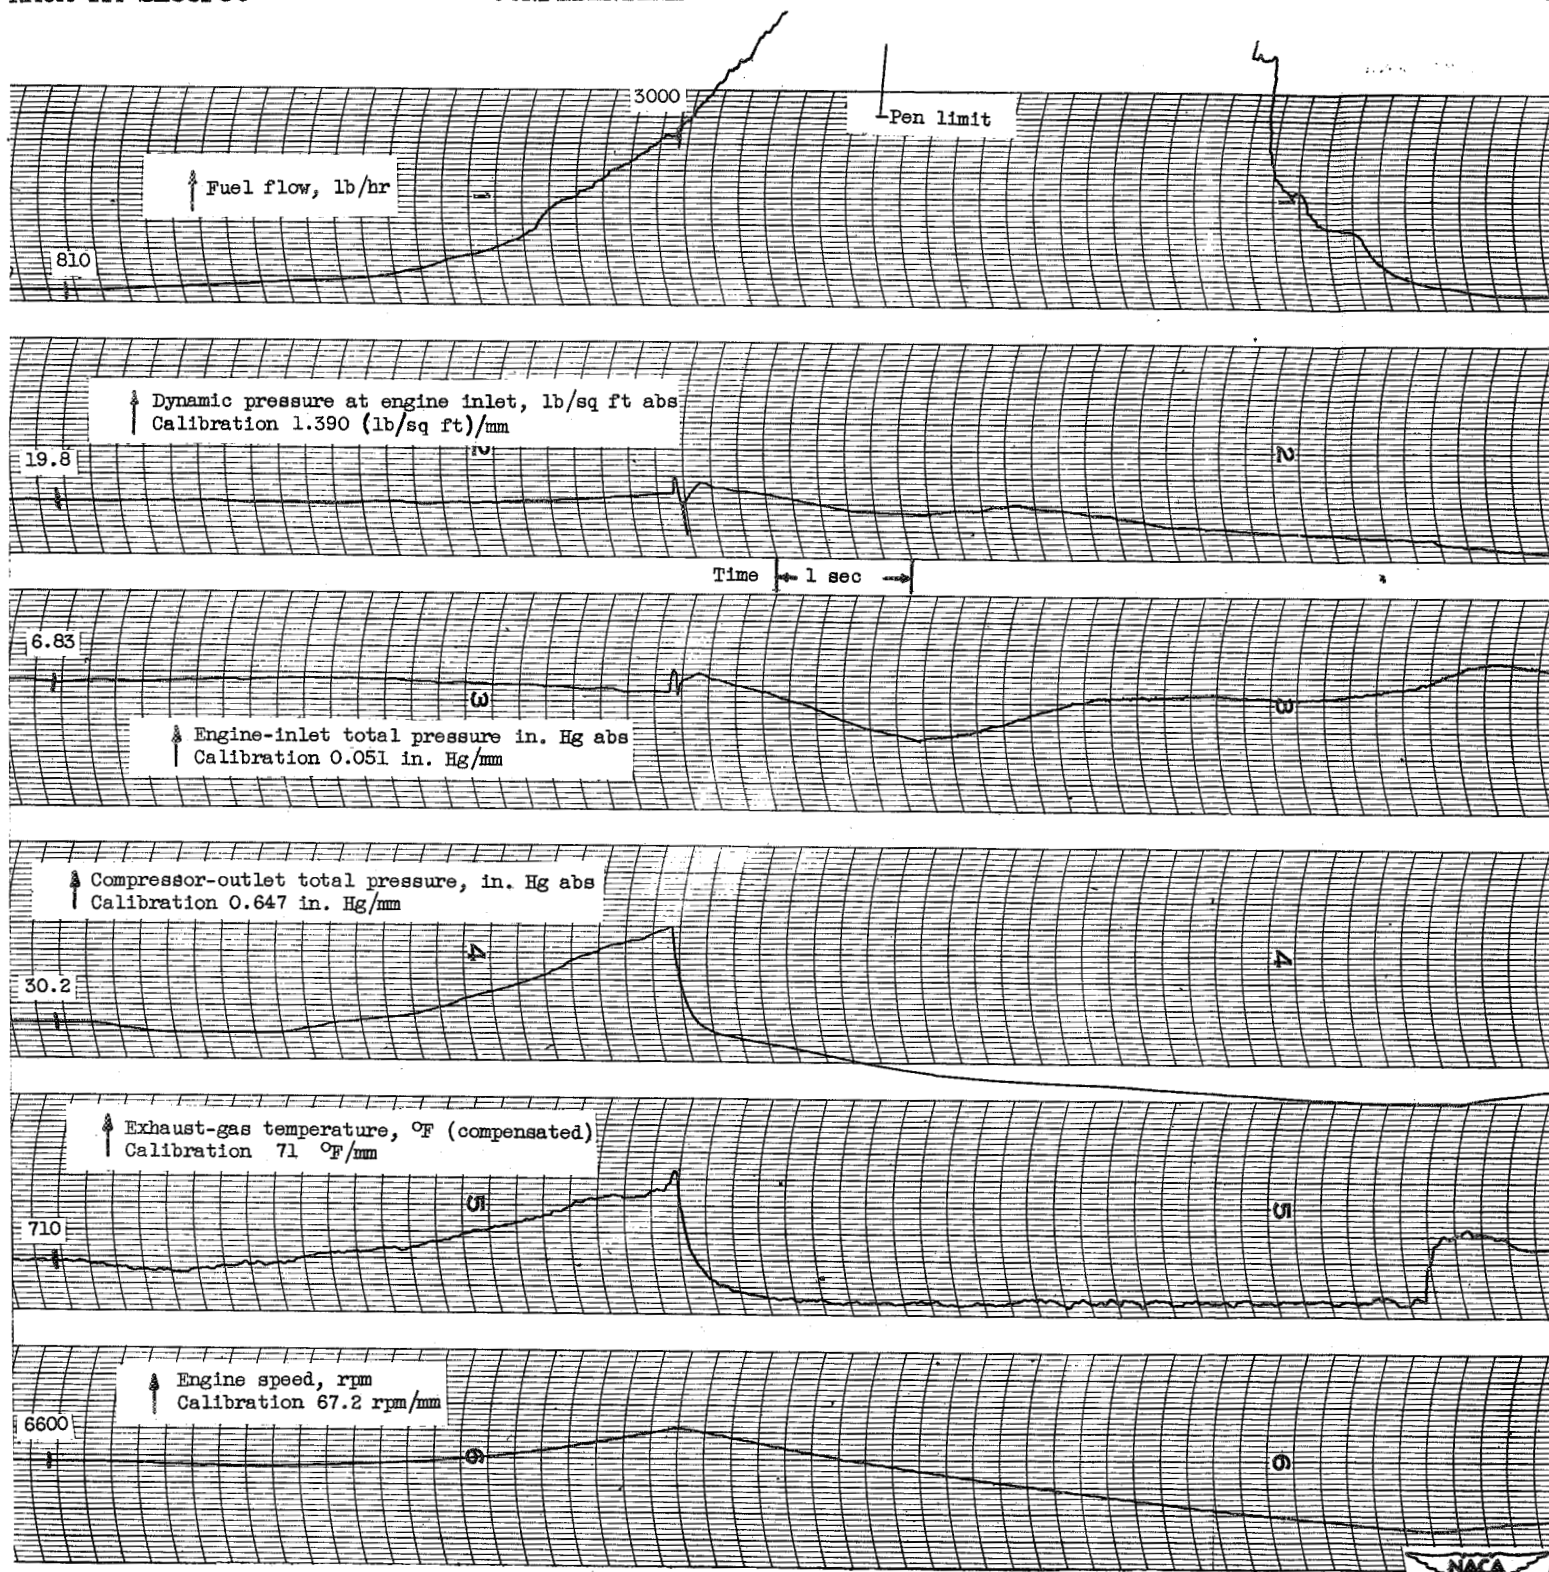


Figure 63

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 72 ° F; inlet guide vanes position, open.

Page intentionally left blank

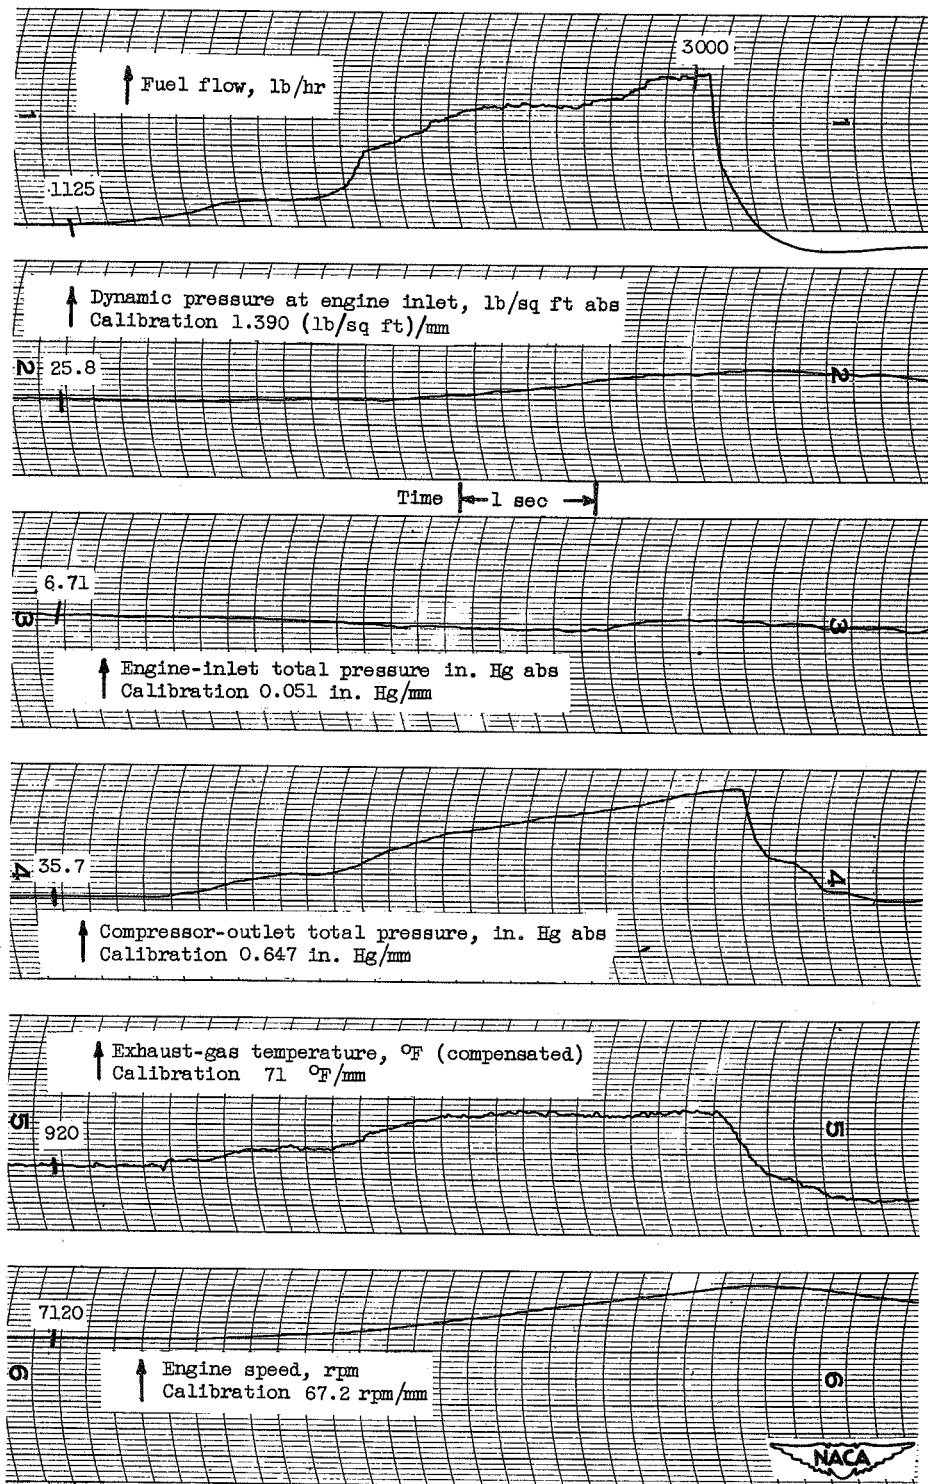


Figure 64

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 72° F; inlet guide vanes position, open.

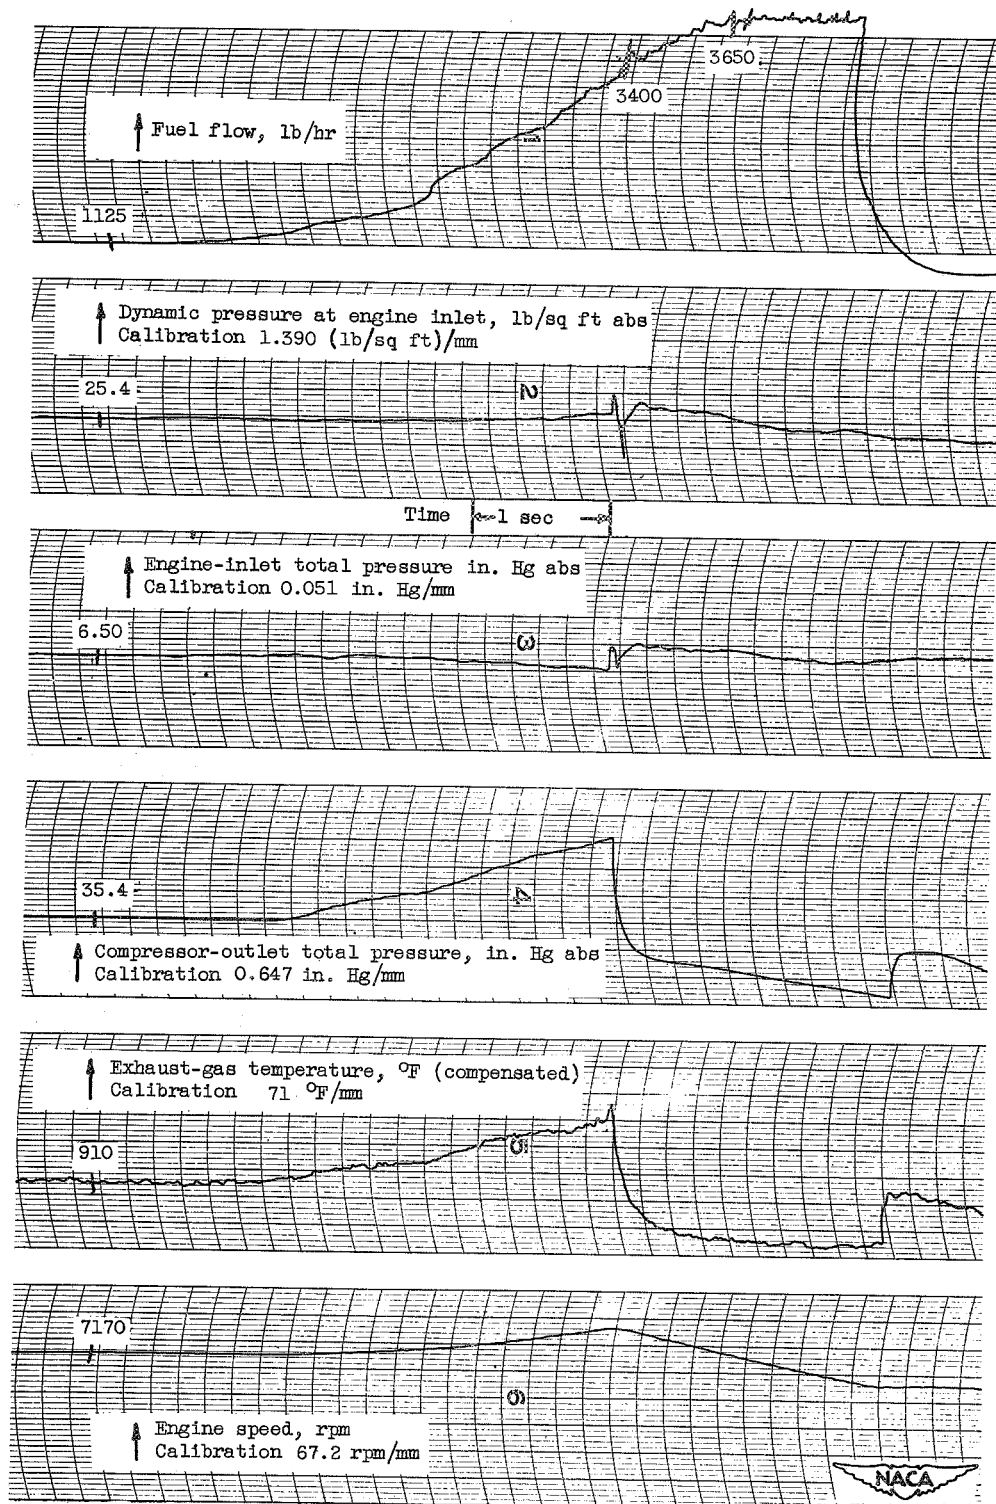


Figure 65

Oscillograph traces showing variations of different engine parameters during a ramp-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 72° F; inlet guide vanes position, open.

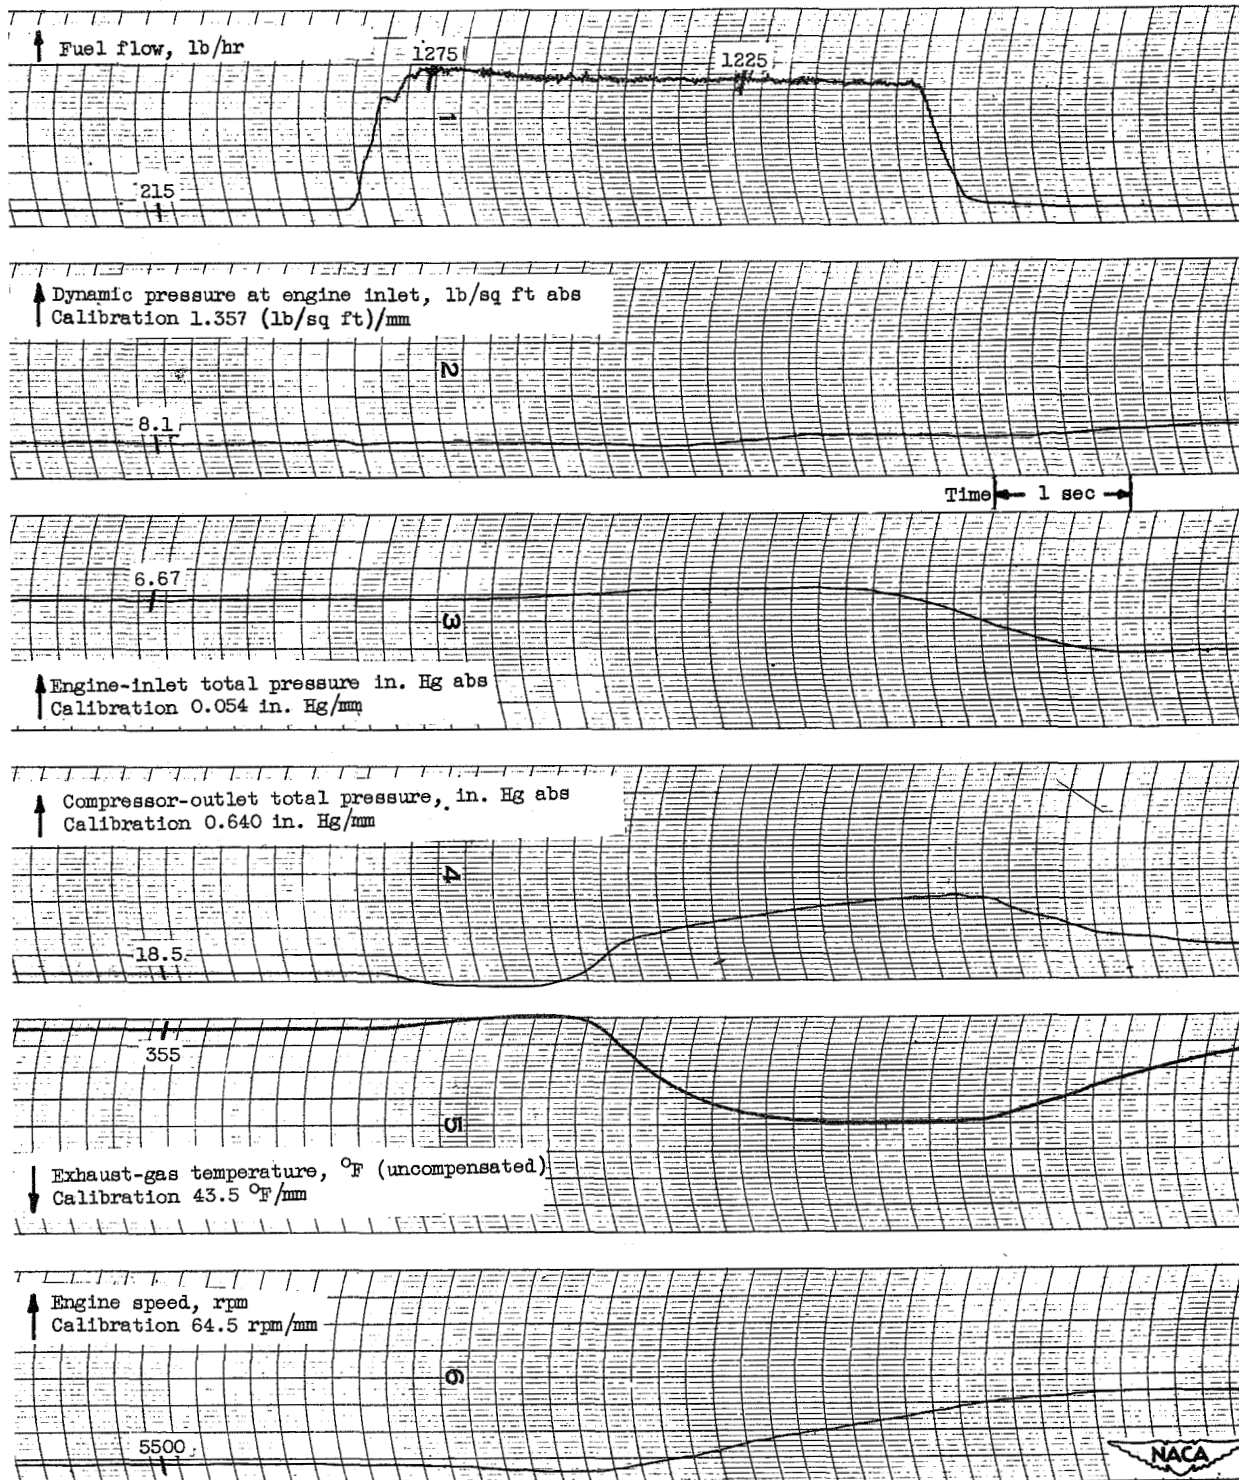


Figure 66
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 31° F; inlet guide vanes position, closed.

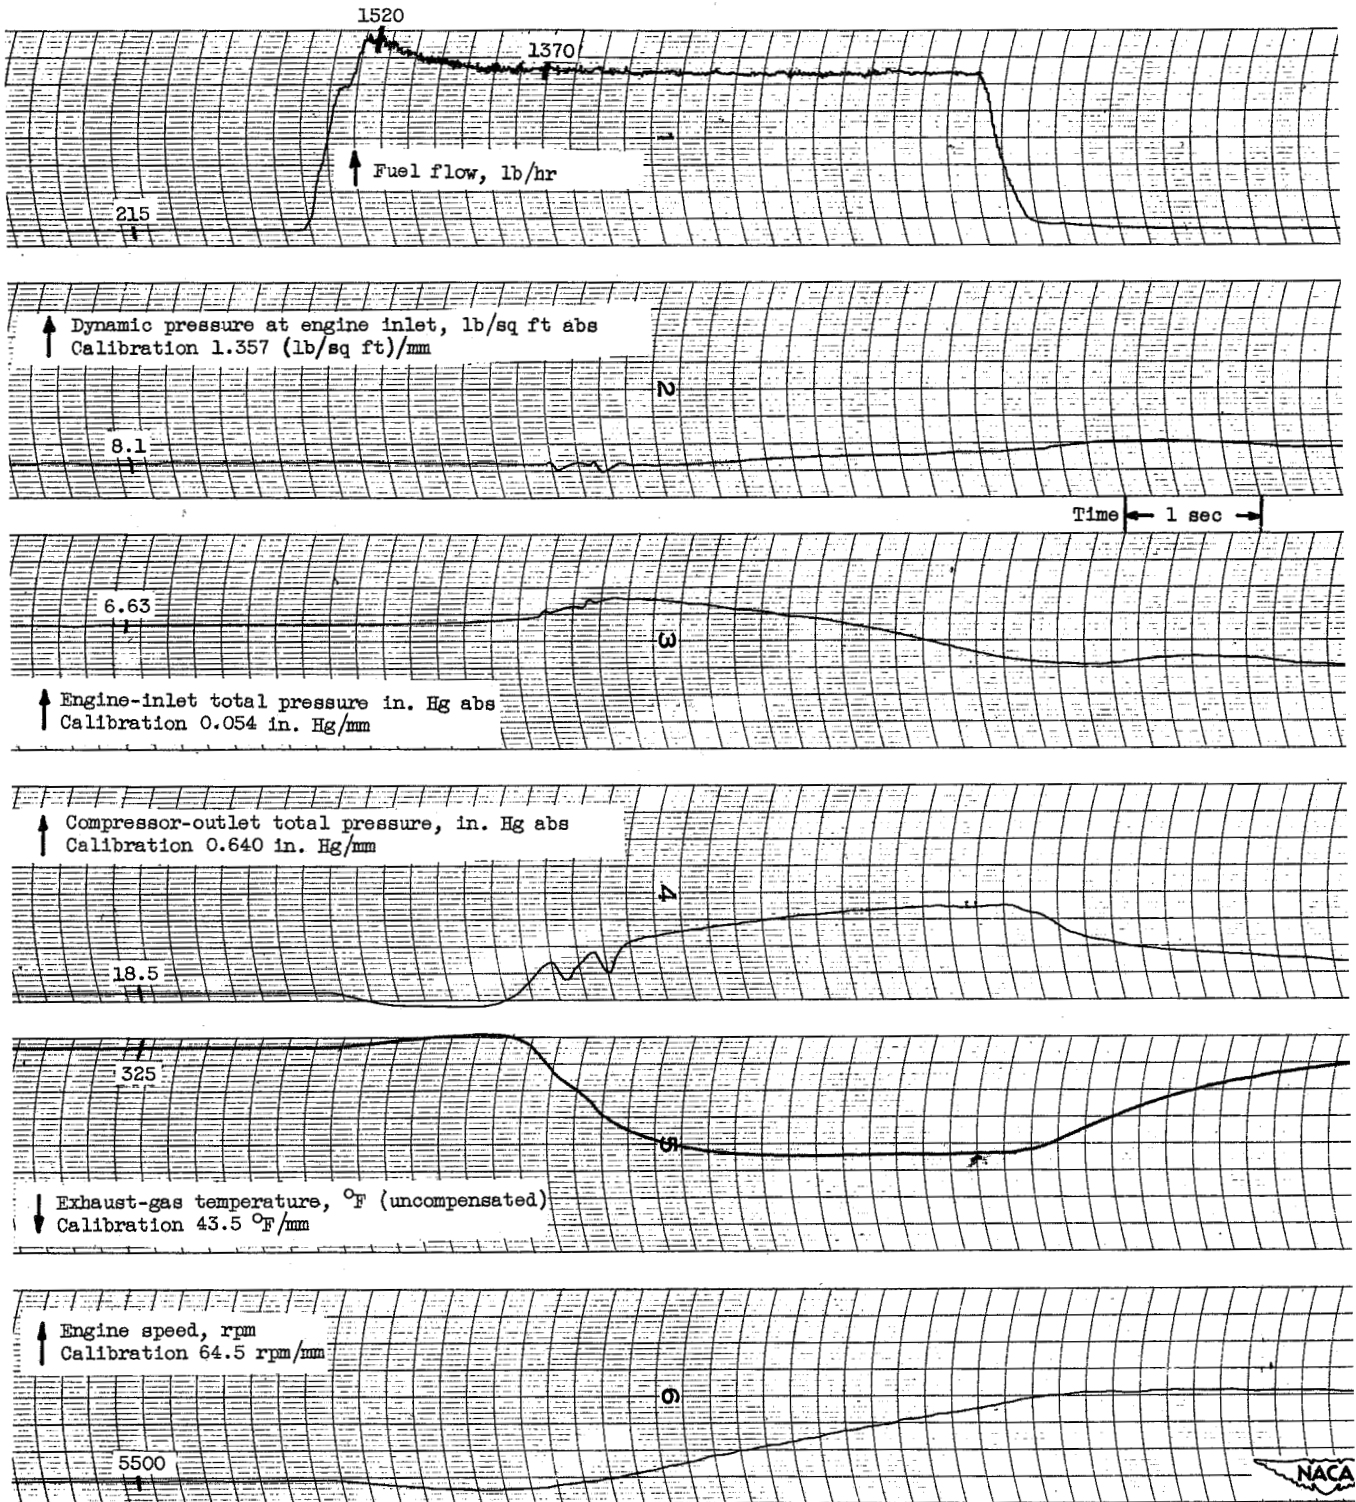


Figure 67

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 31° F; inlet guide vanes position, closed.

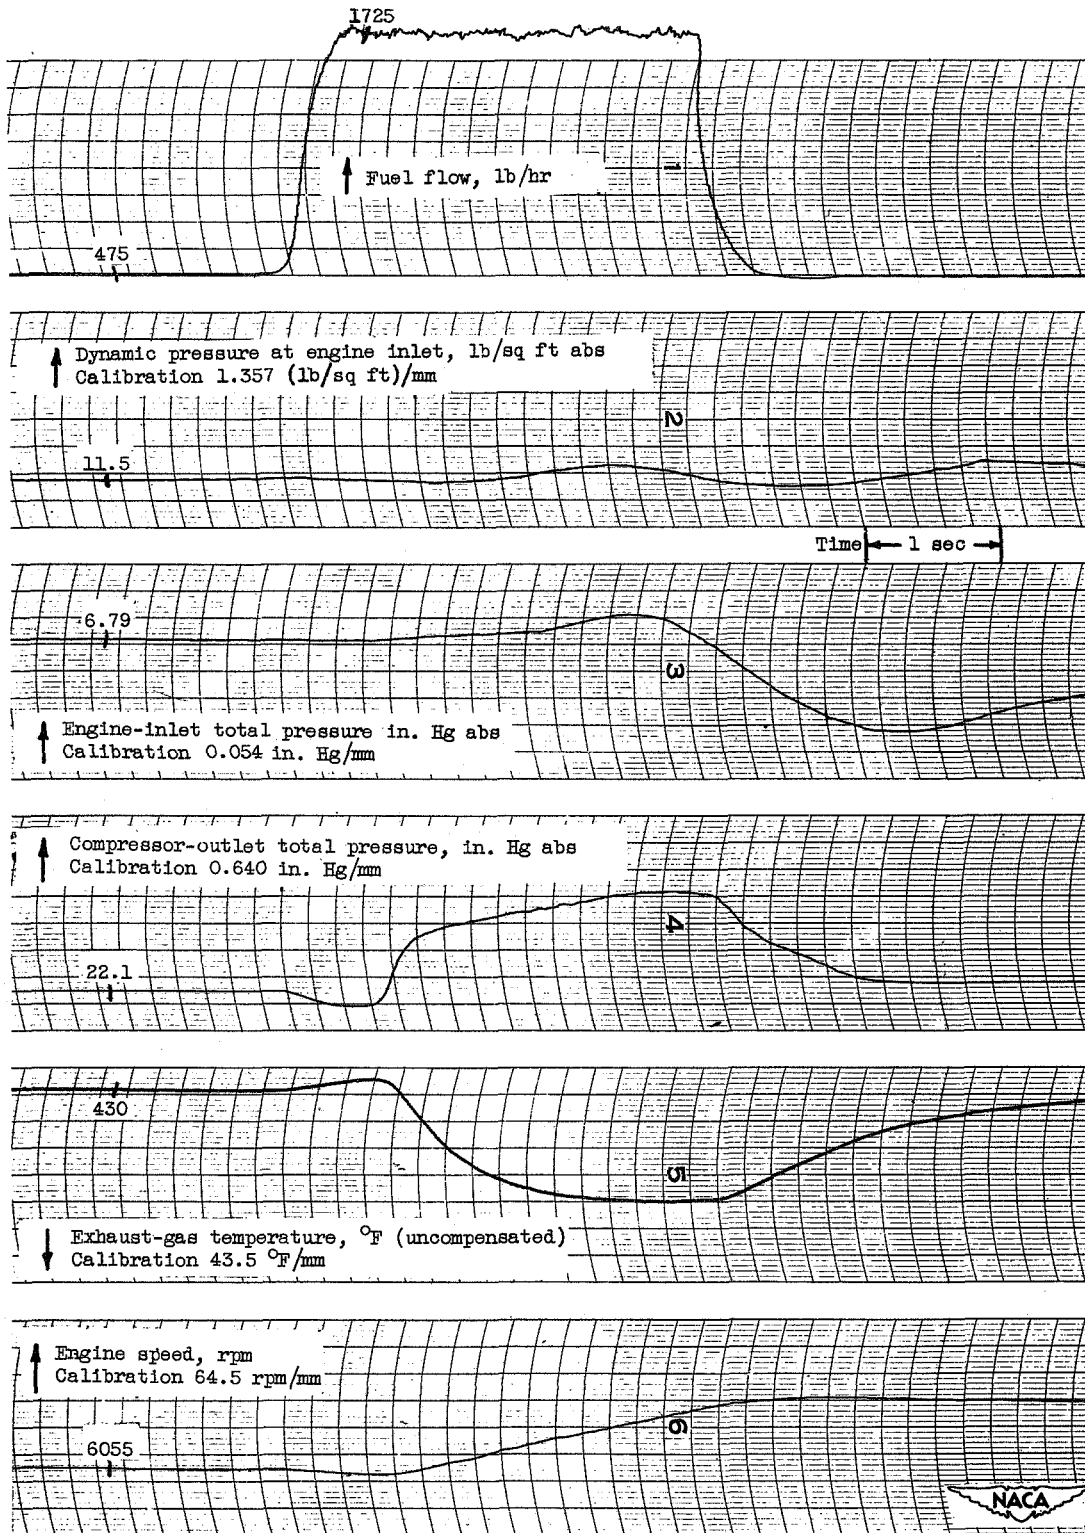


Figure 68
Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 31° F; inlet guide vanes position, closed.

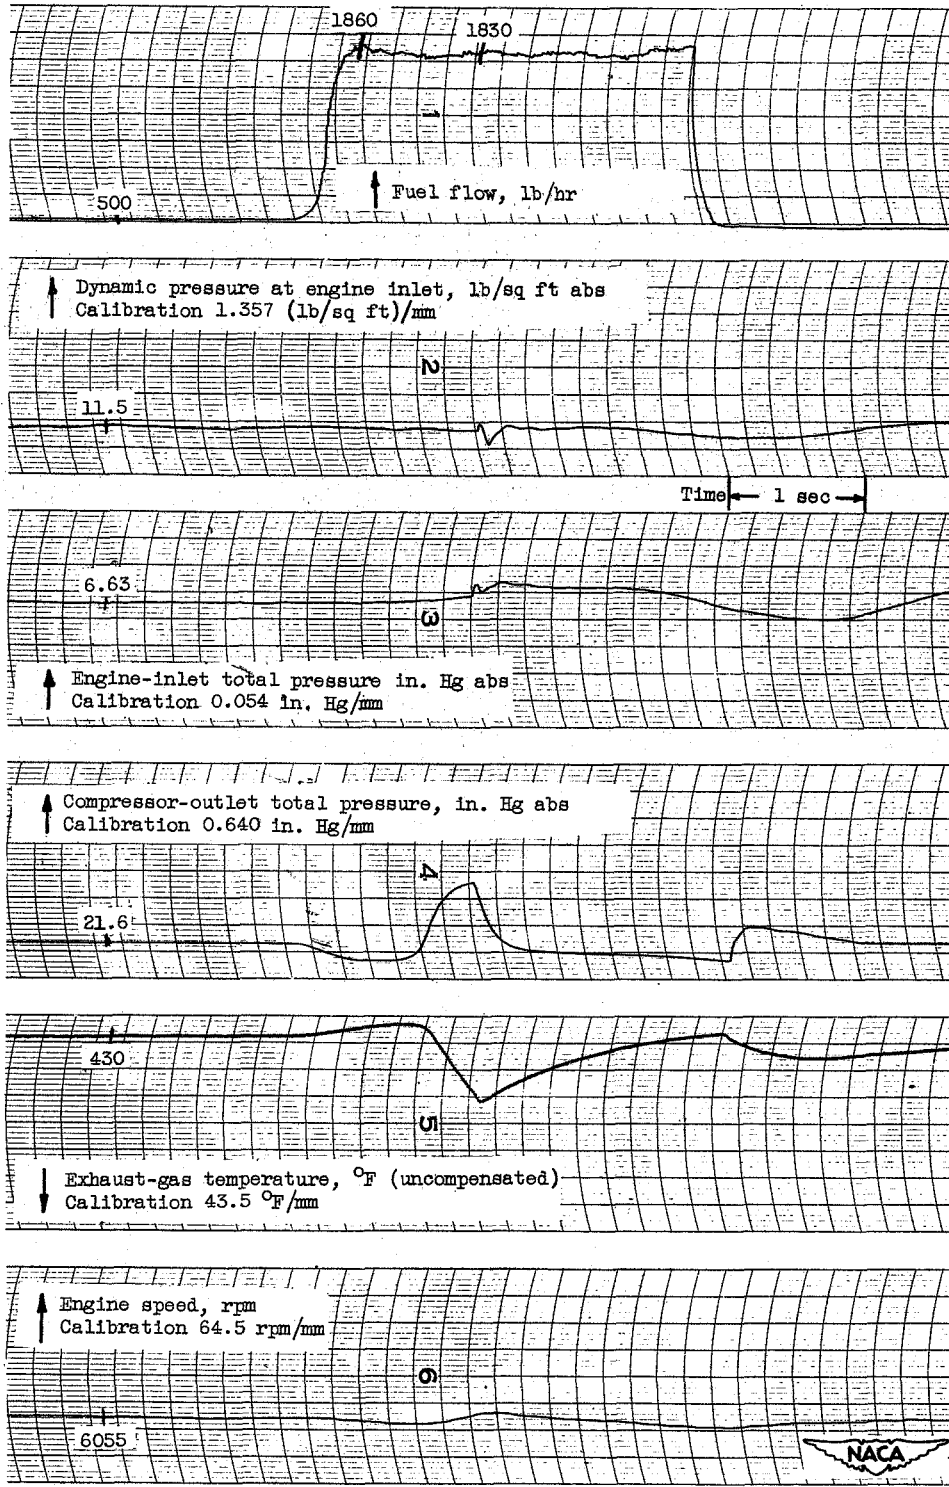


Figure 69

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 31° F; inlet guide vanes position, closed.

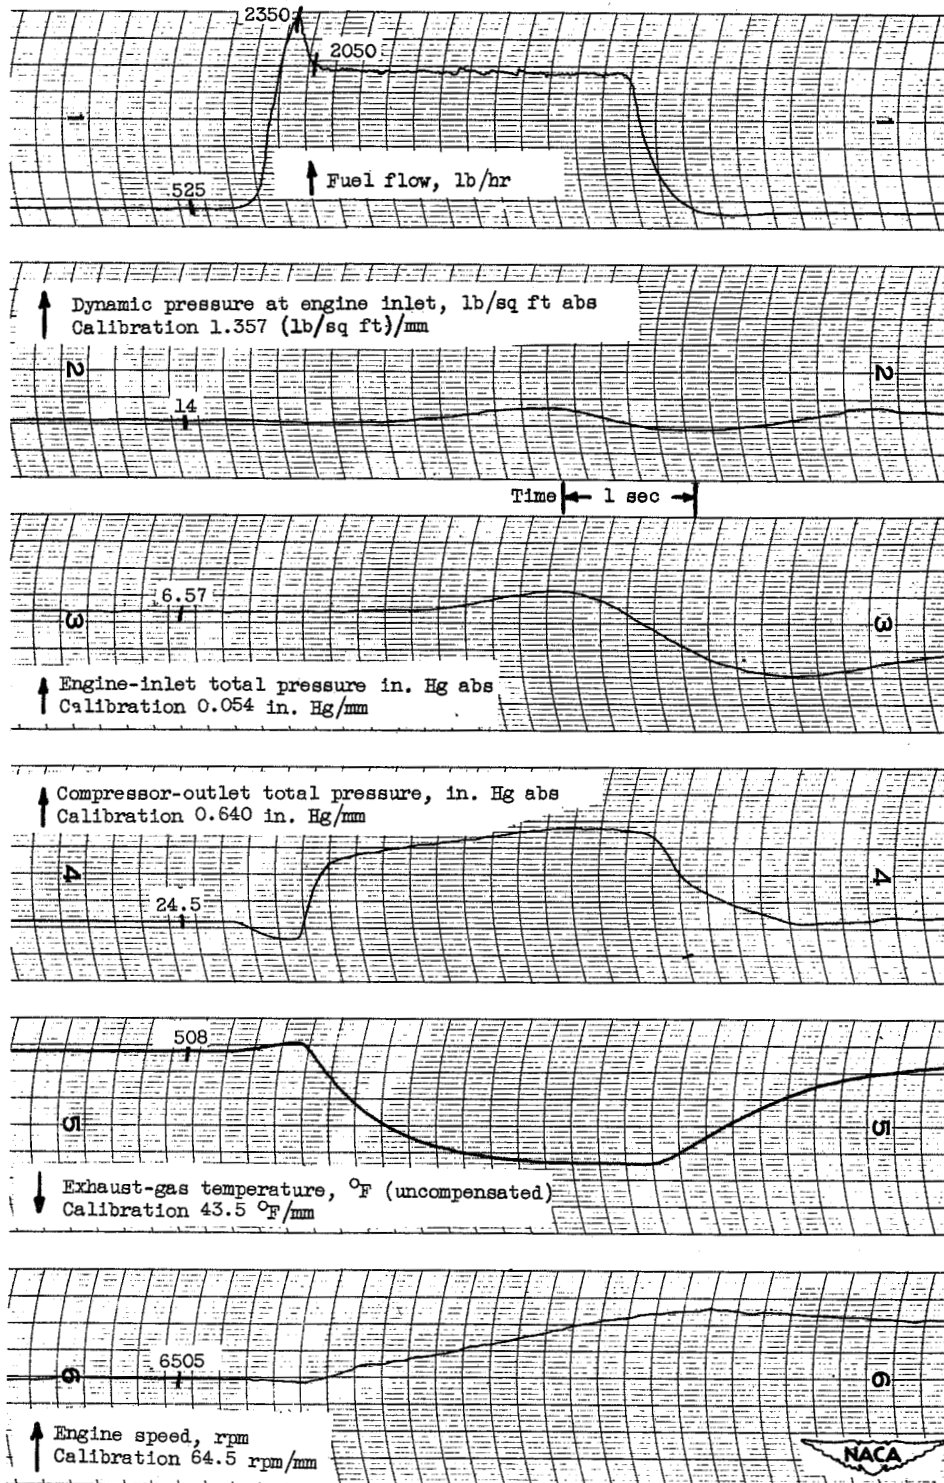


Figure 70

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, closed.

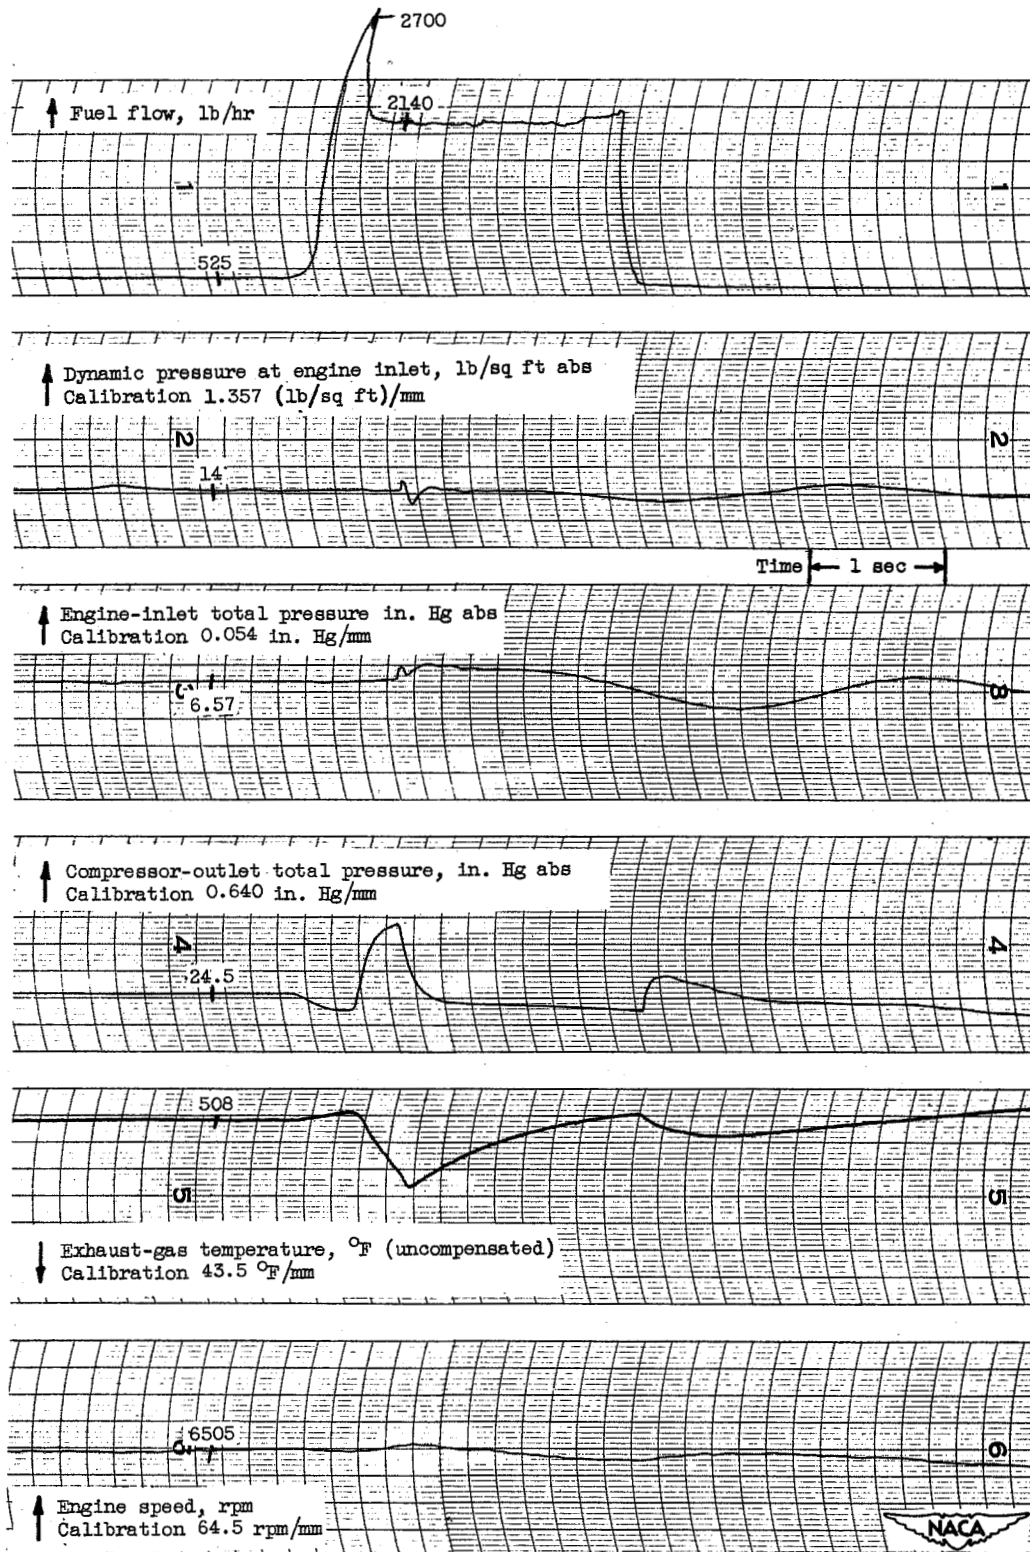


Figure 71
 Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, closed.

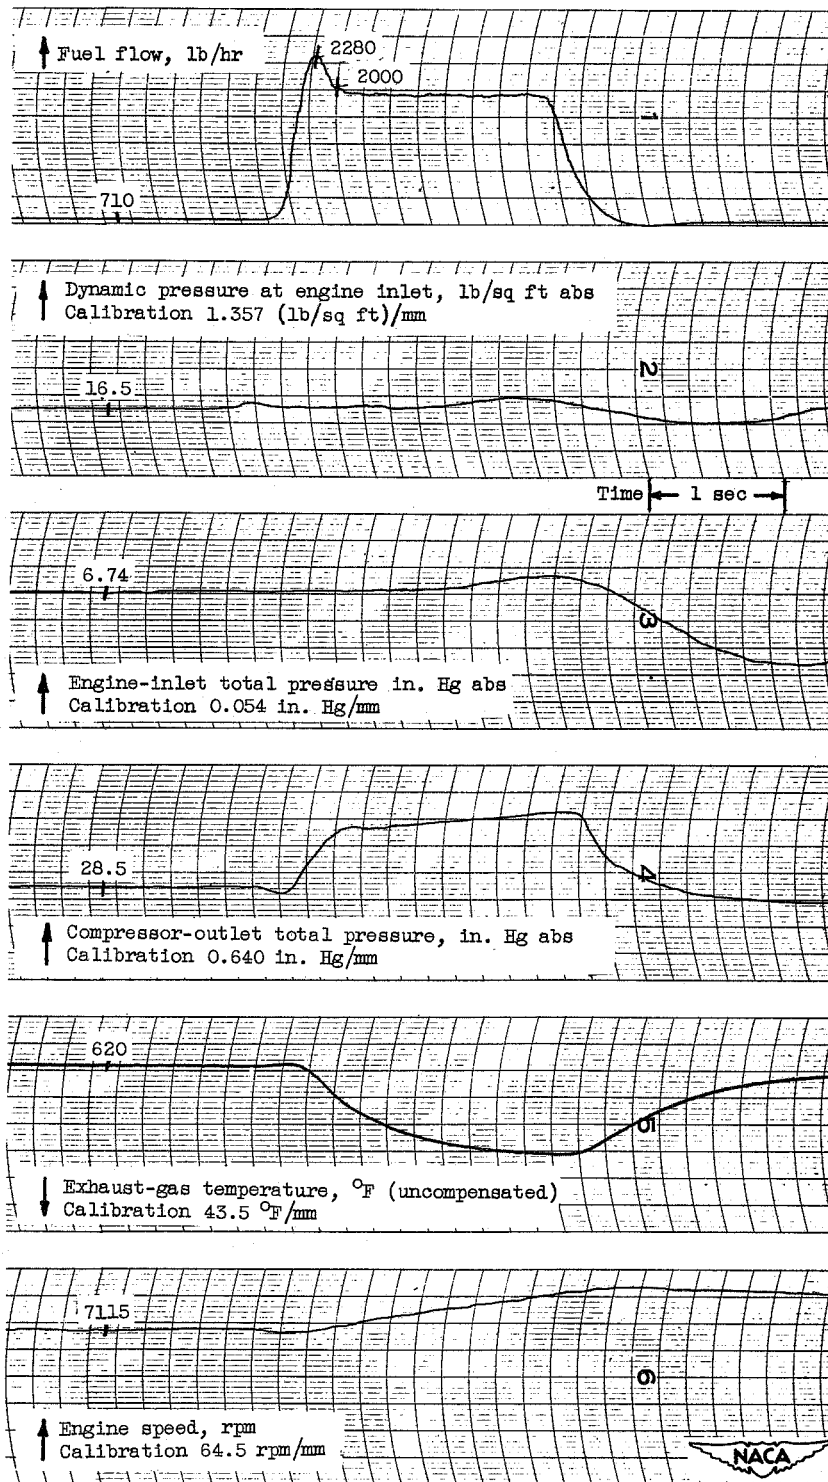


Figure 72
 Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, closed.

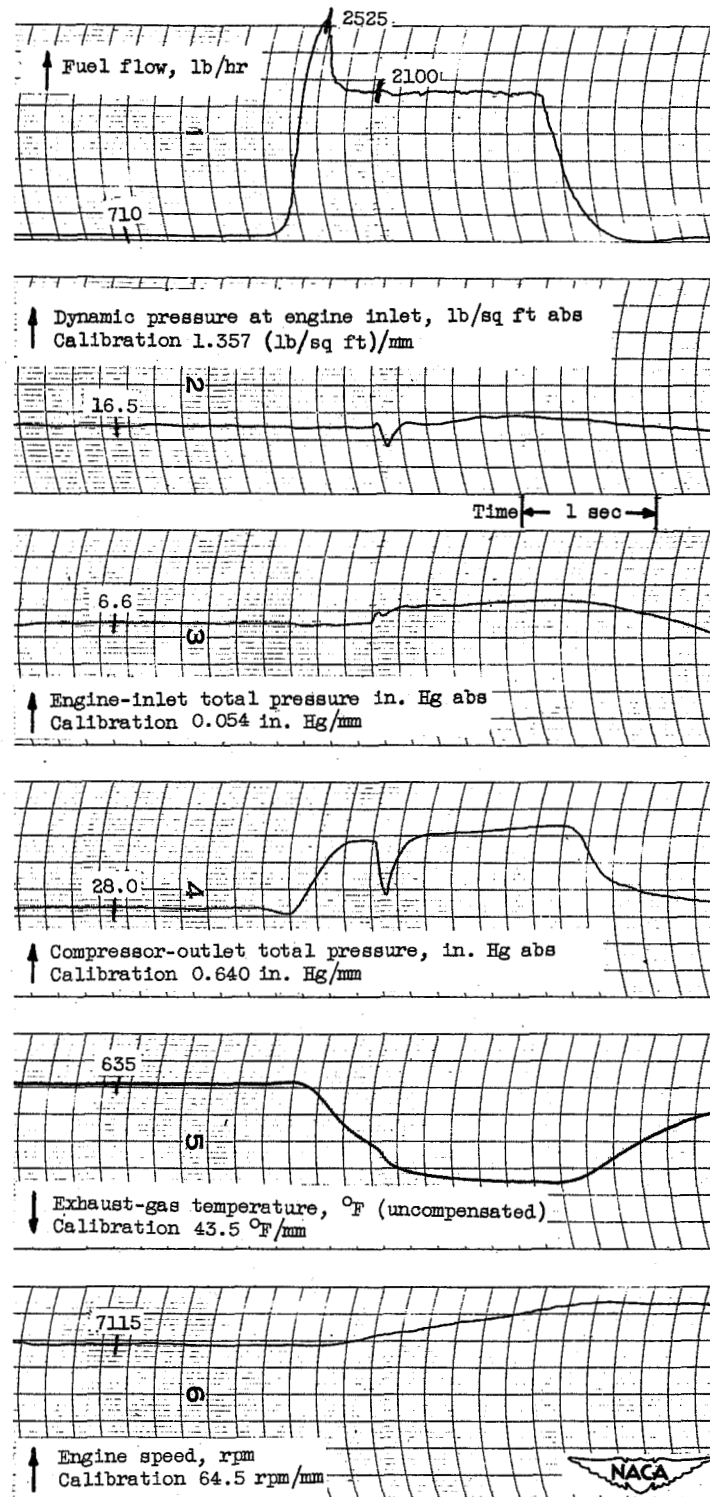


Figure 73

Oscillograph traces showing variations of different engine parameters during a step-change in fuel flow. Altitude, 45,000 feet; flight Mach number, 0.8; engine-inlet air temperature, 30° F; inlet guide vanes position, closed.

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

PRELIMINARY TRANSIENT PERFORMANCE DATA ON THE J73 TURBOJET ENGINE

III - ALTITUDE, 45,000 FEET

John E. McAulay

John E. McAulay
Aeronautical Research Scientist
Propulsion Systems

Lewis E. Wallner

Lewis E. Wallner
Aeronautical Research Scientist
Propulsion Systems

Approved:

David S. Gabriel

David S. Gabriel
Aeronautical Research Scientist
Propulsion Systems

Bruce T. Lundin

Bruce T. Lundin
Chief
Engine Research Division

lsp - 7/2/53