

## **ENSURING SAFE EXPLORATION: ARES LAUNCH VEHICLE INTEGRATED VEHICLE**

### **GROUND VIBRATION TESTING**

M.L. Tuma, PhD and D.J. Chenevert, PhD, P.E.

Ares Flight & Integrated Test Office (FITO), Structural, Environmental, and Vibration Test  
(SE&VT), Marshall Space Flight Center  
Huntsville, AL

### **ABSTRACT**

Ground vibration testing has been an integral tool for developing new launch vehicles throughout the space age. Several launch vehicles have been lost due to problems that would have been detected by early vibration testing, including Ariane 5, Delta III, and Falcon 1. NASA will leverage experience and testing hardware developed during the Saturn and Shuttle programs to perform ground vibration testing (GVT) on the Ares I crew launch vehicle and Ares V cargo launch vehicle stacks. NASA performed dynamic vehicle testing (DVT) for Saturn and mated vehicle ground vibration testing (MVGVT) for Shuttle at the Dynamic Test Stand (Test Stand 4550) at Marshall Space Flight Center (MSFC) in Huntsville, Alabama, and is now modifying that facility to support Ares I integrated vehicle ground vibration testing (IVGVT) beginning in 2012. The Ares IVGVT schedule shows most of its work being completed between 2010 and 2014. Integrated 2<sup>nd</sup> Stage Ares IVGVT will begin in 2012 and IVGVT of the entire Ares launch stack will begin in 2013. The IVGVT data is needed for the human-rated Orion launch vehicle's Design Certification Review (DCR) in early 2015.

During the Apollo program, GVT detected several serious design concerns, which NASA was able to address before Saturn V flew, eliminating costly failures and potential losses of mission or crew. During the late 1970s, Test Stand 4550 was modified to support the four-body structure of the Space Shuttle. Vibration testing confirmed that the vehicle's mode shapes and frequencies were better than analytical models suggested; however, the testing also identified challenges with the rate gyro assemblies, which could have created flight instability and possibly resulted in loss of the vehicle. Today, NASA has begun modifying Test Stand 4550 to accommodate Ares I, including removing platforms needed for Shuttle testing and upgrading the dynamic test facilities to characterize the mode shapes and resonant frequencies of the vehicle. The IVGVT team expects to collect important information about the new launch vehicles, greatly increasing astronaut safety as NASA prepares to explore the Moon and beyond.

### **INTRODUCTION**

Most launch and space vehicles, as well as aircraft, undergo dynamic testing, also known as modal testing or ground vibration testing (GVT). Such testing is conducted to validate pre-test finite element models (FEMs) used for analyzing and verifying loads. The testing confirms the vehicle's modal characteristics (natural frequencies, mode shapes, and damping). Typically these frequencies are very low (approximately 1 hertz to tens of hertz) and well under 50 hertz. The IVGVT will provide guidance, navigation and control (GN&C) with the test verified structural models required to certify that the vehicle is ready to fly. Ares I will have the lowest primary bending frequency of any vehicle that NASA has ever flown so understanding the flex properties of this vehicle are especially important. By measuring the response at the precise location of the flight control sensors to a known excitation a significant amount of uncertainty can be removed from the analysis only models. Furthermore, the IVGVT can provide data for thrust oscillation (TO) mitigation models, propellant tank slosh models and LOX/LH<sub>2</sub> propellant system oscillation or "POGO" models, although that is not in the current requirements.

Without test-calibrated integrated vehicle ground vibration test (IVGVT) models, the model uncertainty factor (MUF) used in verification loads models are not updated and remain at earlier phases of the design. This can translate into increased mass margins. IVGVT can permit structural loads to be better understood and modeled. With the IVGVT data, the structural design of the Ares vehicle can become more efficient, thus permitting improved mass margins. If model uncertainties are too large, GN&C stability requirements can either not be met or GN&C can become more complicated. Model inaccuracies in the bending dynamics of the vehicle that are not corrected with IVGVT results could create an unstable control system design, which could result in loss of the mission. A GVT also supports GN&C analysis by reducing flex model uncertainty. There is a limit to how much flex uncertainty that the GN&C can tolerate before dispersed stability requirements are exceeded.

The Aerospace Corporation conducted a study of 47 launch and space vehicle test programs<sup>1</sup>. In all but one program, the analytical models required updating prior to final vehicle deployment. The study's authors concluded that they were "not aware of a single analytical model of complex structure that has had acceptable agreement with its mode survey test data before adjustment; significant changes in loads from analytical to test-verified model."<sup>2</sup>

Failure to conduct such testing often has catastrophic consequences. The Delta III launch vehicle was destroyed on its maiden launch due to the control system responding to a 4 hertz oscillation that would have smoothed on its own without correction. Designers had relied on known Delta II vehicle responses even though the Delta III launch vehicle had a significantly different configuration, with an increased-diameter first stage fuel tank, a shorter length, two additional solid rocket motors, and a new second stage engine fueled by liquid oxygen/liquid hydrogen (LOX/LH<sub>2</sub>). Based on the heritage Delta II system modes, the Delta III control software responded to a vehicle mode (oscillation) that did not require correction. Had the program conducted dynamic testing on the Delta III, it is likely this mode would have been understood and the control software adjusted to accommodate it.<sup>3</sup>

Similarly, the Ariane 5 was lost on its inaugural flight due to a lack of understanding of the vehicle's new engine nozzle and a decision by management not to compensate by adding additional safety margins into the vehicle's design and testing. The loss of the satellite payload resulted in the need for Arianespace to conduct a further demonstration flight with no payload before another paying customer would sign up to use the launch system.<sup>4</sup>

More recently, the commercially developed SpaceX Falcon 1 suffered a partial failure on its second test flight in March 2007. The launch went well until separation of the first and second stages. The first stage bumped the engine bell of the second stage engine as the interstage separated. A circular coning oscillation began and increased in amplitude causing the vehicle to roll. This ultimately produced a vehicle roll that caused the LOX tank to slosh due to the amplified oscillation. LOX tank slosh increased the oscillation, which would normally be compensated for by thrust vector control (TVC). The increased oscillation caused the TVC to overcompensate the correction, which in turn led to premature burnout of the second stage engine and a failure to meet mission objectives. Perhaps some modal characteristics of the Falcon 1 vehicle were not well understood if a bump could excite a mode that would persist and ultimately doom the mission. Falcon 1 is an example of the worst modal attributes coupling together (natural modes, slosh modes), leading to TVC overcompensation and perhaps failure of other systems to respond. More ground testing, including dynamic testing, could have helped identify these modes prior to launch, ensuring better characterization and design of the structural and slosh modes and the vehicle's ability to control them.

The size of NASA launch vehicles necessitates extensive planning to ensure the vehicle and facility meet requirements not only for good test results but for the safety of those setting up and conducting the test. NASA is currently developing the next generation of launch vehicles—the Ares I crew launch vehicle and the Ares V cargo vehicle—along with the Orion crew exploration vehicle. Both Ares vehicles will require a GVT to validate analytical models to support loads and GN&C modeling.

The Saturn and Space Shuttle programs both performed subscale model dynamic tests. Saturn used a 1/10<sup>th</sup> scale model. Shuttle used a 1/4 scale model. Ares I analysts have determined that Ares I will not require a subscale model due to its simple in-line configuration and payload and because NASA now uses faster, more accurate computational tools. While useful in developing designs for the earlier projects, modern tools allow Ares I to omit the cost and time required to perform subscale model testing.

Planning for the Ares I/Orion Integrated Vehicle GVT has been ongoing since the inception of the Constellation Program. This planning draws heavily on the historic data archived in NASA libraries for Saturn V and Space Shuttle dynamic testing in the dynamic test stand at Marshall Space Flight Center (MSFC). The Ares I vehicle's shape is significantly different from Saturn V and Shuttle. The Ares I crew launch vehicle has a large-diameter upper stage (approximately 18 feet) and a small-diameter first stage (approximately 12 feet). The IVGVT has already conducted two Subject Matter Expert (SME) reviews to obtain the evaluation and lessons learned from experts from both the Saturn and Shuttle GVT projects. The availability of historic records and professional authorities with hands-on GVT experience has been a tremendous aid in IVGVT planning. A third subject matter expert (SME) review is planned prior to the Ares I Critical Design Review (CDR).



While not an objective of dynamic testing per se, the dynamic test in TS 4550 represented the first time the entire Saturn V and Space Shuttle vehicles were stacked. It will be the same with Ares I. It is an excellent opportunity to perform a path-finding vehicle stacking activity prior to delivery to the Kennedy Space Center (KSC) for launch preparations. In fact the IVGVT team will receive an Upper Stage Pathfinder test article. The Pathfinder will be used to dry run a number of activities related to transportation, ground support equipment (GSE), special test equipment (STE), stacking, various procedures, interfaces, and fit-up in the Second Stage Test Position #3 in Test Stand 4550.

## **SATURN V**

NASA planned and executed a GVT during the Saturn V program, called Dynamic Vehicle Test (DVT). The test was performed on a full-scale test article to determine the structural dynamic characteristics for flight control system design and to verify the vehicle's structural integrity. The test article was built to flight article specifications. Deviations from these specifications were built in to ensure that the overall dynamic response of the vehicle was not changed.<sup>5</sup>

The Saturn V vehicle consisted of three booster stages, the instrument unit (IU) and the payload. Fully fueled, the vehicle weighed approximately six million pounds, was 365 feet tall, and was 33 feet in diameter at the base. De-ionized dichromate water was used to simulate the propellant, liquid oxygen (LOX) and RP-1, in the first stage as well as the simulant for LOX in the second and third stages. Due to the difficulties of adequately simulating liquid Hydrogen (LH<sub>2</sub>), the LH<sub>2</sub> tanks were left empty in the second and third stages for lateral testing and were weight-simulated with water for longitudinal and roll testing.<sup>6</sup>

Test Stand 4550 (TS 4550) was built at MSFC during 1962-1964 to perform dynamic testing for the Saturn program. Due to the very large size of the Saturn V vehicle, TS 4550 is 360 feet high. The 200-ton stiff-leg crane on top of the building adds 64 feet to the overall height. Platforms capable of folding back and away from the test article were built at 24 foot levels providing access to the vehicle.<sup>7</sup> The vehicle was handled in the stand by derrick cranes installed on the roof and about halfway up the exterior of the stand.<sup>8</sup>

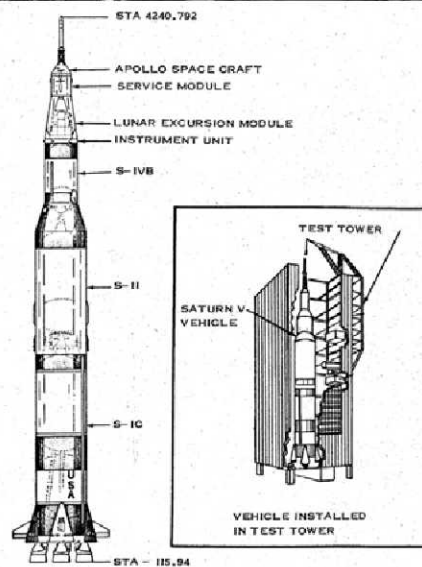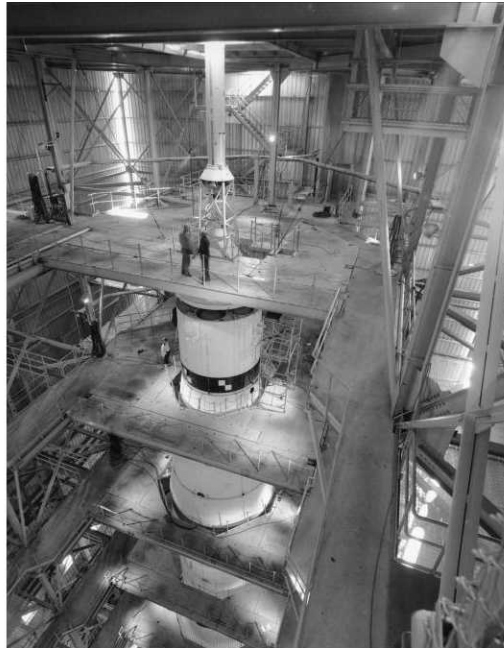

**Figure 1 - Saturn V test article and installed in TS 4550**

The suspension system required to simulate free flight was a particular challenge. Suspending the vehicle by cables would not work, as the cables resonate at frequencies similar to that of the vehicle which might have complicated or invalidated test results.

NASA developed a state-of-the-art suspension system to simulate the free-free boundary conditions of flight. The hydrodynamic support system (HDS) consists of oil bearings and vertical gas springs for lateral and roll stability (Figure 2). Oil under pressure was pumped between flat contacting surfaces to provide a near-frictionless support. This system transmits the heavy vehicle load directly to the ground, enabling the support mass to be relatively small.<sup>9</sup> The HDS units and system were so effective that the entire six-million-pound vehicle could be excited in its low frequency suspension modes by two people pushing the fins on the first stage, deflecting the vehicle as much as two inches.<sup>10</sup>

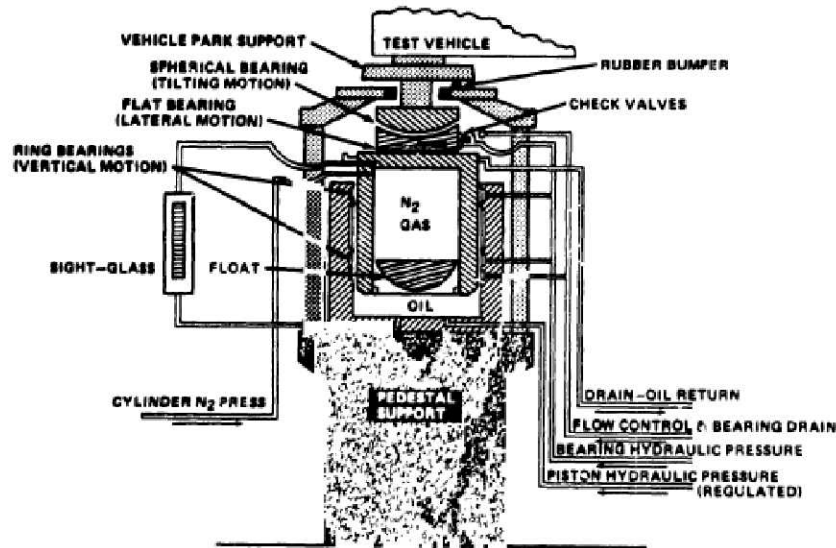


Figure 2 - Hydraulic Support System (HDS)

Lateral support of the vehicle was provided by two sets of lateral stabilizing springs. These springs were located as close to the mean nodal points as possible to minimize their impact on the overall bending modes of the vehicle. An upper stabilizing system of 16 springs was attached tangentially to provide roll restraint and keep the vehicle centered.<sup>11</sup>

The excitation consisted of a thruster system with a four-inch single amplitude linear stroke with 20,000 pounds of output. It was eventually determined that the four-inch stroke was not required and that a 0.5-inch stroke would suffice. The initial requirement was based on an excitation of sufficient amplitude at the sensor point to accurately determine mode shapes with available instrumentation. However, due to improvements in instrumentation sensitivity and less-than-expected modal damping, the lower stroke option would have been adequate.<sup>12</sup>

Instrumentation consisted of accelerometers, rate gyros, pressure sensors and strain gages. A typical test used 120 sensors feeding directly to the Data Acquisition System (DAS). The DAS automatically controlled the frequency sweeps and frequency increment changes. To record or check data, the DAS used three cycles at 900 data points per second from all the sensors simultaneously.

The DVT tested three configurations of the Saturn V. Configuration I consisted of the S-IC first stage, S-II second stage, S-IV third stage, instrument unit (IU), Command/Service Module (CSM) and Launch Escape System (LES). Configuration II included the S-II second stage, S-IV third stage, IU, CSM and LES. Configuration III included the S-IVB-D third stage, IU, CSM, and LES. All configurations tested both the liftoff and burn out conditions of the fuel tanks.

Dynamic testing was conducted on the Saturn V test vehicle between October 1966 and August 1967. A series of test were performed, including force linearity, ring-out damping and ring mode. The force linearity test excited the vehicle at three different force levels at each resonant frequency to determine nonlinear characteristics of the vehicle. The first four flexible mode resonant frequencies and measurement of the logarithmic decay of response to determine sensor damping when force was suddenly removed was measured by the ring-out damping test. The ring mode test was an incremental frequency sweep to determine the IU ring mode activity.<sup>13</sup>

The mathematical model developed during pre-test analysis was verified by the dynamic test and used to analyze the flight vehicle and account for mass and stiffness differences. Generally, the correlation between test results and this model were very good. A major difference, however, was found at the flight gyro cold plate in the IU. The control gyro was located on the upper half of this plate, which had a higher slope than the lower half. This made the analytical

flight control parameters marginal. This finding resulted in the relocation of the control gyro to the lower half of the plate where it correlated well with analytical predictions.<sup>14</sup>

The following table summarizes the major findings and likely consequence found during the Saturn V DVT.<sup>15</sup>

**Table 1. Dynamic vehicle testing helped identify several critical issues during Apollo that could have resulted in loss of mission or crew.**

<b>Problems Discovered</b>	<b>Hardware Impacted</b>	<b>Consequences if Not Discovered</b>
<b>Design deficiency in the SPS tank supports.</b> Unexpectedly high local resonant coupling was detected between the SPS and its bulkhead support.	The upper support bracket for the SPS tanks was redesigned to eliminate a strong tank cantilever mode.	Hardware failure resulting in loss of mission and possible crew loss.
<b>High LOX and fuel dynamic tank bottom pressures.</b> These pressures were under-predicted by a factor of 2. The significance of these pressures was not understood until after pogo occurred on AS-502.	The higher tank pressures contributed to the S-IC pogo accumulator hardware design.	Potential loss of vehicle and crew due to pogo.
<b>High 18 Hz S-IC Crossbeam mode gains.</b> DTV data showed that an accumulator should not be used on the inboard engine.	Elimination of a planned inboard engine accumulator.	Potential loss of vehicle and crew due to pogo between the 18 Hz accumulator mode and the 18 Hz crossbeam mode.
<b>Local rotation of the flight gyro support plate.</b> Vehicle dynamic shears and moments deformed the support plate. The math model under-predicted this deformation by 135%.	The gyros were relocated to the bottom of the support plate where the local rotation was much less. This required wire harnesses of new length. The flight control filter network was redesigned.	Flight control instability resulting in loss of vehicle.


## SPACE SHUTTLE

NASA authorized the development and manufacturing of the National Space Transportation System, commonly called the Space Shuttle, in 1972. The Space Shuttle launch vehicle consists of the orbiter, a winged vehicle capable re-entry and controlled landing as a reusable craft. At launch, the orbiter is mated to an external tank (ET) that supplies the LOX/LH<sub>2</sub> propellant to the orbiter's three main engines. Two reusable solid rocket boosters (SRBs) provide additional power at launch. The launch assembly is 184 feet tall and 122 feet long with a wing span of 78 feet. The launch vehicle weighs 4.5 million pounds at liftoff (weight may vary depending on payload). On the re-entry runway, the orbiter is 57 feet tall from the landing gear to the top of the vertical stabilizer. The STS can lift a payload of 35,000 pounds to orbit. The orbiter can carry a crew of up to seven.

The Space Shuttle is the first reusable space vehicle and as such represented new challenges to design and analysis due to the coupled interaction of the four-body configuration (orbiter, solid rocket boosters and external tank) with many joints and local load paths. Viscoelastic effects were an added complexity due to the solid rocket boosters (SRBs) and their unsymmetrical stiffness and mass effects on the orbiter. A vigorous dynamic test program was

planned that included not only the ¼-scale model, but also a horizontal GVT (HGVT) performed on the orbiter by itself and a mated vertical GVT (MVGVT) performed on the four-body vehicle to validate the mathematical models.

The MVGVT was performed between the summers of 1978 and 1979 at MSFC in TS 4550. The vehicle test configuration necessitated modifications to the test stand and the HDS used for Saturn V testing (Figures 3 and 4). TS 4550 was designed to test vehicles larger than the Saturn V, specifically a vehicle with a 50-foot diameter and about the same height as Saturn V; however the interior of the stand required modifications to accommodate Shuttle dynamic testing.<sup>16</sup> Three columns and all horizontal and vertical connectors to them were removed. Five new columns were added and the derrick crane was relocated. The door was widened to allow the orbiter to be emplaced in one piece.

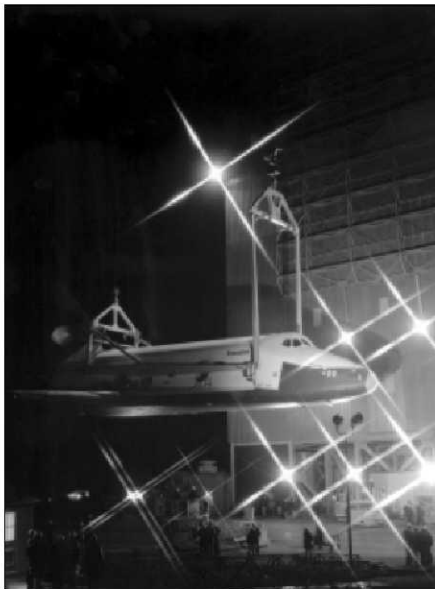

**Figure 3 - Orbiter Prepared for Lift into TS 4550**



**Figure 4 - Orbiter Lifted into TS 4550**

The Saturn-era HDS's were used to provide the simulated free-free boundary condition representing free flight. To save cost, adapter frames were developed for the Saturn-era HDS. These adapter frames required removing the SRB nozzles, as the weight of these components was compensated by the adapter frames.

Interfaces between the ET-SRB and the ET-orbiter (Figure 5) were of prime importance and were heavily instrumented. The ET also required extra instrumentation to adequately characterize and understand the tank, sidewalls, bulkhead and sump areas. The MVGVT used 320 channels of accelerometers, 30 channels of strain gauges, 40 channels of force transducers, 10 channels of pressure transducers, and 9 channels of rate gyros.<sup>17</sup>




**Figure 5 – Space Shuttle Orbiter, External Tank, and Solid Rocket Boosters in TS 4550**

The MVGVT shakers were either rigid or suspended 150 foot-pound and 1,000 foot-pound electrodynamic units. The vehicle did not exhibit any natural frequencies lower than 100 hertz. The suspended shakers were free pendulums with a maximum frequency of 0.5 hertz.<sup>18</sup>

During MVGVT, sinusoidal excitation was applied to the vehicle by driving shakers located to excite and isolate all significant symmetrical and asymmetrical vibration modes. The transverse excitation range was 1.5 to 30.0 hertz; the longitudinal excitation range was 1.5 to 50.0 hertz.

A new data system was designed and installed, the Shuttle Modal Test and Analysis System (SMTAS). The SMTAS was a digital system capable of maintaining modal excitation control, acquiring modal response data and processing, and displaying real-time data. Off-line, the SMTAS could perform data transformation, math model matrix loading, mode shape, frequency, generalized mass, damping, calculations and modal orthogonality checks.<sup>19</sup> The SMTAS provided control for 24 shaker channels capable of driving 38 shakers.<sup>20</sup>

The vehicle was tested in five configurations during the MVGVT, two for the four-body vehicle and three for the two-body vehicle (Figure 6). The four-body vehicle consisted of the orbiter, two solid rocket boosters (SRBs) and the external tank (ET). This was tested at lift-off and pre-SRB separation (burn-out) vehicle configurations. The two-body vehicle consisted of the orbiter and ET. This was tested at start of boost, mid-boost and end of boost vehicle configurations.

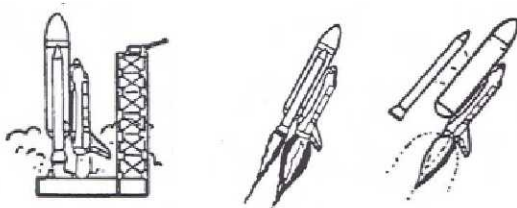

**Figure 6 - Shuttle MVGVT Test Configurations**

Results of the MVGVT generally showed mode shapes and frequencies below 10 hertz to be good. Frequencies between 10 to 20 hertz ranged from good to fair. Frequencies greater than 20 hertz ranged from good to poor. Frequencies of interest to analysts were below 10 hertz, so the structural dynamic models were judged adequate for flight certification.

Major test results identified local resonances in the SRB rate gyros. These resonances corrupted sensor signals. If they had occurred during flight, they would have caused the possible



loss of the sensor or vehicle. Anomalies were also observed in the orbiter side-mounted rate gyros.

Overall, structural damping data ranged from 0.1 percent to greater than 10 percent. Average modal damping was between 1 percent and 3 percent. Major test results identified that the SRB rate gyros measured a local structural resonance. If not corrected, this signal content due to local effects (to the SRB RGA) would likely have caused the loss of the first Shuttle mission. Anomalies were also observed in the orbiter side-mounted rate gyros. This damping data was invaluable in the flight certification stability margins.<sup>21</sup>

The following table is a summary of the major findings and likely consequences found during the Space Shuttle MVGVT.<sup>22</sup>

Problems Discovered	Hardware Impacted	Consequences if Not Discovered
<b>SRB-mounted rate gyros exhibited abnormally high transfer functions.</b> The rate gyros mounted on the forward SRB ring frames resonated at local frequencies and high gains that were critical to flight controls.	Structural redesign was required to stiffen the SRB ring frame, which raised the local resonant frequencies and reduced the gain.	Flight control instability and possible loss of vehicle.
<b>Axial Space Shuttle Main Engine (SSME) frequencies and mode shapes did not correlate with pre-test analysis.</b> A half shell dynamic math model using symmetry was used in pre-test analysis.	A new three dimensional asymmetric math model of the SSME engines and thrust structure was required. No hardware changes necessary.	Pogo stability analyses would have been suspect.
<b>Test rate gyro values showed greater response variations than analysis.</b> Response variations between the Rate Gyro Assemblies (RGAs) were much larger than those used in the analytical studies in determining the Redundancy Management (RM) trip levels.	RM software trip levels and cycle counter levels were increased. The fault isolation routine was modified to inhibit kicking out RGAs and ACCs after first sensor failure.	Flight control instability and possible loss of vehicle.

The Space Shuttle was the first crewed NASA spacecraft to fly humans on its inaugural launch. Results of the dynamic testing during the MVGVT were critical to the decision to launch the vehicle without first performing unmanned flight tests. Clearly the verification of vehicle mathematical models was vital to the successful first flight and the eventual assessment to declare the Shuttle ready for crewed flight. Without this test data to verify the models, confidence to launch humans on the first flight of the vehicle would have been greatly reduced.

## ARES

In 2005, NASA began work on the Constellation Program to return humans to the Moon and build a permanent outpost there as a stepping stone to exploring Mars. The Ares Projects within the Constellation Program are responsible for developing, building and testing the Ares I and Ares V launch vehicles.

The Ares I crew launch vehicle will lift the Orion crew module to low Earth orbit. Ares I is an in-line, two-stage vehicle. Ares I is 325 feet tall, weighs approximately two million pounds at launch, and is capable of lifting 56,500 pounds into low Earth orbit. Ares I has two missions: carry up to six crew (or cargo) to the International Space Station or carry four astronauts to low Earth orbit for rendezvous with Ares V for missions to the Moon. The first stage is a five-segment solid rocket booster based on the heritage Space Shuttle design, and, like the Shuttle SRBs, is reusable. The second stage, or Upper Stage, is powered by the J-2X engine, based on the Saturn second- and third-stage J-2 engine. The Orion crew module sits atop the second stage.

The Ares V cargo launch vehicle will be a heavy-lift vehicle designed to launch cargo and rendezvous with Ares I in Earth orbit. The core stage will be powered by six RS-68 LOX/LH<sub>2</sub> engines. Two 5.5-segment SRBs, like the first stage of Ares I will also provide launch power. The second stage, or Earth departure stage (EDS), will be powered by the same J-2X engine used for the Ares I second stage. The Altair lunar lander is the nominal payload.

Ares V's mission is to lift Altair and other cargo aboard the Earth departure stage to low-Earth orbit where it will rendezvous with the Orion crew module prior to its journey to the moon. Ares V will be 381 feet tall, weigh 8.1 million pounds at launch, and will be capable of lifting about 414,000 pounds into low Earth orbit and 156,700 pounds to lunar orbit.

Plans to perform the Ares I Integrated Vehicle GVT (IVGVT) began in early 2006. The models correlated from IVGVT test data will support the Orion 2 Design Certification Review (DCR) in January 2015. The DCR supports the first crewed launch of the Ares I/Orion vehicle planned for March 2015. The detailed schedule is depicted in Figure 7, below.

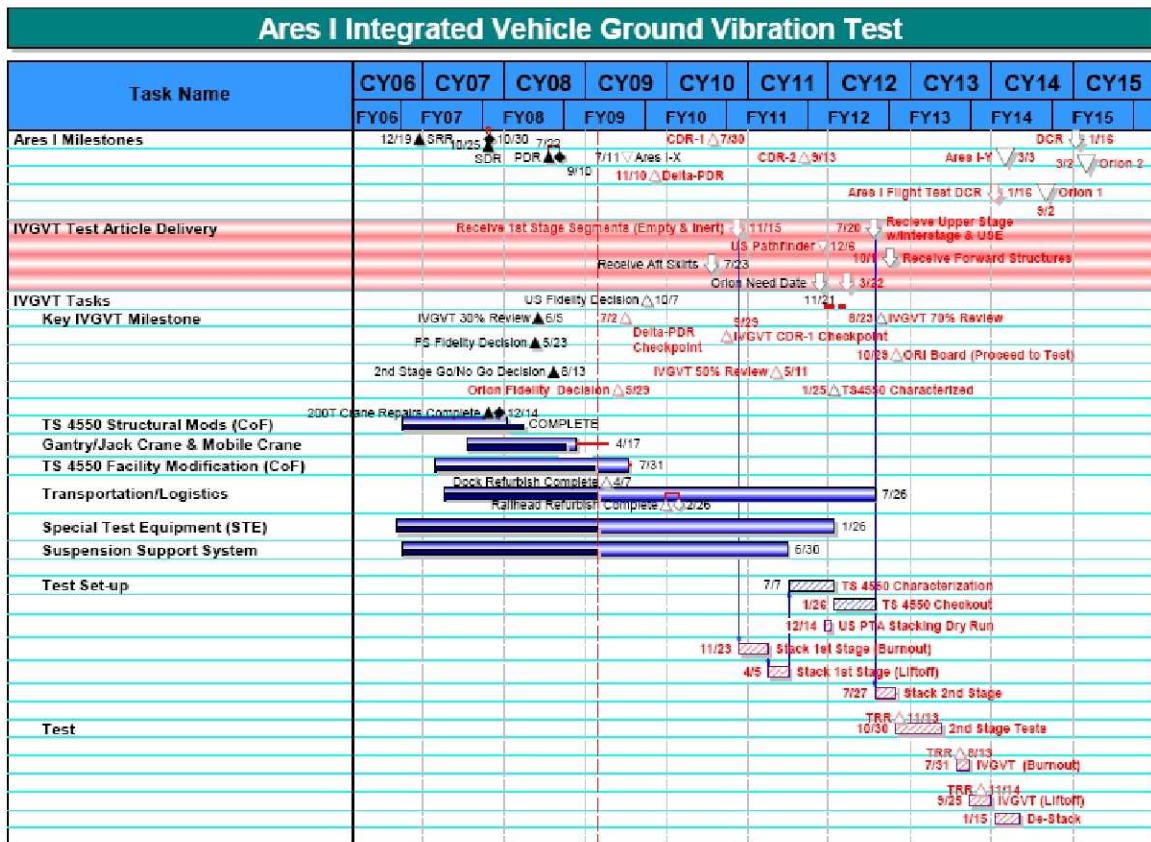



Figure 7. The Ares IVGVT schedule shows most of its work being completed between 2010 and 2014.

After more than 25 years since the Space Shuttle MVGVT, TS 4550 is being repaired and modified to conduct the Ares I IVGVT (Figure 8). In 1987, the United States Department of the Interior's National Park Service designated TS 4550 a national historic landmark.



**Figure 8. TS 4550 Preparing for IVGVT.**


Because of its mothball state since Shuttle-era MVGVT, Test Stand 4550 was inspected and necessary structural repairs are being made to bring it up to safety and IVGVT facility requirements. The 200-ton capacity derrick crane on the roof of TS 4550 underwent inspection and load testing. Upgrades and repairs to the 200-ton capacity roof derrick crane include installation of a new motor and controls. In March 2008, the crane was used to remove the roof panels and lower the door for the first time since the MVGVT. The Shuttle-era platforms and Special Test Equipment (STE) have been removed and additional equipment is being installed to meet current safety codes and future operational needs (Figure 9).

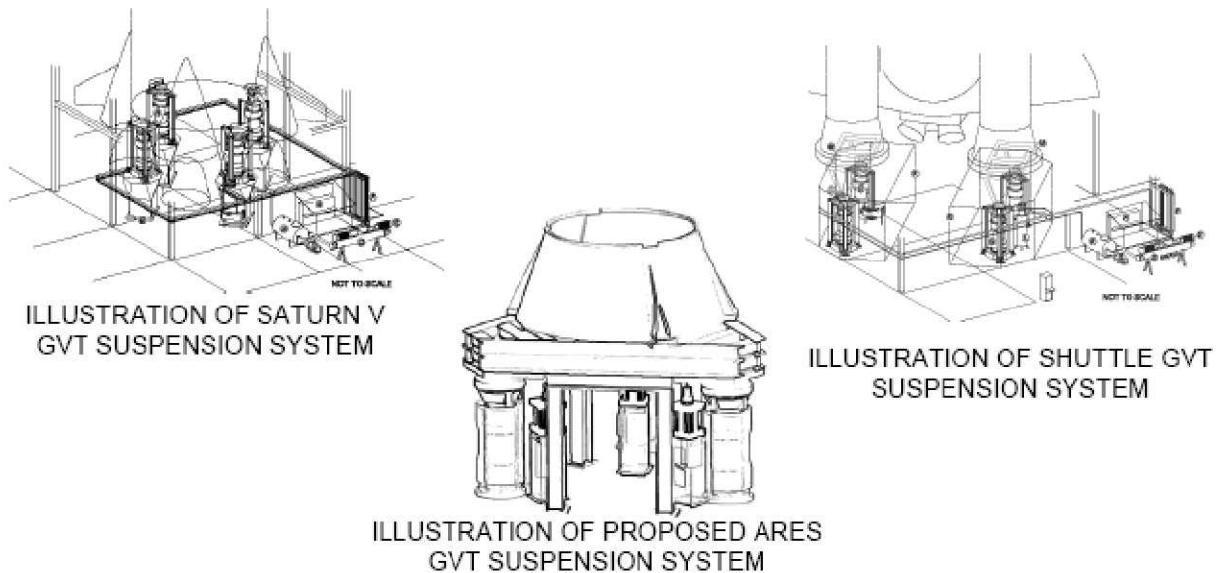

**Figure 9. Since the 1960s, Test Stand 4550's HDSs have been adapted to support a variety of vehicles and test positions.**

The platforms will be replaced with mast climbers (Figure 10) that provide ready access to the test articles and can be moved easily to support different test positions within the test stand (Figure 9). IVGVT is using modified, commercially available, industrial mast climbers instead of

building numerous fixed individual test article access platforms. The mast climbers allow almost unlimited vertical and circumferential access to the test article from the First Stage Aft Skirt to the top of the Orion LAS.

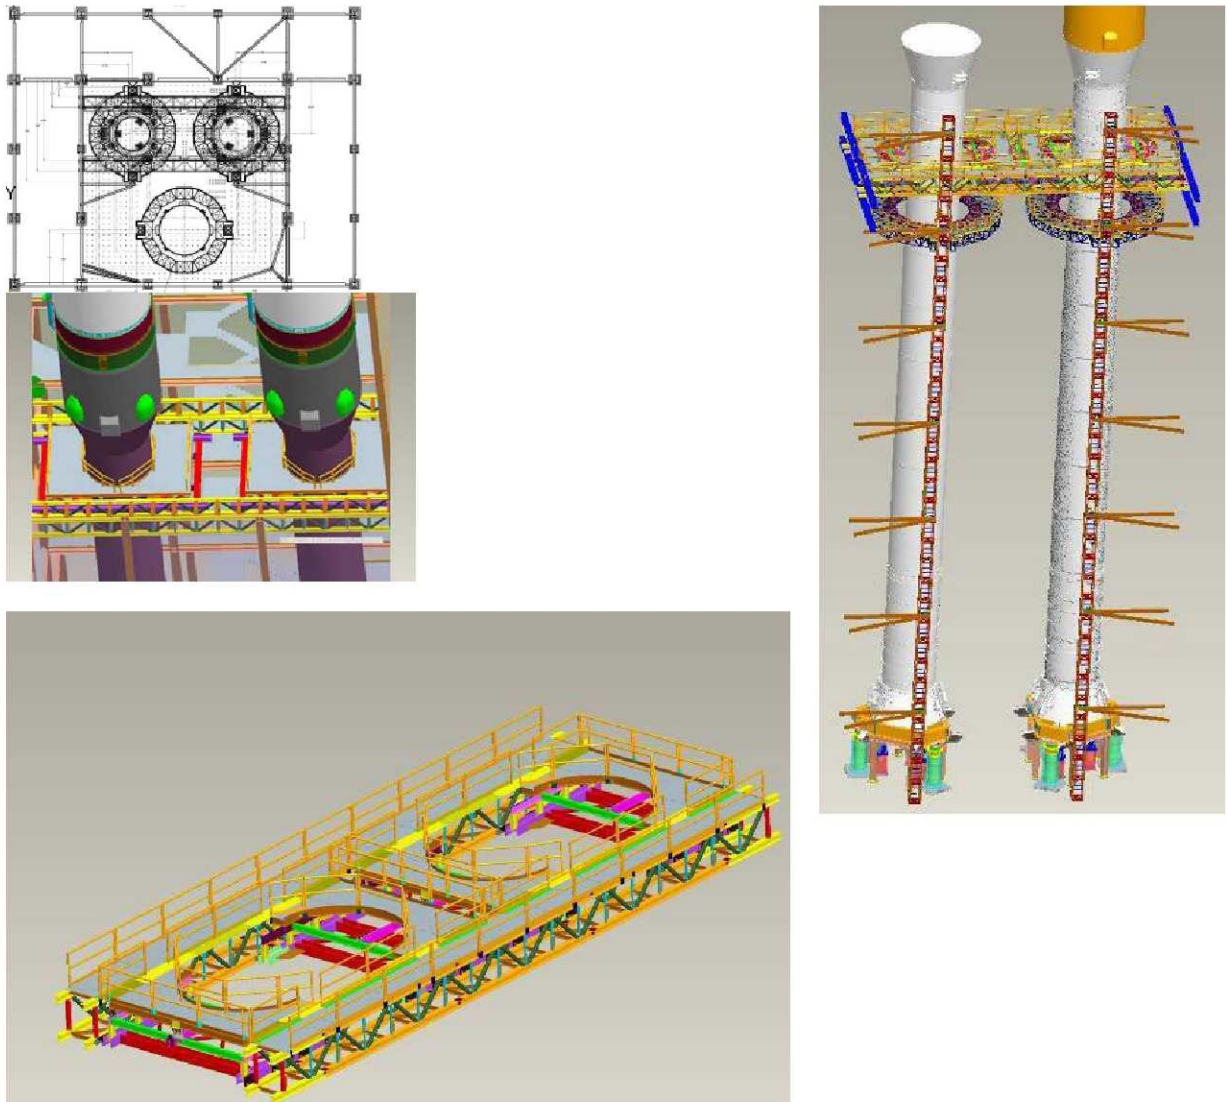

**Figure 10. Test positions and mast climber concepts for TS 4550 (Images provided by MSFC Engineering Directorate).**

The Upper Stage IVGVT test article will be shipped to Redstone/MSFC by NASA barge (Figure 11), from Michoud Assembly Facility (MAF) [near New Orleans, LA] and move by convoy to TS 4550.



**Figure 11. NASA will use the Space Shuttle’s external tank barge to deliver the upper stage IVGVT unit.**

The Orion IVGVT test article will be shipped via the “Super Guppy” cargo aircraft to the Redstone Arsenal airfield and moved by convoy to TS 4550 (Figure 12). Some Orion hardware will travel to TS 4550 from Glenn Research Center’s Plum Brook facility in Ohio and some from Langley Research Center in Virginia.



**Figure 12. The Super Guppy was first developed to transport vehicle components of the Apollo Program.**

Ground Support Equipment (GSE) is an important aspect of IVGVT. GSE is required to unload test article hardware at the entry point to MSFC; transport it to TS 4550 from the entry point; stack, destack, and relocate hardware in the three Test Positions in TS 4550 (Figure 13). Two new cranes have been procured: a jack/gantry crane and a mobile crane to aid in moving the test articles both at the test stand and at the new Redstone Arsenal/MSFC railhead where First Stage segments will be received. The IVGVT First Stage test articles will arrive from ATK in Utah in a one-train shipment consisting of 10 railcars (one solid rocket motor (SRM) segment per railcar) and will be moved by convoy to TS 4550 from the MSFC/Redstone railhead. Five First

Stage SRM segments will be filled with inert solid propellant. Five other First Stage SRM segments will be “empty” and are built to represent SRM segments at the First Stage burnout condition. The unloading gantry has been procured for the railhead and has arrived at MSFC; the mobile crane has been procured, but has not been delivered yet.

The GSE also will stage the hardware outside TS 4550 and at other MSFC locations and after completion of the test, the organizations supplying the hardware for the test will be responsible for its disposition hardware from TS 4450. GSE is generally being provided to IVGVT from the Ares I Elements and the Orion Project. Hundreds of GSE items are required for IVGVT. Some GSE will be loaned to the IVGVT team from KSC.




**Figure 13. A variety of cranes will be used to move IVGVT hardware from transportation facilities to Test Stand 4550.**

The design for a new electrical system and for safety modifications for TS 4550 has been developed and released. Work on these modifications began in the fall of 2008 and is scheduled to complete in the summer of 2009.

Phase I of developing the test requirements for the IVGVT was completed in January 2008. This phase consisted mostly of Beam-Model development and exploring frequency ranges of interest. Phase II was completed in June 2008. The test requirements support development of the IVGVT Test Plan as well as the Special Test Equipment (STE) development and design. A draft Test Plan was submitted for review at the Ares I PDR. STE design is in the preliminary phase, which will continue into Spring 2009.

The HDS used for Saturn and Shuttle are being disassembled and evaluated for use during IVGVT. Progress to date is promising. All three HDS units needed to accomplish IVGVT have been refurbished and are undergoing load testing. A fourth refurbished HDS will be kept as a spare. A modular hydraulic powerpack unit has been designed and a contract awarded to build the first of three such units, one unit for each of the three HDS. In parallel with the HDS evaluation, a pneumatic or hybrid system is being explored to offer more efficient test operations

(Figure 14). A decision on what elements of the hydraulic, pneumatic, or hybrid suspension system to use for IVGVT will be made in May 2010.

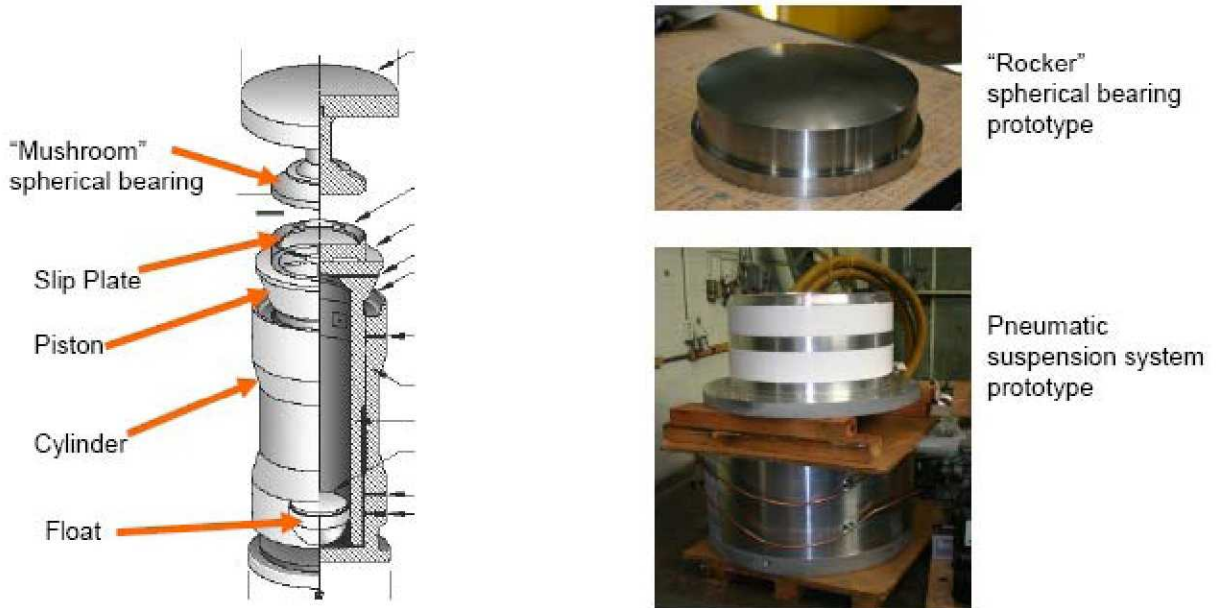


**Figure 14 – While both hydrodynamic and pneumatic alternatives are being explored for the HDS, a hybrid system is also being considered.**

Hydraulic shakers will be used to excite the vehicle and provide input forcing functions at locations to be determined by pre-test analysis. The FITO team anticipates that the majority of shaker locations will be near the base of the vehicle. Testing will include both random excitation and sinusoidal excitation. Random excitation will be used to acquire the primary modal data, while sine sweeps will be used to characterize non-linear behavior and to acquire transfer functions to validate GN&C models.

IVGVT test article instrumentation will consist primarily of tri-axial accelerometers. At this time in test planning and analysis, it is not known if strain gauges or other instrumentation will be required, nor has the requirements development process identified quantity or location for IVGVT test article instrumentation required by the Ares I Elements or Orion. GN&C instrumentation is planned. Instrumentation to support thrust oscillation mitigation models may also be required. Some facility instrumentation will be required to fill, drain, and vent the US tanks. The facility instrumentation and control list is under development. The phase II requirements development will produce a preliminary instrumentation plan in the summer of 2009.

The current plan is that the Ares I IVGVT will test six configurations in three test positions in TS 4550 (Figure 15). TS 4550 Test Position 1 (TP#1) consists of the entire launch stack at liftoff representing Gross-Lift-Off-Weight (GLOW) or total launch stack mass at  $T = 0$  using inert First Stage segments and propellant simulants throughout the vehicle. Test Position 2 (TP #2) consists of the entire launch stack at First Stage burnout (using empty First Stage segments) just before FS and US stage separation. Test Position 3 (TP #3) consists of the Ares I Upper Stage with Orion. Test Position 3 will be used to test four configurations after US stage separation. These are, nominally, J-2X ignition, post Launch Abort System (LAS) jettison, critical slosh mass and J-2X burn-out, also called MECO or Main Engine Cut-Off. Transfer function measurements will be made during all test configurations.

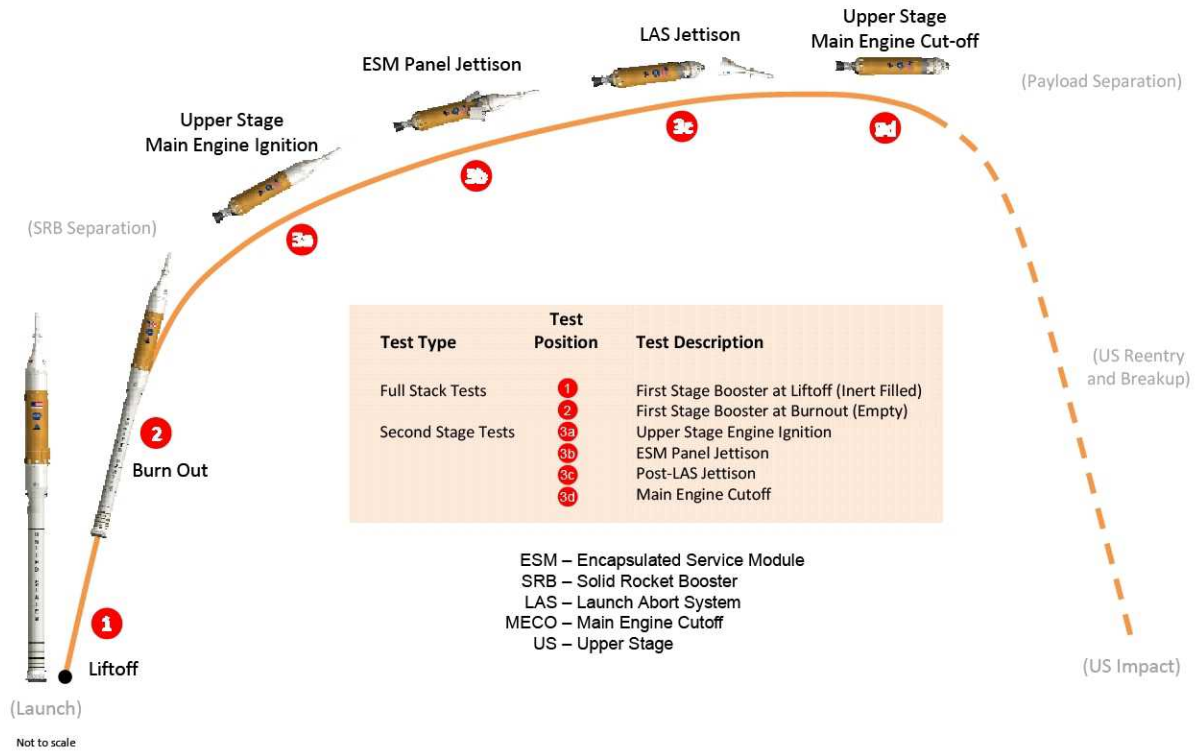


**Figure 15 - IVGVT Test Configurations**

The Ares IVGVT will be conducted from late 2012 to late 2014. It is intended for IVGVT to measure by test the fundamental dynamic characteristics of Ares I during various phases of operation and flight. The final measured results of the IVGVT are clearly dependent on the fidelity of vehicle hardware used during the test and appropriately simulated boundary conditions (BC). A fundamental philosophy of structural dynamic testing is to have as few differences between the test article and the flight article as possible. For accurate testing and model correlation and acceptable levels of uncertainty, both the test and flight configurations must be known and differences understood fully.


To accurately represent the properties of the Ares I flight vehicles, the Ares I IVGVT will be conducted on a test article built to flight-equivalent specifications. The First Stage Element Office is providing one set of first stage segments that will return to flight inventory at the conclusion of IVGVT. The second set of first stage segments containing inert solid propellant will not likely return to flight inventory. The FS IVGVT test article will not have a first stage nozzle for IVGVT but will include a nozzle mass simulator. The FS test article also will have an Aft Skirt. The Ares Upper Stage Engine (USE) Element will provide IVGVT the first US manufactured at MAF. The Ares Upper Stage Engine (USE) Element will provide the US Element will a dynamic mass simulator provide by the J-2X engine contractor. Orion currently plans provide an Orion Ground Test Article (GTA) to IVGVT. The various Ares I test articles and launch sequence are depicted in Figure 16.



## IVGVT Ares I Test Articles

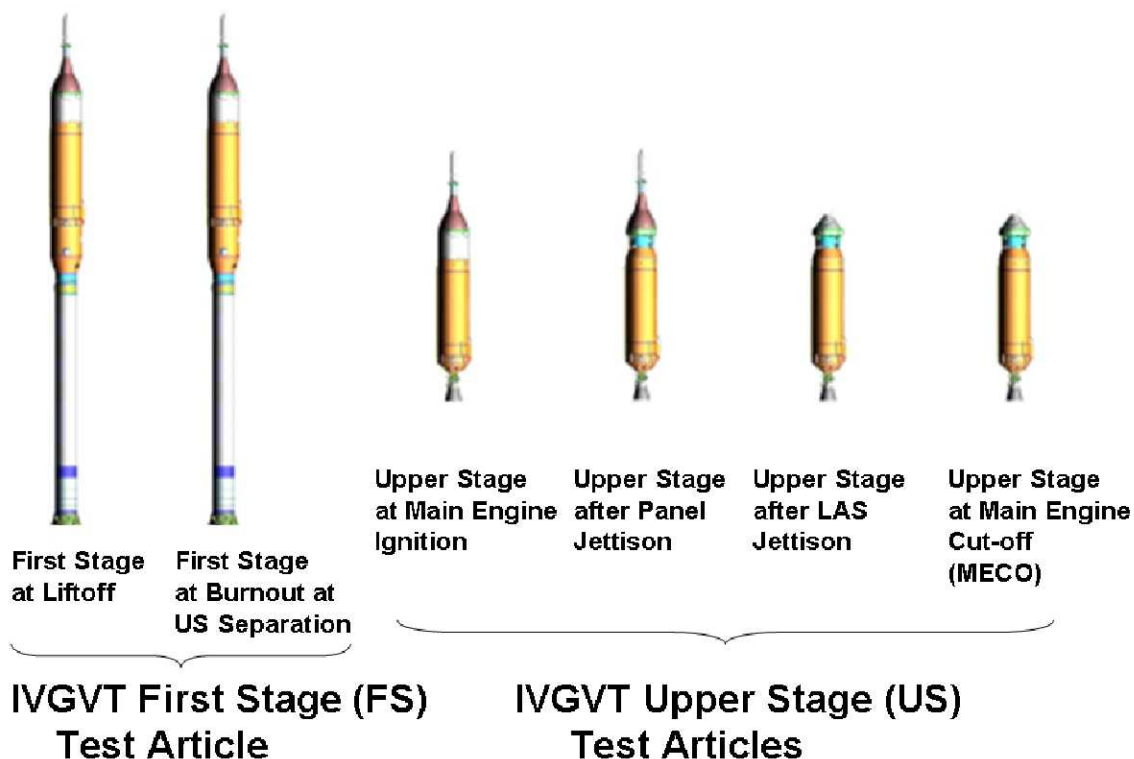

## Launch Sequence

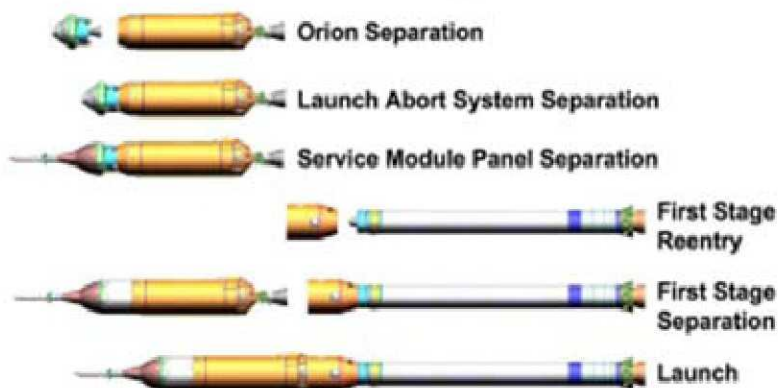

**Figure 16. Ground Vibration Testing will encompass the full range of Ares I launch operations and configurations.**

Mass simulators of certain components may be used for flight-quality components that are not available in the scheduled test timeframe, provided there is sufficient technical rationale to do so. As a general “rule-of-thumb,” IVGVT test article items of less than 25 pounds will be mass simulators. IVGVT and Ares Vehicle Integration analysts will determine which hardware may be mass simulators. Mass simulators will have the correct mass, center-of-gravity, and moments of inertia. The analysts will approve test article configuration prior to beginning a test and approve break-of-configuration before hardware removal and moving on to the next test in a series.

The primary objectives of the IVGVT will be calibrating the Finite Element Models (FEM) for the system. These FEMs are then used for the vehicle certification analysis, Design Certification Review, and approval to fly human-rated missions.

Test objectives pertaining to flight control objectives are to obtain:

- 1) Natural vehicle mode shapes, frequencies, generalized mass, and damping characteristics and coefficients which are used in the stability equations; and
- 2) Amplitude and phase response of the elastic vehicle and transfer functions from thruster locations to all flight control sensor locations.

Structural dynamic test objectives are to obtain:

- 1) Mode shapes, frequencies, and damping to be used as the reference for test calibrated CLV configuration models that form the basis of final verification loads and GN&C controls analysis; and
- 2) Experimental non-linear characteristics of vehicle configurations by exciting the test specimen at different force levels.

Ares V planning and early design is in work at this time, but at a very low level of effort as the Constellation program focus is on Ares I/Orion development and launch. However, initial planning for the Ares V IVGVT has been ongoing. This planning consists primarily of facility studies and a preliminary schedule for long-range budget planning purposes. Ares V efforts are expected to increase in fiscal year 2011, after Space Shuttle retirement.

## **SUMMARY AND CONCLUSIONS**

NASA has conducted dynamic tests on each of its major launch vehicles during the past 45 years. Each test has provided invaluable data to correlate and correct analytical models used to predict structural responses to differing dynamics for these vehicles. With both Saturn V and Space Shuttle, hardware changes were also required to the flight vehicles to ensure crew and vehicle safety.

The Ares I IVGVT will undoubtedly provide similar valuable test data to support successful flights of the Constellation Program. The IVGVT will provide experimentally determined natural frequencies, mode shapes and damping for the Ares I vehicle. This data will be used to support controls analysis by providing this test data to reduce uncertainty in the models. The value of this testing has been proven by past launch vehicle successes and failures. Performing dynamic testing on the Ares vehicles will provide confidence that the launch vehicles will be safe and successful in their missions. In addition, IVGVT will provide the following benefits for the Ares rockets:

- IVGVT data along with Ares development flights like Ares I-X, Ares I-Y, and Orion 1 or other developmental flights will reduce the risk to the Orion-2 crew. IVGVT will permit anchoring the various analytical and operational models used in so many different aspects of Ares operations.
- IVGVT data will permit better understanding of the structural and GN&C margins of the spacecraft and may permit mass savings or expanded day-of-launch opportunities or fewer constraints to launch.
- Undoubtedly IVGVT will uncover some of the “unknown unknowns” so often seen in developing, launching, and flying new spacecraft vehicles and data from IVGVT may help prevent a loss of vehicle or crew.
- IVGVT also will be the first time Ares I flight-like hardware is transported, handled, rotated, mated, stacked, and integrated.
- Furthermore, handling and stacking the IVGVT launch vehicle stacks will be an opportunity to understand certain aspects of vehicle operability much better (for example, handling procedures, touch-labor time to accomplish tasks, access at

interfaces, access to stage mating bolts, access to avionics boxes, access to the Interstage, GSE functionality, and many other important aspects of Ares I operability).

All of these results will provide for better vehicle safety and better stewardship of national resources as NASA begins its next phase of human space exploration.

### ACKNOWLEDGMENTS

The authors wish to thank Bart Leahy, Sr. Technical Writer at Schafer Corporation and the MSFC Engineering IVGVT Team for assistance in writing this paper.

---

### REFERENCES

- 1 Kabe, Alvar, "Design and Verification of Launch and Space Vehicle Structures," AIAA-98-1718 (April 1998).
- 2 Kabe, Alvar, Loads Analysis Model Verification and Validation (Aerospace Corporation).
- 3 Boeing Changes Delta III Control Software, Boeing News Release (October 1998).
- 4 De Selding, Peter B., "Harsh Report Issued on Ariane 5 Failure," Space News (January 2003).
- 5 Covington, Wayne R., Seaholm, Norman A., "Saturn V Dynamic Test Program," Transactions of 1967 National Symposium on Saturn V/Apollo and Beyond, Huntsville, AL (June 12-14, 1967).
- 6 Ibid.
- 7 Ibid.
- 8 Ibid.
- 9 Von Pragenau, George L. "Free Flight Simulated on Ground with Apollo Saturn V Space Vehicle," AIAA/JACC Guidance and Conference, Seattle, WA, (August 15-16, 1966).
- 10 Grimes, P.J., McTigue, L.D., Riley, G.F. and Tilden, D.I., "Advancements in Structural Dynamic Technology Resulting from Saturn V Programs, vol. I, NASA Contractor Report (June 1970).
- 11 Covington, Wayne R., Seaholm, Norman A., "Saturn V Dynamic Test Program," Transactions of 1967 National Symposium on Saturn V/Apollo and Beyond, Huntsville, AL (June 12-14, 1967).
- 12 Ibid.
- 13 Ibid.
- 14 Ibid.
- 15 Ivey, Edward W., "Mated Vertical Ground Vibration Test," NASA Technical Memorandum (July 1980).
- 16 Dyer, Henry C., "Orbiter Structure and Mated Ground Vibration Tests," Presentation to SP-Manager (November 29, 1972).
- 17 Ivey, 8.
- 18 Ibid.
- 19 Ibid.
- 20 Ibid.
- 21 Modlin, Thomas C., Jr., Zupp, George A., Jr., "Shuttle Structural Dynamics Characteristics, the Analysis and Verification," Space Shuttle Technical Conference, Houston, Texas (June 1983).
- 22 Ivey, 85.