

NASA/TM—2010-216262



# High-Efficiency K-Band Space Traveling-Wave Tube Amplifier for Near-Earth High Data Rate Communications

*Rainee N. Simons and Dale A. Force  
Glenn Research Center, Cleveland, Ohio*

*Paul C. Spitsen, William L. Menninger, Neal R. Robbins, Daniel R. Dibb, and Phillip C. Todd  
L-3 Communications Electron Technologies, Inc., Torrance, California*

## NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI Program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Reports Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include creating custom thesauri, building customized databases, organizing and publishing research results.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to [help@sti.nasa.gov](mailto:help@sti.nasa.gov)
- Fax your question to the NASA STI Help Desk at 443-757-5803
- Telephone the NASA STI Help Desk at 443-757-5802
- Write to:  
NASA Center for AeroSpace Information (CASI)  
7115 Standard Drive  
Hanover, MD 21076-1320



# High-Efficiency K-Band Space Traveling-Wave Tube Amplifier for Near-Earth High Data Rate Communications

*Rainee N. Simons and Dale A. Force  
Glenn Research Center, Cleveland, Ohio*

*Paul C. Spitsen, William L. Menninger, Neal R. Robbins, Daniel R. Dibb, and Phillip C. Todd  
L-3 Communications Electron Technologies, Inc., Torrance, California*

Prepared for the  
2010 International Microwave Symposium  
sponsored by the Institute of Electrical and Electronics Engineers  
Anaheim, California, May 23–28, 2010

National Aeronautics and  
Space Administration

Glenn Research Center  
Cleveland, Ohio 44135

## Acknowledgments

The authors would like to thank T.T. Peterson and T.J. Kacpura, NASA Glenn Research Center Program Managers for their support for the NASA's Lunar Reconnaissance Orbiter (LRO) and Communications, Navigation and Networking Reconfigurable Testbed (CoNNeCT) traveling-wave tube amplifier (TWTA) development efforts, respectively.

Trade names and trademarks are used in this report for identification only. Their usage does not constitute an official endorsement, either expressed or implied, by the National Aeronautics and Space Administration.

*Level of Review:* This material has been technically reviewed by technical management.

Available from

NASA Center for Aerospace Information  
7115 Standard Drive  
Hanover, MD 21076-1320

National Technical Information Service  
5301 Shawnee Road  
Alexandria, VA 22312

Available electronically at <http://gltrs.grc.nasa.gov>

# High-Efficiency K-Band Space Traveling-Wave Tube Amplifier for Near-Earth High Data Rate Communications

Rainee N. Simons and Dale A. Force  
National Aeronautics and Space Administration  
Glenn Research Center  
Cleveland, Ohio 44135

Paul C. Spitsen, William L. Menninger, Neal R. Robbins, Daniel R. Dibb, and Phillip C. Todd  
L-3 Communications Electron Technologies, Inc.  
Torrance, California 90509

## Abstract

The RF performance of a new K-Band helix conduction cooled traveling-wave tube amplifier (TWT) is presented in this paper. A total of three such units were manufactured, tested and delivered. The first unit is currently flying onboard NASA's Lunar Reconnaissance Orbiter (LRO) spacecraft and has flawlessly completed over 2000 orbits around the Moon. The second unit is a proto-flight model. The third unit will fly onboard NASA's International Space Station (ISS) as a very compact and lightweight transmitter package for the Communications, Navigation and Networking Reconfigurable Testbed (CoNNeCT), which is scheduled for launch in 2011. These TWTAs were characterized over the frequencies 25.5 to 25.8 GHz. The saturated RF output power is >40 W and the saturated RF gain is >46 dB. The saturated AM-to-PM conversion is 3.5°/dB and the small signal gain ripple is 0.46 dB peak-to-peak. The overall efficiency of the TWT, including that of the electronic power conditioner (EPC) is as high as 45 percent.

## I. Introduction

The Lunar Reconnaissance Orbiter (LRO) is the first mission in NASA's Vision for Space Exploration, a plan to return to the Moon and then to travel to Mars and beyond. The LRO objectives are to find safe landing sites, locate potential resources, characterize the radiation environment, and demonstrate new technology (Ref. 1). NASA desires to transmit to Earth the planetary science data and video images of the Moon from the LRO at much higher data rates than the Apollo missions. The higher data rate requires higher power microwave amplifier. The amplifier has to have high efficiency since the DC power onboard the LRO is limited. In addition, the amplifier has to have very high reliability since the LRO operates in a harsh environment with high

radiation and extreme temperatures, which extends over two years.

Vacuum electronics based devices for space applications such as helix traveling wave tube amplifiers (TWTAs) have demonstrated high on-orbit reliability at microwave frequencies (Ref. 2). In addition, TWTAs can deliver much higher RF output power with higher efficiency at K-Band/Ka-Band frequencies than MMIC based solid-state power amplifiers (SSPAs) (Refs. 3 and 4).

In this paper, we present the RF performance characteristics of a new K-Band helix conduction cooled space traveling-wave tube amplifier (TWT). A total of three such units were manufactured and are fully compliant with the required specifications. The first unit is currently flying onboard the NASA's Lunar Reconnaissance Orbiter (LRO) spacecraft. A photograph of the fully packaged LRO TWT and electronic power conditioner (EPC) is shown in Figure 1. The second unit was set aside as a proto-flight model and subjected to higher degree of mechanical shock and vibrations to evaluate the performance margins. The plan is to fly this unit as a spare on a future mission. The third unit will fly onboard NASA's International Space Station (ISS) as a very compact and lightweight transmitter package for the Communications, Navigation and Networking Reconfigurable Testbed (CoNNeCT), which is scheduled for launch in 2011. The CoNNeCT will investigate reprogrammable radio technology for use during space missions. This investigation will advance a common, software defined radio (SDR) architecture standard for future use on long duration space exploration missions. In addition, CoNNeCT will demonstrate communications from the ISS to the Tracking and Data Relay Satellite (TDRS) constellation at K-Band frequencies (Ref. 5). The above three amplifiers were manufactured by L-3 Communications Electron Technologies Inc., (ETI) under a contract from NASA Glenn Research Center (GRC).

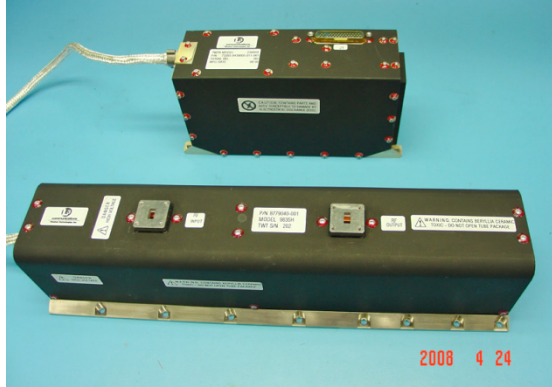


Figure 1.—Photograph of the LRO 40-W K-Band traveling-wave tube in a conduction cooled package attached by an umbilical power cord to an electronic power conditioner located in the background. The TWT input/output waveguide ports are WR-34.

## II. Traveling-Wave Tube Amplifier Design and Modeling

Modern electromagnetic simulation/optimization software tools enabled the first pass design success. These software tools include the U.S. Naval Research Laboratory’s CHRISTINE 3-D Code for high efficiency slow-wave interaction circuit and MICHELLE 3-D Code for multi-stage depressed collector design (Refs. 6 to 8). In addition, thermal modeling/simulation tools enabled the design of an efficient conduction cooled package (Ref. 9), which enhanced the power handling capability of TWT. Furthermore, advances in materials technology resulted in lightweight, temperature stable, high BH product samarium cobalt permanent magnets, which enabled focusing the electron beam. Moreover, advances in tungsten/osmium cathode technology resulted in cathode lifetimes exceeding 20 years in space (Ref. 10).

The baseline design for the LRO TWT was the model 999HA Ka-Band TWT (Ref. 9), which made use of WR-28 waveguide-based input and output couplers. NASA recommended replacing the WR-28 waveguide couplers by larger WR-34 waveguide couplers in the LRO TWT. The advantages are: first, it eliminated the need for a tapered transition from WR-28 to WR-34 waveguide, reducing the overall height of the packaged TWT. Second, it resulted in thicker and larger diameter quartz windows for the vacuum seals inside the TWT, which provided additional strength to withstand mechanical shocks and vibrations and thus enhanced reliability. The proto-flight model TWT test results clearly demonstrated that this was the case. Third, the WR-34 waveguide operates across the frequency range of 22 to 33 GHz,

which includes the frequency bands of interest for NASA’s near-Earth communications. Thus with a minor design change in the helical slow wave circuit, the LRO TWT design can be optimized to meet future near-Earth NASA mission requirements without the need for re-qualification. The WR-34 waveguide lowered the total attenuation of the signal in the waveguide run between the TWT output and the antenna, which enhanced system efficiency.

## III. Requirements for the Lunar Reconnaissance Orbiter Traveling-Wave Tube Amplifier

A brief set of requirements for the LRO TWT and EPC are presented in Tables I and II.

TABLE I.—EPC SPECIFICATIONS

Parameter	NASA specifications
Voltage	7 kV
Mass	1300 gm
Size	20(L) × 7(W) × 11(H) cm

TABLE II.—TWT SPECIFICATIONS

Parameter	NASA specifications
Frequency band	25.5 to 25.8 GHz
Output power, CW	40 W min
Saturated gain	46 dB min
Gain flatness (peak-to-peak)	0.5 dB max
Phase (peak-to-peak)	8 deg max
AM-to-PM	4.5 deg/dB max
VSWR	2.0:1 max
Overall efficiency	44 percent min
Overdrive	+6 dB
Mass	1500 gm
Size	37(L) × 9(W) × 9(H) cm
Input/Output ports	WR-34 waveguide
Operating life/Mission life	14/26 months
Environment	Lunar orbit

## IV. Lunar Reconnaissance Orbiter Traveling-Wave Tube Amplifier and Performance Characteristics

The TWT has a four-stage collector circuit for high efficiency. The collector circuit requires high voltages, which are provided by a standalone 7-kV EPC, which is attached by an umbilical power cord to the TWT. The EPC is designed to operate from an unregulated spacecraft bus voltage in the range of 21.25 to 35 V. The EPC has also a telemetry interface to the spacecraft bus, which provides the ON/OFF state of the TWTA as well

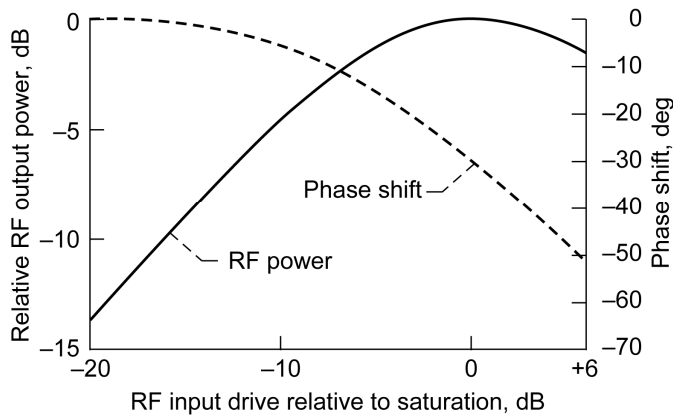


Figure 2.—Measured relative RF output power and phase shift as a function of the RF input drive relative to saturation at the center frequency of 25.65 GHz.

as the anode voltage, helix current and the RF output power. The construction of the EPC is explained in (Ref. 9). The TWTA was characterized over the frequencies 25.5 to 25.8 GHz reserved for NASA’s near-Earth communications. The measured data reported here are at a nominal spacecraft bus voltage of 31 V and ambient temperature of 25 °C.

### A. RF Output Power and Phase Shift

The measured relative RF output power and phase shift as a function of the input drive level is presented in Figure 2. These measurements were carried out at the center frequency of 25.65 GHz. The output power at saturation is 46.22 dB or 41.88 W, which exceeds the requirements of 40 W. The phase shift through the amplifier, as the input drive is increased from small signal to saturation drive, is about 30°. The saturated gain compression is 6.09 dB and the saturated AM-to-PM conversion is 3.5°/dB.

### B. Saturated RF Gain

The measured saturated RF gain as a function of the operating frequency range is presented in Figure 3. The saturated RF gain is about 49.25 dB across the operating frequency range and exceeds the requirements of 46 dB.

### C. Saturated RF Output Power

The measured saturated RF output power as a function of the operating frequency range is presented in Figure 4. The saturated RF output is about 46.25 dB or 42.17 W across the frequency range and exceeds the end of life (EOL) requirements of 40 W.

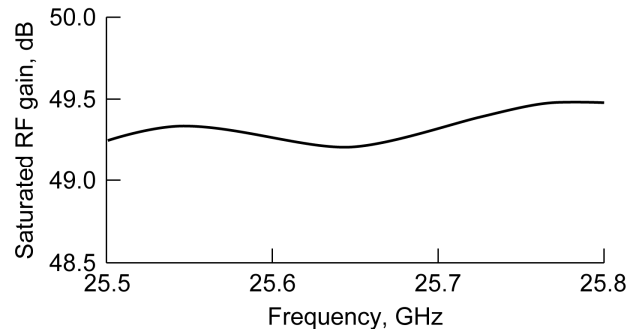


Figure 3.—Measured saturated RF gain as a function of frequency.

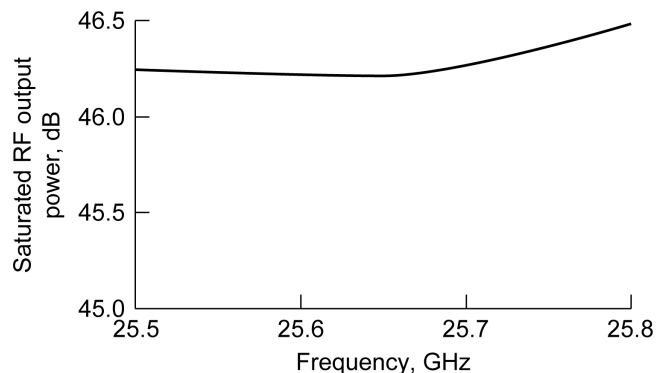


Figure 4.—Measured saturated RF output power as a function of frequency.

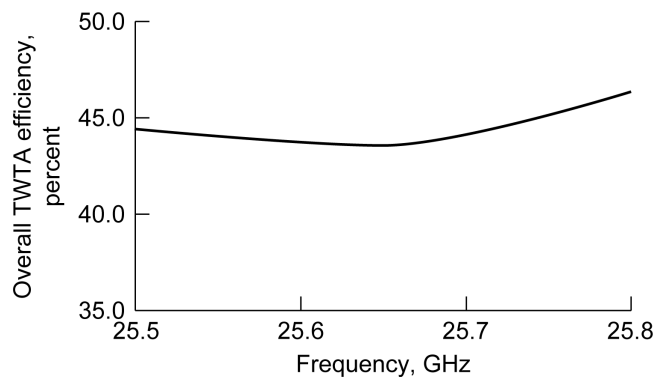


Figure 5.—Measured overall TWTA efficiency as a function of frequency.

### D. Overall Efficiency

The efficiency of the TWT alone is 55.2 percent. However, when the efficiencies of the TWT and the EPC are combined, the overall efficiency of the TWTA is about 45 percent. The measured overall efficiency as a function of the operating frequency range is presented in Figure 5. The overall efficiency exceeds the requirements of 44 percent.

### E. Noise Figure and Second Harmonic Level

The measurements made at the center frequency of 25.65 GHz show that the noise figure is 29.97 dB and the second harmonic level is 23.52 dB below the fundamental.

### F. Small Signal Gain and Phase Shift

The measured small signal gain and residual phase shift as a function of the operating frequency range is presented in Figure 6. The small signal gain ripple is 0.46 dB peak-to-peak, which is within the requirements. The residual peak-to-peak small signal phase after subtracting the linear phase component corresponding to a group delay of 3.798 nS is  $2.02^\circ$ , which is also within the requirements.

### G. Input/Output VSWR

Figures 7(a) and (b) present the measured input/output return loss as a function of frequency. These results indicate that the input/output VSWR is in the range of 1.4 to 1.7, over the operating frequency range of 25.5 to 25.8 GHz, which is within the requirements.

### H. Data Rate

The LRO downlink data rate that this TWTA enables is on the order of 100 Mbps. The modulation is OQPSK. The total volume of data received on Earth per day is on the order of 450 Gb. Compared with the previous Apollo missions to the Moon, the new technology offers several orders of magnitude improvement in data rates and volume.

### I. EMI/EMC

The input filter in the EPC was designed, manufactured and implemented within the physical limitations of the EPC package. This filter did not adequately suppress the conducted emissions from the EPC to the bus. Hence, in order to meet the LRO requirements an external LC filter, which effectively reduced the nonconformance to zero, was designed, manufactured and inserted between the EPC and the bus.

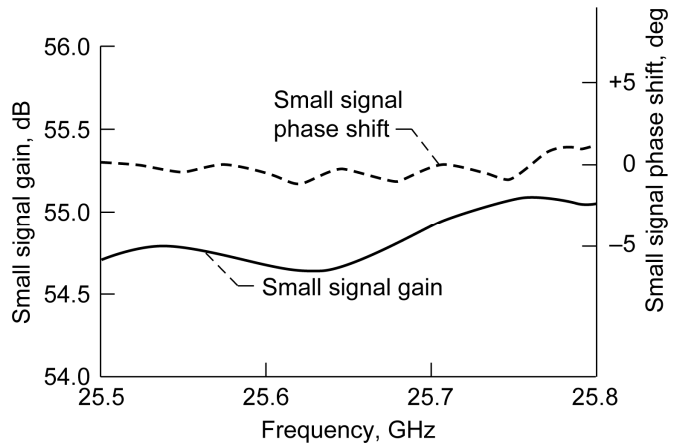


Figure 6.—Measured small signal gain and phase shift as a function of frequency.


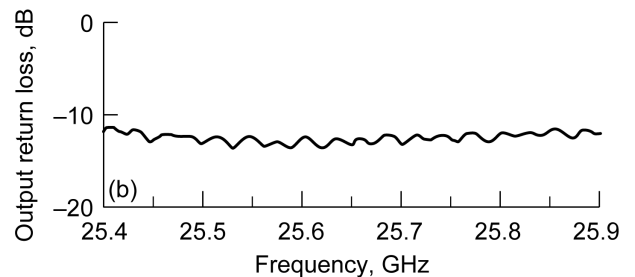


Figure 7.—Measured return loss as a function of frequency. (a) Input port (b) Output port.

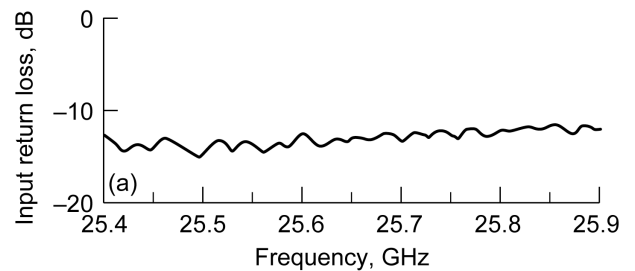

## V. Conclusions and Discussions

The performance parameters of a state-of-the-art compact lightweight K-Band TWTA for NASA's LRO and the CoNNeCT are presented. The saturated RF output power exceeds 40 W and saturated RF gain exceeds 46 dB. The saturated AM-to-PM conversion is 3.5°/dB and the small signal gain ripple is 0.46 dB peak-to-peak. The overall efficiency including that of the EPC is as high as 45 percent. The LRO downlink data rate that this TWTA enables is as high as 100 Mbps, which is several orders of magnitude higher than the Apollo mission. The mass and size of the TWT and the EPC are fully compliant with the specifications presented in Tables I and II.

The TWTA onboard the LRO spacecraft has flawlessly completed over 2000 orbits around the Moon since its launch in June 2009. An independent judging panel and the editors of the R&D Magazine recognized the TWTA as one of the 100 most technologically significant products introduced in the past year and awarded it the 2009 R&D 100 Award. In addition, the LRO was chosen as #3 on Time's 50 Best Inventions of 2008. Furthermore, the December 2009 issue of Popular Science has named the LRO as one of the 100 Best Innovations of the year.

## References

1. <http://lunar.gsfc.nasa.gov/mission.html>
2. E.F. Nicol, B.J. Mangus, and J.R. Grebliunas, "TWTA versus SSPA: Analysis update of the Boeing fleet on-orbit reliability data," *2008 IEEE International Vacuum Electronics Conference Digest*, pp. 169–170, Monterey, CA, April 22–24, 2008.
3. R.N. Simons, J.D. Wilson, and D.A. Force, "High power and efficiency space traveling-wave tube amplifiers with reduced size and mass for NASA missions," *2008 IEEE MTT-S International Microwave Symposium Digest*, pp. 319–322, Atlanta, GA, June 15–20, 2008.
4. R.N. Simons, E.G. Wintucky, J.D. Wilson, D.A. Force, "Ultra-high power and efficiency space traveling-wave tube amplifier power combiner with reduced size and mass for NASA missions," *IEEE Trans. Microwave Theory Tech.*, vol. 57, no. 3, pp. 582–588, March 2009.
5. [http://www.nasa.gov/mission\\_pages/station/science/experiments/CoNNeCT.html](http://www.nasa.gov/mission_pages/station/science/experiments/CoNNeCT.html)
6. D. Chernin, T.M. Antonsen, Jr., B. Levush, and D.R. Whaley, "A three-dimensional multifrequency large signal model for helix traveling wave tubes," *IEEE Trans. Electron Devices*, vol. 48, no. 1, pp. 3–11, Jan. 2001.
7. D.K. Abe, B. Levush, T.M. Antonsen, Jr., D.R. Whaley and B.G. Danly, "Design of a linear C-band helix TWT for digital communications experiments using the CHRISTINE suite of large-signal codes," *IEEE Trans. Plasma Science*, vol. 30, no. 3, part 1, pp. 1053–1062, June 2002.
8. J.J. Petillo, E.M. Nelson, J.F. DeFord, N.J. Dionne, and B. Levush, "Recent developments to the MICHELLE 2-D/3-D electron gun and collector modeling code," *IEEE Trans. Electron Devices*, vol. 52, no. 5, pp. 742–748, May 2005.
9. W.L. Menninger, N.R. Robbins, D.R. Dibb, and D.E. Lewis, "Power flexible Ka-band traveling wave tube amplifiers of up to 250-W RF for space communications," *IEEE Trans. Electron Devices*, vol. 54, no. 2, pp. 181–187, Feb. 2007.
10. J.D. Wilson, E.G. Wintucky, K.R. Vaden, D.A. Force, I.L. Krainsky, R.N. Simons, N.R. Robbins, W.L. Menninger, D.R. Dibb, and D.E. Lewis, "Advances in space traveling-wave tubes for NASA missions," *Proc. IEEE, Special Issue on Technical Advances in Deep Space Communications & Tracking: Part 1*, vol. 95, no. 10, pp. 1958–1967, Oct. 2007.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188		
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>					
<b>1. REPORT DATE (DD-MM-YYYY)</b> 01-03-2010		<b>2. REPORT TYPE</b> Technical Memorandum		<b>3. DATES COVERED (From - To)</b>	
<b>4. TITLE AND SUBTITLE</b> High-Efficiency K-Band Space Traveling-Wave Tube Amplifier for Near-Earth High Data Rate Communications			<b>5a. CONTRACT NUMBER</b>		
			<b>5b. GRANT NUMBER</b>		
			<b>5c. PROGRAM ELEMENT NUMBER</b>		
<b>6. AUTHOR(S)</b> Simons, Rainee, N.; Force, Dale, A.; Spitsen, Paul, C.; Menninger, William, L.; Robbins, Neal, R.; Dibb, Daniel, R.; Todd, Phillip, C.			<b>5d. PROJECT NUMBER</b>		
			<b>5e. TASK NUMBER</b>		
			<b>5f. WORK UNIT NUMBER</b> WBS 342556.06.01.10.01.02		
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191			<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> E-17124-1		
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b> National Aeronautics and Space Administration Washington, DC 20546-0001			<b>10. SPONSORING/MONITOR'S ACRONYM(S)</b> NASA		
			<b>11. SPONSORING/MONITORING REPORT NUMBER</b> NASA/TM-2010-216262		
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> Unclassified-Unlimited Subject Category: 17 Available electronically at <a href="http://gltrs.grc.nasa.gov">http://gltrs.grc.nasa.gov</a> This publication is available from the NASA Center for AeroSpace Information, 443-757-5802					
<b>13. SUPPLEMENTARY NOTES</b>					
<b>14. ABSTRACT</b> The RF performance of a new K-Band helix conduction cooled traveling-wave tube amplifier (TWTA) is presented in this paper. A total of three such units were manufactured, tested and delivered. The first unit is currently flying onboard NASA's Lunar Reconnaissance Orbiter (LRO) spacecraft and has flawlessly completed over 2000 orbits around the Moon. The second unit is a proto-flight model. The third unit will fly onboard NASA's International Space Station (ISS) as a very compact and lightweight transmitter package for the Communications, Navigation and Networking Reconfigurable Testbed (CoNNeCT), which is scheduled for launch in 2011. These TWTAs were characterized over the frequencies 25.5 to 25.8 GHz. The saturated RF output power is >40 W and the saturated RF gain is >46 dB. The saturated AM-to-PM conversion is 3.5°/dB and the small signal gain ripple is 0.46 dB peak-to-peak. The overall efficiency of the TWTA, including that of the electronic power conditioner (EPC) is as high as 45 percent.					
<b>15. SUBJECT TERMS</b> Telecommunications; Transmitters; Deep space network; Space communication; Satellite communications; Microwave transmission; Microwave amplifiers; Microwave tubes; Power amplifiers; Power conditioning; Power efficiency; Traveling wave tubes					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>  UU	<b>18. NUMBER OF PAGES</b> 11	<b>19a. NAME OF RESPONSIBLE PERSON</b> STI Help Desk (email:help@sti.nasa.gov)
<b>a. REPORT</b> U	<b>b. ABSTRACT</b> U	<b>c. THIS PAGE</b> U			<b>19b. TELEPHONE NUMBER (include area code)</b> 443-757-5802



