


NASA/CR—2010-216357



# A New Narrowbeam, Multi-Frequency Scanning Radiometer and Its Application to In-Flight Icing Detection

*David J. Serke*

*National Center for Atmospheric Research, Boulder, Colorado*

*Paul Beaty*

*Radiometrics Corporation, Boulder, Colorado*

*Pat Kennedy*

*Colorado State University, Fort Collins, Colorado*

*Frederick Solheim and Randolph Ware*

*Radiometrics Corporation, Boulder, Colorado*

*Marcia K. Politovich*

*National Center for Atmospheric Research, Boulder, Colorado*

*David Brunkow and Robert Bowie*

*Colorado State University, Fort Collins, Colorado*

## NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI Program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Reports Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include creating custom thesauri, building customized databases, organizing and publishing research results.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to [help@sti.nasa.gov](mailto:help@sti.nasa.gov)
- Fax your question to the NASA STI Help Desk at 443-757-5803
- Telephone the NASA STI Help Desk at 443-757-5802
- Write to:  
NASA Center for AeroSpace Information (CASI)  
7115 Standard Drive  
Hanover, MD 21076-1320



# A New Narrowbeam, Multi-Frequency Scanning Radiometer and Its Application to In-Flight Icing Detection

*David J. Serke*

*National Center for Atmospheric Research, Boulder, Colorado*

*Paul Beaty*

*Radiometrics Corporation, Boulder, Colorado*

*Pat Kennedy*

*Colorado State University, Fort Collins, Colorado*

*Frederick Solheim and Randolph Ware*

*Radiometrics Corporation, Boulder, Colorado*

*Marcia K. Politovich*

*National Center for Atmospheric Research, Boulder, Colorado*

*David Brunkow and Robert Bowie*

*Colorado State University, Fort Collins, Colorado*

Prepared under Contract NNC06E046T

National Aeronautics and  
Space Administration

Glenn Research Center  
Cleveland, Ohio 44135

## Acknowledgments

This research is supported by the NASA Aviation Safety Program, Integrated Intelligent Flight Deck Project.

Trade names and trademarks are used in this report for identification only. Their usage does not constitute an official endorsement, either expressed or implied, by the National Aeronautics and Space Administration.

*Level of Review:* This material has been technically reviewed by NASA technical management.

Available from

NASA Center for Aerospace Information  
7115 Standard Drive  
Hanover, MD 21076-1320

National Technical Information Service  
5301 Shawnee Road  
Alexandria, VA 22312

Available electronically at <http://gltrs.grc.nasa.gov>

# A New Narrowbeam, Multi-Frequency Scanning Radiometer and Its Application to In-Flight Icing Detection

David J. Serke

National Center for Atmospheric Research  
Boulder, Colorado 80307

Paul Beaty

Radiometrics Corporation  
Boulder, Colorado 80301

Pat Kennedy

Colorado State University  
Fort Collins, Colorado 80523

Frederick Solheim and Randolph Ware

Radiometrics Corporation  
Boulder, Colorado 80301

Marcia K. Politovich

National Center for Atmospheric Research  
Boulder, Colorado 80307

David Brunkow and Robert Bowie

Colorado State University  
Fort Collins, Colorado 80523

## 1.0 Introduction

Aircraft accrete ice in flight when the aircraft's surface impacts supercooled liquid water. Accretion often occurs on engine intakes or propellers, leading edges of the wings and tail fin structures. This in-flight icing can result in significant loss of aerodynamic performance due to increased drag, change in the effective wing shape and added weight. Loss of performance can lead to dangerous aircraft responses that are outside of the envelope of normal flight operations. It is an ongoing goal in the aviation safety community to be able to accurately quantify in time and space, the presence of in-flight icing hazards. Since aircraft icing is a process that requires the presence of an aircraft to occur, icing cannot be directly measured with a remote system. While ideally all aircraft would be equipped with icing remote detection equipment to provide coverage over their entire flight paths, this is not practical. The need to provide a ground-based capability that can provide information to all aircraft entering and departing a terminal area is a key element in facilitating icing avoidance.

The current techniques for the remote detection and measurement of icing conditions rely on the identification of liquid water and then the inference or measurement of the surrounding air temperature. The Current Icing Product (CIP), developed by the National Center for Atmospheric Research (Bernstein et al., 2005), ingests near-realtime Rapid Update Cycle model atmospheric and microphysical fields, visible and infrared satellite data, surface weather observations, Pilot

REports (PIREPs) and lightning network data to infer liquid and subfreezing temperatures aloft. CIP is an operational system currently in use by the FAA. Another warning system is the NASA Icing Remote Sensing System (NIRSS), which is a testbed prototype (Reehorst et al., 2006). It consists of a vertically pointing Metek K-band radar to define cloud top and base heights and to determine cloud layer structure. There is also a Radiometrics Corporation multi-channel radiometer (Solheim et al., 1998), whose channels are used to derive integrated liquid water and atmospheric temperature profiles. A laser ceilometer is also incorporated to further define the cloud base. Software integrates the data streams in realtime and the derived liquid is distributed within the detected cloud layer(s) based on internal logic to arrive at an in-flight icing hazard categorization. This testbed system is an effort to provide in-flight icing hazard warnings with existing, cost-effective technologies and the system is currently positioned near John Hopkins Airport at NASA Glenn Research Center in Cleveland, Ohio.

Combining ground-based microwave radiometers with radars has shown great promise, but deficiencies with the current generation of radiometers have somewhat limited their value. These shortcomings include a wide beamwidth (typically 6°), which limits the resolution and possibility of directly comparing the data to the 1° beamwidth available with weather radars. In our Phase I effort, we have determined solutions to several technical challenges with the design of a new instrument—the NASA Narrow beam, Multi-waveband



Figure 1.—Image of the NNMSR located at the CSU CHILL radar site during the summer of 2009.

Scanning Radiometer (NNMSR) that is to operate in concert with weather radars. This report will detail the design (Section 2.1), calibration (Section 2.2), overview of NNMSR channel data interpretation (Section 3.0) and field testing of the NNMSR at Colorado State University's polarized CHILL S-band radar facility (Fig. 1, Section 4) for the application of improving in-flight icing hazard detection. This new sensor, when integrated into the existing NIRSS system and positioned near the soon-to-be-polarized NEXRAD radars near each large national terminal, can fulfill the need for airport terminal area icing hazard warnings.

There are other possible applications of this new system beyond terminal area in-flight icing hazard detection that should be mentioned. The system could help nowcast the need for (or lack of need for) the application of deicing solutions in advance of departure, creating savings and reducing delays. The system could also provide valuable high resolution mesoscale meteorological inputs for weather and climate model initializations (Fabry and Meunier, 2009). The current research is only related to in-flight icing applications, however, and no other applications are being pursued as part of this work.

## 2.0 System Realization

### 2.1 Design

The NNMSR project began when the Boulder, Colorado, based Radiometrics Corporation applied for and received a Small Business Innovation contract in 2004 to design and

construct a turnkey, fast-sampling, multi-frequency, dual polarization narrowbeam radiometer system. The specified system was to include 21 channels in the K-band, and a separate W-band receiver. With its broad K-band sampling capability, it can integrate water vapor along the beam and provide information on the discrimination of liquid and ice phase hydrometeors utilizing the W-band polarization. By using data from both bands, liquid water path can be derived. The system also employs a fast beam steering system to operate in concert with a weather radar. Adding to these measurement capabilities the system's full elevation and azimuth scanning capability results in a measurements with the potential of providing terminal area icing detection and warning. The importance of the technology described in this work is that the value of important radiometric observations provided by the NNMSR are greatly enhanced by matching the sample volume of research radars.

The K-band (20 to 30 GHz) receiver was chosen for inclusion in the NNMSR because the band includes the peak and shoulder of a water vapor absorption line. By comparing the received brightness temperatures (TB) from a channel near the peak of the water absorption line to a second channel in the water vapor window region, values for integrated water vapor and integrated cloud liquid water can be obtained. This is because channels near the peak of the water vapor absorption line have an absorption coefficient for water vapor that is nearly independent of altitude. Channels well away from the water absorption peak are used because the received TB is dominated by the absorption and emission from liquid water (which increases with the frequency squared).

The W-band 89 GHz channel, is sensitive to cloud liquid water but is also strongly affected by scattering from precipitation sized glaciated hydrometeors (Troitsky et al. 2003). For this reason, the W-band receiver was separated into vertically and horizontally polarized receiver channels to attempt to discriminate cases when horizontally oriented glaciated particles were present.

### 2.2 Calibration

Figure 2 details relevant parameters and calibration procedures employed in the development of the operational NNMSR system. In the resulting passive radiometer system, all beams are collinear and match the antenna gain pattern of NEXRAD and weather research radars. Elevation and azimuth beam matching between the K and W band radiometers was achieved by scanning a 1° by 1° grid encompassing the tallest peaks on the Front Range near Boulder, Colorado. These peaks were located approximately 7 km in distance from the radiometer. Many hours of vertical and horizontal profiles across these mountain targets were averaged and analyzed so that precise vertical and horizontal beam matching was achieved.

Parameter	NASA Narrowbeam Multi-channel Scanning Radiometer (NNMSR)
Frequency Channels (GHz)	22.000, 22.234, 22.500, 23.000, 23.034, 23.500, 23.834, 24.000, 24.500, 25.000, 25.500, 26.000, 26.234, 26.500, 27.000, 27.500, 28.000, 28.500, 29.000, 29.500, 30.000 and 89.0 V and 89.0 H
Antenna Beamwidth (°)	1
Calibration	Tipping curve, Microwave absorber at ambient temperature and LN <sub>2</sub>
Mass	Scanhead ~ 90 kg, Tripod ~ 16 kg
Dimensions	Scanhead 1m x 1m x 1.5m, Tripod 3m x 3m x 2m
Power Consumption	110 V

Figure 2.—Parameters of the NNMSR system.

### 3.0 Data Interpretation

Lohnert and Crewell (2003) used a large radiosonde profile dataset to model clouds in three different cloud models, which all used a modified adiabatic assumption and a threshold for relative humidity. They developed nine different regression algorithms of LWP for multi-frequency ground-based radiometers and applied them to data sets where clouds were generated by the threshold method, gradient method and a cloud microphysical model. The generalized form of the retrieval is

$$LWP = c_0 + \mathbf{c} \cdot \mathbf{TB} \quad (1)$$

where  $\mathbf{c}$  is the coefficient vector with dimensions defined by the number of frequencies of brightness temperatures as a vector,  $\mathbf{TB}$ , used in the retrieval. For this study, a LWP algorithm was selected for use based on availability and proximity of NNMSR channels to those in the reference publication, shown as

$$LWP = c_0 - 7.5 \cdot \mathbf{TB}_{23.0} + 6.6 \cdot \mathbf{TB}_{28.5} + 4.5 \cdot \mathbf{TB}_{90.0} \quad (2)$$

which had an RMS of 19.8 gm<sup>-2</sup> and a COR<sup>2</sup> of 0.96 between the modeled and retrieved LWP. In their study, they found that the inclusion of the W-band channel made a significant improvement in the LWP correlation statistics. For the case studies in the following section, we will compute the LWP in this fashion as part of the analysis.

It is important to note that liquid water on the radiometer dish can result in artificially high values of brightness temperature. None of the cases explored in the following sections involved precipitation reaching the surface.

### 4.0 Case Studies

Two case studies are discussed in this section which elucidate how the new NNMSR system can be utilized in concert with polarized S-band radars to detect in-flight icing hazards in the airport operational environment.

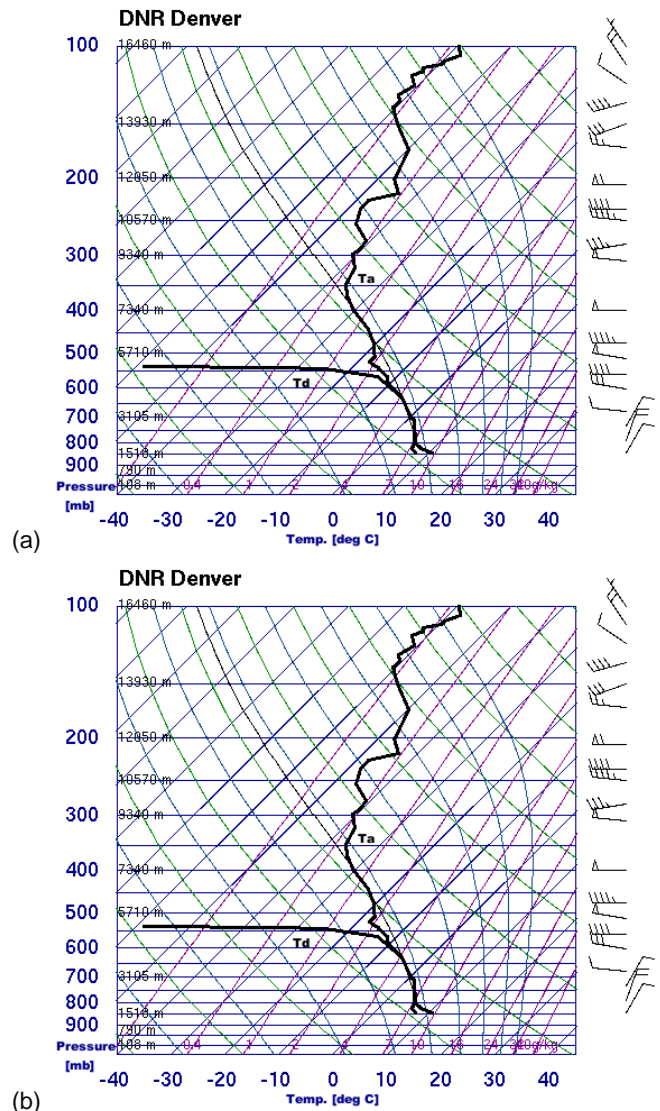


Figure 3.—Atmospheric profiles of ambient temperature (Ta) and dewpoint temperature (Td) from 12Z on September 21st (a) and from 00Z on September 22nd (b) from Denver, Colorado.

#### 4.1 September 21, 2009

The first case study is from September 21, 2009, when a cold front moved southward from Canada over the CHILL site. The progression of the front can be seen in Figure 3(a), as wind barbs from the north below 700 mb, and in Figure 3(b) as a cooling of the ambient temperature Ta in the atmospheric profile up to 400 mb and a deepening of the northerly wind layer. By the later time period, there is a slight drying of the lowest levels, but a moistening from 3.5 to 6.5 km AGL. The more dense cold air sliding southward behind the front is drying the lowest levels due to its continental origin. At the same time the lower-level airmass is providing just enough lift to the airmass above it that the upper airmass is becoming saturated and supercooled cloud droplets are forming. We know this to be true because this time corresponds



to when four ‘moderate’ and one ‘light’ icing PIREP were reported within 1 hr and 10 nmi of the CSU CHILL instrument site. All of these PIREPs were reported in the layer between 4 and 8 km in altitude. The freezing level lowers from 1.6 to 0.9 km by 00Z on September 22nd. No precipitation reached the ground at any time during the times encompassing this case study.

We’ll begin by looking at the CHILL moment data and NNMSR derived LWP and 89 GHz polarization differences around 18:00 Z on September 21. All of the radar data imagery presented in this work are from range-height indicator (RHIs) scan format from 1° to 30° beam elevations, which means the radar was viewing vertical slices of the atmosphere at a fixed azimuth. The signal in the radar velocity field (Fig. 4(a)) supports the synoptic view of a cold front affecting the radar site. Red and orange radial velocity values from the surface up to 3 km indicate flow away from the radar, and since the radar is pointed southward (175° azimuth) this lower layer is the cold, dense airflow from the north behind the cold front. Blueish values in the layer between 4 and 7 km altitude have a flow component from the south. Very low reflectivity values below zero dBZ (Fig. 4(b)) in the layer between 4 and 7 km are consistent with findings in previous research (Serke et al., 2008) as an indicator to the presence of supercooled liquid in winter. The differential reflectivity (ZDR, Fig. 5(a)) is a ratio of the returned vertically and horizontally polarized signals and gives some information on the shape and orientation of the dominant particles being viewed by the radar. In the layer between 4 and 7 km where the icing PIREPS are being reported, ZDR values are slightly positive. Values from zero to slightly positive indicate the vertical and horizontal axial dimensions of the targets in the viewing volume are similar, which is consistent with rounded particles. The LWP field was derived for 18:04 Z (Fig. 6(a)) as shown in Equation (2). Since NNMSR in its current form is unable to range liquid, it helps to think of this image as a sector of sky centered on due south (180° azimuth) where each pixel is a range integrated measurement of LWP. The supercooled liquid, which is detected otherwise as numerous positive icing PIREPs, show up in this plot as horizontal streaks of elevated LWP in excess of 600 gm<sup>-2</sup>. The horizontal ‘streakiness’ is likely due to the passage of super-cooled liquid pockets across the viewed sky sector in the 14 minutes it took to collect all the NNMSR channel data for the sky sector. The visual view of the same sky sector (Fig. 7) comes from a webcam positioned on an instrument tower right next to the NNMSR and depicts a grey, stratiform cloud deck with occasional gaps. The 89 GHz channel was included as part of this system because not only is this band sensitive to emission from liquid water, but it is also affected by the reflection and scattering of microwave radiation from glaciated particles. Oblate ice particles such as dendrites tend to fall with their long axis horizontal. Radiation that is absorbed and emitted is naturally unpolarized (Fig. 8), thus the only way to receive a polarized signal is if the particle mass effectively polarizes the signal. This is theorized to occur in the presence of oblate crystals (or

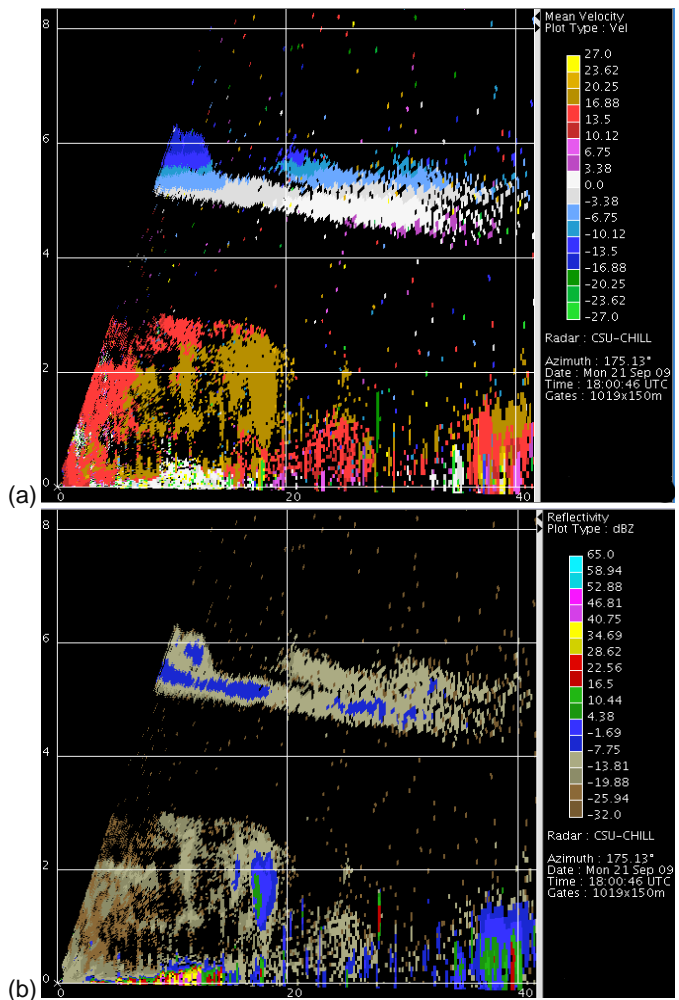


Figure 4.—CHILL RHI views from 175° azimuth of radial velocity (a), [ $\text{ms}^{-1}$ ] and reflectivity (b), [dBZ] at 18:00Z on September 21st. Vertical and horizontal ranges are in kilometers.

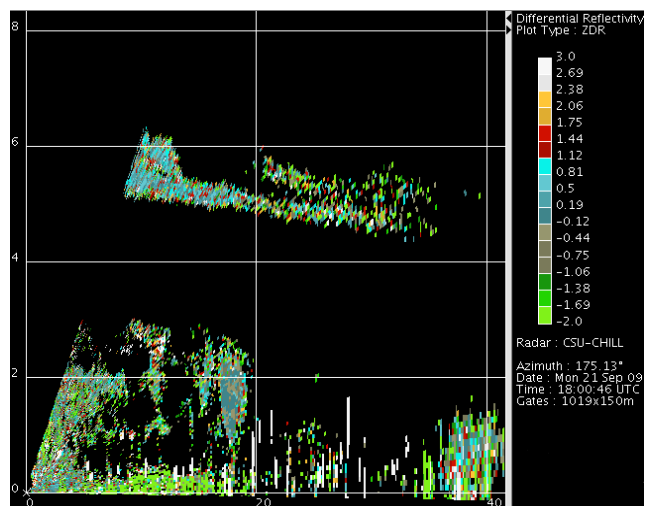


Figure 5.—CHILL RHI views from 175° azimuth of differential reflectivity [dBZ] at 18:00Z on September 21st.



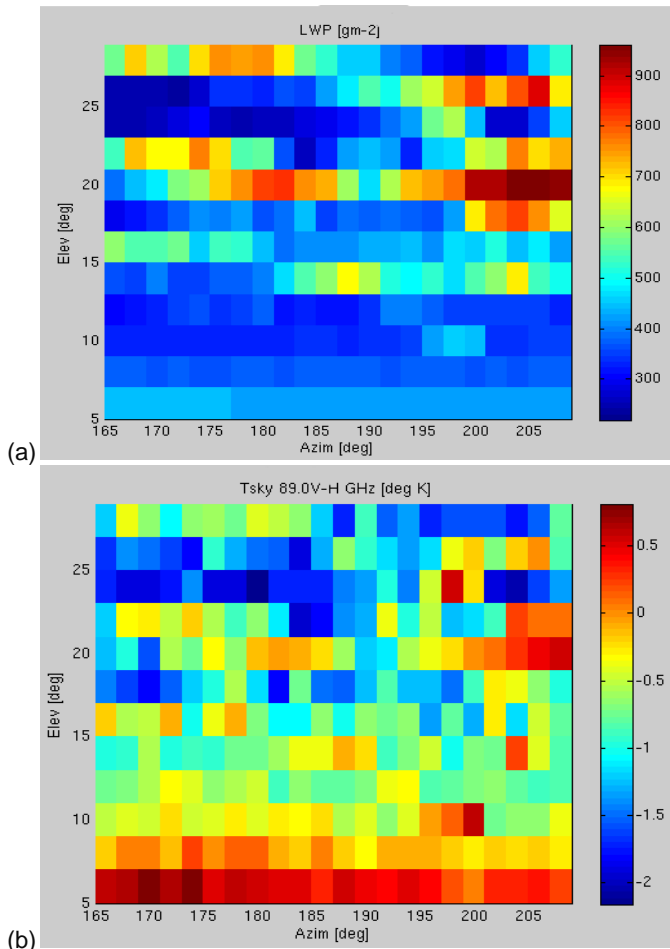


Figure 6.—NNMSR derived LWP (a), [ $\text{gm}^{-2}$ ], 89 GHz V-H (b), [ $^{\circ}\text{K}$ ] at 18:04 Z.

large rain drops) as horizontal radiation is preferentially reflected from the surfaces of all the particles at the given viewing angle. When the horizontal component is larger than the vertical, V-H is negative. This is the case in Figure 6(b) for areas where LWP values are smallest. At elevations and azimuths where LWP is largest, 89 V-H is near zero which is consistent with viewing round liquid particles which emit unpolarized radiance. At elevation angles of  $5^{\circ}$  and below, channel values can be suspect due to surface effects (Troitsky et al., 2003). Quick calculations based on  $800 \text{ gm}^{-2}$  of LWP (from Fig. 6(a)) distributed through the upper cloud layer with a path length of 1500 m (from Fig. 4(b)) at a  $20^{\circ}$  slant angle leads to a significant liquid water content of  $0.4$  to  $0.5 \text{ gm}^{-3}$  through the cloud depth. This significant level of liquid water content is producing the local reports of moderate in-flight icing.

Four hours later at 22:00Z, there were no reported icing PIREPs within 1 hr and 100 nmi of the CHILL instrument site. Both the radar and radiometer were operating in the same respective modes of viewing RHIs along  $175^{\circ}$  azimuth for CHILL and a similar southern-facing sky sector for the

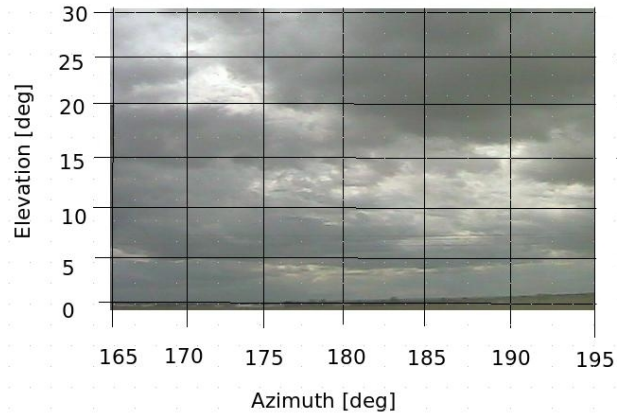


Figure 7.—Visual sky sector image at 18:04 Z.

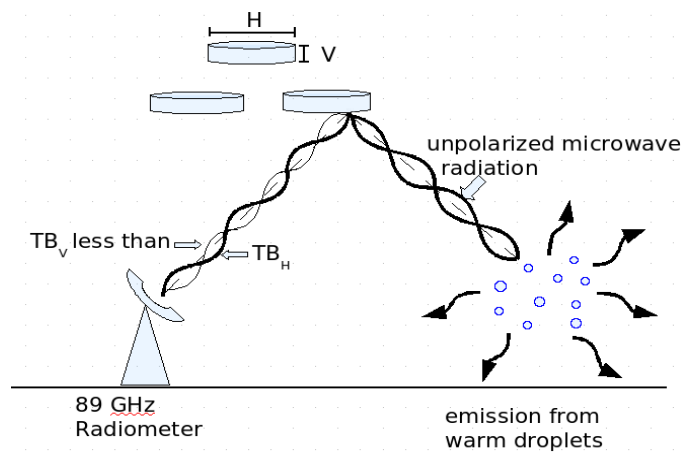


Figure 8.—Schematic of unpolarized microwave radiation becoming polarized and how horizontally oriented crystals create  $TB_V - TB_H < 0$ .

NNMSR. The change in radar and radiometer signals from the earlier icing time period is dramatic. The radial velocity (Fig. 9(a)) field shows consistent flow from the north from the cloud base at 1 km AGL up to 5 km altitude. This is again consistent with a deepening layer of cold air flowing southward after a cold frontal passage. The reflectivity RHI (Fig. 9(b)) shows nearly all values are now above 0 dBZ, with the bulk being above 10 dBZ. Streamers of virga are seen reaching downward below the clouds, indicating that particles are large and weighty enough to begin falling out of the cloud, but are sublimating before they reach the surface. ZDR values (Fig. 10(a)) are somewhat positive near the cloud base and average about +1 dB near the cloud tops, consistent with small particles that are somewhat oriented. All of these clues from the CHILL moment data lead to the conclusions that the particle population in this increasingly cold cloud layer has a uniformly high reflectivity and a uniformly consistent shape and/or particle orientation. This particle mass must be almost fully glaciated, which is partially supported by the lack of positive icing PIREPs at a time of day when a significant volume of air traffic was transecting the region.

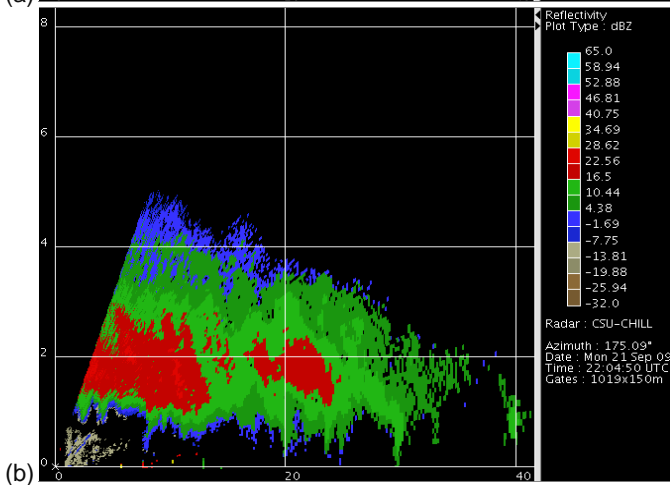
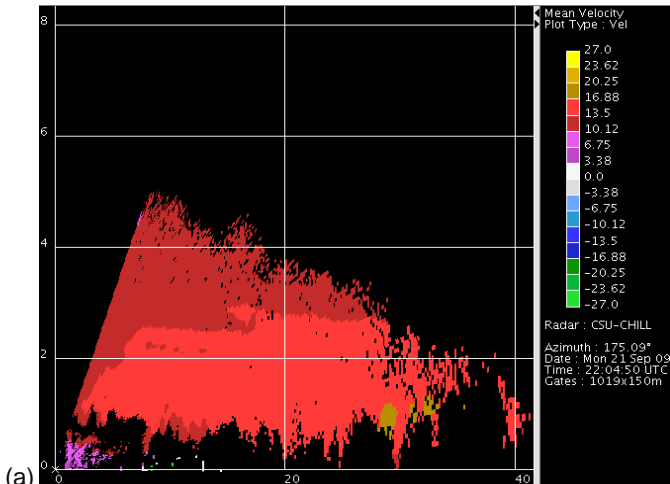


Figure 9.—CHILL RHI views from 175° azimuth of radial velocity (a), [ $\text{ms}^{-1}$ ] and reflectivity (b), [dBZ] at 22:04Z on September 21st.

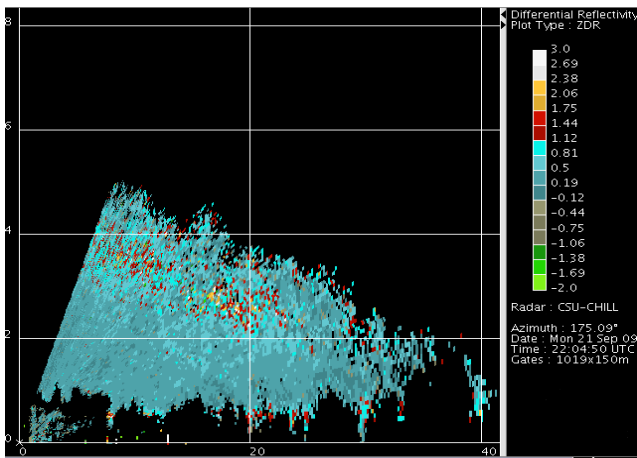


Figure 10.—CHILL RHI views from 175° azimuth of differential reflectivity [dBZ] at 22:04Z on September 21st.

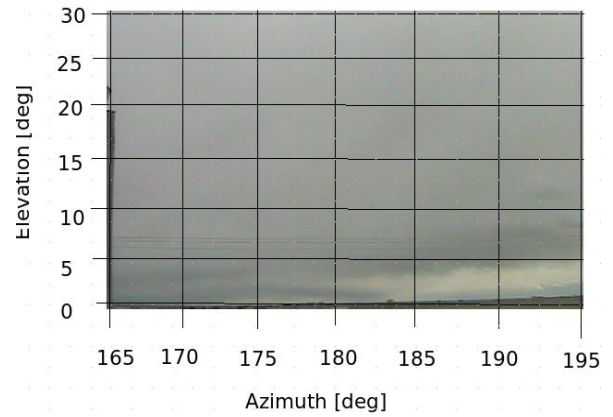


Figure 11.—Gridded visual sky sector image at 22:28 Z on September 21st.

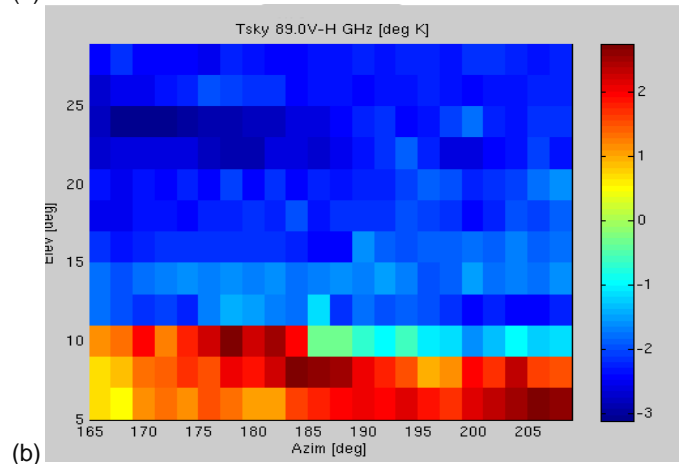
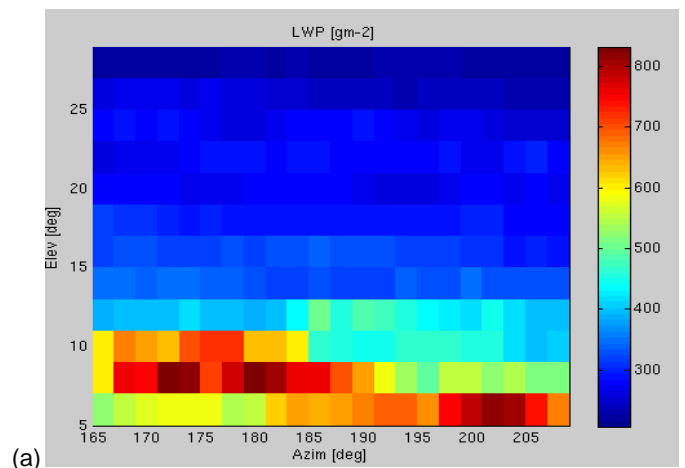


Figure 12.—NNMSR derived LWP (a), [ $\text{gm}^{-2}$ ], 89 GHz V-H (b), [ $^{\circ}\text{K}$ ] at 22:28Z on September 21st.

The south-facing visual sky sector image (Fig. 11) shows a grey stratiform cloud deck with no gaps, with what appears to be blue skies at low elevation angles. Retrieved LWP (Fig. 12(a)) values at angles above 10° are uniformly below 300  $\text{gm}^{-2}$ , which is half to one-third the values seen at the

earlier case time. Figure 12(b) shows negative  $2^\circ$  to  $3^\circ$  V-H differences at viewing angles above  $10^\circ$ . This is due to relatively large (warm TB) emission from water droplets in the lower levels of the atmosphere being more preferentially scattered by horizontally oriented ice particles in the horizontal component than the vertical component back towards the passive NNMSR, thus creating a negative V-H channel difference. One curious feature of the LWP and 89 V-H views are the large values of each field below  $10^\circ$  elevation. Troitsky et al., (2003) demonstrated that theoretically calculated polarization differences at 85 GHz became large and positive at low viewing angles in the presence of horizontally oriented oblate particles (such as plates, dendrites or rods). Since the 3 GHz CHILL radar ZDR is just slightly positive and the much higher frequency 89 GHz V-H is significantly negative, the preferentially oriented particles must be fairly small and not made up of larger dendrites.

## 4.2 September 12, 2009

Late on September 12th, an easterly wind component behind a cold front led to the formation of discretely layered upslope clouds. Two light icing PIREPs were recorded within 1 hr and 100 nmi of the instrument location at CHILL. By 12:00Z, the Denver temperature sounding (Fig. 13) had a freezing level at about 2 km altitude and a nearly saturated profile above 1.5 km that became saturated by 00Z on September 13th. The RHI reflectivity field (Fig. 14) looking south at  $185^\circ$  azimuth from CHILL exhibits three distinct cloud layers—centered on 3.7, 2 and 0.5 km altitude. The vertical height scale of the reflectivity scale is matched up with the vertical scale of the temperature sounding for ease of comparison. All three layers offer only weak returns, with most values being below zero and only pockets of the upper layer reaching 6 dBZ. Analysis of the ZDR field (Fig. 15(a)) leads to very interesting ramifications for the ability of satellite based detection methods to detect icing in this case. One can see that the lowest two layers have slightly positive ZDRs, indicating nearly round or axial-symmetric shapes of the reflectivity-weighted particle distribution. The upper level, however, has a mean ZDR of about +2 dB. This means that the dominant reflectivity-weighted hydrometeors in the volume are horizontally oriented. Significantly oriented particles at  $-15^\circ\text{C}$  must be plates or dendrites as opposed to oblate large raindrops, and since the layer reflectivity is so low the glaciated particles must be small and sparse.

On this day, the radiometer was collecting data every  $5^\circ$  azimuth and elevation with  $1^\circ$  resolution, which is why the image resolution (Fig. 16(a)) seems reduced compared to the previous case study. The LWP field has discrete regions of relative maxima of about  $350\text{ gm}^{-2}$  at elevations above  $10^\circ$ . Relative maxima in LWP spatially correspond to 89 V-H values near zero (Fig. 16(b)), which is consistent with round particles. Other areas above  $10^\circ$  elevation have V-H values of  $-1\text{ dB}$  or below, which is consistent with oriented particles. The visual view of the sampled sky sector in Figure 17 shows a continuous grey stratiform cloud deck.

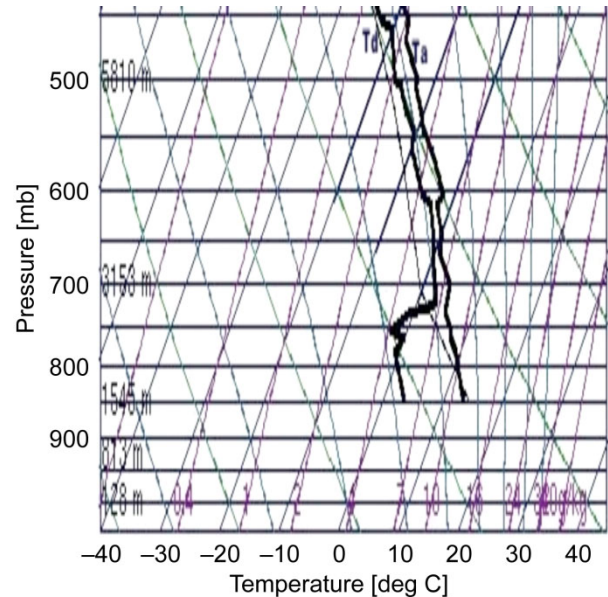


Figure 13.—Atmospheric profile of ambient temperature (Ta) and dewpoint temperature (Td) from 12Z on September 12th from Denver, Colorado.

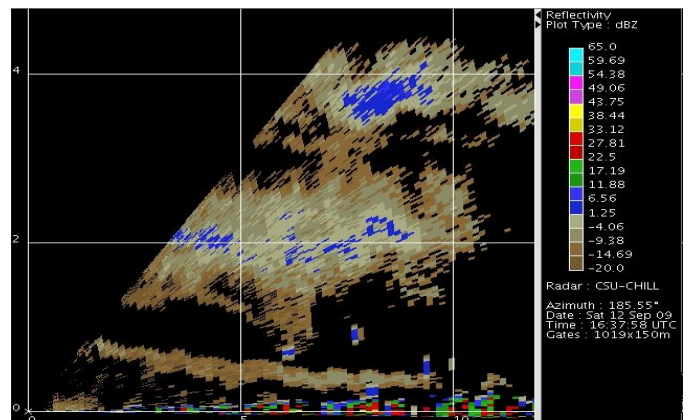


Figure 14.—CHILL RHI view from  $185^\circ$  azimuth of reflectivity (b, [dBZ]) at 16:37Z on September 12th.

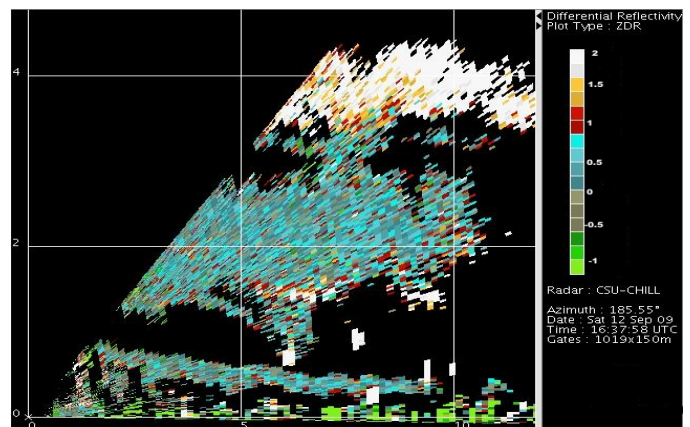


Figure 15.—CHILL RHI views from  $185^\circ$  azimuth of differential reflectivity [dBZ] at 16:37Z on September 12th.



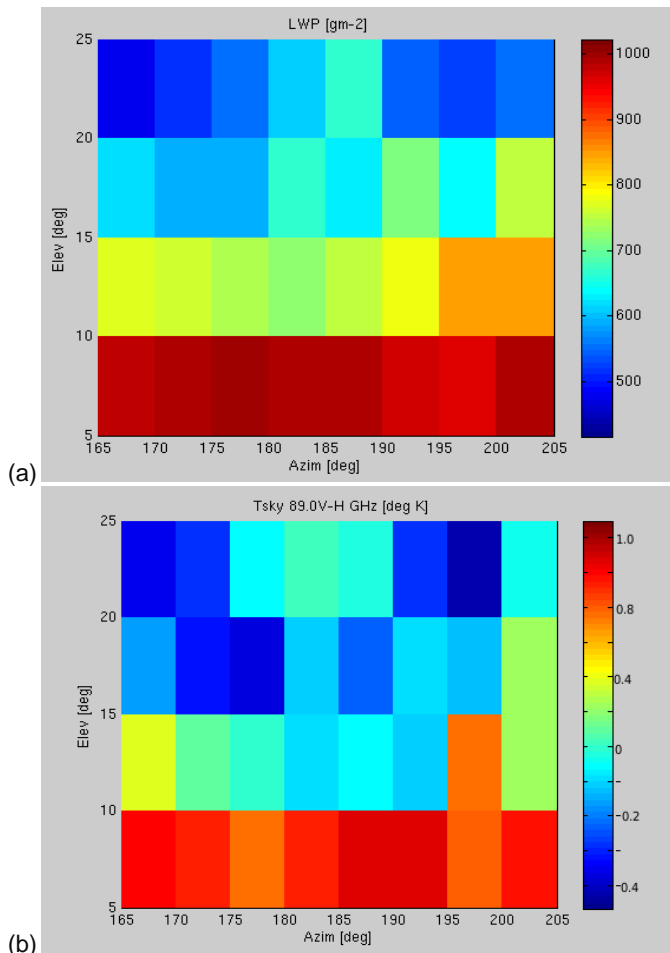


Figure 16.—NNMSR derived LWP (a), [gm<sup>-2</sup>], 89 GHz V-H (b), [°K] at 16:37Z on September 12th.

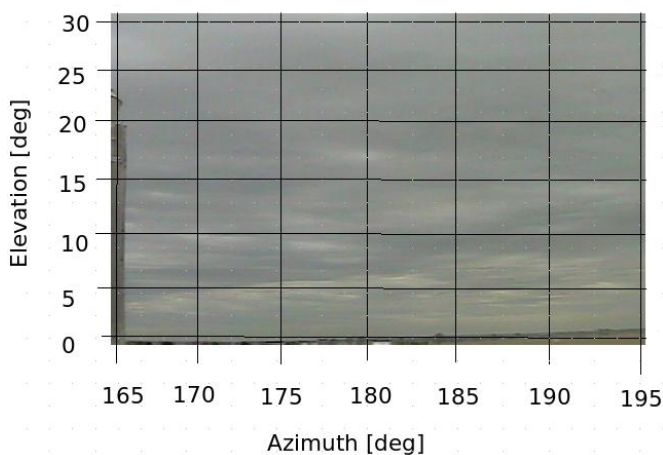


Figure 17.—Gridded visual sky sector image at 16:37 Z on September 12th.

The important fact to note in this case is that satellite-based visible and infrared icing detection methods will sense only the glaciated upper layer of clouds and not be able warn for in-flight icing for the cloud layers lower down. Also, icing in multi-layer clouds are a very important scenario to detect since they can lead to sequenced icing events that can be more dangerous and unpredictable for controlled flight than icing from deeper single layered clouds. A ground-based system such as the NASA Icing Remote Sensing System, of which NNMSR will be a part, can efficiently detect the icing threat in the middle layer when positioned with a polarized S-band radar.

## 5.0 Summary

The first purpose of this summer field program was to test the new, one-of-a-kind system for robustness and stability. After the two months of field testing and data collection, the scanhead drive and receivers seemed very stable. The system was operated remotely in an automated fashion for most of the test period.

The second purpose of this study was to determine if the new NNMSR could aid in the detection of in-flight icing hazards. One case study time had multiple icing PIREPs located close to the instrumentation. Low radar reflectivity (<0 dBZ) indicated a lack of large reflectors. High radiometer LWP values and no preferred particle orientation were consistent with the presence of significant liquid drops aloft at a time with many positive icing PIREPs. At a later time with no reported PIREPs, high radar reflectivity (>10 dBZ) indicated the presence of large reflectors which are known to effectively scavenge available liquid drops. Positive ZDR values meant somewhat oriented particles. Low radiometer LWP values and a horizontal particle preference detected in the 89 GHz V-H signal were consistent with an all glaciated cloud and no icing PIREPs.

The second case study had three discrete cloud layers, the top of which was clearly glaciated based on the radar ZDR values. Two ‘light’ icing PIREPs were reported roughly at the height of the middle cloud layer. Satellite-based in-flight icing hazard warning systems, such as CIP, would not be able detect icing conditions in this case since they can only detect the highest cloud top. The NNMSR products were able to discern patchy relative maxima in LWP and 89 GHz V-H differences consistent with more round particles.

Based on the system’s overall stability and ability to detect elevated LWP in association with icing verification from PIREPs, we have determined that the NNMSR would be a valuable addition to NIRSS for detecting in-flight icing hazards in the airport environment. This will especially be true in the coming years as the national network of S-band NEXRADs are upgraded to collect polarimetric moment data, as was available for this study at CSU’s CHILL.

Future work includes more summer 2009 case analysis by averaging the CHILL moment data along the radar beam and comparing the results to radiometer LWP. Also, it might be useful to compare areal averaged GOES LWP product to radiometer LWP for the collected case studies. In 2010, the NNMSR will be positioned at NASA Glenn Research Center with NASA's Icing Remote Sensing System. Work will focus on applying the NIRSS algorithms with the NNMSR and NEXRAD data.

## References

- Bernstein, B., McDonough, F., Politovich, M., Brown, B., Ratvasky, T., Miller, D., Wolff, C., and Cuning, G., "Current Icing Potential: Algorithm description and comparison to aircraft observations," *Journal of Applied Meteorology*, 44, pp. 969–986, 2005.
- Fabry, F., and Meunier, V., "Conceptualisation and design of a Mesoscale Radiometer," 8<sup>th</sup> International Symposium on Tropospheric Profiling, S06-P03-1, Delft, NL, 2009.
- Lohnert, U., and S. Crewell, "Accuracy of cloud liquid water path from ground-based microwave radiometry, 1. Dependency on cloud model statistics," *Radio. Sci.*, 38(3), 8041, 2003
- Reehorst, A., Politovich, M., Zednik, S., Isaac, G., and Cober, S., "Progress in the Development of Practical Remote Detection of Icing Conditions", Report NASA/TM—2006-214242, 2006.
- Serke, D.J., F. McDonough and M. Politovich, "Analysis of 3-D NEXRAD Mosaic Reflectivity Data Collocated with Research Aircraft and Satellite Data: Implications on In-Flight Icing," 13<sup>th</sup> Conference on Aviation, Range and Aerospace Meteorology Preprint, New Orleans, LA, Jan. 20–25, 2008.
- Solheim, F., Godwin, J., Westwater, E., Han, Y., Keihm, S., Marsh, K., and Ware, R., "Radiometric profiling of temperature, water vapor and cloud liquid water using various inversion methods," *Radio Sci.*, **33**, pp. 393–404, 1998.
- Troitsky, A.V., Osharin, A.M., Korolev, A.V., and Strapp, J.W., "Thermal Microwave Atmospheric Radiation Due to Scattering by Ice Particles in Clouds," *Journal of the Atmospheric Sciences*, 60, pp. 1608–1620, 2003.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188		
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>					
<b>1. REPORT DATE (DD-MM-YYYY)</b> 01-07-2010		<b>2. REPORT TYPE</b> Final Contractor Report		<b>3. DATES COVERED (From - To)</b>	
<b>4. TITLE AND SUBTITLE</b> A New Narrowbeam, Multi-Frequency Scanning Radiometer and Its Application to In-Flight Icing Detection			<b>5a. CONTRACT NUMBER</b> NNC06E046T		
			<b>5b. GRANT NUMBER</b>		
			<b>5c. PROGRAM ELEMENT NUMBER</b>		
<b>6. AUTHOR(S)</b> Serke, David, J.; Beaty, Paul; Kennedy, Pat; Solheim, Frederick; Ware, Randolph; Politovich, Marcia, K.; Brunkow, David; Bowie, Robert			<b>5d. PROJECT NUMBER</b>		
			<b>5e. TASK NUMBER</b>		
			<b>5f. WORK UNIT NUMBER</b> WBS 609866.02.07.03.04		
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> National Center for Atmospheric Research P.O. Box 3000 Boulder, Colorado 80307-3000			<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> E-17293		
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b> National Aeronautics and Space Administration Washington, DC 20546-0001			<b>10. SPONSORING/MONITOR'S ACRONYM(S)</b> NASA		
			<b>11. SPONSORING/MONITORING REPORT NUMBER</b> NASA/CR-2010-216357		
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> Unclassified-Unlimited Subject Categories: 03, 35, and 47 Available electronically at <a href="http://gltrs.grc.nasa.gov">http://gltrs.grc.nasa.gov</a> This publication is available from the NASA Center for AeroSpace Information, 443-757-5802					
<b>13. SUPPLEMENTARY NOTES</b>					
<b>14. ABSTRACT</b> A narrow-beam (1° beamwidth), multi-channel (20 to 30 and 89 GHz), polarized (89 vertical and horizontal) radiometer with full azimuth and elevation scanning capabilities has been built with the purpose of improving the detection of in-flight icing hazards to aircraft in the near airport environment. This goal was achieved by co-locating the radiometer with Colorado State University's CHILL polarized Doppler radar and taking advantage of similar beamwidth and volume scan regiments. In this way, the liquid water path and water vapor measurements derived from the radiometer were merged with CHILL's moment fields to provide diagnoses of water phase and microphysics aloft. The radiometer was field tested at Colorado State University's CHILL radar site near Greeley, Colorado, during the summer of 2009. Instrument design, calibration and initial field testing results are discussed in this paper.					
<b>15. SUBJECT TERMS</b> Aircraft icing; Radiometers; Meteorology; Meteorological radar; Clouds (meteorology); Aircraft hazards; Aviation meteorology; Aircraft safety					
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b>	<b>18. NUMBER OF PAGES</b> 15	<b>19a. NAME OF RESPONSIBLE PERSON</b> STI Help Desk (email:help@sti.nasa.gov)
<b>a. REPORT</b> U	<b>b. ABSTRACT</b> U	<b>c. THIS PAGE</b> U			<b>19b. TELEPHONE NUMBER (include area code)</b> 443-757-5802





