

commonly known as electrostatic precipitation, is a mature technology in air at one atmosphere. In this case, the high voltages required for the method to work can easily be achieved. However, in carbon dioxide at low pressures, such as those found on Mars, large voltages are not possible.

The innovation reported here consists of two concentric cylindrical electrodes set at specific potential difference that generate an electric field that produces a corona capable of imparting an electrostatic charge to the incoming dust particles. The strength of the field is carefully balanced so as to produce a stable charging corona at 5 to 10 mbars, and is also capable of imparting a force to the particles that drives them to the collecting electrode.

There are only two possible ways that dust can be removed from Martian atmospheric gas intakes: with this electrostatic precipitator design, and with

the use of filters. However, filters require upstream compression of the gas to be treated because the atmospheric pressure on Mars is too close to vacuum to use a vacuum pump downstream to the filter to draw the gas through the filter. The electrostatic precipitator is the best and more efficient solution for this environment. No other precipitator designs have been developed for the environment of Mars due to the challenges of the low atmospheric pressure.

Dust particles are charged using corona generation around the high-voltage discharge electrode, which ionizes gas molecules. Since the atmospheric gas intakes for the ISRU processing chambers will likely be cylindrical, cylindrical precipitator geometry was chosen. The electrostatic precipitator design presented here removes simulated Martian dust particles in the required

range in a simulated Martian atmospheric environment. The current-voltage (I-V) characteristic curves taken for the nine precipitator configurations at 9 mbars of pressure showed that a cylindrical collecting electrode 7.0 cm in diameter with a concentric positive high-voltage electrode 100  $\mu\text{m}$  thick provides the best range of voltage and charging corona current. This precipitator design is effective for the size of the dust particles expected in the Martian atmosphere. Mass determination, as well as microscopic images and particle size distributions of dust collected on a silicon wafer placed directly below the precipitator with the field on and off, showed excellent initial results.

*This work was done by Carlos Calle of Kennedy Space Center, and Sid Clements of the Appalachian State University Department of Physics and Astronomy. Further information is contained in a TSP (see page 1), KSC-13657*


## Terahertz Quantum Cascade Laser With Efficient Coupling and Beam Profile

**High-power QCLs can be used in medical instruments, security screening equipment, and illicit material detection.**

*NASA's Jet Propulsion Laboratory, Pasadena, California*

Quantum cascade lasers (QCLs) are unipolar semiconductor lasers, where the wavelength of emitted radiation is determined by the engineering of quantum states within the conduction band in coupled multiple-quantum-well heterostructures to have the desired energy separation. The recent development of terahertz QCLs has provided a new generation of solid-state sources for radiation in the terahertz frequency range. Terahertz QCLs have been demonstrated from 0.84 to 5.0 THz both in pulsed mode and continuous wave mode (CW mode).

A 2.7-THz QCL structure uses a metal-metal waveguide QCL with multiple-quantum-well cascade medium to provide terahertz gain for subbands engineered to have the desired energy separation. The approach employs a resonant-phonon depopulation concept. The metal-metal (MM) waveguide fabrication is performed using Cu-Cu thermo-compression bonding to bond the GaAs/AlGaAs epitaxial layer to a GaAs receptor wafer. A laterally corrugated distributed feedback (DFB) grating is etched into a MM waveguide, as

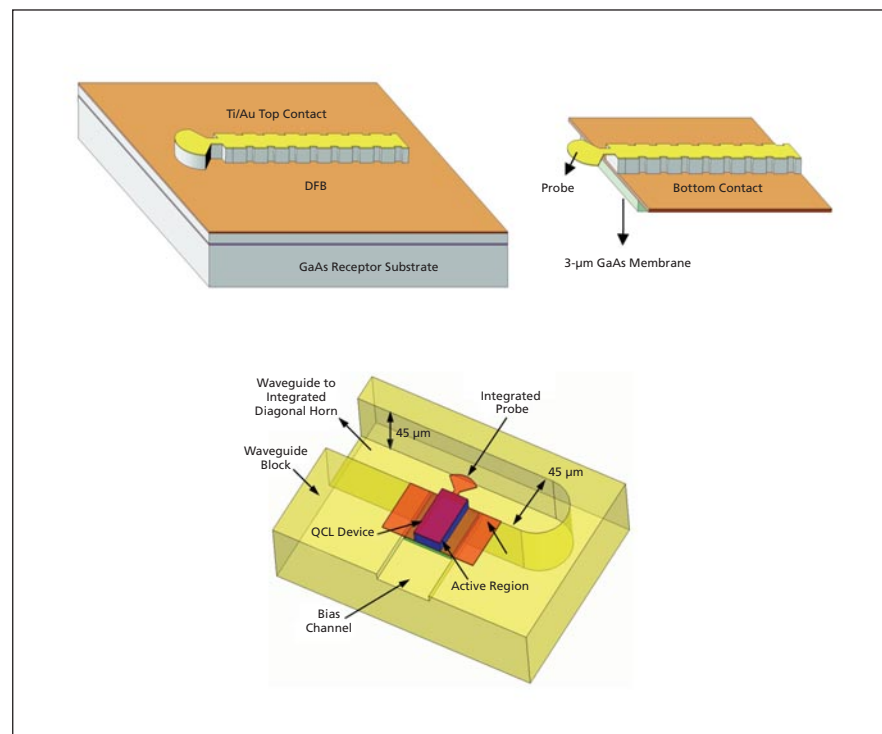

**MM-Waveguide QCL Laser** shown in (top) a processing schematic for fabrication of the laser with integrated waveguide probe; and (bottom) in a waveguide mount with the integrated radial probe. The top half of the block is removed to show the QCL device inside the waveguide.

this is easily performed in a single photolithographic and etch step. Extended modeling is done for both the DFB cavity and the coupling with the waveguide via the integrated probe. The DFB structure QCL has an integrated waveguide probe suitable for mounting in a machined waveguide block. Following fabrication of the MM-waveguide, the wafer can be mounted top-down on a temporary support wafer, and the GaAs receptor substrate is thinned to a membrane with the assistance of an etch-stop layer.

Development of a demonstrator horn-antenna coupled QCL at 2.7 THz with Gaussian output beam profile and high coupling efficiency capable of effectively pumping mixers at these frequencies is a

major breakthrough in the spectroscopic studies for the Earth-observation and astrophysics community. The approach, which includes an integrated probe on the QCL device in a waveguide enclosure transitioning to a diagonal horn, may lead to compact, coherent, continuous-wave solid-state sources.

A phase-locked terahertz QCL source with high-quality beam profile and excellent output coupling efficiency operating at or above liquid nitrogen temperatures will be of great strategic importance for NASA's astrophysics, Earth, and planetary mission capabilities. This will make these QCLs the local oscillator source of choice for the future NASA and European suborbital and or-

bit terahertz instruments for astrophysics missions such as the interferometric (ESPRIT) and other single- and multi-pixel heterodyne spectroscopic missions, as well as for Earth observing and planetary missions. A high-power QCL with good beam profile can also be used in biological and medical science instruments, security screening and illicit material detection, and nondestructive evaluation applications.

*This work was done by Goutam Chattopadhyay, Jonathan H. Kawamura, and Robert H. Lin of Caltech, and Benjamin Williams of UCLA for NASA's Jet Propulsion Laboratory. For more information, contact iaoffice@jpl.nasa.gov. NPO-46980*

## Measurement Via Optical Near-Nulling and Subaperture Stitching

**This simple and universal technique uses adjustable corrective optics.**

*Goddard Space Flight Center, Greenbelt, Maryland*

A subaperture stitching interferometer system provides near-nulling of a subaperture wavefront reflected from an object of interest over a portion of a surface of the object. A variable optical element located in the radiation path adjustably provides near-nulling to facilitate stitching of subaperture interferograms, creating an interferogram representative of the entire surface of interest. This enables testing of aspheric surfaces without null optics customized for each surface prescription.

The surface shapes of objects such as lenses and other precision components are often measured with interferometry. However, interferometers have a limited capture range, and thus the test wavefront cannot be too different from the reference or the interference cannot be analyzed. Furthermore, the performance of the interferometer is usually best when the test and reference wavefronts are nearly identical (referred to as a "null" condition). Thus, it is necessary when performing such measurements to correct for known variations in shape to ensure that unintended variations are within the capture range of the interferometer and accurately measured.

This invention is a system for near-nulling within a subaperture stitching interferometer, although in principle, the concept can be employed by wavefront-measuring gauges other than interferom-

eters. The system employs a light source for providing coherent radiation of a subaperture extent. An object of interest is placed to modify the radiation (e.g., to reflect or pass the radiation), and a variable optical element is located to interact with, and nearly null, the affected radiation. A detector or imaging device is situated to obtain interference patterns in the modified radiation. Multiple subaperture interferograms are taken and are "stitched," or joined, to provide an interferogram representative of the entire surface of the object of interest.

The primary aspect of the invention is the use of adjustable corrective optics in the context of subaperture stitching near-nulling interferometry, wherein a complex surface is analyzed via multiple, separate, overlapping interferograms. For complex surfaces, the problem of managing the identification and placement of corrective optics becomes even more pronounced, to the extent that in most cases the null corrector optics are specific to the particular asphere prescription and no others (i.e. another asphere requires completely different null correction optics). In principle, the near-nulling technique does not require subaperture stitching at all.

Building a near-null system that is practically useful relies on two key features: simplicity and universality. If the system is too complex, it will be diffi-

cult to calibrate and model its manufacturing errors, rendering it useless as a precision metrology tool and/or prohibitively expensive. If the system is not applicable to a wide range of test parts, then it does not provide significant value over conventional null-correction technology. Subaperture stitching enables simpler and more universal near-null systems to be effective, because a fraction of a surface is necessarily less complex than the whole surface (excepting the extreme case of a fractal surface description). The technique of near-nulling can significantly enhance aspheric subaperture stitching capability by allowing the interferometer to capture a wider range of aspheres. Moreover, subaperture stitching is essential to a truly effective near-nulling system, since looking at a fraction of the surface keeps the wavefront complexity within the capability of a relatively simple near-null apparatus. Furthermore, by reducing the subaperture size, the complexity of the measured wavefront can be reduced until it is within the capability of the near-null design.

*This work was done by Greg Forbes, Gary De Vries, and Paul Murphy of QED Technologies, Inc.; and Chris Brophy of Optical Engineering Services for Goddard Space Flight Center. Further information is contained in a TSP (see page 1). GSC-16152-1*