

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

Field Testing of High Current Electrokinetic Nanoparticle Treatment for Corrosion Mitigation in Reinforced Concrete

Joshua B. Alexander, Luz Marina Calle, Henry E. Cardenas, Kunal Kupwade-Patil,

This work examines field performance of nanoscale pozzolan treatments delivered electrokinetically to suppress chloride induced corrosion of concrete reinforcement. The particles are 20 nm silica spheres coated with 2 nm alumina particles that carry a net positive charge. Earlier work demonstrated that the alumina particles were stripped from the silica carriers and formed a dense phase with an interparticle spacing that is small enough to inhibit the transport of solvated chlorides. A D.C. field was used to inject the particles into the pores of concrete specimens, directly toward the mild steel bars that were embedded within each 3 inch diameter by 6 inch length concrete specimen. The voltage was held constant at 25 v per inch of concrete cover for a period of 7 days. These voltages permitted current densities as high as 3 A/m². During the final 3 days, a 1 molar solution of calcium nitrate tetrahydrate was used to provide a source of calcium to facilitate stronger and more densified phase formation within the pores. In a departure from prior work the particle treatments were started concurrent with chloride extraction in order to determine if particle delivery would inhibit chloride transport. Following treatment the specimens were immersed in seawater for 4 weeks. After this post-treatment exposure, the specimens were tested for tensile strength and the steel reinforcement was examined for evidence of corrosion. Scanning electron microscopy was conducted to assess impact on microstructure.



Field Testing of High Current Electrokinetic Nanoparticle Treatment for Corrosion Mitigation in Reinforced Concrete

Joshua B. Alexander
Henry E. Cardenas
Kunal Kupwade-Patil
Luz Marina Calle

1

Overview

- Background
 - Nanoparticle
 - Rebar Corrosion
- Experimental Design
 - Specimen
 - Treatments
 - Electrokinetic Nanoparticle (EN)
 - EN with additional Calcium treatment (EN + Ca)
 - Electrochemical Chloride Extraction (ECE)
 - Post-treatment exposures




2

Nanoparticle Treatment

- Nanoparticle used was alumina coated silica which carries a positive charge
- Nanoparticle size: 24 nm (20 nm silica interior surrounded by 2 nm layer of alumina)
- Nanoparticles predicted to form barrier surrounding rebar which will prevent chlorides from attacking rebar

3


Concept of Nanoparticle Treatment

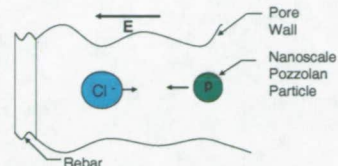

Reactive Electrokinetic Treatment in Cement Matrix

4

Concept of Nanoparticle Treatment

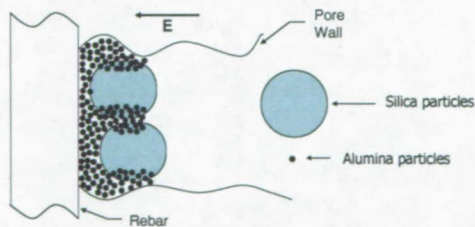


Predicted Formation of particles in Cement Matrix after treatment

5


Rebar Corrosion

- Causes of Corrosion
 - Cl⁻ catalyzed attack by dissolved oxygen
 - Drop in concrete pH depassivates rebar

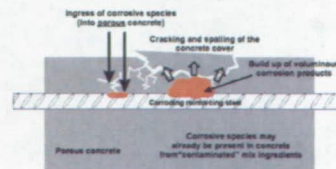

6

Experimental Flow Chart

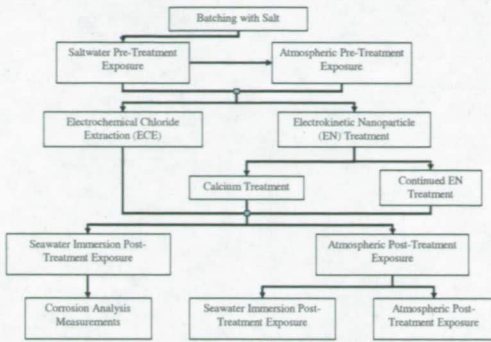

7

Specimen Design

- 3" Dia. by 6" Ht.
- Reinforced with 0.25" Dia. 1018 steel
- Sealed exposed rod and top of concrete with red epoxy




Batch Composition

Materials	Weight (lbs)
Water	18.5
Cement	36.5
Gravel	93.5
Sand	56.5
Salt	0.83


8

Treatments

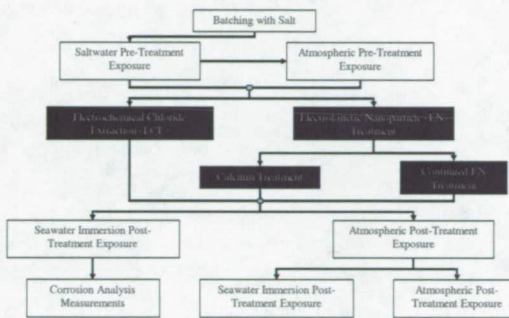

9

Treatment Setup

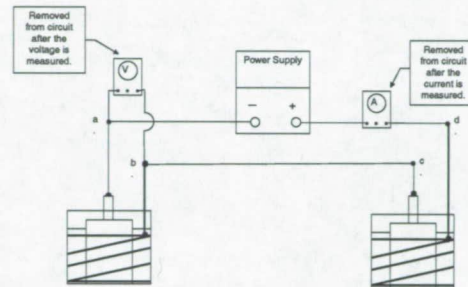

10

Treatment Procedure

- Two specimens per power supply (one EN and one ECE)
- Treatment voltage: 37.5 V (25 V per in. of concrete cover)
- Current Density < 10 A/m²
- Voltage & Current checked daily





11

Treatment Types


- Electrokinetic nanoparticle (EN)
 - Treatment duration: 7 days
- Electrokinetic nanoparticle plus additional introduction of calcium (EN + Ca)
 - Treatment duration: 4 days of EN and 3 days of Calcium
- Electrochemical Chloride Extraction (ECE)
 - Treatment duration: 7 days

12

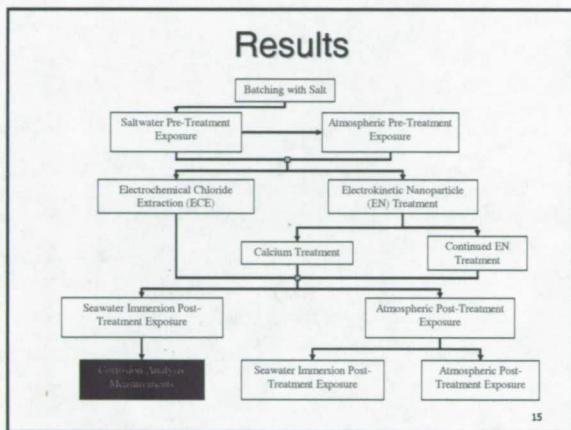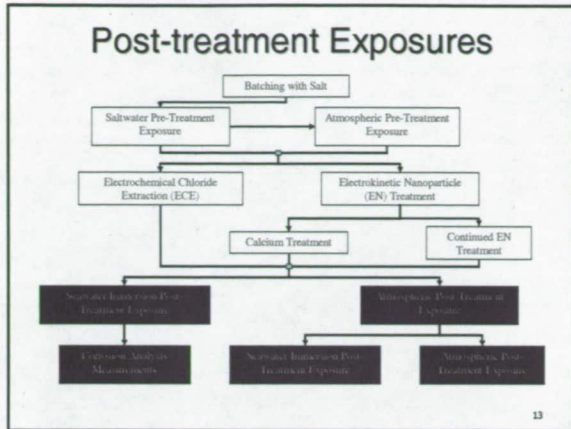


- ### Corrosion Measurements
- Corrosion potential (V_{corr})
 - Measured daily during treatment and weekly thereafter
 - Corrosion Rate
 - Linear Polarization Resistance (LPR) method
 - Measured after 1, 4, and 7 days of treatment
 - Corroded Area Coverage
 - Breaking apart specimen and visually
- 16

- ### Other Analyses
- Indirect Tensile Test
 - Scanning Electron Microscopy (SEM)
 - Fractured sample
 - Polished sample (for elemental composition via EDAX¹)
- 17

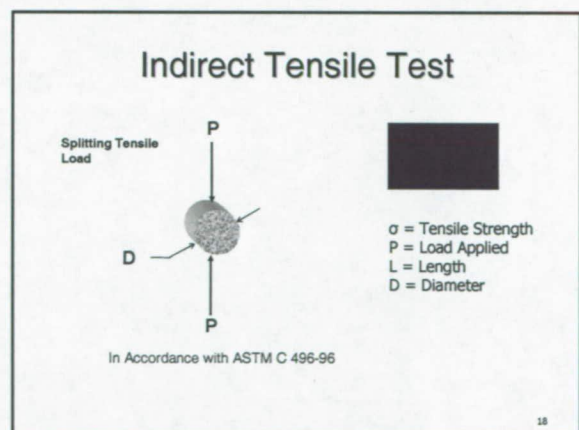

Corrosion Potential

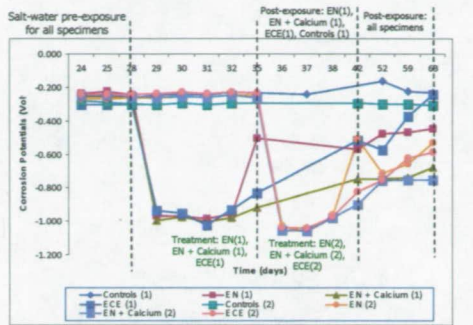

All corrosion potentials measured with respect to S.H.E.

19

Linear Polarization (immersion only)

Treatment Type	Corrosion rate (mpy)		
	After 1 Day of treatment	After 4 days of treatment	28 days post-treatment
Controls	0.4 ¹		2.7 ²
EN	1.7	0.5	3.5
EN + Ca	1.5	0.6	1.6
ECE	2.5	2.2	3.8


¹ Taken day treatment was started

² 0.5 mpy is considered serious corrosion in steel concrete reinforcement

- Corrosion rate for control specimens can be interpreted as the corrosion of the rebar
- Corrosion rate for treated specimens does not represent corrosion of steel


20

Treatment Current for Atmospheric Specimens

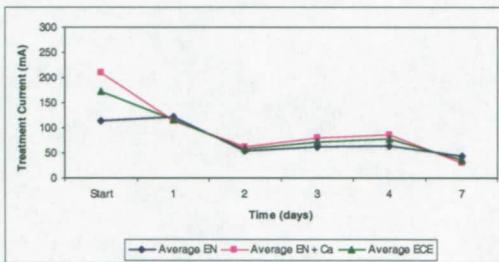

21

Average Treatment Current vs. Corrosion Rate

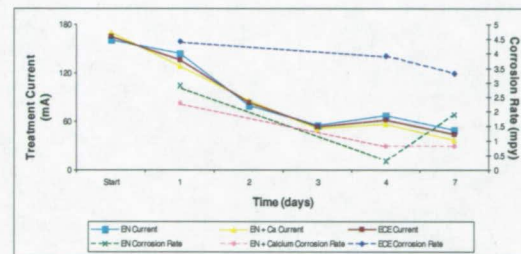

22


Pre-treatment Corrosion

- Average percent area corroded: 3% ± 1%
- Corrosion rate: 0.41 mpy ± 0.43 mpy
- Considered serious corrosion for steel reinforcement when 0.46 mpy




23

Corroded Area (post-treatment)

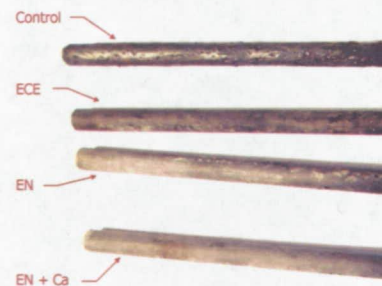


24

Corrosion Product Analysis

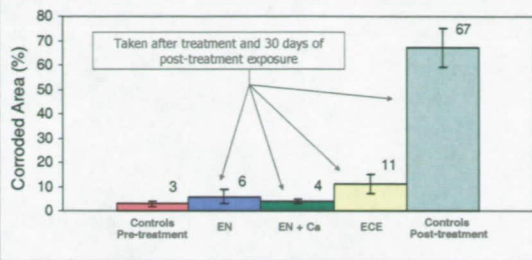


25

Splitting Tensile Strength Test Results

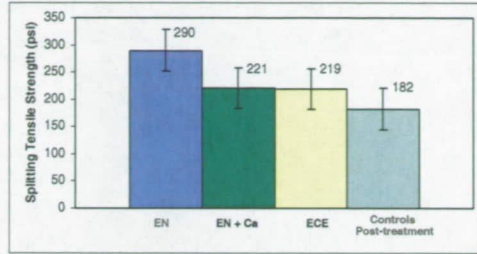

26

Microstructure Analysis

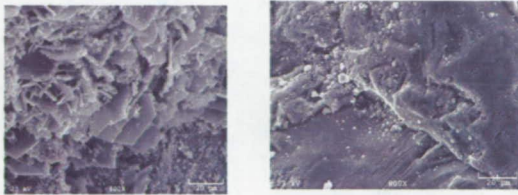


Control

EN Specimen

Images taken 1 mm from rebar

Microstructural Analysis

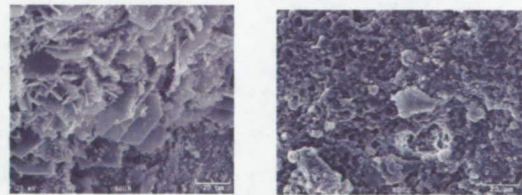


Control

ECE Specimen

Images taken 1 mm from rebar

28

Comparison of EN and EN + Ca

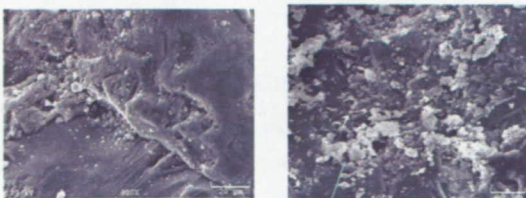


EN Specimen

EN + Ca Specimen

Images taken 1 mm from rebar

29

EDAX for EN Treated Specimen

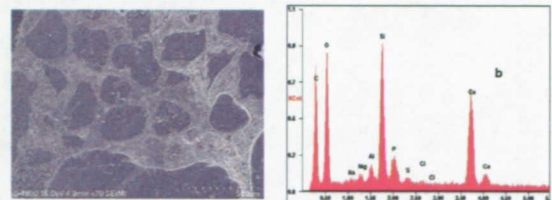


a) Polished Section


b) EDS Analysis

30

EDAX for EN + Ca Treated specimen

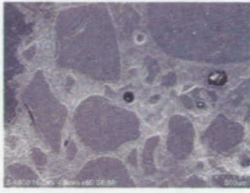


a) Polished Section

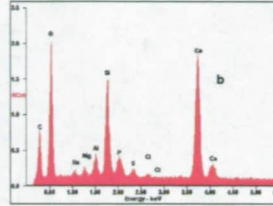


b) EDS Analysis

31

EDAX for ECE Treated Specimen

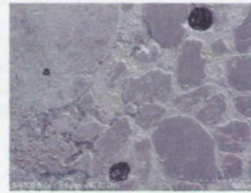

a) Polished section

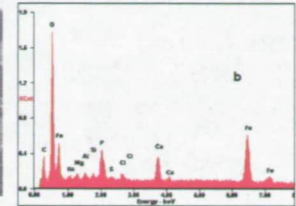

b) EDS Analysis

Elemental Compositions via EDAX

Specimen Type	Elements (Wt%)				
	Chlorine	Sodium	Aluminum	Calcium	Silica
Controls	4.1	3.2	1.0	10.9	23.8
EN	0.0	0.3	1.1	14.8	10.0
EN +Ca	0.4	0.5	1.7	23.7	5.6
ECE	0.8	0.5	0.6	8.5	1.0

33

Conclusions

- High current used during treatment supplied enough force to deliver particles in less than a week
- All treatments were able to mitigate corrosion in a short period of time, a more extensive analysis in the future could produce better results
- Introduction of calcium into specimen did not have as much effect on strength as predicted; although, it did not have a negative effect on corrosion mitigation

34

Acknowledgements

- Paul Hintze
- Mark Kolody
- Jerry Curran
- Wendy Li
- Teddy Back
- Jerry Buhrow

35