

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

Space Transportation System Availability and Its Relationships to Life Cycle Cost

Russel E. Rhodes¹

NASA, Kennedy Space Center, Florida, 32899

Benjamin B. Donahue²

The Boeing Company, Huntsville, Alabama, 35806

Timothy T. Chen³

NASA, Marshall Space Flight Center, Huntsville, Alabama, 35812

Future space transportation architectures and designs must be affordable. Consequently, their Life Cycle Cost (LCC) must be controlled. For the LCC to be controlled, it is necessary to identify all the requirements and elements of the architecture at the beginning of the concept phase. Controlling LCC requires the establishment of the major operational cost drivers. Two of these major cost drivers are reliability and maintainability, in other words, the system's availability (responsiveness). Potential reasons that may drive the inherent availability requirement are the need to control the number of unique parts and the spare parts required to support the transportation system's operation. For more typical space transportation systems used to place satellites in space, the productivity of the system will drive the launch cost. This system productivity is the resultant output of the system availability.

Availability is equal to the mean uptime divided by the sum of the mean uptime plus the mean downtime. Since many operational factors cannot be projected early in the definition phase, the focus will be on inherent availability which is equal to the mean time between a failure (MTBF) divided by the MTBF plus the mean time to repair (MTTR) the system. The MTBF is a function of reliability or the expected frequency of failures. When the system experiences failures the result is added operational flow time, parts consumption, and increased labor with an impact to responsiveness resulting in increased LCC. The other function of availability is the MTTR, or maintainability. In other words, how accessible is the failed hardware that requires replacement and what operational functions are required before and after change-out to make the system operable. This paper will describe how the MTTR can be equated to additional labor, additional operational flow time, and additional structural access capability, all of which drive up the LCC.

A methodology will be presented that provides the decision makers with the understanding necessary to place constraints on the design definition. This methodology for the major drivers will determine the inherent availability, safety, reliability, maintainability, and the life cycle cost of the fielded system. This methodology will focus on the achievement of an affordable, responsive space transportation system.

It is the intent of this paper to not only provide the visibility of the relationships of these major attribute drivers (variables) to each other and the resultant system inherent availability, but also to provide the capability to bound the variables, thus providing the insight required to control the system's engineering solution. An example of this visibility is the need to provide integration of similar discipline functions to allow control of the total parts count of the space transportation system. Also, selecting a reliability requirement will place a constraint on parts count to achieve a given inherent availability requirement, or require accepting a larger parts count with the resulting higher individual part reliability requirements. This paper will provide an understanding of the relationship of mean repair time (mean downtime) to maintainability (accessibility for repair), and both mean time between failure (reliability of hardware) and the system inherent availability.

¹AST, Technical Management, Engineering Directorate Design & Development Eng Div Sys Engineering & Integration Br, Kennedy Space Center, Florida/NE-D2, and AIAA Senior Member.

² System Engineer, Advanced Systems Group, 950 Explorer Blvd, MS JV- 05, AIAA Sr. Member

³ AST, Aerospace Engineer, Spacecraft & Vehicle Systems Department, Vehicle Systems Design & Integration Branch, Marshall Space Flight Center/ EV-91, and AIAA Senior Member.

Nomenclature

A_i	=	inherent availability
A_a	=	achieved availability
A_o	=	operational availability
DDT&E	=	design, development, test & evaluation
IFA	=	in-flight anomaly
LCC	=	life cycle cost
LRU	=	line replaceable unit
MRB	=	materials review board
MTBF	=	mean time between failure
MTTR	=	mean time to repair
λ	=	failure rate or the reciprocal of the MTBF
r	=	number of failures or repairs
N	=	total parts count
t	=	system exposure time
PR	=	problem report
Pr	=	probability
SPST	=	space propulsion synergy team
TPM	=	technical performance metric

I. Introduction

It is essential that management and engineering understand the need for a derived availability requirement for the customer's space transportation system that is linked to life cycle cost (LCC). It is also essential to provide engineering and management the visibility of the several variables that determine the availability values required to enable key goals and objectives such as controlling LCC shown in Figure 1. This relationship of the variables driving the availability needs must be understood by all decision makers involved. This paper will address the *inherent availability* which addresses the mean downtime as that mean time to repair (the time to determine the failed article, remove it, install a replacement article and verify the functionality of the repaired system). Also, with inherent availability the mean uptime will only consider the mean time between failures (for example, another form of availability addresses mean time between maintenance that includes both preventive and corrective maintenance) that require the repair of the system to be functional. It is also essential that management and engineering understand all influencing attribute relationships to each other and to the resultant inherent availability requirement. Figure 1 provides a visual influence diagram of these attribute relationships to each other and to the resultant availability requirement. This visibility will provide the decision makers with the understanding necessary to place constraints on the design definition for the major drivers that will determine the inherent availability, safety, reliability, maintainability, and the life cycle cost of the fielded system provided to the customer. This inherent availability requirement must be driven by the need to control the number of unique parts/subsystems and the spare parts required to support the transportation system operation.

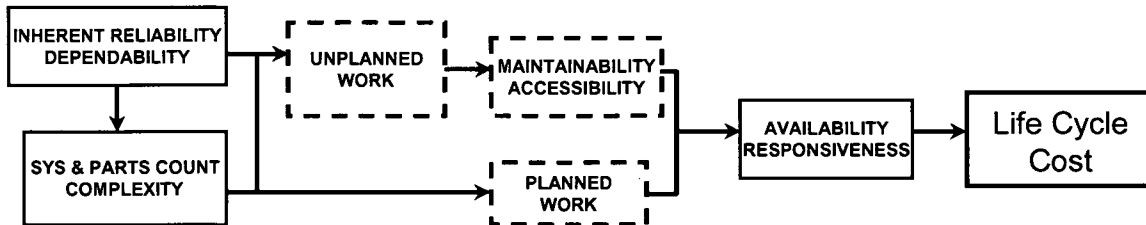


Figure 1. Availability influence diagram.

II. Design to Life Cycle Cost Management

The design to life cycle cost requires a rigorous process. The foundation must be implemented and demonstrated during the early part of the vehicle design program and refined during its duration. It is a process where trades-offs among development, operational performance, schedule, risk, DDT&E costs, and LCC must be addressed on a continuing basis. An ability to control LCC within stringent total program and fiscal constraints must be managed from the start of the design definition phase and must be carried through the operational life of the vehicles developed in the program. Key features of the design to Life Cycle Cost Management approach include:

1. Cost credibility through the use of extensive cost databases to develop initial values and operation cost models to assure the credibility of initial, early estimates.
2. The ability to assess annual funding constraints while exploring alternative system concepts.
3. A Design to LCC Management manager reporting directly to the program manager, thereby providing a high level, single point of contract.
4. A Design to LCC Management process which is an integral part of performance management system, thereby assuring an integrated cost management system which is coupled with the technical performance measurement system to enhance the early detection of unfavorable trends.
5. Cost effective design solutions through System Engineering control of the Technical performance and Operation cost assessments and constraints.
6. Early establishment of a realistic budget of cost driving functions and cost objectives and an emplaced highly visible management processes and accompanied discipline to control and to achieve them.

III. Background for Availability Discussion

Availability is the probability that a repairable system is operational—thus, availability is a function of both reliability and maintainability. Reliability is the probability a system will perform its intended function without failure for a specified period of time under specified conditions. Maintainability is the probability of restoring or repairing a system within a period of time when maintenance is performed in accordance with prescribed procedures.

Availability and not reliability addresses downtime (i.e., time for maintenance, repair, and replacement activities). As with reliability, availability can be either a demonstrated or predictive measure of performance. Demonstrated availability is simply (uptime) / (uptime + downtime). Predictive availability has three types, namely, at time t (point availability), over an interval from t_1 to t_2 (interval availability), or over the long run as $t \rightarrow \infty$ (steady-state availability).

Steady-state availability has three common forms (with each depending on the definitions of uptime and downtime), namely, inherent availability (A_i), achieved availability (A_a), and operational availability (A_o). Inherent availability is based solely on the failure (reliability) distribution and the downtime distribution (maintainability) and is an important system parameter for concept architectural design definition through systems trade studies.

The maintainability parameter of inherent availability only accounts for the time to diagnose and locate the failed article, access and repair it and verify the functionality of the repaired system. Whereas the maintainability parameter for achieved availability is the same as inherent availability except it includes the time for preventive maintenance. Last, the maintainability parameter for operational availability is the same as achieved availability except it includes the time for logistics and administrative delays.

For the purpose of this paper we will only discuss inherent availability (A_i) as shown in Eq. 1,

$$A_i = \text{MTBF} / (\text{MTBF} + \text{MTTR}) \quad (1)$$

where MTBF is the mean time between failure and MTTR is the mean time to repair. That is, MTBF is the average time between system failures (i.e., the average time the system performs its intended function), and MTTR is the average down time required to identify and access the failed article, repair or replace the article, and verify the functionality of the repaired system. Stating an availability requirement by itself will not accomplish the requirement's intent. Why, because there are three major drivers that influence and enable the achievement of the availability requirement. These drivers are reliability, maintainability, and total parts count. The availability requirement and the mentioned drivers must be developed and linked together to form interdependent requirements. The relationship of these drivers and the desired level of inherent availability must be understood by both engineering and management to systematically achieve the

customer's needs and goals. Also the understanding of the overall productivity of the transportation system is linked to these same three major drivers as well as the support labor and material for the system's operation.

IV. Discussion: Understanding System Availability, its Drivers, and Relationship to Cost

A. Inherent Availability and its Influencing Attributes

We will address inherent availability from a design perspective. By emphasizing the importance of the key attributes that influence availability, we can control or minimize the need to perform unplanned work during space operations and only be addressed during planned downtime for both modifications and depot type maintenance. Since inherent availability is a mathematical function of MTBF and MTTR, availability is determined by both parameters (drivers) and not one. Thus, reliability and its common metric (MTBF) do not equate to availability. As MTBF increases, upper-bound MTTR increases for lower-bound availability requirement. Therefore, if the transportation operation cannot accommodate the amount of down time from the predicted MTTR requirement, there is a need for selecting a higher availability requirement. If the opposite approach is taken to reduce MTBF in order to reduce the allowable MTTR, the probability of the number of failures would increase resulting in more replacement parts and the same total down time. However, the impact to the operation/mission will be much greater. That is, there would be a greater burden on logistics and higher life cycle cost due to the increased demand in providing more parts. Table 1 below illustrates this relationship between the requirements for MTTR and MTBF for different availability requirements. This table assumes there is one system element with an operation/mission time of one hour and with failures occurring at a constant rate.

Table 1. Availability requirement as a function of the reliability requirement and maintainability requirement for a fixed mission time.

System Reliability	Availability (A)						MTBF = -1/ln R
	90%	94%	98%	99%	99.50%	99.90%	
0.9500	2.17	1.24	0.40	0.20	0.10	0.02	19.496
0.9800	5.50	3.16	1.01	0.50	0.25	0.05	49.498
0.9900	11.06	6.35	2.03	1.01	0.50	0.10	99.499
0.9940	18.46	10.61	3.39	1.68	0.84	0.17	166.166
0.9950	22.17	12.73	4.07	2.02	1.00	0.20	199.500
0.9960	27.72	15.93	5.09	2.52	1.25	0.25	249.500
0.9980	55.50	31.88	10.19	5.05	2.51	0.50	499.500
0.9990	111.06	63.80	20.40	10.10	5.02	1.00	999.500
0.9998	555.50	319.12	102.03	50.50	25.12	5.00	4999.500
0.9999	1,111.06	638.27	204.07	101.01	50.25	10.01	9999.500

MTTR (Hours)

To understand the relationship between increased hardware failures and reduced reliability, we will examine the probability of failure, total parts count, and system reliability. The Poisson distribution can be used to predict the exact number of repair or failure events (r) in time period (t) of interest. However, it assumes a part has a constant repair or failure rate λ (where λ is the reciprocal of MTBF), and is immediately repaired or replaced. When the forecast is to determine the likelihood of r or less number of failures, the cumulative Poisson distribution can be used to determine this probability (Pr) and is described in Eq 2

$$Pr = \sum_{n=0}^r \left[e^{-N\lambda t} (N\lambda t)^n / (n!) \right] \quad (2)$$

where r is the upper bound for the number of failures, N is the total parts count under consideration, λ is the failure rate, and t is time period of interest. Using Eq. 2 and Table 2 illustrates the relationship between

system complexity (parts count) and system reliability where Table 2 provides the visibility for the predicted probability of success of controlling the part failures during the period of time of interest. This methodology can be used during design for controlling predicted hardware failures. This methodology places bounds on parts count to system reliability being selected.

Table 2. System Complexity (parts count) shown as a function system reliability and probability of 1 or less failures (events) per one hour time period (mission).

IF: Proposed System Has Serial Element Count (N) = 2,000

Mission Time (t) = 1

Mission's Maximum Failure Count (r) = 1

And:	Then:		Probability Of Success: Failure Count Is r Or Less During t For Various System Complexity Levels (N_{rel}) Based On λ_i						
System Reliability (R)	System MTBF	Element Failure Rate (λ_i)	1,000	1,500	2,000	2,500	5,000	10,000	20,000
0.940	16.2	3.0938E-05	0.99953	0.99896	0.99816	0.99716	0.98920	0.96096	0.87189
0.945	17.7	2.8285E-05	0.99961	0.99913	0.99846	0.99761	0.99089	0.96680	0.88926
0.950	19.5	2.5647E-05	0.99968	0.99928	0.99873	0.99803	0.99245	0.97223	0.90585
0.955	21.7	2.3022E-05	0.99974	0.99942	0.99897	0.99841	0.99386	0.97724	0.92155
0.960	24.5	2.0411E-05	0.99979	0.99954	0.99919	0.99874	0.99513	0.98180	0.93623
0.965	28.1	1.7814E-05	0.99984	0.99965	0.99938	0.99904	0.99626	0.98590	0.94977
0.970	32.8	1.5230E-05	0.99989	0.99974	0.99955	0.99929	0.99724	0.98952	0.96204
0.975	39.5	1.2659E-05	0.99992	0.99982	0.99968	0.99951	0.99808	0.99263	0.97288
0.980	49.5	1.0101E-05	0.99995	0.99989	0.99980	0.99969	0.99877	0.99523	0.98214
0.985	66.2	7.5568E-06	0.99997	0.99994	0.99989	0.99982	0.99930	0.99728	0.98967
0.990	99.5	5.0252E-06	0.99999	0.99997	0.99995	0.99992	0.99969	0.99878	0.99528

When evaluating total parts count, this can be considered in two different ways. If the concern is for affordability (LCC), the total parts count considers all components that could be considered to have a failure mode. Any part failure will result in added maintenance burden and result in added life cycle cost. However, if the concern is for achieving a successful launch on time or for the in-space application for long term space flight, only the critical components (parts) should be considered that would impact the successful mission accomplishment. Because of this difference in objectives, the designer will probably want to perform both evaluations to allow the achievement of both objectives which can be controlled and accomplished by the design process. These attribute relationships and availability can be made more visible by examining scenario examples.

B. An example of Space Transportation Application

Let's work an example case through this process to allow better visibility of using these aids. Let's assume for a repairable system the requirements are a 45 day period (1080 hours) with 0.98 system reliability, 98% system availability, and upper-bound MTTR at 216 hours. This 45-day target may represent a desired total time for receiving the hardware at the launch site, integrating the major elements, servicing the consumables, installing and connecting any ordinance, and launching the space transportation system into space (including approximately 20% for hardware replacement, e.g., MTTR). We can see from Table 3 that the upper bound MTTR for our example is 1090.98 hours. However, we must either select a higher availability or lower system reliability since the calculated upper-bound MTTR greatly exceeds the 216-hour requirement. Again using Table 3 when we do not change the 0.98 system reliability requirement, the availability requirement needs to be adjusted upwards to be ~ 99.9% providing an upper-bound MTTR of 53.51 hours. The other option would be to reduce system reliability to 0.90 to retain the upper-bound MTTR requirement of 216 hours. However, when we select a lower reliability, we need to address the likelihood (probability) of experiencing additional hardware failures. It can be seen from Table 4 that the system complexity requirement would be constrained to ~ 10,765 critical parts count maximum at a 98% or better probability of success while predicting the failures to be 2 or less parts per event. However, the upper-bound MTTR for these 2 parts will only be ~ 209 hours to achieve the availability of 98%. This option can be compared to the reliability choice of 0.98 where the critical parts constraint would be ~ 56,125 vs. the 10,765 with the reliability reduction to 0.90.

Table 3. Availability shown highlighted as a function of system reliability and mean time to repair in hours.

Availability (A) = Mean Time Between Failure (MTBF) / (MTBF + Mean Time To Repair (MTTR))

$A = \text{MTBF} / (\text{MTBF} + \text{MTTR})$ or $\text{MTTR} = \text{MTBF}(1 - A / A)$ t = 1080 Hours

A family of curves can be created for A = 90% to 99.9% with Sys. Reliability (R) = 0.95 to 0.99996
 Then MTTR is calculated for @ each A value

System Reliability	Availability (A)							MTBF = -t/ln R
	90%	98%	99%	99.50%	99.90%	99.98%	99.996%	
0.9000	1,138.95	209.19	103.54	51.51	10.26	2.05	0.410	10250.52
0.9800	5,939.80	1,090.98	539.98	268.63	53.51	10.69	2.138	53458.18
0.9900	11,939.90	2,193.04	1,085.45	540.00	107.57	21.50	4.299	107459.10
0.9940	19,939.94	3,662.44	1,812.72	901.81	179.64	35.90	7.179	179459.46
0.9950	23,939.95	4,397.13	2,176.36	1,082.71	215.68	43.10	8.619	215459.55
0.9960	29,939.96	5,499.18	2,721.81	1,354.07	269.73	53.90	10.779	269459.64
0.9980	59,939.98	11,009.38	5,449.09	2,710.85	540.00	107.91	21.579	539459.82
0.9990	119,939.99	22,029.79	10,903.64	5,424.42	1,080.54	215.94	43.180	1079459.91
0.9995	239,939.99	44,070.61	21,812.73	10,851.56	2,161.62	431.98	86.382	2159459.95
0.9998	599,940.00	110,193.06	54,540.00	27,132.96	5,404.86	1,080.11	215.987	5399459.98
0.9999	1,199,940.00	220,397.14	109,085.45	54,268.64	10,810.27	2,160.32	431.996	10799459.99

Again it can be seen from Table 4 that it may be desirable to increase the systems reliability if it is unreasonable to constrain the parts count below ~56,125 with a probability of success greater than ~ 98%. If we select a systems reliability greater than 0.98 to accommodate an increased parts count constraint, we will again need to reassess the availability requirement value for 99.9% to retain the MTTR requirement to ~ 216 hours. Attention should be paid to the element (part) failure rate requirement to attain these system reliability value to assure they are obtainable.

For the purpose of understanding the impact on LCC, if it is assumed the unplanned work of replacing failed hardware required the MTTR to perform corrections was outside the 45 days (1080 hours), this 20% impact on the flow time would require an additional 20% program labor cost per flight operation. Another way of assessing the impact would be to equate the productivity of the transportation system as equivalent to 8.1 flights per year without impact of failures vs. the 20% impact which is equated to be 6.759 flights per year. However, if the 98% reliability and 98% availability are retained with an accepted MTTR of 1090.98 hours, this impact would be equivalent to only 4.035 flights per year which would double the program labor cost per flight because it would take twice as long to perform the same total number of flights. Let us not forget that there is a constraint on total number of critical parts which is influenced by the selection of the required reliability value. To provide relief of the constraint of total critical parts allowed, it may be desirable to keep the higher reliability value and simply require the increase in availability value from the 98% to the 99.9%. This assessment is based on allowing up to 2 critical parts to fail and be corrected within the planned time of 45 days. The system design now must accommodate the corrective action of these 2 failures within the required MTTR value.

Table 4. System Complexity (parts count) constraint example shown as a function of system reliability (0.90 & 0.98) and 98% probability of success of controlling failures to 2 or less / event.

IF: Proposed System Has Serial Element Count (N) = 2,000

Mission Time (t) = 1,080

Mission's Maximum Failure Count (r) = 2

And: System Reliability (R)	Then:		Probability Of Success: Failure Count Is r Or Less During t For Various System Complexity Levels (N _{ref}) Based On λ _i						
	System MTBF	Element Failure Rate (λ _i)	1,000	1,500	2,000	2,500	5,000	10,765	56,125
0.900	10,250.5	4.8778E-08	0.99998	0.99992	0.99982	0.99965	0.99750	0.98001	0.43297
0.945	19,091.3	2.6190E-08	1.00000	0.99999	0.99997	0.99994	0.99958	0.99625	0.78658
0.950	21,055.4	2.3747E-08	1.00000	0.99999	0.99998	0.99996	0.99968	0.99714	0.82389
0.955	23,455.9	2.1317E-08	1.00000	0.99999	0.99998	0.99997	0.99977	0.99789	0.85893
0.960	26,456.3	1.8899E-08	1.00000	1.00000	0.99999	0.99998	0.99984	0.99850	0.89107
0.965	30,313.9	1.6494E-08	1.00000	1.00000	0.99999	0.99999	0.99989	0.99898	0.91974
0.970	35,457.3	1.4101E-08	1.00000	1.00000	1.00000	0.99999	0.99993	0.99935	0.94438
0.975	42,657.7	1.1721E-08	1.00000	1.00000	1.00000	0.99999	0.99996	0.99962	0.96457
0.980	53,458.2	9.3531E-09	1.00000	1.00000	1.00000	1.00000	0.99998	0.99980	0.98002
0.985	71,458.6	6.9971E-09	1.00000	1.00000	1.00000	1.00000	0.99999	0.99992	0.99072
0.990	107,459.1	4.6529E-09	1.00000	1.00000	1.00000	1.00000	1.00000	0.99997	0.99697

For the purposes of determining the availability of the system during a more critical time during the launch operation, provide an assessment of the last 16 hours (two work shifts) of the total 45 day flow time by adjusting the value for t in our model to 16 hours. For this evaluation select a system reliability of 0.98 and the availability desired of 0.98% with an upper-bound MTTR value of 5 hour for hardware replacement. It can be seen from Table 6 that a reliability value of 0.98 must be selected to achieve a one or less failure prediction within the 16 hours while constraining the critical parts count to 21,250 with minimum of a 0.98% probability of success. From Table 5 it can be determined with a system reliability value of 0.98 (MTBF of ~ 792 hours) that the availability must be 99.5% to constrain the MTTR to within the desired 5 hours. The first selected availability value of 0.98% would have allowed the MTTR of ~ 16 hours which is not compatible with our requirement. If it is desirable to increase the critical parts constraint above the 21,250, the system reliability requirement may need to be raised to 0.99 at an availability requirement of 99.9% to allow constraining the parts failure potential to one element (part) during this final 16 hour with a maximum of ~ 5 hours for this repair.

Table 5. Availability shown highlighted as a function of system reliability and mean time to repair in hours.

Availability (A) = Mean Time Between Failure (MTBF) / (MTBF + Mean Time To Repair (MTTR))

$A = \text{MTBF} / (\text{MTBF} + \text{MTTR})$ or $\text{MTTR} = \text{MTBF}(1 - A / A)$ $t =$ 16 Hours

A family of curves can be created for A = 90% to 99.9% with Sys. Reliability (R) = 0.95 to 0.99996
 Then MTTR is calculated for @ each A value

System Reliability	Availability (A)							MTBF = -t/ln R
	90%	98%	99%	99.50%	99.90%	99.97%	99.994%	
0.9500	34.66	6.37	3.15	1.57	0.31	0.09	0.02	311.93
0.9800	88.00	16.16	8.00	3.98	0.79	0.24	0.05	791.97
0.9900	176.89	32.49	16.08	8.00	1.59	0.48	0.10	1591.99
0.9940	295.41	54.26	26.86	13.36	2.66	0.80	0.16	2658.66
0.9950	354.67	65.14	32.24	16.04	3.20	0.96	0.19	3191.99
0.9960	443.55	81.47	40.32	20.06	4.00	1.20	0.24	3991.99
0.9980	888.00	163.10	80.73	40.16	8.00	2.40	0.48	7992.00
0.9990	1,776.89	326.37	161.54	80.36	16.01	4.80	0.96	15992.00
0.9998	8,888.00	1,632.49	808.00	401.97	80.07	24.00	4.80	79992.00
0.99990	17,776.89	3,265.14	1,616.08	803.98	160.15	48.01	9.60	159992.00

MTTR (Hours)

Table 6. System Complexity (parts count) example shown as a function of system reliability (0.98) and 98% probability of success of controlling failures to 1 or less per event in time (16 hours).

IF: Proposed System Has Serial Element Count (N) = 2,000

Mission Time (t) = 16

Mission's Maximum Failure Count (r) = 1

And: System Reliability (R)	Then:		Probability Of Success: Failure Count Is r Or Less During t For Various System Complexity Levels (N _{ref}) Based On λ _t						
	System MTBF	Element Failure Rate (λ _t)	1,000	1,500	2,000	2,500	5,000	10,000	21,250
0.940	258.6	1.9336E-06	0.99953	0.99896	0.99816	0.99716	0.98920	0.96096	0.85885
0.945	282.8	1.7678E-06	0.99961	0.99913	0.99846	0.99761	0.99089	0.96680	0.87775
0.950	311.9	1.6029E-06	0.99968	0.99928	0.99873	0.99803	0.99245	0.97223	0.89586
0.955	347.5	1.4389E-06	0.99974	0.99942	0.99897	0.99841	0.99386	0.97724	0.91305
0.960	391.9	1.2757E-06	0.99979	0.99954	0.99919	0.99874	0.99513	0.98180	0.92918
0.965	449.1	1.1133E-06	0.99984	0.99965	0.99938	0.99904	0.99626	0.98590	0.94411
0.970	525.3	9.5185E-07	0.99989	0.99974	0.99955	0.99929	0.99724	0.98952	0.95767
0.975	632.0	7.9118E-07	0.99992	0.99982	0.99968	0.99951	0.99808	0.99263	0.96970
0.980	792.0	6.3133E-07	0.99995	0.99989	0.99980	0.99969	0.99877	0.99523	0.98001
0.985	1,058.6	4.7230E-07	0.99997	0.99994	0.99989	0.99982	0.99930	0.99728	0.98841
0.990	1,592.0	3.1407E-07	0.99999	0.99997	0.99995	0.99992	0.99969	0.99878	0.99469

Again it can be seen the same relationship to LCC; however, the impact may be greater because during this phase of the launch operations range safety and other institutional functions are engaged in the operation driving up the cost of the operation. It may be hard to place a value on this additional impact, but it will be large.

V. LCC Impact From Availability Cost Drivers (Reliability and Maintainability)

A Three-Flow Shuttle Orbiter Component Removal Analysis performed in 1995 provided much insight into the understanding of actual experience. To allow this analysis to be performed in a reasonable time, the task was confined to a data set to 3 Flows and the top 12 of 59 subsystems [represents about 80% of line replaceable unit (LRU) problem reports (PRs)]. 10% of the hardware failures were discovered in-flight (8% were not documented as “in-flight anomalies” or IFAs). Approximately 54% of all the LRUs failures reviewed result from required turnaround servicing and normal support functions. Approximately 12% of the LRUs reviewed were processing-induced (accessibility would be considered as major cause). It was found that about 36% of the reviewed LRU removals would go undetected as they were found during test and inspection (significant compromise in safety and mission success). Given the safety/reliability consequences of this level of undetected component failures accumulating over a period of flights, substantiates the value added by pre-flight test and certification. To save time and money, in place repair can be accomplished to avoid a LRU replacement. A comparison of component removals vs. engineering actions to avoid hardware removals indicated there was LRU PRs = 40% (i.e., component removals) vs. material review boards (MRBs) = 60% (i.e., removal avoidance). The average LRU replacement is approximately 100 per turnaround operation.

To provide the understanding of the impact to LCC, this unplanned troubleshooting and repair accounted for approximately 24% of the work content during the total turnaround operation between flights of the shuttle system. Some fluid systems this work content was up to 50%. The cost is measured in several ways as there is labor, hardware logistics, and lost productivity of each shuttle orbiter. This loss in transportation productivity drives the facility infrastructure needs, e.g., these facilities now support less transportation system turnaround operation per year which results in additional facilities to support the annual launch rate. These additional facilities require resources to provide maintenance, repair, and operation which add to the LCC of the space transportation system operation.

VI. Balancing System Safety, Reliability, and Maintainability Requirements Study

One design technique for increasing mission reliability emphasizes increased redundancy. However, it should be noted that this technique, i.e., increasing reliability through redundancy, often results in increasing the maintainability burden.

A notional example that demonstrates how added redundancy, inserted in a design to increase reliability, may also increase the maintainability burden is shown in Figure 2. The example sited compares a notional triple redundant string (Case 1 left) with a dual redundant string (Case 2 right). The examples use a mission reliability goal of 0.999. Case 1 results in a 300:1 added burden on maintainability, whereas case 2 results in a 60:1 added burden. The resulting outcome on recurring cost is different – the added parts count of Case 1 increases cost compared to Case 2. A thorough appreciation of the coupling of maintainability and reliability must be held throughout the design phase, and design teams must strive for low parts counts in order to meet critical maintainability objectives.


Individual design teams often seek to optimize their system, and system engineering staffs often force this onto them via the requirements definition process. Design teams must first and foremost meet their specifications (be compliant). Program management must look at the total vehicle, its operations, its future upgrade paths as a whole system, and be disciplined enough to appreciate the necessity of coupling maintainability and reliability goals with performance goals to prevent independent subsystem level optimizations from collectively adversely affecting LCC.

As an example, even though the Shuttle initial design considerations emphasized performance, maintainability goals were also set, but inadequate internal discipline was exercised and a high performance, but also high maintenance cost, flight system was the result. Recurring costs and maintenance costs must be reduced and an essential factor in that process is the introduction of fewer, but more highly reliable, components. The inevitable “growth in parts count” that results from “highly redundant” design approaches often leads to maintenance intensive designs.

If the element or component reliability requirements to achieve the desired minimum maintainability burden become prohibitive, then the efforts must focus on other methods of reducing the parts count. The reduction in parts count may be accomplished through improved functional integration of systems, restructuring redundant combinations to a minimum, and using the highest element reliability possible.

The Coupling of Maintainability And Reliability (Redundancy - Case)

Techniques for increasing mission reliability (increased redundancy) should be used only to achieve safety goals desired above and beyond that reliability required to produce the lowest life cycle cost avoiding added maintainability burden.

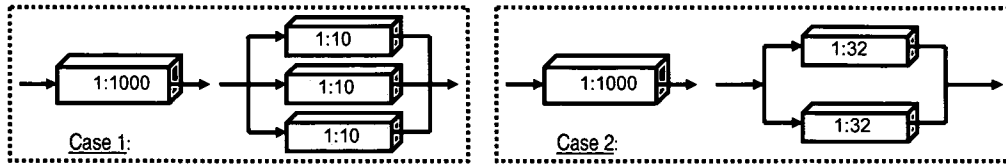

Simple Example Comparisons

(Each with common reliability/safety requirements, but very different maintainability burdens and recurring cost outcomes)

Case 1: Reliability objective set = 0.999 with single string component two orders-of-magnitude more reliable than using three parallel components

- 1:1000 = 3 of 1:10 in parallel = 0.999 reliability objective (Reliability = $1 - 1/10^3 = 0.999$)
- **Result:** 300:1 added burden on maintainability for triple redundancy vs. single higher reliability component

Case 2: Seeks to find a dual redundant solution and meet the Reliability objective set = 0.999

- 1:1000 = 2 of 1:32 in parallel = 0.999 reliability objective (Reliability = $1 - 1/32^2 = 0.999$)
- **Result:** 60:1 added burden on maintainability for dual redundancy vs. single higher reliability component

Figure 2. Coupling of Maintainability and Reliability: Sample Case Study.

The “maintainability burden” is a major driver of recurring cost. Often a key element in the recurring cost burden is a direct function of the number of parts. Part counts increase when the reliability of the selected parts is not sufficient to meet safety needs and redundancy is instituted to achieve reliability goals. Part counts are also increased by the lack of functional systems integration. To achieve recurring cost objectives, highly reliable parts must be used in the design, which in turn leads to lower repair requirements that will drive down the maintainability requirement. Figures 3 and 4 show these effects.

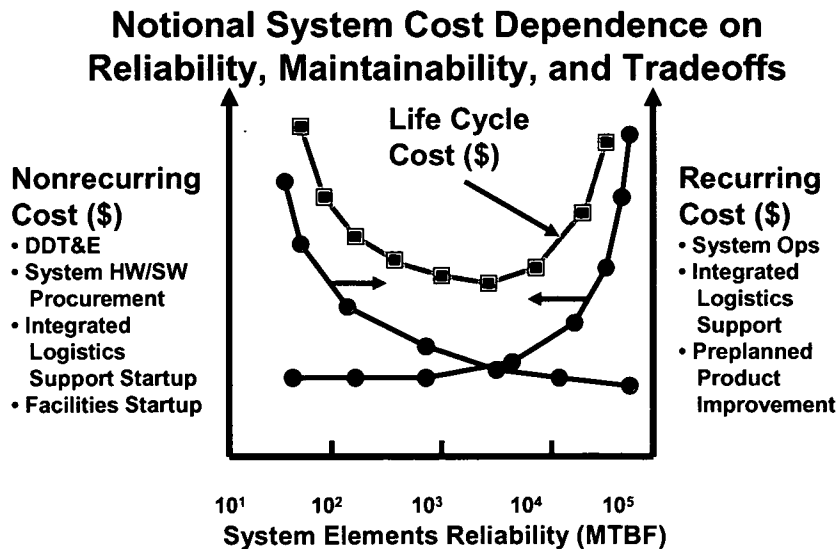


Figure 3. Flight System Cost Dependence on Reliability, Maintainability.

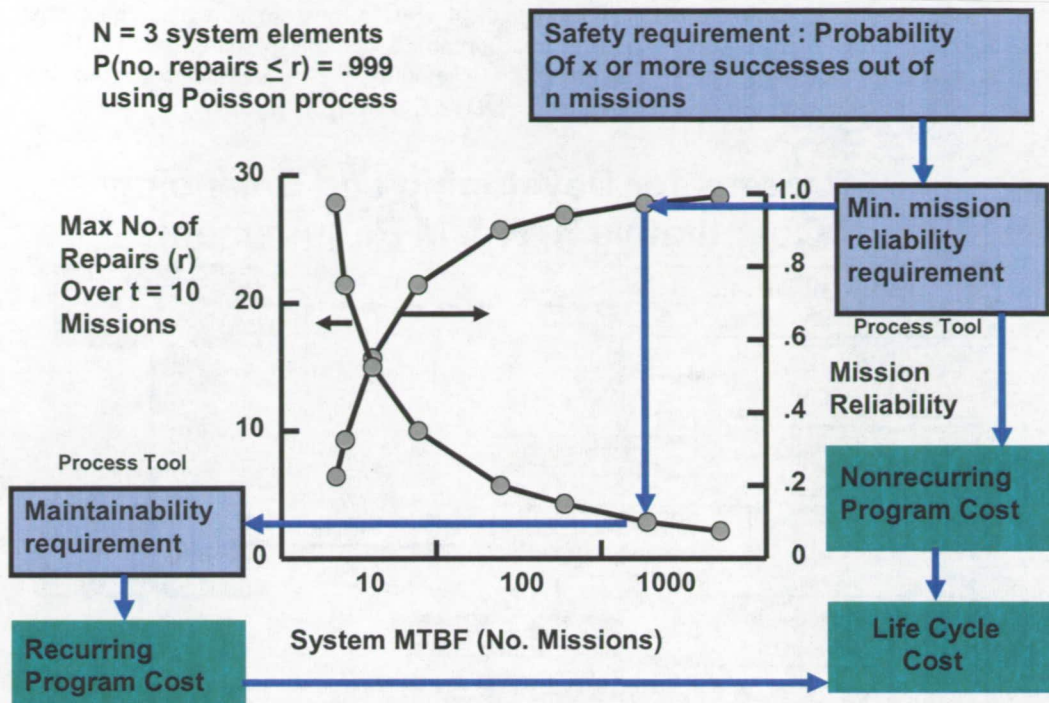


Figure 4. Mission Reliability, Repairs over Flight Rate Period and MTBF.

Thus it is imperative to conduct early technology development programs to achieve the availability of high reliability parts.

Achieving this balance of design life requirements with safety and maintainability objectives requires a process such as that shown in Figure 5 for developing and balancing quantitative safety, reliability and maintainability requirements. Achieving the appropriate balance among these factors to achieve low recurring cost requires a thorough understanding of subsystem element reliability, subsystem element fail rate and the number of serial system elements.

VII. Conclusion and Recommendations

In order to reduce the LCC of a future space transportation system, a rigorous process of Design-to-LCC Management must be implemented early in the vehicle design program and refined during its duration. Life cycle cost, as a part of the design team's technical performance metrics (TPM), must be managed from the start of the design definition phase and carried through the operational life of the vehicles. It has been shown that a lower LCC can be achieved through the correct allocation of vehicle availability cost drivers: maintainability and reliability. However, a careful balance of system safety, reliability and maintainability must be carefully quantified and traded in the design process so as to not adversely affect each other. Vehicle system engineers must look at the total vehicle, its operations, and its future upgrade paths as a whole system, to prevent independent subsystem level optimization from collectively adversely affecting the overall system LCC.

The availability requirement cannot be worked independently from the influencing attributes of MTBF requirement and MTTR requirement as well as a constraint on total parts count of the system being designed. These requirements must be developed together and maintained throughout the design process with the understanding of all their relationships. If a design analysis capability such as the one discussed in this paper or using today's reliability and maintainability tools is used in the design, development, and evaluation (DDT&E) phase, the availability requirement, the MTTR requirement, the MTBF requirement, probability of success, affordability, and safety can all be controlled by design. However, because of their relationships to each other, they must be worked and developed together to provide the correct

understanding and control to meet all of the objectives. They also must be performed during concept development and available as requirement inputs before proceeding with the detailed design. Traditionally these reliability and maintainability assessments and adjustments to the design are performed much too late in the process to provide an enabling benefit to an affordable space transportation system. We can't over stress the need to have this activity involved in developing the requirements at the start of the concept/architecture development and throughout the DDT&E phase.

Process for Developing and Balancing Quantitative S, R & M Requirements

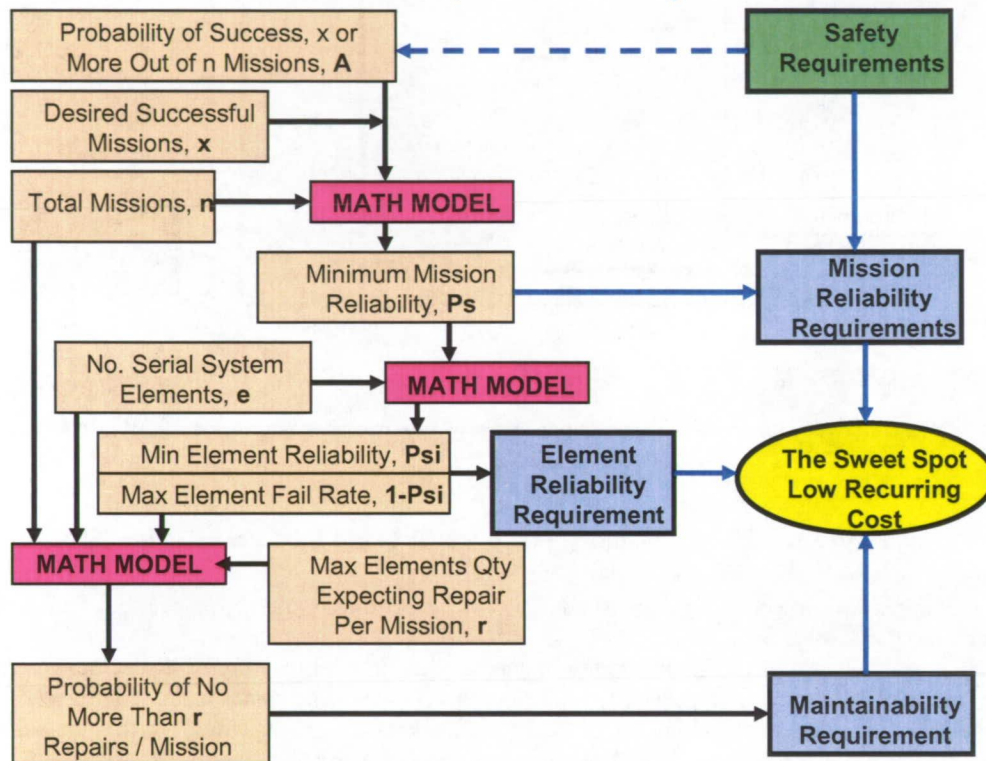


Figure 5. Process for Developing and Balancing Quantitative Safety, Reliability and Maintenance Requirements.

Additional benefits can be achieved by selecting the best technologies that provide major reductions in total parts count. Example would be to select a direct electro-mechanical control instead of using an intermediate fluid to perform the function while using the electro-mechanical device to control the intermediate fluid, e.g., electro-mechanical valve controlling fluid flow vs. a hydraulic or pneumatic operated valve while using a solenoid valve to control the hydraulic or pneumatic fluid which then controls the fluid valve. The use of common fluids for propulsion applications allowing an integrated system solution with only one fluid container would provide a major reduction in total parts count. When the criticality drives the design to provide redundant hardware solutions, the selection of hardware should always be at the best element reliability possible to provide the lowest maintenance burden for lowering life cycle costs. In all of the above examples the resultant DDT&E and operational cost will be reduced along with the achievement of the highest overall system reliability and safety. This will also lead to a higher availability of the system, thus enabling mission success.

In summary, added emphasis in any system development on the issue of inherent reliability, in so far as it addresses both parts count and MTBF, inevitably will improve performance, safety and operational affordability. Performance is improved when fewer, better, parts are used and they should weigh less overall. Weight margin at the start of the program should be large enough to accommodate common

hardware, in many cases of-the-shelf, from the aircraft industry to allow selection of demonstrated high reliability hardware. Safety will be improved as hardware that fails less during integration, checkout, and servicing inevitably will perform better in actual use. Affordability is helped because better performance makes each flight more productive or allows more flights given shorter process or production intervals. Ultimately hardware that cannot be counted on to function during processing, regardless of redundancies, cannot be expected to function well in flight. All that is lacking is the non-recurring investment up-front that focuses on sufficient generic technology. This initial investment is then justified when numerous subsequent users take advantage of it. An additional benefit is that the productivity of the facility infrastructures is improved which will require fewer facilities and again result in lower LCC.

Acknowledgments

The SPST is a national volunteer organization of government, industry, and university experts in space propulsion and propulsion-related technologies. The SPST is unique in its organization, membership and capability. It was chartered in 1991 by NASA and has a diversified membership of retired and active senior engineers, managers and scientist from industry, government and academia who have a wealth of hardware experience. The SPST was, and continues to be, dedicated to the development and operation of safe, dependable, affordable and sustainable space transportation systems. This is generally believed to be the key element in the Nation's ability to meet the goals of a Space Exploration Program.

Special thanks to several colleagues for their review and critique of this technical paper.

References

- ¹Ned H. Criscrimagna, Maintainability Toolkit, IIT Research Institute, New York, 2000, pp. 43-46.
- ²Dr. Paul Barringer & Associates, Inc., Web site <http://www.barringer1.com>, 8003 Pine Cup, Humble, TX, 77346-1740, USA.
- ³Ebeling, C. E., An Introduction To Reliability and Maintainability Engineering, Waveland Press, Long Grove, Illinois, Reissued 2005.
- ⁴AIAA Technical Paper 111429 Space Ops 2008 Conference 4-8-08.