

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

MECHANICAL ANALOG APPROACH TO PARAMETER ESTIMATION OF LATERAL SPACECRAFT FUEL SLOSH

Yadira Chatman* and Sathya Gangadharan[†]
Embry-Riddle Aeronautical University, Daytona Beach, FL 32114

Keith Schlee[§]
Analex Corporation, Kennedy Space Center, FL 32899

James Sudermann[#], Charles Walker[&] and James Ristow^{**}
NASA, Kennedy Space Center, FL 32899

Carl Hubert⁺⁺
Hubert Astronautics, Inc., Purcellville, VA 20134

The nutation (wobble) of a spinning spacecraft in the presence of energy dissipation is a well-known problem in dynamics and is of particular concern for space missions. Even with modern computing systems, CFD type simulations are not fast enough to allow for large scale Monte Carlo analyses of spacecraft and launch vehicle dynamic behavior with slosh included. Simplified mechanical analogs for the slosh are preferred during the initial stages of design to reduce computational time and effort to evaluate the Nutation Time Constant (NTC). Analytic determination of the slosh analog parameters has met with mixed success and is made even more difficult by the introduction of propellant management devices such as elastomeric diaphragms. By subjecting full-sized fuel tanks with actual flight fuel loads to motion similar to that experienced in flight and measuring the forces experienced by the tanks, these parameters can be determined experimentally. Currently, the identification of the model parameters is a laborious trial-and-error process in which the hand-derived equations of motion for the mechanical analog are evaluated and their results compared with the experimental results. Of particular interest is the effect of diaphragms and bladders on the slosh dynamics and how best to model these devices. An experimental set-up is designed and built to include a diaphragm in the simulated spacecraft fuel tank subjected to lateral slosh. This research paper focuses on the parameter estimation of a SimMechanics model of the simulated spacecraft propellant tank with and without diaphragms using lateral fuel slosh experiments. Automating the parameter identification process will save time and thus allow earlier identification of potential vehicle problems.

* Graduate Student, Department of Aerospace Engineering

[†] Professor, Department of Engineering Sciences

[§] Controls Analyst, Mission Analysis Branch, Expendable Launch Vehicle Division

[#] Controls Analyst, Mission Analysis Branch, Expendable Launch Vehicle Division

[&] Lead Controls Analyst, Mission Analysis Branch, Expendable Launch Vehicle Division

^{**} Loads Analyst, Mission Analysis Branch, Expendable Launch Vehicle Division

⁺⁺ Consultant in Spacecraft Dynamics and Control

INTRODUCTION

Fuel slosh in spacecraft is a concern in at least two types of scenarios. Spacecraft fuel slosh can interact with the launch vehicle control system and cause unpredicted motions and reactions. Likewise, spacecraft control systems and sensors can be influenced by sloshing fuel or by fuel simply not being in the expected center of gravity location. Slosh effects can be categorized in two additional ways. The first deals with slosh caused by launch vehicle and spacecraft maneuvers and, if induced under an acceleration field, is usually some type of bulk fluid motion with a periodic component. The second is slosh induced by interaction with a spinning or rotating spacecraft. This type of slosh can be bulk fluid motion and/or subsurface wave motion (currents) and almost always is periodic because of the spin. In either case, an unpredicted coupled resonance between the vehicle or spacecraft and the on board fuel can have mission threatening affects. For example, missions have been lost because of uncontrolled growth in nutation driven by resonant fuel slosh.¹ This paper describes the on-going research effort to improve the accuracy and efficiency of modeling techniques used to predict these types of motions. In particular, a comparison of some of the preliminary results with and without diaphragms is made to illustrate the effect of diaphragms and bladders on the slosh dynamics.

Historically, it has been possible to predict free-surface lateral slosh of bulk fluid motion with a great deal of confidence and accuracy using codes such as the Lomens and the Dodge programs.² The difficulty increases and the confidence will diminish when a diaphragm or a bladder is introduced into a fuel tank. These devices are used to separate the fuel from the gas ullage (usually pressurized) so as to ensure a pure liquid flow to the spacecraft engines. They have become very popular with spacecraft designers since they can guarantee smooth engine performance in any orientation and gravity field (or lack thereof). They also do a very good job of ensuring that a very high percentage of the available fuel is utilized. Both the Lomens and Dodge codes assume a pendulum as a mechanical analog for the slosh motion. Additional types of mechanical analogs (such as rotors and suspended masses) are being considered to develop a more generalized method of modeling fuel motion.

NASA's Launch Services Program at Kennedy Space Center has developed several launch vehicle dynamic simulations that use parameters derived from these full scale tank tests. These simulations are based on the Matlab SimMechanics toolbox from Mathworks, Inc.³ The basic mechanical analog used to date has been the pendulum for bulk slosh, with rotors added when needed to account for subsurface rotational waves. SimMechanics provides a library of masses, joints, actuators and sensors and can be used to quickly build up a large variety of different mechanical representations of the fluid motion.

On-going research effort is aimed at developing a method whereby the parameters can be derived directly from an arbitrary Matlab SimMechanics model of the mechanical analogs using the Parameter Estimator Toolbox.^{4, 5, 6 and 7} It has been found that the diaphragm shape can profoundly affect slosh behavior and that, surprisingly, many of these diaphragms will hold their initial shape throughout launch vibration and maneuvers.⁸

Extensive analysis has been done on the different tank shapes and locations, as well as the use of PMDs. A summary of this analysis, like that reported by Hubert⁹ shows the vast differences in possible behaviors of different designs. For example, a number of relatively simple mechanical models have been developed for cylindrical tanks with hemispherical end-caps mounted outboard of the spin axis. This type of tank has been popular in a number of spacecraft programs. Hubert also notes that one of the most difficult aspects of employing such mechanical models is in the selection of appropriate parameters in the model.

One of the most practical types of spacecraft propulsion fluid control devices has proven to be the diaphragm, which uses an elastomeric material to create an effective barrier between the pressurant gas and the liquid propellant. Main advantages of currently available diaphragms over other PMDs are that they are easier to manufacture and they are light weight.¹⁰ Hopefully, future diaphragms will be able to collapse in a more repeatable folding pattern. This will further reduce the variability in finding spacecraft fuel slosh parameters and give a more certain location of the fuel tank (and hence spacecraft) center of gravity.

PROBLEM DEFINITION

Various simulation parameters are estimated by matching the pendulum/rotor model response to the experimental response of full sized test tanks in NASA's Spinning Slosh Test Rig (SSTR) located at the Southwest Research Institute (SwRI). Testing has been done to understand and measure the forces and torques generated by the fuel in both spinning and lateral excitation modes. Test rigs have been developed for both modes. The test rig (Figure 1) for the spinning mode Spinning Slosh Test Rig (SSTR) has recently been modified to allow testing of centerline mounted tanks (Figure 2).

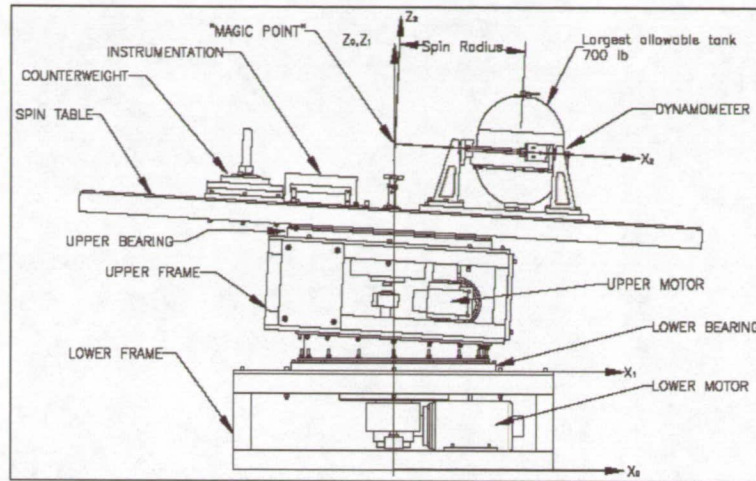


Figure 1. Schematic diagram of SSTR.

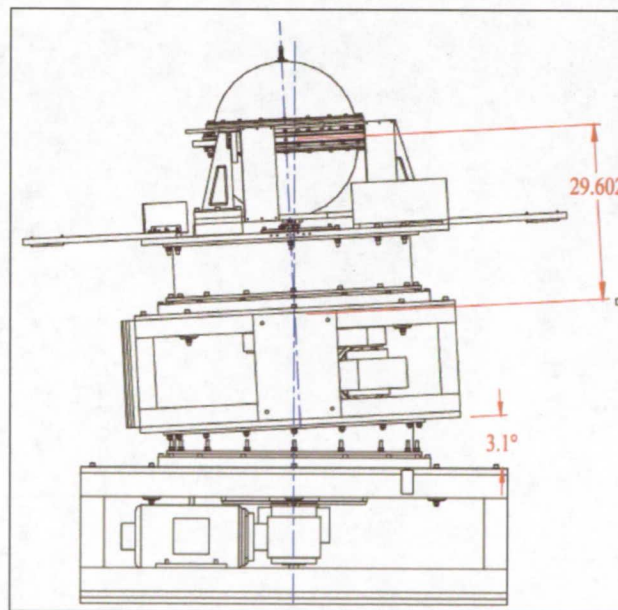


Figure 2. SSTR modified for on-axis mounted tank at SwRI.

The SSTR can subject a test tank to a realistic nutation motion, in which the spin rate and the nutation frequency can be varied independently, with the spin rate chosen to create a centrifugal acceleration large enough to ensure that the configuration of the bladder and liquid in the tank is nearly identical to the zero-g

configuration. The propellant motion is simulated using models with various parameters (inertia, springs, dampers, etc.) and the problem reduces to a parameter estimation problem to match the experimental results obtained from the SSTR. The data from these tests are used to derive model parameters that are then used in the slosh blocks of a MATLAB/SimMechanics-based spacecraft and upper stage simulation. Currently, the identification of the model parameters is a laborious trial-and-error process in which the equations of motion for the mechanical analog are hand-derived, evaluated, and compared with the experimental results.

The previous research used mechanical analogs such as pendulums and rotors to simulate sloshing mass as a common alternative to fluid modeling. A homogeneous vortex model of liquid motions in spinning tanks and an equivalent mechanical rotor model was developed by Dodge et al.¹¹ An approximate theory of oscillations that predicts the characteristics of the dominant inertial wave oscillation and the forces and moments on the tank are described. A 3-DOF pendulum model was proposed by Green et al.¹² There was evidence of liquid resonance from the experimental data. The resonance was closely tied to the tangential torque and to a lesser degree to the radial torque, and there was little or no resonance in the force measurements. Green et al., proposed a rotary oscillator concept to simulate the torque resonance in tangential and radial directions. This rotary oscillator model was superimposed on the pendulum model to provide the overall response of liquid oscillation in the tank.

The previous research effort proposed was directed toward modeling fuel slosh on spinning spacecraft using simple 1-DOF pendulum analogs. The pendulum analog modeled is a spherical tank. An electric motor induced the motion of the pendulum via a locomotive arm assembly to simulate free surface slosh. A SimMechanics model incorporating the pendulum analog of the experiment was created. Parameters describing the simple pendulum models characterized the modal frequency of the free surface sloshing motion. The 1-DOF model helped to understand fuel sloshing and serve as a stepping stone for future more complex simulations to predict the NTC accurately with less time and effort.

METHOD OF APPROACH

The experimental set-up (Figure 3) is directed toward modeling fuel slosh on spinning spacecraft using simple 1-DOF pendulum analogs.

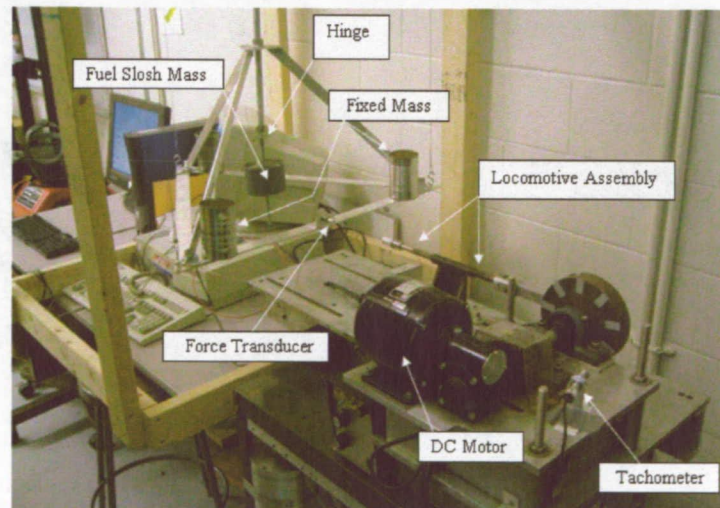


Figure 3. Photograph of the experimental set-up of the 1-DOF pendulum analog at Embry-Riddle Aeronautical University.

FREE SURFACE FUEL SLOSH

An electric motor induced the motion of the pendulum to simulate free surface slosh. Parameters describing the simple pendulum models included pendulum length, pendulum hinge spring/damping constants, fixed mass and several other parameters related to the DC motor/locomotive arm assembly. The one degree of freedom model helped to understand fuel sloshing and serve as a stepping stone for future more complex simulations to predict the NTC accurately with less time and effort.

Free surface slosh has a well defined resonant frequency. The only sloshing motion assumed to be taking place in this simplified model is a surface wave that in turn is simulated by the pendulum. The rest of the liquid is essentially at rest and can be treated like a fixed mass. Initial pendulum properties are found by the use of a program developed by Dodge at SwRI. This "Dodge", or SLOSH, code predicts the modes of the fuel tank with that of a pendulum.² The tank/fuel parameters such as shape, kinematic viscosity, and liquid fill level are provided as input to the program. An illustration of the tank/pendulum definition along with values for various pendulum parameters for an 8 inch spherical tank is in Figure 4.

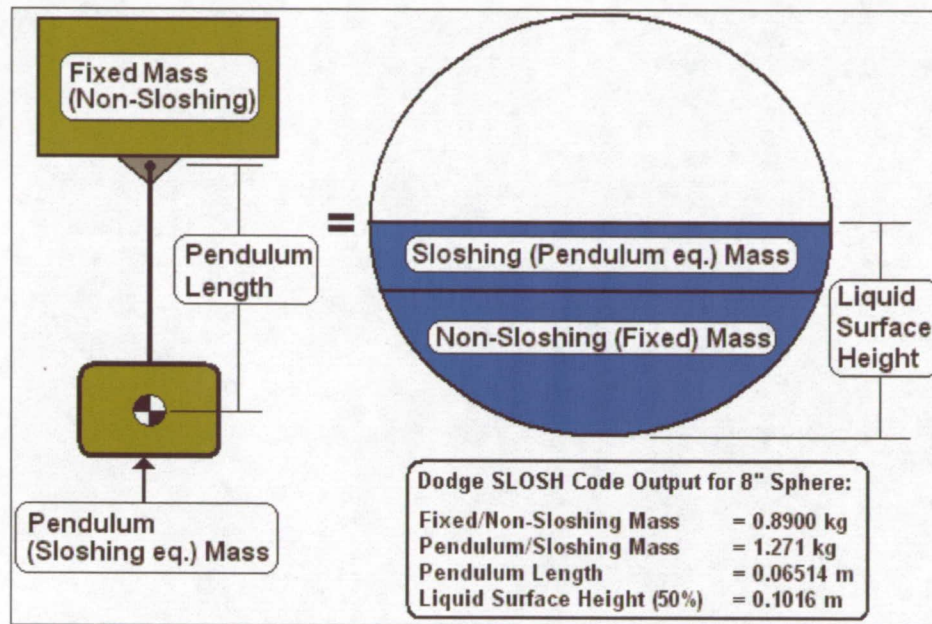


Figure 4. SLOSH code pendulum/tank equivalent and data

Using the tank/fuel parameters, the code can then determine the proper pendulum equivalent. The physical parameters given by the code include the liquid's fixed and pendulum masses as well as the pendulum length. First and second mode slosh data is also given by the code. The first mode parameters (sloshing mass) represent the majority of the propellant undergoing free surface slosh while the second mode represents a small correction factor for the first mode. This correction factor is an order of magnitude smaller than the first mode. Therefore, it can be added to the first mode mass with minimal error.

The code predicted that the maximum sloshing mass will occur at approximately 60% fill level as shown in Table 1. While the simulation tested this entire range of fill levels, the 1-DOF pendulum experiment was limited to test from 60-80% fill levels. This was due to the fixed mass constraint of the pendulum frame for the lower end and a tank fill restriction for the upper end.

Using the code's data distributions along with the geometric/material characteristics obtained from the experimental setup, a computer simulation of the one DOF pendulum analog was developed using SimMechanics software³ as illustrated in

Figure 5. For laboratory testing, water is an excellent and frequently used substitute for hazardous propellants. Water's fluid properties (density, viscosity, etc.) are nearly identical to those of hydrazine, the most commonly used propellant.

Fill Level	10%	20%	30%	40%	50%	60%	70%	80%	90%	99%
Fixed Mass (kg)	0.008	0.064	0.209	0.476	0.890	1.456	2.161	2.965	3.783	4.356
Pendulum Mass (kg)	0.114	0.392	0.738	1.068	1.303	1.386	1.277	0.964	0.479	0.028

Table 1. Slosh Code Liquid Mass distribution for 8" sphere.

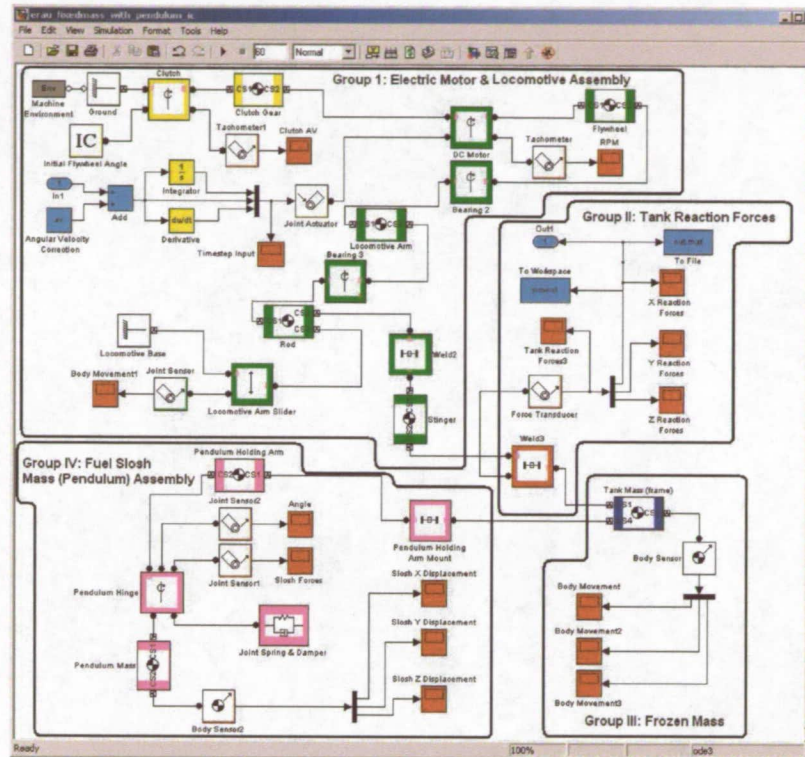


Figure 5. SimMechanics model of 1-DOF pendulum.

The previous research was the first step to automate the process of slosh model parameter identification using a MATLAB/SimMechanics-based computer simulation of the experimental SSTR setup. The parameter estimation and optimization approaches were evaluated and compared in order to arrive at a reliable and effective parameter identification process. Currently some modifications and changes are being made in order to expand and further elaborate in this research validation. The introduction of diaphragms to this experimental set-up will aid for a better and more complete estimation systems on fuel slosh characteristics and behavior.

Slosh Code Natural Frequency Verification

Before an automated parameter estimation process can begin, the raw data from the experiment must be filtered. This is primarily due to noise from the DC motor and friction from the locomotive arm assembly. Matlab's Signal Processing Toolbox was used to filter the data.

Calculating the natural frequency of the tank at various fill levels was an effective way to verify the predictions of the SLOSH code. In order to determine the natural frequency, the tank was excited close to its predicted natural frequency. This can be determined visually as the fluid in the tank starts to slosh with a high degree of turbulence near its natural frequency. The excitation can be stopped and the fluid will be allowed to come to rest naturally once the vicinity of natural frequency is reached. As with a pendulum, this natural motion provides the natural frequency. Figure 6 illustrates the natural damping of the fluid and the three states of the fluid during this test respectively. Figure 7 provides the unfiltered and filtered force data obtained from the experiments. Table 2 compares the natural frequency predicted by the SLOSH code to that measured experimentally.

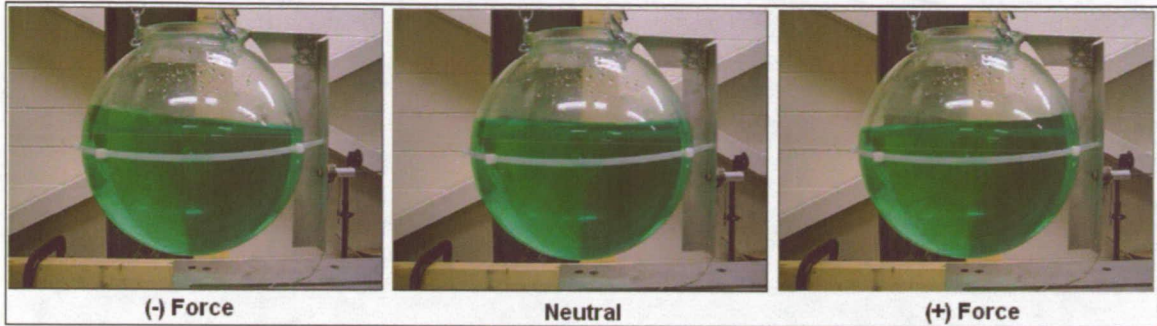


Figure 6. Natural damping slosh positions for 60% fill level.

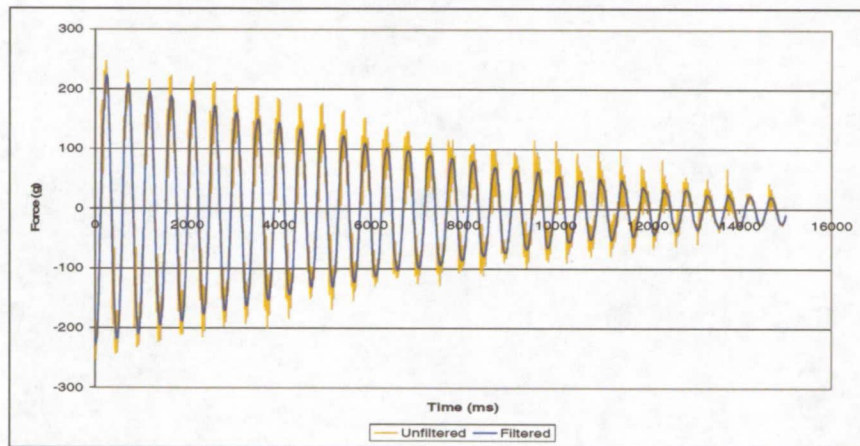


Figure 7. Natural damping of tank at 60% fill level.

Fill Level	SLOSH Code Predicted NF	Experimentally Calculated NF	Percent Difference
60%	2.092Hz	2.148Hz	2.61%
70%	2.288Hz	2.343Hz	2.35%
80%	2.600Hz	2.734Hz	4.90%

Table 2. Comparison of natural frequency.

The SLOSH code predicts the natural frequency of the tank accurately. Error for all three tests averages about 3% greater than predicted. This is most likely due to wall friction in the water and the tank. The tank was tested with fill levels ranging from 60-80%. The lower boundary of 60% is about equal to the minimum weight of the pendulum assembly while the upper boundary of 80% is due to the maximum practical fill level in the tank assembly.

Parameter Identification Process

Before conducting parameter identification process, frozen mass testing (no pendulum) was executed. The first step was to identify all of the parameters relating to the control of the DC motor/locomotive arm that would directly affect simulation results. In this case, frozen mass was treated as the only parameter directly related to the SLOSH code's predictions. The parameter was well-known and the parameter estimation process can be checked with these known values. Two parameter identification approaches are used to determine the parameters. The first approach was conducted using Newton's method for nonlinear least squares. The second estimation method is a "black box" approach using MATLAB's Parameter Estimation Toolbox.

Standard MATLAB M-code was used for the first approach to run Newton's method of non-linear least squares (MATLAB function: `lsqnonlin`). For the frozen mass test case, one primary and two secondary parameters are considered. These are frozen tank mass, angular velocity correction constant, and time delay. While it is obvious that the frozen tank mass is the primary parameter, the reason for the other two secondary parameters is less apparent. These parameters deal with a small phase-shift between the experimental and simulated data. Simulation operating parameters must be very accurate in order to obtain proper values for frozen mass and subsequently the pendulum properties. The angular correction factor constant is a minor correction applied to the operating frequency of the simulation to minimize the phase shift between the simulation and experimental data. This value is approximately $\pm 4.0e-2$ rad/s. The initial flywheel angle sets the starting angle of the flywheel. If not for this secondary parameter, the simulation would always start at a flywheel angle of zero radians. In reality, the flywheel rarely starts at this angle. Typical initial flywheel angle values, based on the standard data selection method, range from ± 1 radian. A lower and upper bound for each parameter must be given to the algorithm as well as conditions such as initial conditions, maximum iterations, maximum function evaluations, and parameter tolerances. The limits used in the frozen mass parameter estimation tests can be seen in Table 3.

Key:	Default Limits for all Frozen Testing					
A Series: 60% Fill Level Tests	A Series (All)		B Series (All)		C Series (All)	
B Series: 70% Fill Level Tests	Lower	Upper	Lower	Upper	Lower	Upper
C Series: 80% Fill Level Tests						
Flywheel Initial Angle (rad)	-2.0	2.0	-2.0	2.0	-2.0	2.0
Angular Velocity Correction (rad/s)	-0.5	0.5	-0.5	0.5	-0.5	0.5
Predicted Mass (lb)	4.0	+Inf	4.0	+Inf	4.0	+Inf

Table 3. Frozen mass test parameter estimation limits.

The convergence criterion is defined by:

$$R = \sum [abs(E) - abs(S)]^2 \quad (1)$$

Where,

R = Residual

E = Reaction forces obtained from the experiment

S = Reaction forces obtained from the MATLAB simulation

The Parameter Estimator Toolbox refers to this residual as the "cost function. For the frozen mass testing, the tolerance criterion for convergence of the residual was set to be $10e-7$. The M-code parameter estimation results for a simulated frozen mass at 60% fill level at several different frequencies are shown in **Error! Reference source not found.**Table 4. Figure 8 provides a comparison of the results between the experiment and the simulation.

Table 4. Newton's nonlinear least squares M-code parameter identification results for 60% frozen fill level.

Measured 60% Mass (lb)	6.2655				
Measured Test Frequency (Hz)	1.66	1.855	1.953	2.343	2.637
Predicted Mass (lb)	6.0302	6.1236	6.1937	6.0173	5.9599
Flywheel Initial Angle (rad)	-0.2373	-0.0775	-0.1191	-0.2034	-0.5209
Angular Velocity Correction (rad/s)	0.0752	0.1159	-0.0004	0.4369	-0.0794
Mass % Difference from Measured	3.76%	2.26%	1.15%	3.96%	4.88%

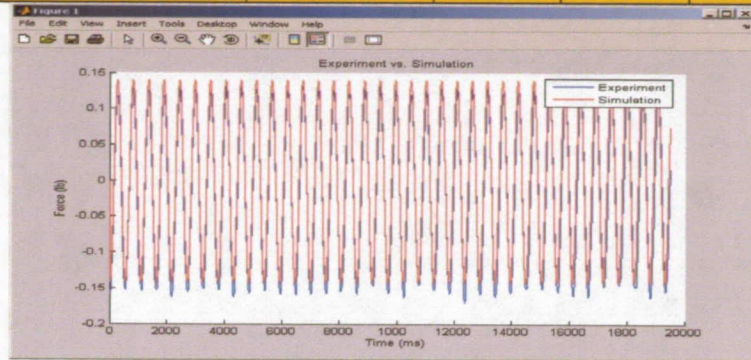


Figure 8. 60% Frozen mass parameter identification results using M-Code ($F=1.855\text{Hz}$).

The second parameter identification approach uses MATLAB's Parameter Estimator Toolbox. This toolbox provides a graphical interface enabling the user to use a powerful suite of optimization tools. The first step in using the parameter estimator is to prepare the SimMechanics model. The estimator requires that the simulation has an output block so that it can extract output data (tank reaction force) from the model and compare it with the transient, or measured data. An optional input block can also be incorporated into the simulation. This enables the user to specify a specific frequency scheme if desired. Since these tests are performed at a constant frequency, an input table was not used. Each parameter (frozen mass, angular velocity correction, and initial flywheel angle) must also be supplied to the MATLAB workspace before starting the Parameter Estimator Toolbox. The measured data is imported from a spreadsheet as an input (if desired)/output data vs. time dataset. Each dataset must start and end at the same time and have the same number of data points. For example, if a test is run for 20.00 seconds with a data collection rate of 10 ms, each column would have 2001 data points starting at 0.00 seconds and ending at 20.00 seconds. Figure 9 shows a comparison of the optimized solution with the measured data. The Parameter Estimator results for a simulated frozen mass at 60% fill level at several different frequencies are shown in Table 5.

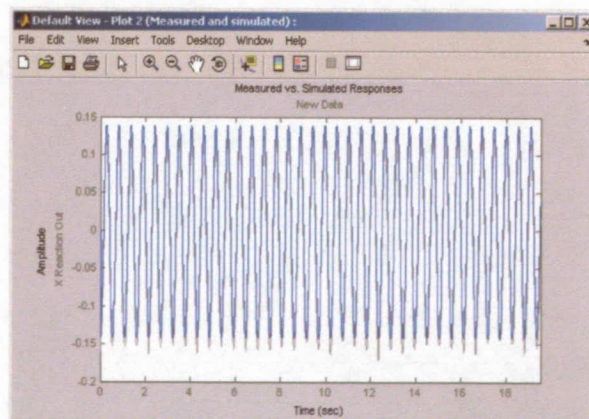


Figure 9. Real-time measured vs. response plot ($F=1.855\text{Hz}$)

Measured 60% Mass (lb)	6.2655				
Measured Test Frequency (Hz)	1.66	1.855	1.953	2.343	2.637
Predicted Mass (lb)	6.0307	6.1241	6.1939	6.0176	5.9605
Flywheel Initial Angle (rad)	-0.2855	-0.0759	-0.1177	-0.2082	-0.5205
Angular Velocity Correction (rad/s)	0.0817	0.1192	0.0038	0.4392	-0.0714
Mass % Difference from Measured	3.75%	2.26%	1.14%	3.96%	4.87%
Mass % Difference from M-Code	0.008%	0.008%	0.003%	0.005%	0.010%

Table 5. Parameter estimator toolbox results for 60% frozen fill level.

The same method used to estimate the frozen mass parameters was then used to estimate the pendulum parameters on a liquid-fill tank with no PMDs undergoing free surface slosh. Pendulum length and pendulum spring/damping coefficients were added in addition to the parameters in Table 5. Limits for the pendulum length were set to be +/- 20% of the length predicted by the SLOSH code while the other limits were similar to those shown in Table 4. Table 6 shows the results for the 60% fill level tests. Overall, 35 distinct datasets were optimized with each method to total over 70 optimizations.¹³

Pendulum Simulation (M-Code)			
	Fixed Mass (lb)	Pendulum Mass (lb)	
Five Parameters			
60% Fill Level Properties	3.2099	3.055	
Test ID	A1	A2	A3
Measured Test Frequency (Hz)	1.660	1.757	1.770
Angular Velocity Correction (rad/s)	-0.1124420	-0.0274759	0.1357546
Initial Flywheel Angle (rad)	-0.2676705	-0.8283001	-1.1392384
Pendulum Spring Constant (ft-lb/rad)	0.0443370	0.0454400	0.0302538
Pendulum Damping Constant (ft-lb/rad/sec)	0.0213000	0.0053249	0.0024797
Predicted Pendulum Length (in)	2.6167000	2.2831900	2.1315700
Cost Function	0.41629	0.89570	2.52411
Pendulum Simulation (Parameter Estimator)			
Test ID	A1	A2	A3
Measured Test Frequency (Hz)	1.660	1.757	1.770
Angular Velocity Correction (rad/s)	-0.110270	-0.028498	0.135030
Initial Flywheel Angle (rad)	-0.375980	-0.810290	-1.134300
Pendulum Spring Constant (ft-lb/rad)	0.000031	0.000000	0.013874
Pendulum Damping Constant (ft-lb/rad/sec)	0.020442	0.003703	0.002133
Predicted Pendulum Length (in)	2.6185 (L)	1.949900	2.005400
Cost Function	0.40716	0.83715	2.48520

Table 6. Comparison of 60% pendulum results for the two parameter estimation methods.

Parameter Estimation with Different Liquids

The first step is to experiment with several liquids with different viscosities in order to better understand the lateral fuel slosh effects. Liquids of varying viscosities (Table 7) and physical characteristics different from water are used. It is assumed that for higher viscosities the resonance frequency is slightly higher than the predicted value for an ideal liquid.¹⁴

Liquid	Viscosity (Poise)
Water	0.01
Glycerine	13
Corn Syrup	22

Table 7. Comparison of viscosities of different liquids.

The SLOSH code was also utilized to obtain the model characteristic and properties for the new liquids. Using the same tank geometry and different fill levels, the SLOSH code provided mechanical system properties and they were compared with the previous results obtained with water. Table 8 illustrates the SLOSH code output for the liquids in the experiment.

	Glycerine			Corn Syrup			Water		
	60	70	80	60	70	80	60	70	80
Fill Level %	60	70	80	60	70	80	60	70	80
Liquid Mass (kg)	3.587	4.340	4.960	3.900	4.719	5.393	2.842	3.438	3.929
Liquid Surface Height (M)	0.122	0.142	0.163	0.122	0.142	0.163	0.122	0.142	0.163
First Mode Parameters									
Pend. Mass (kg)	1.689	1.532	1.133	1.836	1.666	1.232	1.338	1.214	0.898
Pend. Length (M)	0.057	0.047	0.037	0.057	0.047	0.037	0.057	0.047	0.037
Pend. Hinge z-location (M)	0.102	0.104	0.109	0.102	0.104	0.109	0.102	0.104	0.109
Pend. % crit. Damping	8.839	10.990	15.300	10.360	12.880	17.930	0.703	0.874	1.217
Ratio of Slosh Amplitude to pend. Amplitude	1.448	1.541	1.635	1.448	1.541	1.635	1.448	1.541	1.635
Second Mode Parameters									
Pend. Mass (kg)	0.060	0.079	0.083	0.066	0.086	0.091	0.048	0.063	0.066
Pend. Length (M)	0.018	0.017	0.014	0.018	0.017	0.014	0.018	0.017	0.014
Pend. Hinge z-location (M)	0.100	0.100	0.095	0.100	0.100	0.095	0.100	0.100	0.095
Pend. % crit. Damping	8.839	10.990	15.300	10.360	12.880	17.930	0.703	0.874	1.217
Ratio of Slosh Amplitude to pend. Amplitude	0.405	0.506	0.627	0.405	0.506	0.627	0.405	0.506	0.627
Fixed Mass Parameters									
Mass (kg)	1.838	2.728	3.743	1.998	2.966	4.070	1.456	2.161	2.965
Z-location (M)	0.101	0.100	0.099	0.101	0.100	0.099	0.101	0.100	0.099
Mom. Inertia (kg*M ²)	0.008	0.013	0.018	0.009	0.014	0.019	0.007	0.010	0.014
1st Mode Slosh Frequency	2.092	2.288	2.600	2.092	2.288	2.600	2.093	2.289	2.601
2nd Mode Slosh Frequency	3.664	3.828	4.147	3.664	3.828	4.147	3.666	3.830	4.149
*Frequencies are cycles/sec.									

Table 8. Slosh code prediction for all tested liquids.

As predicted with the SLOSH code output, damping is a critical parameter when comparing the liquids with different viscosities. Parameters such as the slosh frequency and pendulum length remain the same for all liquids regardless of their viscosities. Modeling the system with a diaphragm will help to better understand the damping effects on the system.

The SimMechanics model was updated and adjusted for simulation using liquids other than water. As mentioned before with the aid of the Dodge Code the pendulum properties were determined for each of the liquids. Under free surface slosh conditions, the mass differences were accounted in the model. The parameters to be estimated are the initial flywheel angle, the angular velocity correction, the pendulum hinge spring constant and the pendulum damping constant.

After obtaining the experimental data for the different fill levels (60%, 70% and 80%) for both glycerine and corn syrup, the experimental data was then imported to the Parameter Estimation Toolbox. With the use of MATLAB Parameter Estimation Toolbox, the simulation for glycerine and corn syrup under free

surface slosh conditions were simulated. Figure 10 illustrates the comparison between the experimental data and the simulated data for glycerine at 60% fill level.

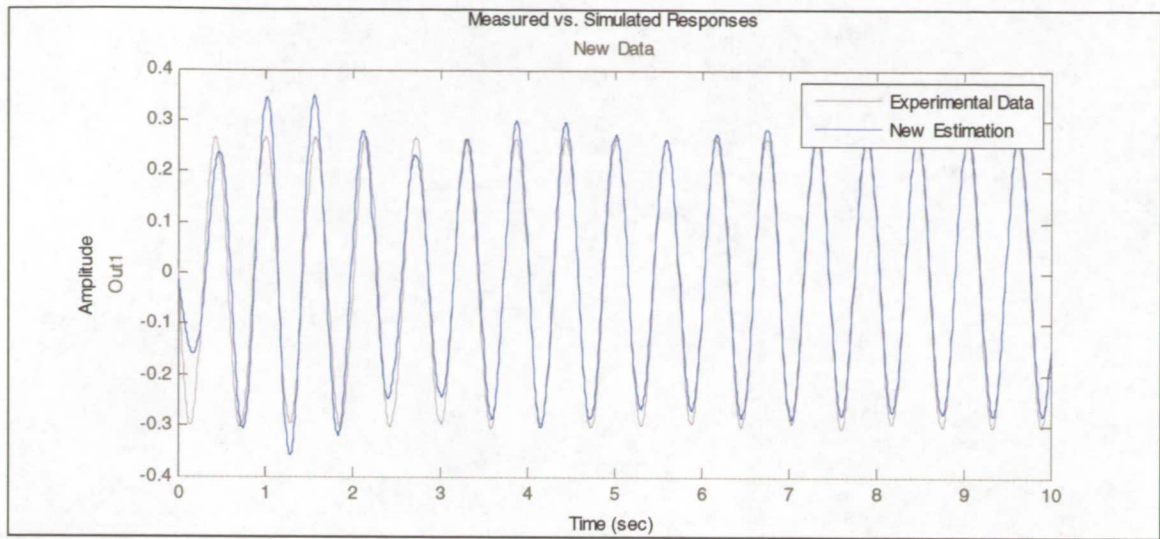


Figure 10. Glycerine 60% Fill Level 1.75Hz

The same procedure was followed to test and simulate the corn syrup 60% fill level conditions (Figure 11).

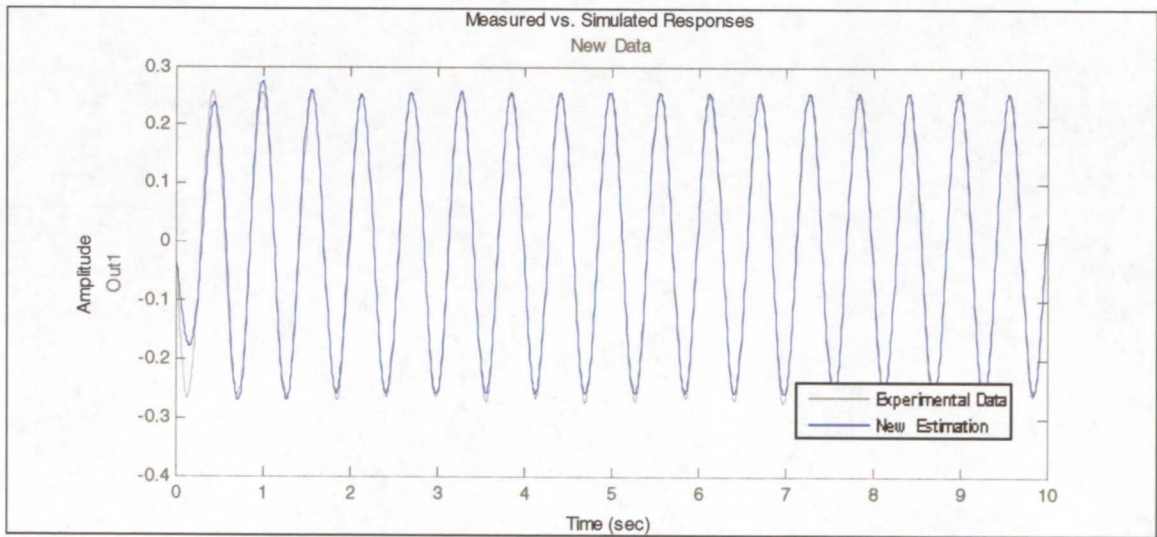


Figure 11. Corn Syrup 60% Fill Level 1.75Hz

After obtaining the simulated estimation, it can be compared with the results previously acquired with water at same fill level. The following table illustrates all three liquids results obtained with the MATLAB Parameter Estimation Toolbox. The results (Table 9) were compared and some of the values were as expected yet the damping value for glycerine was surprisingly lower than expected. The spring stiffness, on the other hand, increased as we tested each of the liquids.

Tank Simulation (Parameter Estimation)

Water		
60% Fill Level	Fixed Mass (lb)	Pendulum Mass (lb)
	3.210	3.055
Parameter Estimation: 4 Parameters		
Measured Test Frequency (Hz)	1.757	
Angular Velocity Correction (rad/s)	-0.151930	
Flywheel Initial Angle (rad)	0.212970	
Pendulum Spring Constant (ft-lb/rad)	0.167660	
Pendulum Damping Constant (ft-lb/rad/sec)	0.010487	

Glycerine		
60% Fill Level	Fixed Mass (lb)	Pendulum Mass (lb)
	4.052	3.856
Parameter Estimation: 4 Parameters		
Measured Test Frequency (Hz)	1.757	
Angular Velocity Correction (rad/s)	-0.113750	
Flywheel Initial Angle (rad)	-4.849900	
Pendulum Spring Constant (ft-lb/rad)	0.261830	
Pendulum Damping Constant (ft-lb/rad/sec)	0.004307	

Corn Syrup		
60% Fill Level	Fixed Mass (lb)	Pendulum Mass (lb)
	4.405	4.192
Parameter Estimation: 4 Parameters		
Measured Test Frequency (Hz)	1.757	
Angular Velocity Correction (rad/s)	-0.042086	
Flywheel Initial Angle (rad)	-4.944100	
Pendulum Spring Constant (ft-lb/rad)	0.404120	
Pendulum Damping Constant (ft-lb/rad/sec)	0.020734	

Table 9. Comparison of results among different liquids

FUEL SLOSH WITH DIAPHRAGM

The current research is utilizing the previous modeling of fuel slosh for the introduction of a diaphragm and its effects to the whole system. The experimental set-up proposed is to study the effects of slosh under a diaphragm is shown in Figure 12. A plexi-glass transparent spherical fuel tank with a diaphragm will be mounted on a fixture that will be linearly oscillated using a shaker. The forces due to fuel slosh will be measured using a force transducer mounted on the fixture. Noise will be filtered from the measured data. The proposed research on lateral fuel slosh modeling and parameter estimation will be a natural extension of the on-going research and will focus on two aspects:

- Understanding fuel slosh with various liquids
- Understanding how a diaphragm effects fuel slosh

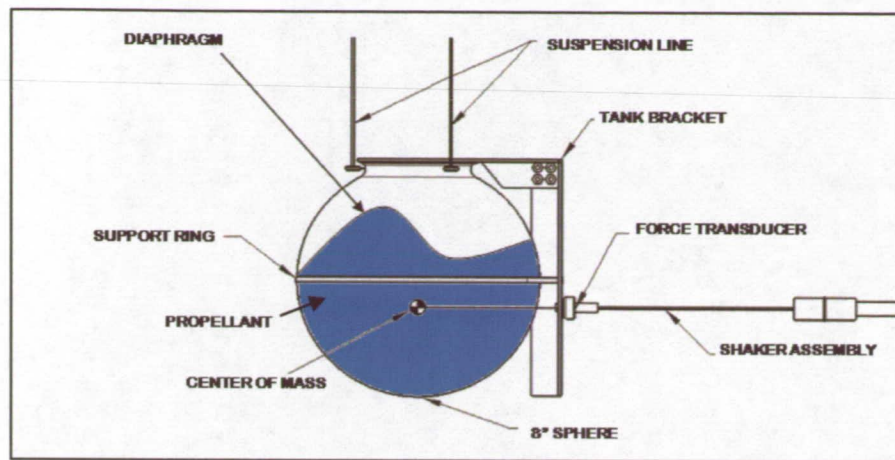


Figure 12. Schematic diagram of experimental set-up with the diaphragm.

Introduction of Diaphragm

The flexible diaphragm will be attached to the periphery of the tank wall. Because of the geometric constraints, a flexible diaphragm is most commonly used in spherical propellant tanks. Diaphragms provide a substantial level of slosh damping as a result of the combination of viscoelastic flexing of the diaphragm and the increased viscous effects at the liquid-diaphragm interface.¹⁵ A diaphragm also increases the slosh natural frequency because of the constraints imposed on the free surface shape. The effective mass of liquid participating in the sloshing is slightly smaller than for a tank of the same shape and fill level without a diaphragm. The nutation characteristics of the whole system also depend on the dissipation induced by the liquid viscosity, as well as on the presence and damping characteristics of PMD.¹⁶

The introduction of a PMD in the propellant tank, in this case a diaphragm, could involve more complicated behavior than the previously researched free surface slosh. By utilizing a similar step-by-step approach as what was used for the free surface slosh, incorporating a diaphragm into the simulation may lead to better parameter identification of this type of system. The stiffness of the diaphragm in the tank is one of the parameters in the system that was not previously present in the former experimental set-up. This will be yet another parameter to be either experimentally determined and/or calculated with the computer estimation tools. Also including the stiffness effect of the diaphragm to the SLOSH code to predict the slosh changes expected in the tank, will be needed to compare the previous results without the diaphragm.

Diaphragm Testing

The new tank including a diaphragm (Figure 13) was filled with water to a 60% fill level. To determine the natural frequency of the tank including the diaphragm, a damping test was executed utilizing the experimental set-up. With the use of the locomotive arm assembly, the tank was excited close to its natural frequency.

The natural frequency calculated based on the experimental data obtained was of about 2.08Hz. When comparing the experimental natural frequency calculated with the SLOSH code prediction for the same fill level at free surface slosh, the percent difference is about 0.4%. In addition, the diaphragm tank natural frequency calculated was found to be close to the glycerine natural frequency obtained at 60% fill level.

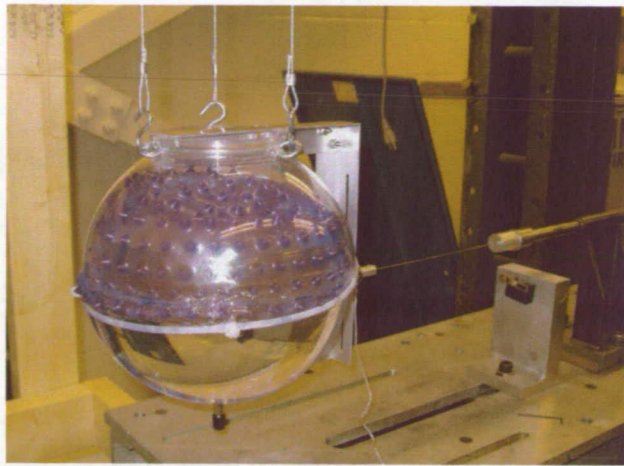


Figure 13. Tank fill 60% with water and diaphragm included

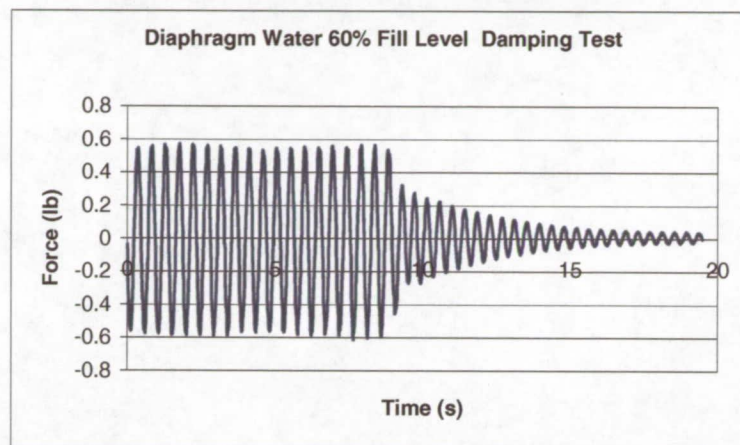


Figure 4. Tank with Diaphragm Damping Test

The future research will continue toward modifying the SimMechanics model to include the diaphragm in the system. There are several parameters to be considered due to the diaphragm effect on the overall slosh behavior.

CONCLUSION

Liquid sloshing in moving containers remains of great concern to aerospace applications like spacecraft and rocket missions. By extending the parameter estimation techniques previously developed to include the presence of a diaphragm, a greater number of real life missions can be analyzed. The on-going research will allow for earlier and easier identification of potential vehicle performance problems. This collaboration between NASA's Launch Services Program, Embry-Riddle Aeronautical University, Southwest Research Institute and Hubert Astronautics has led to a deeper understanding of the slosh issues confronting the spacecraft and launch vehicle community and enabled the development of these new approaches to predictive simulation.

ACKNOWLEDGMENTS

The authors would like to thank ELV Mission Analysis Branch at NASA Kennedy Space Center. Special thanks go to Bora Eryilmaz and Rohit Shenoy (The MathWorks, Inc.) for their guidance and help in this research project.

REFERENCES

1. Hubert, C., *Behavior of Spinning Space Vehicles with Onboard Liquids*, Hubert Astronautics, 2003, Carl@HubertAstro.com.
2. Dodge, F.T., *Fuel Slosh in Asymmetrical Tank Software*.
3. Wood, G.D., and Kennedy, D.C., *Simulating Mechanical Systems in Simulink with SimMechanics*, The Mathworks report 2003.
4. Sudermann, J., *Parameter Estimation of Spacecraft Fuel Slosh Mode*, Research and Technology 2004 Annual Report, NASA Technical Memorandum 2004-211535
5. Sudermann, J., *Parameter Estimation of Spacecraft Fuel Slosh*, Technology Development and Application 2005 Annual Report, NASA Technical Memorandum 2006-214201
6. Gangadharan, S.N., Sudermann, J., Marlowe, A., *Parameter Estimation of Spacecraft Nutation Growth Model*, AIAA/ASME/ASCE/AHS/ASC 45th. Structures, Structural Dynamics and Materials (SDM) Conference, Palm Springs, California, In-Proceedings, April 19-22, 2004.
7. Schlee, K., Gangadharan, S.N., Ristow, J., Sudermann, J., Walker, C., and Hubert, C., *Modeling and Parameter Estimation of Spacecraft Fuel Slosh*, 29th Annual AAS Guidance and Control Conference, In Proceedings, Paper # AAS-06-027, American Astronautical Society, Rocky Mountain Section, Breckenridge, Colorado, February 4-8, 2006.
8. Green, S., Burkey, R., Dodge, F., and Walter, D., *Lateral Slosh Test for STEREO Propellant Tank*, Final Report SwRI Project#18.12441.01.008 2006.
9. Hubert, C., *Introduction to the Dynamics and Control of Spinning Space Vehicles*, Hubert Astronautics, 2001.
10. Ballinger, I.A., Lay, W.D., and Tam, W.H., *Review and History of PSI Elastomeric Diaphragm Tanks*, AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit, San Diego, CA. July, 1995.
11. Dodge, F.T., Unruh, J.F., Green, S.T., Cruse, M.W., *A Mechanical Model of Liquid Inertial Waves for Use with Spinning Craft*, Fluid Transients, FED-Vol. 198/PVP-Vol. 291, ASME 1994.
12. Green, S., Burkey, R., Dodge, F., and Walter, D., *Nutation Time Constant Model Parameters for the Contour Spacecraft*, Final Report SwRI Project#18.04617 2002.
13. Schlee, K., *Modeling and Parameter Estimation of Spacecraft Fuel Slosh Using Pendulum Analogs*, MS Thesis, Embry-Riddle Aeronautical University, Daytona Beach, Florida, July 2006.
14. Ibrahim, R. *Liquid Sloshing Dynamics: Theory and Applications*. Wayne State University, Michigan. Cambridge Publishing. ISBN-13: 9780521838856
15. Kana, D.D., and Dodge, F.T., *Dynamics of Sloshing in Upright and Inverted Bladdered Tanks*, ASME Journal Fluids Engineering, 109, pp. 58-63.
16. Quadrelli, M., *Modeling and Analysis for Nutation Time Constant Determination of On-Axis Diaphragm Tanks Spinners: Application to the Deep Space One*. AAS paper 03-155, AIAA copyright 2003.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY) 01/04/2007		2. REPORT TYPE Conference Paper		3. DATES COVERED (From - To) 23/04/2007 - 26/04/2007	
4. TITLE AND SUBTITLE Mechanical Analog Approach to Parameter Estimation of Lateral Spacecraft Fuel Slosh				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER NNK06EC92H	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Embry-Riddle Aeronautical University: Chatman, Yadira; Gangadharan, Sathya Analex: Schlee, Keith NASA: Sudermann, James; Walker, Charles; Ristow, James Hubert Astronautics: Hubert, Carl				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) NASA Launch Services Program: VA-A ATTN: Export Control Representative Kennedy Space Center, FL 32899				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT No restrictions/limitations.					
13. SUPPLEMENTARY NOTES Conference title: 48th AIAA Structures, Structural Dynamics, and Materials (SDM) Conference					
14. ABSTRACT Simplified mechanical analogs for the slosh are preferred during the initial stages of design to reduce computational time and effort to evaluate the Nutation Time Constant (NTC). Analytic determination of the slosh analog parameters has met with mixed success and is made even more difficult by the introduction of propellant management devices such as diaphragms. By subjecting full-sized fuel tanks with actual flight fuel loads to motion similar to that experienced in flight and measuring the forces experienced by the tanks, these parameters can be determined experimentally. Of particular interest is the effect of diaphragms and bladders on the slosh dynamics and how best to model these devices. An experimental set-up is designed and built to include a diaphragm in the simulated spacecraft fuel tank subjected to lateral slosh. This research paper focuses on the parameter estimation of a SimMechanics model of the simulated spacecraft propellant tank with and without diaphragms using lateral fuel slosh experiments. Automating the parameter identification process will save time and thus allow earlier identification of potential vehicle problems.					
15. SUBJECT TERMS Fuel Slosh, Pendulum Analog, Automated Parameter Estimation, Matlab SimMechanics, Nutation Time Constant.					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 16	19a. NAME OF RESPONSIBLE PERSON Keith Schlee
a. REPORT U	b. ABSTRACT	c. THIS PAGE			19b. TELEPHONE NUMBER (Include area code) (321) 867-4186