

# Toward a simple real-time control system for efficient management of furrow irrigation

Kanya L. Khatri & R. J. Smith

Cooperative Research Centre for Irrigation Futures, and National Centre for Engineering Agriculture, University of Southern Queensland, Toowoomba, Queensland, 4350, Australia

Corresponding author

**Kanya Lal Khatri**

Cooperative Research Centre for Irrigation Futures

Faculty of Engineering and Surveying

University of Southern Queensland

Toowoomba, QLD, 4350

Australia

Ph: +61 7 4631 1713

Fax: +61 7 4631 2526

**Email: [khatrik@usq.edu.au](mailto:khatrik@usq.edu.au), [rajaln@yahoo.com](mailto:rajaln@yahoo.com)**

## Abstract

A simple real-time control system for furrow irrigation is proposed that: predicts the infiltration characteristic of the soil in real time using data measured during an irrigation event, simulates the irrigation, and determines the optimum time to cut-off for that irrigation. The basis of the system is a new method for estimating the soil infiltration characteristic under furrow irrigation, developed previously by the authors, that uses a model infiltration curve, and a scaling process to predict the infiltration characteristic for each furrow and each irrigation event. Using the new method, infiltration parameters were calculated for two different fields. The SIRMOD simulation model was then used to simulate irrigation performance under different model strategies. These were framed to assess the feasibility of and demonstrate the gains from the real time control strategy. The simulation results showed that the system is feasible. The scaled infiltration gave predictions of the irrigation performance comparable to the measured performance, clearly establishing the suitability of this method for use in real-time control. The results further indicated that under simple real time control the irrigation performance for the two fields could be improved greatly with

1 reductions in the total volume of water applied to the two fields of 20% and 60%  
2 respectively, indicating the scale of benefits that can be achieved in the irrigation sector by  
3 implementing simple real-time control.

4  
5 **Keywords:** surface irrigation, automation, irrigation advance, irrigation efficiency,  
6 simulation

## 7 8 **1. Introduction**

9 Amongst surface irrigation methods, furrow irrigation is the most commonly used method for  
10 irrigating crops and pastures in northern Australia and around the world but this method has  
11 been often considered inefficient with highly variable and poor application efficiencies. In  
12 fact it is not the fault of method but indeed it is the lack of proper management and a limited  
13 capability to predict the soil infiltration characteristic.

14  
15 The performance of surface irrigation is a function of the field design, infiltration  
16 characteristic of the soil, and the irrigation management practice. However, the complexity  
17 of the interactions makes it difficult for irrigators to identify optimal design or management  
18 practices. The infiltration characteristic of the soil is the most crucial factor affecting the  
19 performance of surface irrigation (Khatri and Smith, 2005a) and both spatial and temporal  
20 variations in the infiltration characteristic are a major physical constraint to achieving higher  
21 irrigation application efficiencies (Shafique and Skogerboe, 1983). The spatial and temporal  
22 variation commonly found in infiltration characteristics (Raine *et al.*, 1997) also raises  
23 concerns regarding the adequacy of generalised design and management guidelines for  
24 surface irrigation.

25  
26 A real-time control system has the potential to overcome these spatial and temporal variations  
27 and highly significant improvements in performance are achievable with real-time  
28 optimization of individual irrigation events. A study was undertaken by Raine *et al.* (1997) to  
29 identify the potential improvement in irrigation performance (application efficiency, storage  
30 efficiency and distribution uniformity) achievable through real time control strategies. The  
31 flow rate and application time required to maximize the application efficiency was calculated  
32 for each individual irrigation throughout the season. These management variables were then  
33 used in simulations of individual irrigations using the SIRMOD model. When the

1 management parameters were optimized for each irrigation throughout the season to simulate  
2 perfect real- time control of individual irrigations, the average application efficiency  
3 increased significantly to 93% with a storage efficiency of 90%, without any significant  
4 difference in the distribution uniformity.

5  
6 The term real time control applied to the analysis of field parameters in surface irrigation  
7 means that irrigation information is collected, studied and processed during the irrigation.  
8 The results obtained are used to modify the management variables for the same irrigation.  
9 The necessary information can be obtained from advance data or field run-off. Smith and  
10 Duke (1984) modified the two-point method proposed by Elliott and Walker (1982) to  
11 determine infiltration characteristics in real time from advance data. They developed a remote  
12 sensing system to automatically measure the advance time and they looked for the optimum  
13 placement for sensors using the kinematic wave model. The best location for a two sensor  
14 system was between 40 and 60% of field length.

15  
16 Walker and Busman (1990) developed a computer model for simulation and optimization of  
17 surface irrigation in real-time, combining a kinematic wave model and a Simplex  
18 optimization technique that minimizes the sum of squares of differences between the  
19 measured and simulated advance by fitting the three parameters of the modified Kostikov  
20 equation. Azevedo *et al.*, (1992) developed another computer model called SIRTOM (surface  
21 irrigation real time optimization model) to estimate the infiltration parameters in real time  
22 from advance data. They used a one-dimensional optimization technique called the Brent  
23 method to obtain the parameters  $k$  and  $f_o$  of the Kostikov-Lewis equation. The parameter  $a$   
24 was determined by the two-point method.

25  
26 Camacho *et al.* (1997) developed the IPE (Infiltration parameter estimation) model for  
27 management and control of furrow irrigation in real time. This simulation model of furrow  
28 irrigation allowed estimation of infiltration parameters in real time. The model simulated the  
29 irrigation using a kinematic-wave model. The objective was to find the infiltration parameters  
30 that simulate water advance best fitted to the field measured data. The model estimated the  
31 parameters only  $k$  and  $a$  of the Kostikov–Lewis equation, where as the parameter ( $f_o$ ) was to  
32 be initially calculated by using indirect methods.

1 The major drawback of the above models is that they are data intensive and difficult to  
2 operate. The IPE model also requires the final infiltration parameter ( $f_0$ ) to be measured  
3 separately which is time consuming and difficult to measure accurately. The quest to extract  
4 the maximum information on soil infiltration from a minimum possible quantity of field  
5 advance data is of enormous importance, particularly for the automation of surface irrigation  
6 using real time control (Oyonarte *et al.*, 2002). The greatest limitation of the most of the  
7 existing infiltration methods is that they are data intensive and none of them is entirely  
8 suitable for use in real time control (Khatri and Smith, 2005b). The high data requirement is a  
9 major hindrance to the implementation of any form of real-time control.

10  
11 To over-come this problem a new approach to prediction of infiltration in real-time (REIP)  
12 that uses a model infiltration curve and a scaling technique was developed by .Khatri and  
13 Smith (2006). The method requires minimum field data, inflow and only one advance point  
14 measured around the mid length of the furrow. The testing of the method using data from two  
15 selected fields having very different infiltration characteristics has shown quite reliable  
16 results for prediction of infiltration characteristics. The method has potential for use in real  
17 time control.

18  
19 The work reported in this paper is the second part of a study directed at the development of a  
20 simple and practical real-time control system for surface irrigation. The feasibility of the  
21 proposed system is assessed through simulation of the irrigation performance, using the  
22 scaled infiltration parameters given by the proposed method and those estimated from full  
23 advance data. The gains in irrigation performance possible from adoption of the real time  
24 control strategy are demonstrated.

## 26 **2. Description of the proposed system**

27 The proposed real-time control system involves:

- 28 • measurement or estimation of the inflow to each furrow or group of furrows,
- 29 • measurement of the advance at one point approximately mid way down the furrow,
- 30 • estimation of the infiltration characteristic for the furrow or group of furrows using the  
31 scaling technique of Khatri and Smith (2006),
- 32 • simulation of the irrigation and optimization to determine the time to cut off the inflow.

1 The actual measurement, simulation and control would preferably be automated but could be  
2 undertaken manually with very little capital investment on the part of the farmer.

3

4 A necessary precursor to application of the system is the determination of the shape of the  
5 infiltration characteristic (model infiltration curve) for the particular field or soil type. This is  
6 best done from a comprehensive evaluation of one or more furrows from the field, involving  
7 measurements of the inflow, advance and where possible runoff, with the infiltration curve  
8 determined using a model such as INFILT (McClymont and Smith, 1996) or IPARM (Gillies  
9 and Smith, 2005). The preferred (constant) furrow inflow rate is also determined at this stage  
10 although it may be altered over time as experience with operation of the system is  
11 accumulated.

12

13 The underlying hypothesis for the method is that the shape of the infiltration characteristic for  
14 a particular field or soil is relatively constant despite variations in the magnitudes of the  
15 infiltration rate or depth of infiltration. These spatial and temporal variations are  
16 accommodated by scaling the infiltration curve, where the scaling is determined from the  
17 measured advance point and the volume balance equation. The method of scaling is as  
18 described by Khatri and Smith (2006) and is summarized below. Any infiltration equation  
19 can be used however for consistency with available simulation models the present study  
20 employs the Kostiakov-Lewis equation:

21

$$22 \quad I = k\tau^a + f_o\tau \quad (1)$$

23

24 where  $I$  is the cumulative infiltration ( $\text{m}^3/\text{m}$ ),

25  $a$ ,  $k$ , and  $f_o$  are the fitted parameters, and

26  $\tau$  is the infiltration time (min).

27

28 In this method a scaling factor ( $F_s$ ) is determined for each furrow or event from a re-  
29 arrangement of the volume balance model (as used by Elliot and Walker (1982)):

30

$$31 \quad F_s = \frac{Q_o t - \sigma_y A_o x}{\sigma_z k t^a x + \frac{f_o t x}{1+r}} \quad (2)$$

32

1 where  $Q_o$  is the inflow rate for the corresponding furrow ( $\text{m}^3/\text{min}$ ),  
 2  $A_o$  is the cross-sectional area of the flow at U/S end of furrow ( $\text{m}^2$ ) (determined by  
 3 any appropriate method),  
 4  $a, k, f_o$  are the infiltration parameters for the model furrow,  
 5  $\sigma_y$  is a surface shape factor taken to be a constant (0.77),  
 6  $\sigma_z$  is the sub-surface shape factor for the model furrow, defined as:

$$7 \quad \sigma_z = \frac{a + r(1 - a) + 1}{(1 + a)(1 + r)}$$

8  $r$  is the exponent from power curve advance function  $x = pt^r$  for the model curve,  
 9 and  
 10  $t$  (min) is the time for the advance to reach the distance  $x$  (m) for the corresponding  
 11 furrow.

12  
 13 This scaling factor ( $F_s$ ) is then applied in conjunction with the Kostiakov–Lewis infiltration  
 14 model to scale the infiltration parameters for each furrow:

$$15 \quad a_s = a_m \quad (3)$$

$$16 \quad k_s = F_s k_m \quad (4)$$

$$17 \quad f_{os} = F_s f_{om} \quad (5)$$

18  
 19  
 20 where  $a_s, k_s, f_{os}$  are the scaled infiltration parameters for a furrow,  
 21  $F_s$  is the scaling factor for the corresponding furrow, and  
 22  $a_m, k_m, f_{om}$  are the infiltration parameters for the model furrow.

23  
 24 For the proposed real time control system the infiltration estimates are required in sufficient  
 25 time to allow selection and application of optimum times to cut-off while the irrigation event  
 26 is under way. To achieve this, the advance times ( $t_{0.5}$ ) taken at or near the mid-point down the  
 27 furrow/field ( $x_{0.5}$ ) are used in equation 2.

### 30 **3. Analysis**

#### 31 **3.1 Irrigation performance and infiltration data**

1 Two very different fields with a total of 44 furrow irrigation events conducted by growers  
2 using their usual practices were selected for analysis, 27 furrow irrigation events for field T  
3 and 17 furrow irrigation events for field C. These fields were selected from the different  
4 farms across the cotton growing areas of southern Queensland for which irrigation water  
5 balance and irrigation advance data have been collected. The basis for selection was the  
6 relatively large number of events for each field.

7

8 Data collected for each event included:

- 9 • furrow inflow and outflow rates;
- 10 • irrigation advance (advance times for various points along the furrow including the time  
11 for the advance to reach the end of the furrow);
- 12 • physical characteristics of the furrow (length, slope, cross section shape).

13

14 The flow rate and irrigation advance were measured using the IRRIMATE™ suite of tools  
15 developed by the National Centre for Irrigation in Agriculture (NCEA), as described by  
16 Dalton *et al.* (2001). The data sets are summarized in Tables 1 and 2.

17

18 The actual infiltration parameters and the scaled parameters for each furrow/event from the  
19 two fields, given by the INFILT software (McClymont and Smith, 1996) and the method of  
20 Khatri and Smith (2006), respectively, have been taken from the previous paper (Khatri and  
21 Smith, 2006).

22

### 23 **3.2 Simulation methodology**

24 *SIRMOD (Surface Irrigation Simulation, Evaluation and Design)*

25 To test the proposed real-time control system, simulations were performed for the two fields  
26 using the actual (INFILT) and the scaled infiltration parameters in the simulation model  
27 SIRMOD (Walker, 2001). These SIRMOD simulations were used to compare the irrigation  
28 performance (application efficiency  $E_a$ , requirement or storage efficiency  $E_r$ , and distribution  
29 uniformity  $DU$ ) of the actual irrigations, recipe approaches to irrigation performance  
30 improvement, and the simple real time control strategy.

31

32 SIRMOD is a software package designed to simulate the hydraulics of surface irrigation at  
33 the furrow scale, and to optimize the irrigation system parameters to maximize application

1 efficiency. The input data required for the simulation component of the model include field  
2 length, slope, infiltration characteristics, target application depth, flow rate, Manning  $n$  and  
3 furrow geometry. The model output includes a detailed advance-recession trajectory,  
4 distribution of infiltrated water, volume balance, runoff hydrograph, water distribution  
5 uniformity, and the water application and requirement efficiencies. The ability of the  
6 SIRMOD to evaluate the irrigation performance of furrows and borders has been well  
7 documented (for example, McClymont *et al.*, 1996).

8  
9 The three performance measures used in the evaluation have their usual meanings.

10  
11 Application efficiency  $E_a$  is defined as the ratio of volume of water stored in the root zone  
12 during irrigation to volume of water delivered in the field during that irrigation and usually  
13 expressed as a percentage.

14  
15 Requirement (or storage) efficiency  $E_r$  is a measure of the adequacy of the irrigation. It is  
16 defined as the ratio of water stored in the root zone during irrigation to water required (the  
17 deficit) in the root zone prior to irrigation.

18  
19 Uniformity describes the spatial distribution of water over the field. The performance  
20 measure used in this paper, distribution uniformity  $DU$ , is defined as the average of the  
21 lowest 25% of infiltrated depths of water divided by the average infiltrated depth of water  
22 over the whole field.

#### 23 24 *Model strategies*

25 To perform the simulations, six (6) irrigation strategies were framed to test the proposed  
26 system and to demonstrate the achievable gains in irrigation performance. The model  
27 strategies adopted are:

28  
29 Strategy 1. Is the actual irrigation simulated using the actual infiltration parameters (INFILT  
30  $a, k, f_o$ ), actual inflow ( $Q_o$ ) and actual cut-off time ( $t_{co}$ ) as recorded under usual farm  
31 practices.

32  
33 Strategy 2. Prediction of the actual irrigation simulated using the scaled infiltration  
34 parameters, actual inflow and actual cut-off time.



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33

Strategy 3. Optimisation of the actual irrigation. In this case each irrigation event was optimized by using the INFILT parameters and varying the inflow and cut-off time to obtain maximum application efficiency ( $E_a$ ). This strategy also indicates the best over all flow rate.

Strategy 4a. A simple recipe for performance improvement, simulated using the INFILT parameters, actual inflow but with the cut-off time fixed equal to 90% of the advance time.

Strategy 4b. An alternative recipe, simulated using the INFILT parameters, a fixed inflow as selected from strategy 3 and cut-off time equal to 90% of the advance time.

Strategy 5. A simple practical real time control strategy in which the scaled infiltration parameters were used with a fixed inflow while varying/optimizing only the cut-off time to achieve the best irrigation.

Strategy 6. Simulation of the actual result of the real time control strategy (5), using the INFILT parameters and the same inflow and cut-off time as used in strategy 5.

## 4. Results and Discussion

### 4.1 Advance trajectories

The previous paper (Khatri and Smith, 2006) demonstrated that the scaled infiltration was able to reproduce the measured advance curves when applied in the same volume balance model that was used to generate the infiltration parameters. This ability was confirmed by the SIRMOD simulations. The measured and simulated advance curves for field T are presented in Figures 1 and 2 respectively. From these curves it can be seen that the scaled infiltration has reproduced advance trajectories of similar form to the measured trajectories. As expected, the advance trajectories pass through the advance point selected for the infiltration scaling, for example, in the case of data sets T1 and T22 as shown in Figure 3, but exhibit some small divergence by the end of the field.

The trend line analysis (Fig 4) for the advance times at the end-points shows a strong correlation between the final measured and the simulated advance times, giving:

$$t_{measured} = 0.955 t_{simulated}$$

1 This close correlation and excellent reproduction of advance curves by SIRMOD simulations  
2 confirms the potential of the scaled infiltration for the purpose of real-time control.

#### 4 **4.2 Irrigation Performance**

5 The summary of simulated irrigation performance results obtained for the model strategies  
6 are shown in Tables 3 and 4 for fields 1 and 2 respectively. The results obtained under each  
7 of the model strategies are discussed below.

##### 9 *Strategies 1 & 2 (Actual irrigation - usual farm management)*

10 From the summary of simulation results for field T (Table 3) it is evident that the over all  
11 mean irrigation performance (application efficiency and storage efficiency) of the actual  
12 irrigations (strategies 1 and 2) was reasonable (<75%), with a mean application efficiency  $E_a$   
13 of 77% and storage efficiency  $E_r$  91%. However, application efficiencies were shown to be  
14 highly variable from 50 to 95%. Similarly in case of field C the application efficiencies  
15 showed considerable variation from 16 to 57%, but this field showed a poorer performance  
16 (Table 4) with an over all mean application efficiency of 37% and storage efficiency of 97%.

17  
18 For all of the irrigation events, the simulated performance using the scaled infiltration  
19 (strategy 2) was similar statistically to the actual performance (strategy 1) for each field as  
20 shown for field T in Figures 5 and 6, respectively. The results summarized in Tables 3 and 4  
21 also confirm that the overall mean performance obtained for each field under strategies 1 and  
22 2 is almost identical, reflecting the ability of the scaled infiltration parameters to reproduce  
23 the actual irrigations.

##### 25 *Strategy3 (Perfect Control and Management)*

26 In this case the INFILT parameters were used and each irrigation event was optimized by  
27 varying inflow ( $Q_o$ ) and cut-off time ( $t_{co}$ ) to suit individual soil conditions and furrow  
28 characteristics. As expected an excellent performance was obtained for most events. The  
29 mean over all irrigation performance ( $E_a$  and  $E_r$ ) obtained for all of the irrigation events for  
30 field T was above 90% and for field C the  $E_a$  was above 72% and  $E_r$  95% as shown in Tables  
31 3 and 4. This strategy involves the application of more advanced irrigation management  
32 practices that may not be possible to be practically implemented in field. The overall best  
33 flow rate of 6.5 l/s as observed under this strategy was selected for use in strategies 4, 5 and  
34 6.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34

*Strategy 4 a & b (Simple Recipe Management)*

Under strategy 4a a simple recipe management was applied where the cut-off time was fixed equal to 90% of the advance time. The performance was improved but in many events the advance did not reach the end of the field. To overcome this, strategy 4b was applied, using all the same parameters as in strategy 4a except that the inflow rate was increased to 6.5 l/s.

The simulation results (Table 3) revealed that performance was raised for field T, the application efficiency was improved in most events but showed great variation from 50% to 100% with a mean of 80%. Some furrows still faced an incomplete advance. The simple recipe management showed poorer results in case of field C, under both strategies 4a and 4b. The advance was unable reach the end of the field for many of the furrows and yet the field was shown to have low application efficiencies, varying from 15% to 47% with an overall mean of 34% (Table 4). Field C poses substantial problems for the irrigation manager because of the extreme variation in the infiltration characteristic across the field, hence its poor response to recipe management.

*Strategies 5 & 6 (Real-time Control)*

From Tables 3 and 4 it is evident that the simple real time control strategy (5) predicts improved performance ( $E_a$  and  $E_r$ ) for both fields. For field T the means of the performance measures are  $E_a$  82.1% and  $E_r$  90.2%, with mean  $E_a$  of 70.3% and  $E_r$  82.7% for field C.

The actual outcomes from the real time control strategy predicted using the actual infiltration parameters (strategy 6) are comparable to those above, with mean  $E_a$  82.7%,  $E_r$  90.2% and  $E_a$  70.2,  $E_r$  82.2% for fields T and C, respectively. This indicates that the mean performance predicted by the real time control system based on the scaled infiltration is very close to the actual outcomes. The predictions obtained under both strategies for the 44 individual irrigation events are also almost identical to each other, providing further evidence of the equivalence between the scaled and actual infiltration parameters. This is illustrated in the comparison of the application efficiencies predicted under both strategies for individual irrigation events as shown for field T in Table 5 and Figure 6. The table further shows that the volume of water infiltrated under both strategies is also similar. The results for these strategies show that simple real-time control using the scaled infiltration parameters is feasible and that significant gains in irrigation performance are possible from this system.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34

### **4.3 Water savings from real-time control**

The performance simulation results (Tables 3 and 4) show there is considerable opportunity to improve the irrigation performance obtained under usual farm practices (strategy 1). The recipe management strategies (4a & b) were shown to raise the performance for field T but for some furrows the advance failed to reach the end of the field. However, the recipe management could not bring a simultaneous improvement in the three irrigation performance measures for field C. When the real time control (strategy 5) was applied the overall mean irrigation performance was improved for both fields. A highly significant improvement in irrigation performance was noted in case of field C, with application efficiency increasing from 37% to 70% as shown in Table 4, along with acceptable uniformity and storage efficiency. It is evident from these results that the simple real-time control system does have potential to bring significant gains in irrigation performance, with the additional benefit of reducing the volume of water applied per irrigation and deep drainage volumes, thus reducing the potential for environmental harm.

Table 6 presents the total volumes of water applied to the 44 furrows at fields T and C under usual farm management and real-time control. It can be seen from the table that the volume of water applied to the 44 furrows at fields T and C was reduced from 7341 m<sup>3</sup> under usual farm management to 5071 m<sup>3</sup> under real-time control. This indicates the substantial potential savings of 2270 m<sup>3</sup> (2.270 MI) of volume of water per irrigation, which is a significant loss of water to the grower. For Queensland cotton growers usually applying 4 to 6 irrigations annually this represents an annual water saving of 1.283 to 1.924 MI/ha that can be used beneficially to grow more crop, clearly indicating the substantial benefits that are achievable in the irrigation industry by implementing simple real time control.

### **5. Conclusions**

A simple practical system for real-time control of furrow irrigation that varies only the time to cut-off is proposed. To evaluate the method, the SIRMOD model was used to simulate the irrigation performance for two fields, for a range of irrigation strategies using both the scaled and the actual infiltration parameters. One of the strategies included in the simulations was the proposed real-time control strategy.

It is concluded that:

- 1 • the measured advance curves and measured irrigation performance were able to be  
2 reproduced with sufficient accuracy using the scaled infiltration parameters,
- 3 • the simple real-time control strategy is feasible and has the potential to bring  
4 significant improvements in irrigation performance over that achieved under simple  
5 recipe management or current farmer management, and
- 6 • substantial reductions in the total volume of water applied per irrigation are  
7 achievable, that could be used beneficially to grow a greater area of crop.

## 9 **References**

10 Azevedo, C.A.V., Merkle, G.P. and Walker, W.R., 1996. Surface irrigation real-time  
11 optimization model (SIRTOM). Proceedings of Computers in Agriculture Conference,  
12 Cancun Mexico, 11-14 June 1996, ASAE, 872-884.

14 Camecho, E., Lucena, C.P., Canas, J.R. and Alcaide, M., 1997. Model for management and  
15 control of furrow irrigation in real-time. Journal of Irrigation and Drainage Engineering,  
16 123(4): 264-269.

18 Dalton, P., Raine, S.R. and Broadfoot, K., 2001. Best management practices for maximising  
19 whole farm irrigation efficiency in the Australian cotton industry. Final report to the Cotton  
20 Research and Development Corporation, National Centre for Engineering in Agriculture  
21 Report 179707/2, USQ, Toowoomba.

23 Elliott, R.L. and Walker W.R., 1982. Field evaluation of furrow infiltration and advance  
24 functions. Trans of the ASAE 25(2): 396-400.

26 Gillies, M.H. and Smith, R.J., 2005. Infiltration parameters from surface irrigation advance  
27 and runoff data. Irrigation Science 24(1):25-35.

29 Khatri, K.L. and Smith, R.J., 2005a. Toward real-time control model for management of  
30 surface irrigation in Australia. Book of abstracts, International Conference on Advances: In  
31 the Internet, Processing, Systems and Interdisciplinary Research. 10-13 November 2005  
32 Venice, Italy. ISBN: 86-7466-117-3.

1 Khatri, K.L. and Smith, R.J., 2005b. Evaluation of methods for determining infiltration  
2 parameters from irrigation advance data. *Irrigation and Drainage*, 54: 467-482.  
3

4 Khatri, K.L. and Smith, R.J., 2006. Real-time prediction of soil infiltration characteristics for  
5 management of furrow irrigation. *Irrigation Science* DOI 10.1007/s00271-006-0032-1.  
6

7 McClymont, D.J. and Smith, R.J., 1996. Infiltration parameters from optimization on furrow  
8 irrigation advance data. *Irrigation Science*, 17(1): 15-22.  
9

10 McClymont, D.J., Raine, S.R. and Smith, R.J., 1996. The prediction of furrow irrigation  
11 performance using the surface irrigation model SIRMOD. *Irrigation Australia 1996*,  
12 *Irrigation Association of Australia*, Adelaide, May 1996.  
13

14 Oyonarte, N.A., Mateos, L. and Palomo, M.J., 2002. Infiltration variability in furrow  
15 irrigation. *Journal of Irrigation and Drainage Engineering*, 128(1): 26-33.  
16

17 Raine, S.R., McClymont, D.J. and Smith, R.J., 1997. The development of guidelines for  
18 surface irrigation in areas with variable infiltration. *Proceedings of Australian Society of*  
19 *Sugercane Technologists 1997*: 293-301.  
20

21 Shafique, M.S. and Skogerboe, G.V., 1983. Impact of seasonal infiltration function variation  
22 on furrow irrigation performance. In: *Advances in infiltration, Proceedings of National Conf.*  
23 *on Advances in Infiltration*, 292-301. ASAE, St. Joseph, MI, USA.  
24

25 Smith, D.L. and Duke, H. R., 1984. Prediction of irrigation advance rates in real time. ASAE  
26 paper No. 84-2590. American Society of Agric. Engineers St. Joseph, Mich.  
27

28 Walker, W.R., and Busman, J.D., 1990. Real-time estimation of furrow infiltration. *Journal of*  
29 *Irrigation and Drainage Engineering*, 116(3): 299-318.  
30

31 Walker, W.R., 2001. SIRMOD II - Surface Irrigation Simulation, Evaluation and Design.  
32 *User's Guide and Technical Documentation*. Utah State University, Logan, U.S.A  
33

1 **Table 1** Summary of data sets for field T

2

<b>Furrow</b>	<b>Length (m)</b>	<b>Cross-sectional area (m<sup>2</sup>)</b>	<b>Flow rate (m<sup>3</sup>/min)</b>	<b>Advance time (min)</b>
T1	1120	0.050	0.3036	688
T2	840	0.050	0.3036	531
T3	840	0.0262	0.3036	531
T4	1120	0.050	0.3036	635
T5	1120	0.0262	0.3378	635
T6	1120	0.0262	0.3378	615
T7	840	0.0262	0.3546	457
T8	840	0.0262	0.3504	476
T9	1120	0.0262	0.3504	673
T10	1120	0.0262	0.3504	667
T11	1120	0.0262	0.3504	662
T12	1120	0.0262	0.3216	483
T13	840	0.0262	0.3216	316
T14	1120	0.0262	0.3216	446
T15	1120	0.0262	0.3216	448
T16	1120	0.0262	0.3678	383
T17	840	0.0262	0.3678	199
T18	840	0.0262	0.3678	195
T19	840	0.0262	0.3678	192
T20	1120	0.0262	0.2382	616
T21	1120	0.0262	0.2382	612
T22	1120	0.0262	0.4122	440
T23	1120	0.0262	0.4134	439
T24	1120	0.0262	0.3462	455
T25	840	0.0262	0.4272	312
T26	1120	0.0262	0.3876	498
T27	1120	0.0262	0.3876	481

3

4

1 **Table 2** Summary of data sets for field C

2

<b>Furrow</b>	<b>Length (m)</b>	<b>Cross-sectional area (m<sup>2</sup>)</b>	<b>Flow rate (m<sup>3</sup>/min)</b>	<b>Advance time (min)</b>
C1	240	0.038	0.0498	273
C2	240	0.038	0.0498	307
C3	240	0.038	0.0498	336
C4	240	0.038	0.0498	427
C5	240	0.038	0.3126	277
C6	240	0.038	0.3126	367
C7	240	0.038	0.1566	238
C8	240	0.038	0.1566	246
C9	240	0.038	0.1566	210
C10	180	0.038	0.2244	186
C11	240	0.038	0.4752	109
C12	240	0.038	0.1134	164
C13	240	0.038	0.2286	126
C14	180	0.038	0.27	144
C15	240	0.038	0.27	189
C16	180	0.038	0.27	124
C17	240	0.038	0.27	171

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21



1 **Table 3** Summary of irrigation performance under different modeling strategies for field T.

<b>Management/Model strategies</b>	<b><math>E_a</math> (%)</b>	<b><math>E_r</math> (%)</b>	<b><math>DU</math> (%)</b>
Strategy 1 Actual irrigation	77.6	91.3	93.4
Strategy 2 Scaled infiltration	77.3	90.6	91.7
Strategy 3 Perfect management	90.2	90.1	94.0
Strategy 4a Simple recipe management **	81.3	86.6	82.2
Strategy 4b Simple recipe management	80.5	88.6	84.5
Strategy 5 Real-time control (scaled infiltration)	82.1	90.2	92.2
Strategy 5 Real-time control (actual infiltration)	82.7	90.2	92.5

2 \*\* Under this strategy the advance failed to reach the end of the field for six furrows  
 3  
 4  
 5  
 6

7 **Table 4** Summary of irrigation performance under different modeling strategies for field C.  
 8

<b>Management/Model strategies</b>	<b><math>E_a</math> (%)</b>	<b><math>E_r</math> (%)</b>	<b><math>DU</math> (%)</b>
Strategy 1 Actual irrigation	38.0	97.9	80.2
Strategy 2 Scaled infiltration	38.2	96.9	83.9
Strategy 3 Perfect management	72.1	95.9	92.5
Strategy 4a Simple recipe management **	68.5	79.5	72.2
Strategy 4b Simple recipe management	34.4	88.6	86.6
Strategy 5 Real-time control (scaled infiltration)	70.3	82.7	88.5
Strategy 5 Real-time control (actual infiltration)	70.2	82.2	90.7

9 \*\* Under this strategy the advance failed to reach the end of the field for eight furrows  
 10  
 11  
 12  
 13  
 14


1 **Table 5** Volume of water applied and individual irrigation performance for field T under real  
 2 time control strategies 5 & 6.  
 3

$t_{co}$ (min)	$Q_o$ (l/s)	Strategy 5			Strategy 6			
		Volume diverted (m <sup>3</sup> )	$E_a$ %	$E_r$ %	Volume infiltrated (m <sup>3</sup> )	$E_a$ %	$E_r$ %	Volume infiltrated (m <sup>3</sup> )
450	6.5	175.5	87.7	98.7	153.9	89.3	100.0	156.8
700	6.5	273.0	78.9	88.7	215.3	76.3	85.8	208.4
675	6.5	263.3	86.0	97.6	226.4	80.6	91.5	212.2
485	6.5	189.2	66.1	99.9	125.1	66.2	100.0	125.3
620	6.5	241.8	91.6	95.5	221.5	91.7	95.5	221.6
625	6.5	243.8	91.3	95.9	222.4	90.9	95.5	221.5
625	6.5	243.8	65.4	99.3	159.3	65.5	100.0	159.6
650	6.5	253.5	88.4	96.6	224.0	89.1	97.4	225.9
635	6.5	247.7	90.0	96.1	222.8	91.5	97.7	226.7
450	6.5	175.5	88.3	94.1	155.0	83.9	89.4	147.2
500	6.5	195.0	76.7	90.8	149.6	78.4	92.8	153.0
550	6.5	214.5	71.2	92.8	152.8	71.5	93.2	153.5
375	6.5	146.3	85.0	50.1	95.1	86.8	66.9	127.0
350	6.5	136.5	82.8	73.2	113.0	94.6	86.9	129.1
350	6.5	136.5	85.0	59.8	88.7	88.5	81.4	120.8
475	6.5	185.3	82.2	77.2	152.3	70.2	65.9	130.0
475	6.5	185.3	91.2	95.8	169.0	92.7	92.5	171.6
475	6.5	185.3	91.3	95.9	169.1	89.2	93.7	165.2
475	6.5	185.3	87.2	91.6	161.5	79.0	82.4	146.3
525	6.5	204.8	87.9	97.0	180.0	85.7	94.5	175.4
525	6.5	204.8	84.3	97.9	172.6	82.3	95.6	168.6
500	6.5	195.0	87.9	97.2	171.5	88.9	98.4	173.4
<b>Total</b>		<b>4481.1</b>			<b>3701.1</b>			<b>3719.0</b>

4  
5  
6  
7  
8  
9


**Table 6** Summary of volumes of water applied to fields T and C under usual farm management and real time control.

Field	Water applied under usual farm management (m <sup>3</sup> )	Water applied under real time control (m <sup>3</sup> )	Water savings due to real time control (m <sup>3</sup> )
Field T	5850	4481	1369
Field C	1491	590	901
Total	7341	5071	2270

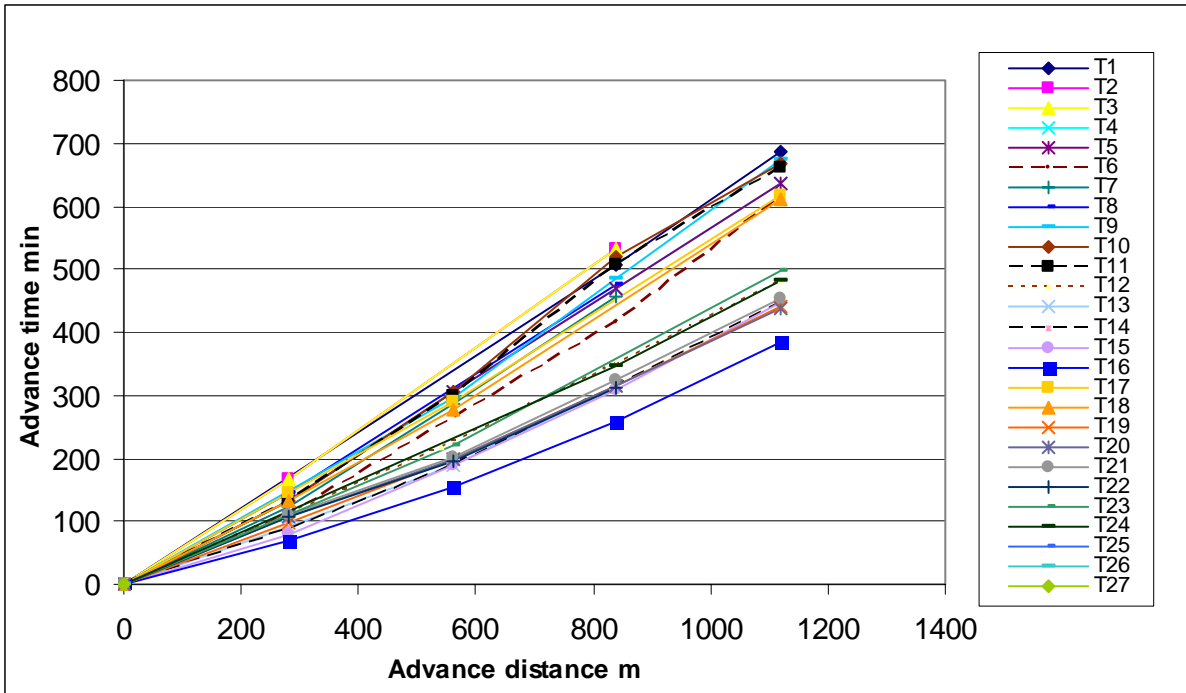

1  
2  
3  
4  
5  
6


**Figure 1 Measured advance curves for field T**

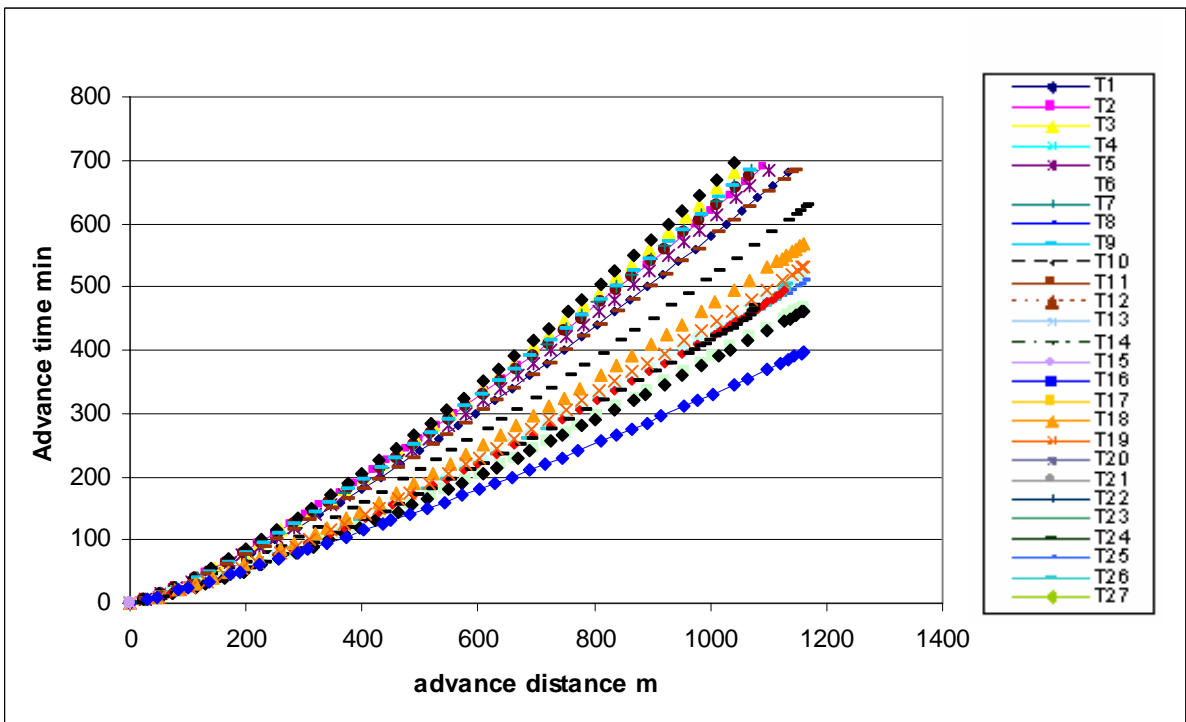

7  
8  
9  
10  
11  
12  
13


**Figure 2 Simulated advance curves for field T using the scaled infiltration**

1  
2

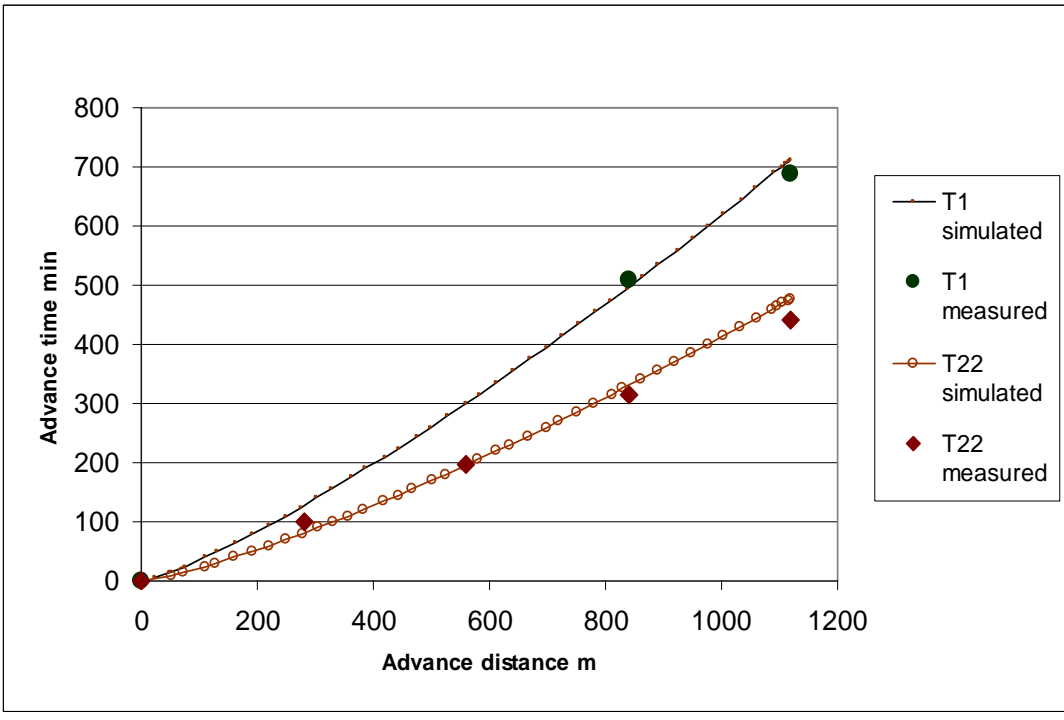

3  
4  
5  
6  
7  
8  
9

**Figure 3 Comparison of measured and simulated advance trajectories for selected furrows**

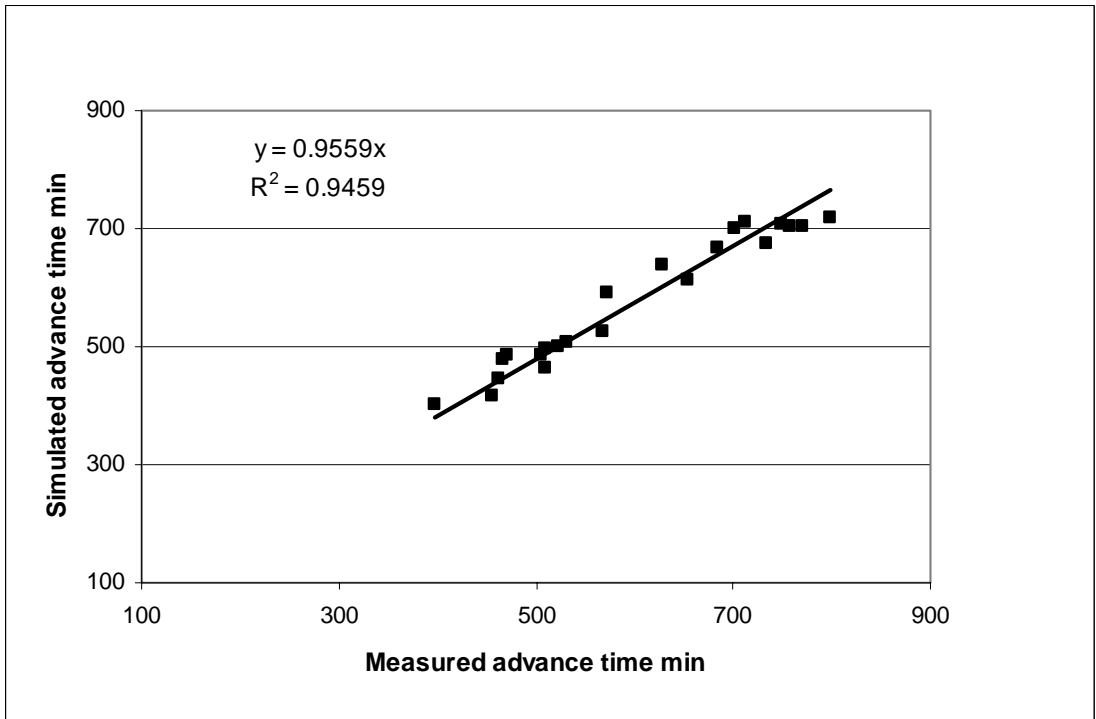


10  
11  
12  
13  
14

**Figure 4 Comparison of final advance times for measured and simulated advance trajectories**


1  
2  
3  
4

(a) Application efficiency

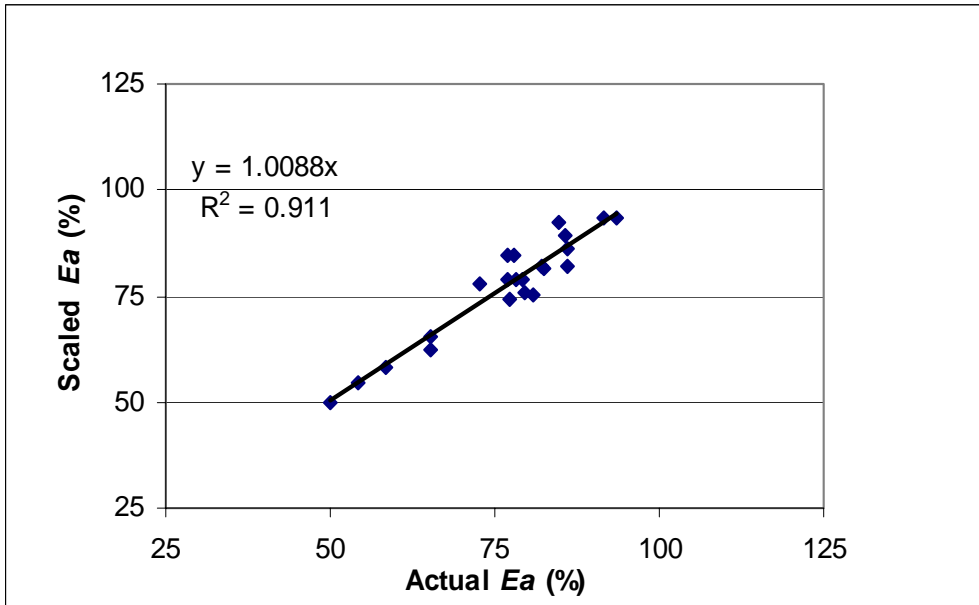

5  
6  
7  
8  
9  
10


(b) Requirement efficiency

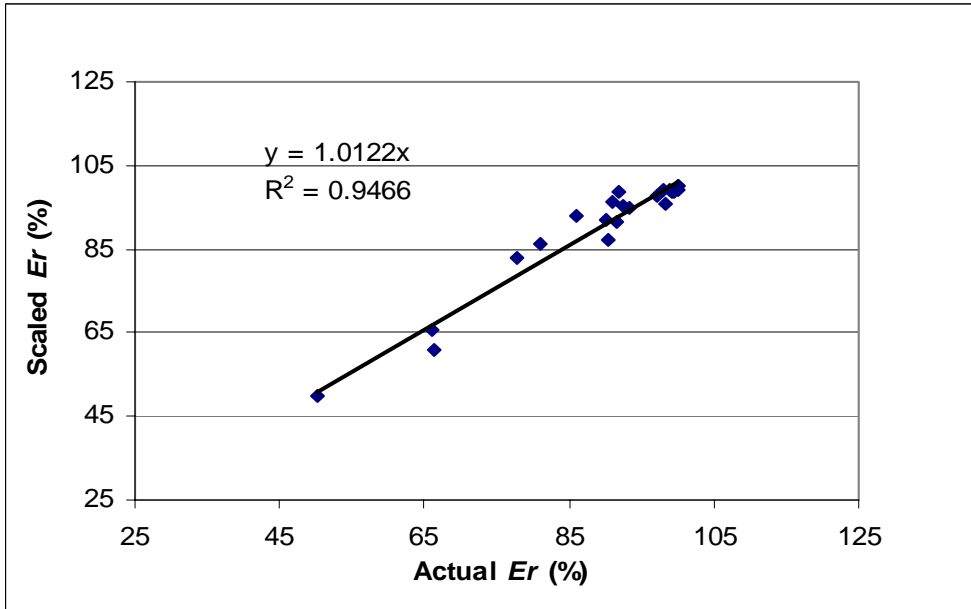


11  
12  
13  
14  
15  
16  
17  
18

**Figure 5 Comparison of irrigation performance results under model strategies 1 and 2 for field T.**

1  
2 (a) Application efficiency  
3

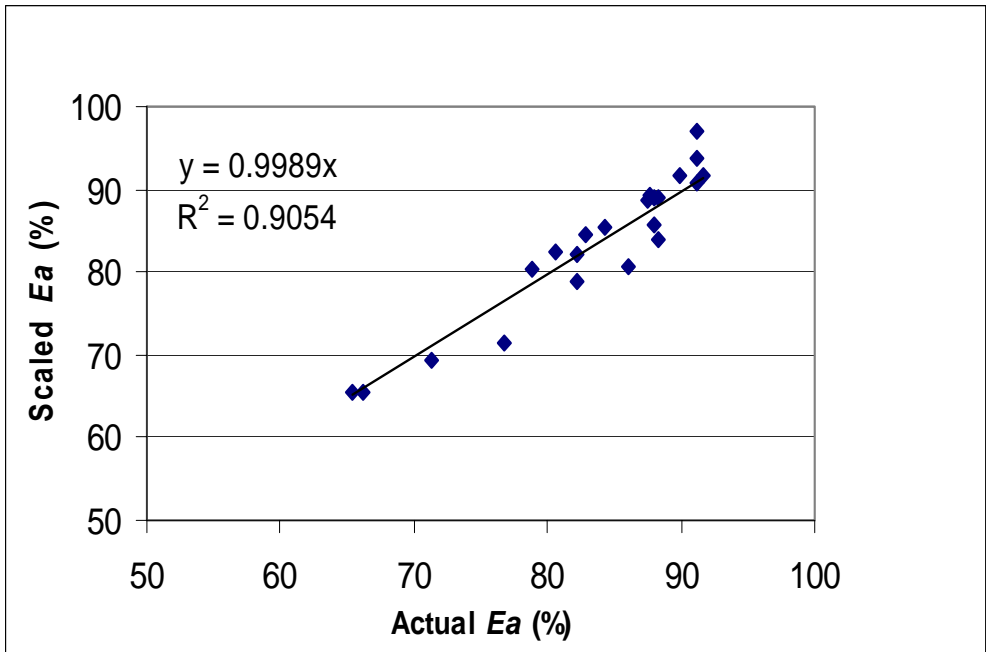

4  
5  
6 (b) Requirement efficiency  
7

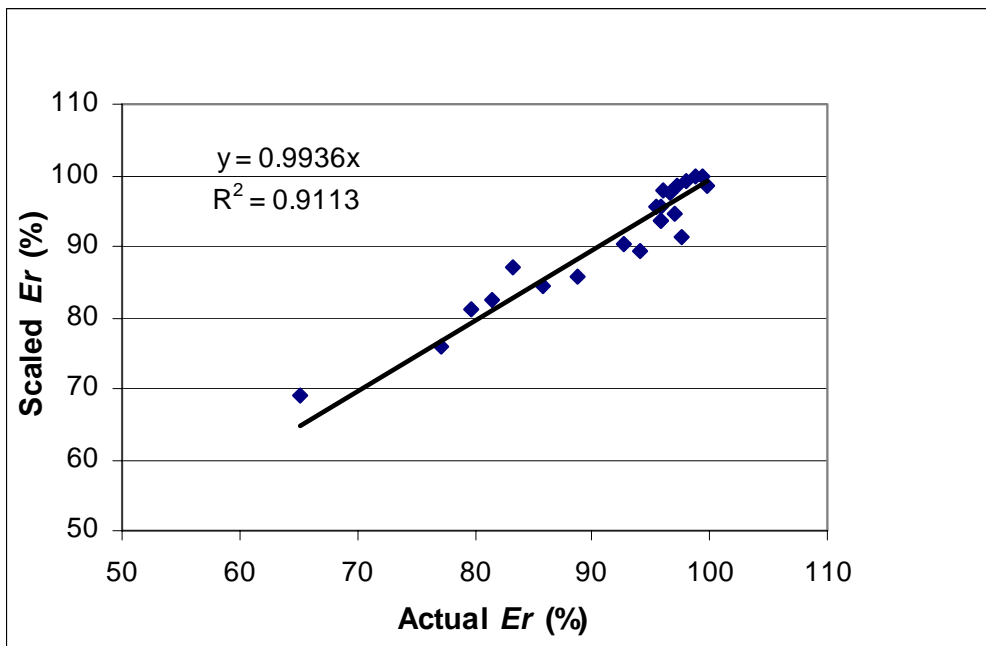

8  
9  
10  
11 **Figure 6 Comparison of irrigation performance simulation results under model**  
12 **strategies 5 and 6 for field T.**  
13  
14  
15  
16