

Lavrač, R. 2012. Meritve infiltracije in vodoodbojnosti na različnih tipih tal
Dipl. nal. – UNI. Ljubljana. UL. FGG, Študij vodarstva in komunalnega inženirstva

1D

PRILOGA D: MERITVE INFILTRACIJE Z DVOJNIM OBROČEM (DRI)


1. Meritev infiltracije z DRI na distrično rjavih tleh

Čas [min]	Čas [s]	Višina vode (cm)	Pretok [cm/s]
0	0	259.3	0.00000
1	60	242.7	0.27667
2	120	230.5	0.20333
3	180	220.1	0.17333
4	240	211.1	0.15000
5	300	201	0.16833
6	360	198.3	0.04500
7	420	192.9	0.09000
8	480	188	0.08167
9	540	185.8	0.03667
10	600	182.7	0.05167
11	660	180.8	0.03167
12	720	178.4	0.04000
13	780	177.2	0.02000
14	840	175.8	0.02333
15	900	171	0.08000
16	960	160.2	0.18000
17	1020	150	0.17000
18	1080	141	0.15000
19	1140	134.3	0.11167
20	1200	128.4	0.09833
21	1260	124.1	0.07167
22	1320	120.9	0.05333
23	1380	119.2	0.02833
24	1440	119.2	0.00000
25	1500	114.2	0.08333
26	1560	112.3	0.03167
27	1620	110.4	0.03167
28	1680	108.9	0.02500
29	1740	107.9	0.01667
30	1800	104.3	0.06000
31	1860	103.3	0.01667
32	1920	102.2	0.01833
33	1980	101.2	0.01667
34	2040	100.1	0.01833
35	2100	99.1	0.01667
36	2160	98.2	0.01500
37	2220	97.4	0.01333
38	2280	96.6	0.01333

Se nadaljuje..

Nadaljevanje 1. meritve

39	2340	95.6	0.01667
40	2400	94.9	0.01167
41	2460	94	0.01500
42	2520	93.3	0.01167
43	2580	92	0.02167
44	2640	90.4	0.02667
45	2700	89	0.02333
46	2760	87.5	0.02500
47	2820	86.1	0.02333
48	2880	84.2	0.03167
49	2940	83.1	0.01833
50	3000	81	0.03500
51	3060	79.8	0.02000
52	3120	78.8	0.01667
53	3180	77.7	0.01833
54	3240	76.6	0.01833
55	3300	75.4	0.02000
56	3360	74.4	0.01667
57	3420	72.6	0.03000
58	3480	71.7	0.01500
59	3540	70.8	0.01500
60	3600	68.7	0.03500
65	3900	66.2	0.00833
70	4200	63.2	0.01000
75	4500	60	0.01067
80	4800	57.9	0.00700
85	5100	56.4	0.00500
90	5400	55	0.00467
100	6000	44.7	0.01717
110	6600	37	0.01283
120	7200	32.1	0.00817
130	7800	29	0.00517

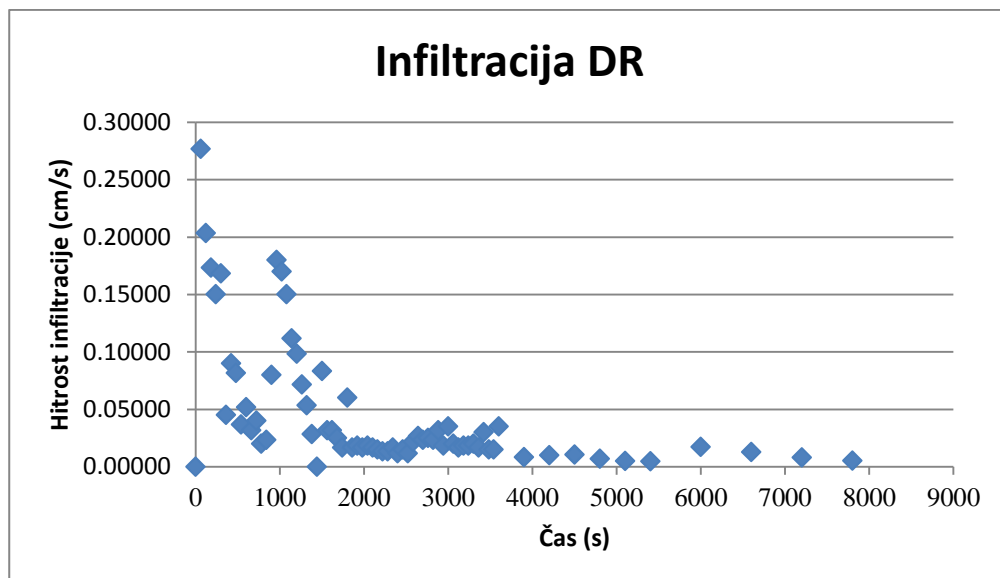


2. Meritev infiltracije z DRI na obrečno oglejnih tleh

Čas [min]	Čas [s]	Višina vode (cm)	Pretok [cm/s]
0	0	567.8	0.00000
1	60	550.6	0.28667
2	120	536.6	0.23333
3	180	523.8	0.21333
4	240	514.6	0.15333
5	300	497.8	0.28000
6	360	492.9	0.08167
7	420	484.9	0.13333
8	480	475	0.16500
9	540	470.6	0.07333
10	600	467.6	0.05000
11	660	450.6	0.28333
12	720	447.6	0.05000
13	780	445.8	0.03000
14	840	444.6	0.02000
15	900	443.6	0.01667
16	960	441.6	0.03333
17	1020	440.6	0.01667
18	1080	438.6	0.03333
19	1140	436.6	0.03333
20	1200	434.3	0.03833
21	1260	431.6	0.04500
22	1320	429.3	0.03833
23	1380	427.1	0.03667
24	1440	424.1	0.05000
25	1500	421.4	0.04500
26	1560	418.6	0.04667
27	1620	409.6	0.15000
28	1680	407.6	0.03333
29	1740	406.4	0.02000
30	1800	405.1	0.02167
31	1860	403.6	0.02500
32	1920	402.1	0.02500
33	1980	401.1	0.01667
34	2040	400	0.01833
35	2100	398.8	0.02000
36	2160	397	0.03000
37	2220	395.6	0.02333
38	2280	393.6	0.03333

Se nadaljuje..

Nadaljevanje 2. meritve

39	2340	391.8	0.03000
40	2400	389.6	0.03667
41	2460	387.6	0.03333
42	2520	385.8	0.03000
43	2580	383.6	0.03667
44	2640	381.3	0.03833
45	2700	379.1	0.03667
46	2760	377.1	0.03333
47	2820	374.8	0.03833
48	2880	364.8	0.16667
49	2940	363.1	0.02833
50	3000	361.8	0.02167
55	3300	355.6	0.02067
60	3600	348.8	0.02267
65	3900	339.8	0.03000
70	4200	330.3	0.03167
75	4500	324.3	0.02000
80	4800	307.3	0.05667
85	5100	300.9	0.02133
90	5400	291.3	0.03200
100	6000	274.8	0.02750
110	6600	219.8	0.09167
120	7200	219.8	0.00000
130	7800	219.8	0.00000
140	8400	198.6	0.03533
150	9000	183.6	0.02500
170	10200	148.8	0.02900
190	11400	114.2	0.02883
210	12600	80.8	0.02783
240	14400	55	0.01433

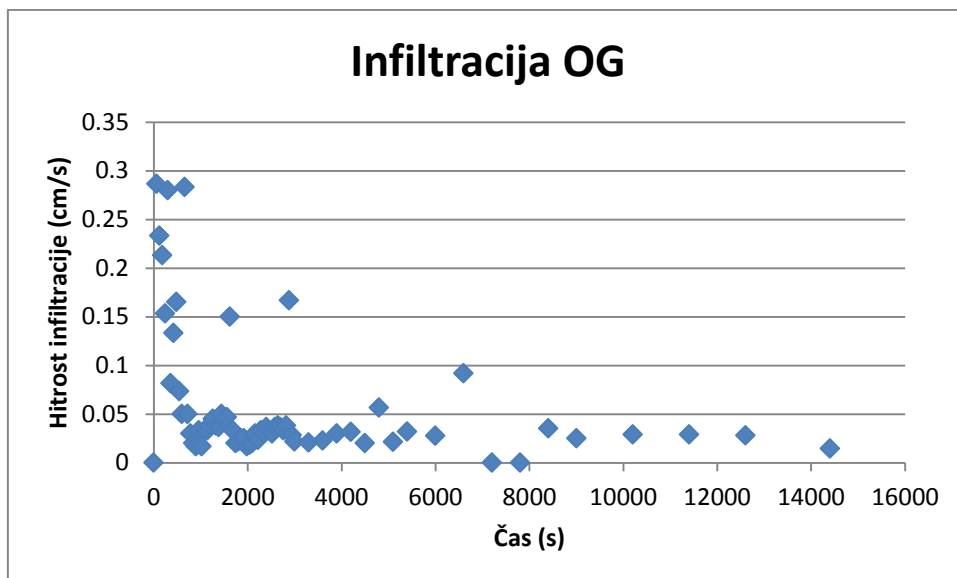

3. Meritev infiltracije z DRI na koluvalno psevdoglejnih tleh

Čas [min]	Čas [s]	Višina vode (cm)	Pretok [cm/s]
0	0	521.2	0.00000
1	60	438.7	1.37500
2	120	420	0.31167
3	180	409	0.18333
4	240	398	0.18333
5	300	380	0.30000
6	360	376	0.06667
7	420	362.5	0.22500
8	480	348	0.24167
9	540	339.3	0.14500
10	600	327.2	0.20167
11	660	317.5	0.16167
12	720	309.2	0.13833
13	780	302	0.12000
14	840	301	0.01667
15	900	300	0.01667
16	960	298	0.03333
17	1020	296.4	0.02667
18	1080	294.2	0.03667
19	1140	292.8	0.02333
20	1200	290.9	0.03167
21	1260	289	0.03167
22	1320	287.2	0.03000
23	1380	285.7	0.02500
24	1440	283.8	0.03167
25	1500	281.2	0.04333
26	1560	278.4	0.04667
27	1620	275.7	0.04500
28	1680	270	0.09500
29	1740	265.5	0.07500
30	1800	262	0.05833
31	1860	258.9	0.05167
32	1920	256.5	0.04000
33	1980	255.5	0.01667
34	2040	253.1	0.04000
35	2100	251.5	0.02667
36	2160	249.7	0.03000
37	2220	248.5	0.02000
38	2280	247	0.02500

Se nadaljuje

Nadaljevanje 3 meritve

39	2340	245.3	0.02833
40	2400	243.5	0.03000
41	2460	242	0.02500
42	2520	240.6	0.02333
43	2580	239.3	0.02167
44	2640	237.9	0.02333
45	2700	236.4	0.02500
46	2760	235.3	0.01833
47	2820	233.9	0.02333
48	2880	232.7	0.02000
49	2940	231.6	0.01833
50	3000	230.5	0.01833
55	3300	216.2	0.04767
60	3600	208.3	0.02633
65	3900	198.7	0.03200
70	4200	192	0.02233
75	4500	185.6	0.02133
80	4800	173.2	0.04133
85	5100	166.6	0.02200
90	5400	159.3	0.02433
95	5700	154	0.01767
100	6000	149.3	0.01567
110	6600	144.5	0.00800
120	7200	128.3	0.02700
130	7800	109.8	0.03083
140	8400	98.3	0.01917
150	9000	80.7	0.02933
170	10200	55	0.02142
190	11400	28.8	0.02183

