


# Third Generation Tracking and Data Relay Satellite (TDRS-KLM)

## Payload Performance of TDRS KL and Future Services

Marco A. Toral

NASA/GSFC

October 16, 2017

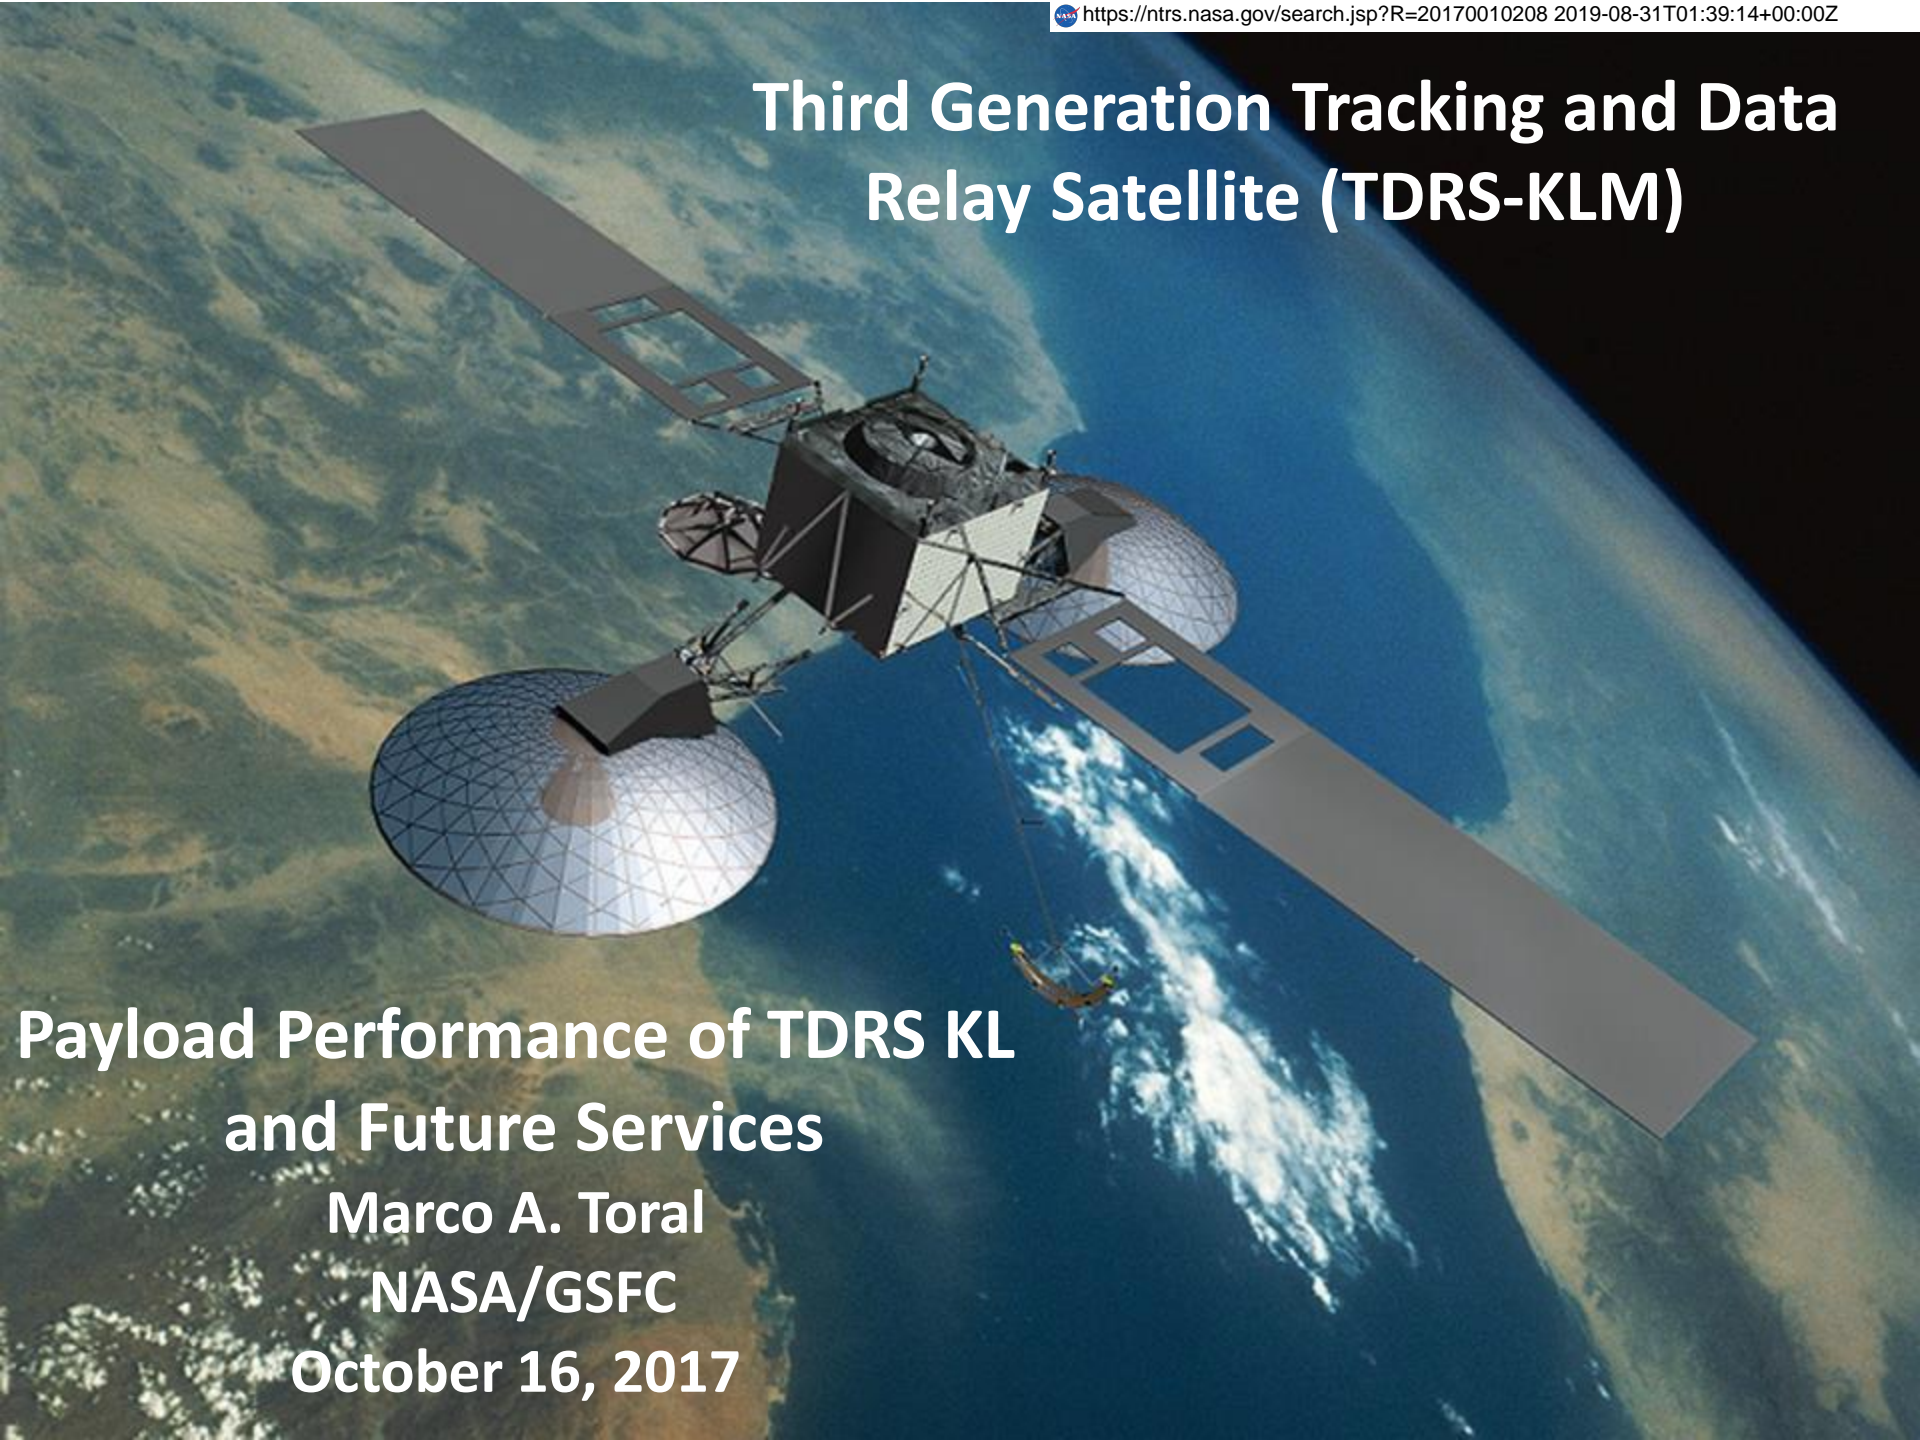




# TDRS System Capabilities



TDRS Project Office

Provide communications, data relay, and tracking services for Near Earth Orbiting (EO) satellites, Human Space Flight including ISS, Expendable Launch Vehicles (ELV), and Scientific Customers. Enable missions with near real-time observations such as Gamma Ray detections via Fermi Gamma-ray Space Telescope

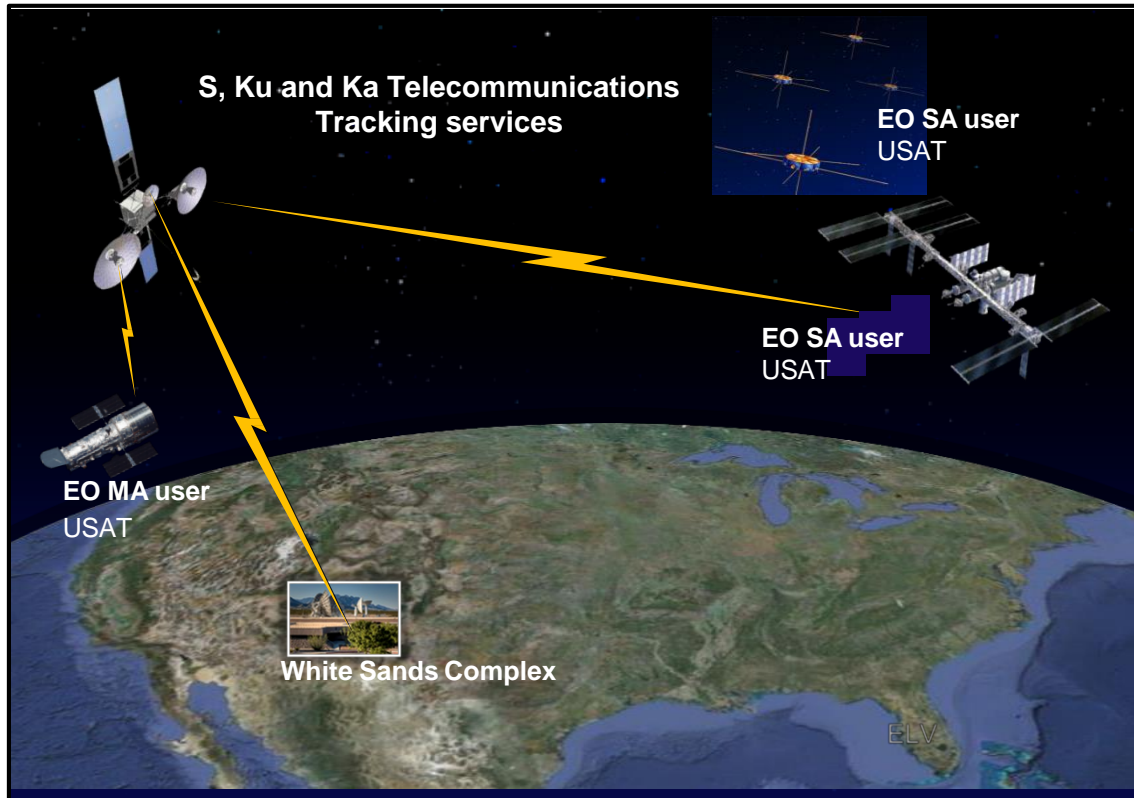

- SN/TDRS provides ~ 100% coverage of satellites in Low Earth orbit
- Single access user services
  - Scheduled services at S-band, Ku-band and Ka-band
- Multiple access user services
  - Ground based beam forming on TDRS 3 - 7, TDRS 11- 13 (KLM)
  - 24/7 support at S-band
  - On board beam forming for TDRS 8 - 10




# TDRS K,L,M Satellite



TDRS Project Office

- Payload module contains communication electronics
- Two gimballed 15 foot Single Access antennas
  - SA field of view +/- 31° N/S and 22.5° inboard and 77° outboard E/W
- One Multiple Access phased array antenna with 15 transmit and 32 receive elements
  - MA field of view +/- 13°
- One gimballed Ku- band Space Ground Link antenna
- Two S-Band Omni antennas

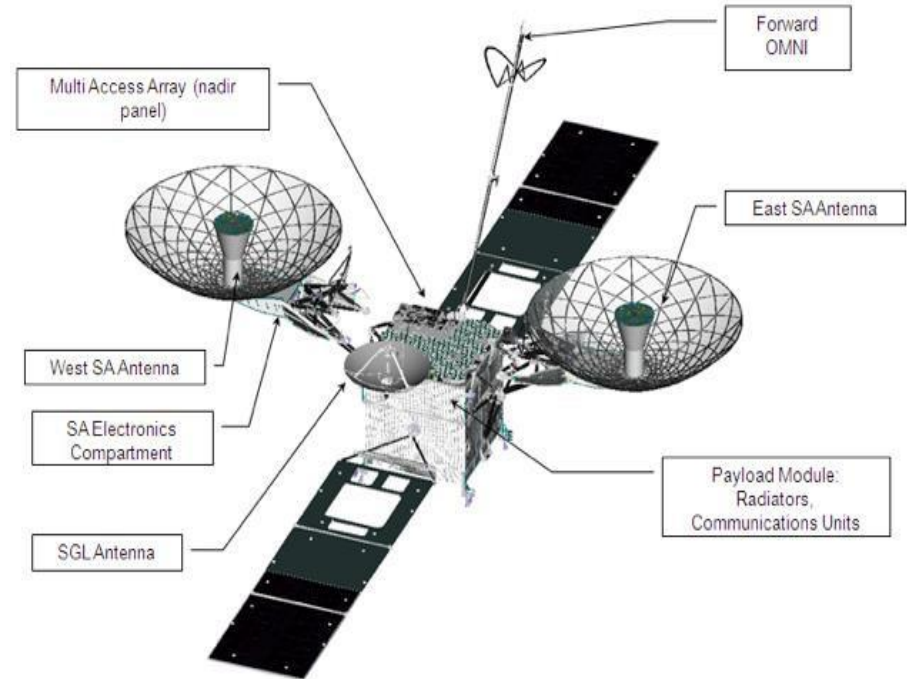

## Frequency, Tuning Range and Bandwidth

Parameter	Forward - (Transmit)				Return - (Receive)				
	S-band MA	S-band SA	Ku-band SA	Ka-band SA	S-band MA	S-band SA	Ku-band SA	Ka-band SA (Nar)	Ka-Band SA (Wide)
Channel Frequency Range (GHz)	2.1064	2.030-2.1135	13.775	22.555-23.545	2.2875	2.200-2.300	15.0034	25.2534-27.4784	25.545-27.195
Frequency Step (MHz)	Fixed	0.5	Fixed	5	Fixed	0.5	Fixed	25	25
Channel Bandwidth (MHz)	6	20	50	50	6	10	225	225	650



# Multiple Access Phase Array



TDRS Project Office

S-Band phased array: 47-element array is comprised of 15 transmit-only elements, and 32 receive-only elements

- Receive array has 32 elements 30 of which are used nominally
- Six return beams can be supported by the ground-based beamformer
- Additional users can be supported by the Demand Access System (DAS) beamformer; Space Network User Guide (SNUG) provides information regarding all the SN services including DAS.
- Up to two forward beams can transmit data to users (6 elements/beam)
  - Transmit array has 15 elements 12 of which are used for one single forward service

On-orbit calibration testing includes:

- Onboard forward beamformer calibration includes amplitude and phase verification of the factory values
- Antenna pattern raster scans are used to verify electrical boresight biases
- EIRP, C/N and BER testing are used to verify MA performance



# TDRS Multiple Access System On-Orbit Performance<sup>1</sup>



TDRS Project Office

Service Description	Parameter	TDRS-J (10)	TDRS-K (11)	TDRS-L (12)	Specification/ Allocation <sup>2</sup>
S-Band	EIRP (dBW)	45.2	45.2	45.0	≥ 42.0
MA Forward	Bandwidth (MHz)	8.2	9.6	10.9	≥ 6.0
S-Band	G/T (dB/K)	7.2	6.4	7.6	≥ 4.0 <sup>3</sup>
MA Return	Bandwidth (MHz)	7	7.1	7.3	≥ 6.0

Notes:

1. Performance using spacecraft primary electronics. Similar performance measured using redundant spacecraft electronics.

2. TDRS KLM specification

3. For a field-of-view ≤ ±10.5° conical. For a field-of-view > ±10.5° conical and ≤ ±13° conical, G/T spec is -1.5 dB/K.

Observation: TDRS J uses on-board beamformer vs ground-based for TDRS K&L for third generation

***TDRS-KL performance similar to TDRS-J***



# Single Access Antenna



TDRS Project Office

4.6 meter Diameter Main Reflector with Carbon Fiber “Springback” Reflectors that are folded during launch to fit in the Atlas V 4 meter fairing

- Tri-band Feed: Ka, Ku and S-band with polarization/selectable – RHCP or LHCP
- Antenna Pointing:
  - Program track Ka, Ku and S-Band
  - Autotrack provided for Ka-band and Ku-band to minimize pointing loss due small antenna 3 dB beamwidth
- Pointing Requirements driven by EIRP & G/T Over Specified Field of View



SA Antennas

TDRS in launch configuration

## SA Antenna Pointing Requirements



	Field of View (degrees)		Maximum Antenna Pointing Error (degrees)					
	E-W (AZ)	N-S (EL)	SSAF	SSAR	KuSAF	KuSAR	KaSAF	KaSAR
<b>PT, LEO</b>	+/-10.5° Conical		-----	-----	-----	-----	0.105°	0.102°
<b>PT PEFOV</b>	+/-22.5°	+/-31.0°	0.360°	0.360°	0.155°	0.155°	0.114°	0.114°
<b>AT PEFOV</b>	+/-22.5°	+/-31.0°	-----	-----	0.087°	0.061°	0.073°	0.045°
<b>Nominal Antenna Beamwidth</b>			~2.1°	~2.0°	~0.31°	~0.28°	~0.18°	~0.17°
PEFOV	Primary Elliptical Field of View							



# SA Antenna Ka-band Performance After Tuning



TDRS Project Office

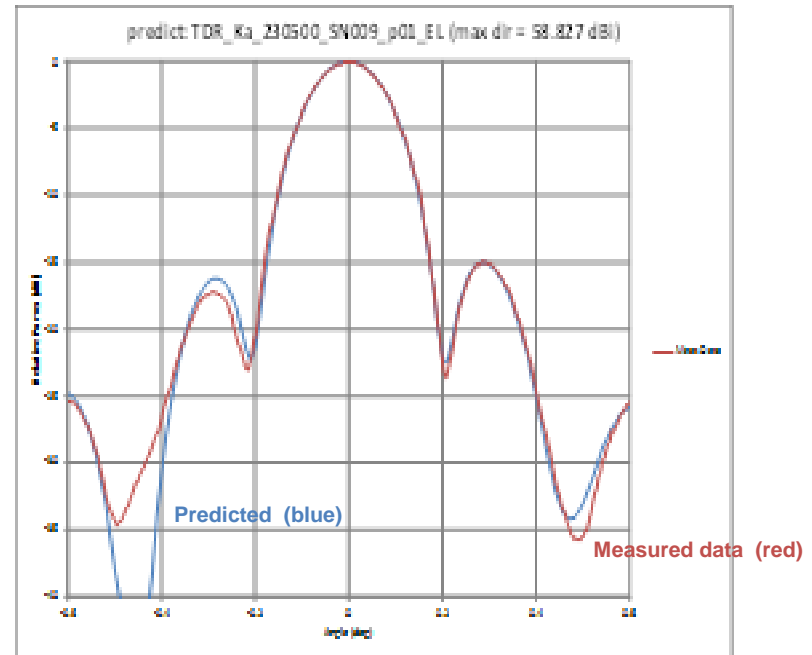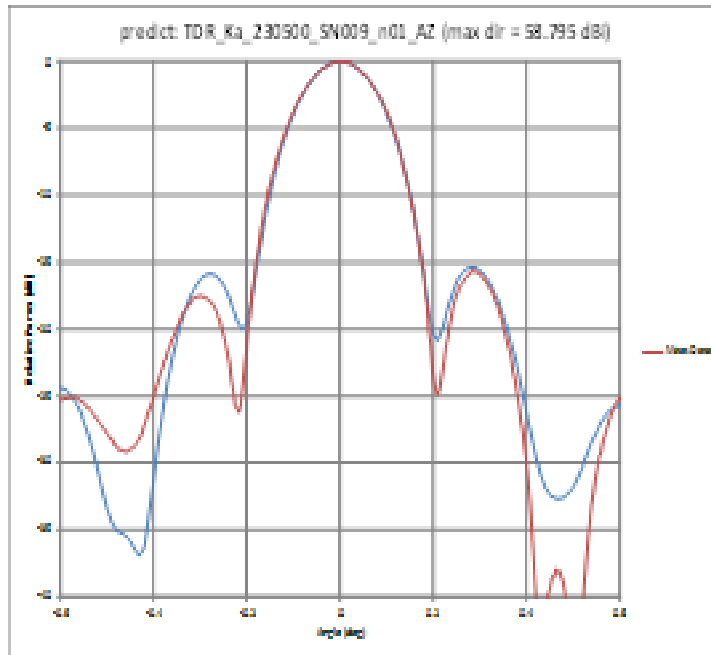

- SA antenna reflectors return to original shape after release in approximately 45 days
- Effectiveness of on-orbit reflector tuning demonstrated; Ka Band antenna pattern data shows good agreement with predicted results
- Tuning increased Ka-band gain as much as 2.1 dB of the measured forward EIRP for the TDRS L spacecraft

**TDRS L Ka-band Single Access Forward Service Antenna Patterns**



# SA Performance Summary



TDRS Project Office

Service		Parameter	TDRS-J (10)				TDRS-K (11)				TDRS-L (12)				Spec/ Alloc	
			SA@West		SA East		SA@West		SA East		SA@West		SA East			
			LHCP	RHCP	LHCP	RHCP	LHCP	RHCP	LHCP	RHCP	LHCP	RHCP	LHCP	RHCP		
Ka-Band SA	Forward	EIRP <sup>1</sup> , dBW	70.2	69.9	69.8	69.7	69.2	66.9	67.5	68.0	70.3	70.3	70.1	70.1	>63.0	
		Antenna Gain <sup>2</sup> , dBi	58.2	57.8	57.6	57.9	58.6	58.6	58.2	58.3	59.0	59.1	58.7	58.8	54.7	
		Bandwidth, MHz	64.7	62.3	65.8	65.7	66.5	54.4	64.8	62.8	63.0	53.5	63.3	56.0	>50	
	Return	Narrow	G/T, dB/K	30.2	30.3	30.3	32.1	31.5	30.8	29.5	30.7	31.6	31.6	30.3	30.8	>26.5
			Antenna Gain <sup>2</sup> , dBi	58.3	58.3	58.1	58.3	59.4	59.4	58.7	58.8	59.5	59.5	59.1	59.1	56.4
			Bandwidth, MHz	241	247	251	251	252	252.5	252	251	252	253	254	253	>225
		Wideband	G/T, dB/K	30.3	-----	29.7	-----	-----	-----	31.3	-----	-----	-----	30.8	-----	>26.5
			Antenna Gain <sup>2</sup> , dBi	58.6	-----	58.2	-----	58.7	-----	58.7	-----	59.1	-----	60.2	-----	56.4
			Bandwidth, MHz	686	-----	696	-----	739	-----	731	-----	727	-----	733	-----	>650
Ku-Band SA	Forward	EIRP, dBW	53.6	53.8	54.2	54.2	57.1	56.7	57.6	57.9	58.0	58.7	58.4	58.3	>49.0	
		Antenna Gain <sup>2</sup> , dBi	54.1	53.8	53.9	53.8	54.0	54.1	53.8	53.6	53.7	53.8	53.7	53.8	51.7	
		Bandwidth, MHz	62.2	63.2	65.2	65.6	65.7	65.3	64.0	54.5	62.8	61.8	62.8	61.7	>50	
	Return	G/T, dB/K	26.2	25.5	27.0	27.9	27.0	25.0	27.4	27.3	26.6	27.7	26.5	26.8	>24.4	
		Antenna Gain <sup>2</sup> , dBi	54.4	54	54.4	54.3	54.5	54.5	54.4	54.3	54.3	54.3	54.3	53.4	52.6	
		Bandwidth, MHz	247	248	253	250	253	252	252	253	254	253	254	254	>225	
S-Band	Forward	EIRP, dBW	51.8	51.1	51.5	51.0	52.3	53.0	52.6	52.5	52.1	51.8	51.9	51.6	>48.5	
		Antenna Gain <sup>2</sup> , dBi	36.2	36.2	36.3	36.2	36.4	36.4	36.5	36.5	36.2	36.2	36.1	36.0	35	
		Bandwidth, MHz	26.8	26.4	27.8	27.5	41.8	29.8	38.2	30.9	30.4	30.3	30.9	31.7	>20	
	Return	G/T, dB/K	11.7	10.4	11.3	10.2	10.7	11.9	11.1	12.7	11.8	12.3	11.6	11.6	>8.5	
		Antenna Gain <sup>2</sup> , dBi	37.3	37.3	37.2	37.1	37.2	37.2	37.0	37.0	37.5	37.5	37.4	37.3	35.8	
		Bandwidth, MHz	17.2	17.2	17.6	17.6	17.7	18.0	18.5	18.5	17.8	17.9	18.7	18.5	>10	

Notes:  
 1. Ka-band calibration uncertainty can overstate EIRP.  
 2. Antenna gain determined based upon nominal expected spacecraft power amplifier performance.

**TDRS K&L Spacecraft Exceed Required SA Performance**







# Ka-band Return BER Performance



TDRS Project Office

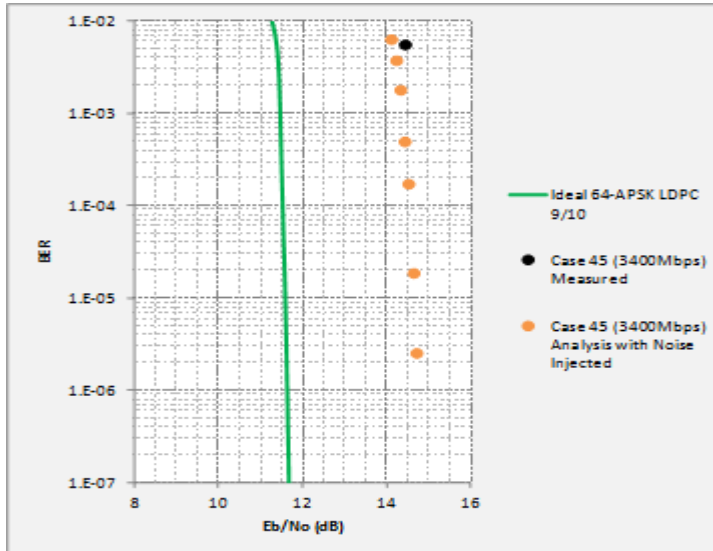

Ka-Band BER Performance

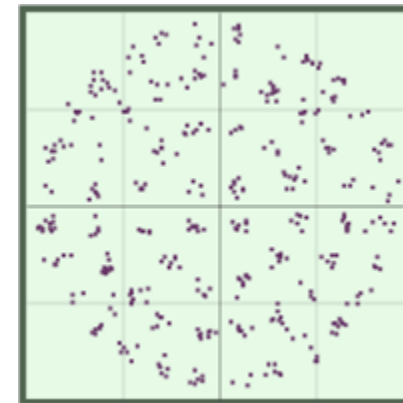

64 APSK Constellation

- TDRS K Payload Test bed measured performance with different test cases utilizing SNUG and Digital Video Broadcast – Satellite 2nd edition (DVB-S2 and DVB-S2X) waveforms
  - Tested up to 3.4 Gbps with 64-APSK (Amplitude Phase Shift Keying) and Low Density Parity Check Code) with the 650 MHz Bandwidth wideband channel, measured performance shows 3.2 dB Implementation Loss
- TDRS KL on-orbit measured KaSAR performance at 25.25 GHz is about 1.6 dB from theoretical at  $10^{-5}$  BER, and about 2.0 dB from theory at  $10^{-7}$  BER for 300 Mbps (225 MHz channel) with QPSK. WSC is in the process of updating receivers to support higher modulation to support 8PSK including planned support for ISS (600 Mbps).

**Demonstrated up to 3.4 Gbps Ka-band Wideband Return BER Performance with test bed**



# Future Services: Optical Communications



TDRS Project Office

NASA/GSFC TDRS project supported NASA plans to include Laser Communications in the Next Generation Relay System


## Optical Primary Payload: (Study results – 2016)

- Three 20 cm optical terminals, optical modems at 1550 nm wavelength (additional terminals are in plan)
- Two optical channels (2.5 Gbps) to the ground, and up to 3 return channels via RF (one 2.5 Gbps and two 1 to 1.5 Gbps)
- Field of Regard: +/- 80° conical supports Near Earth, Geostationary orbital arc, cis-Lunar space
- User Enhancements:
  - Acquisition Beacon to each terminal
  - Redundant GNSS receivers for on-board orbit determination, laser terminal pointing, and an absolute time reference for optometrics
  - Introduced Coherently Detected burst Mode BPSK for increased receiver sensitivity
  - Provided modems that compensate for Doppler on forward and return signals
  - Includes optometric range and range-rate observations on the laser communication links
  - Provided multi-channel wavelength division multiplexing for the optical SGL

## RF SGL payload

- Ku/Ka requires two 2.5 to 2.8 Gbps channels for the RF Space to Ground link
- Ka provides wider uplink/downlink channels

Note: The concepts and acquisition strategies for an optical relay have been subjects of follow on studies and will be published by NASA when appropriate.



# Future Services: Optical Communications



TDRS Project Office

## TDRS Project Optical Payload Documentation


The structure and relationship of the major technical documents generated helped the team focus on the major technical questions and trades that needed to be addressed for any potential procurement.

### Additional documents

- Concept of Operations
- Concept of Navigation

### Procurement

- Statement of Work for the Prime contractor
- Mission Assurance Requirements document
- Contract Data Requirements

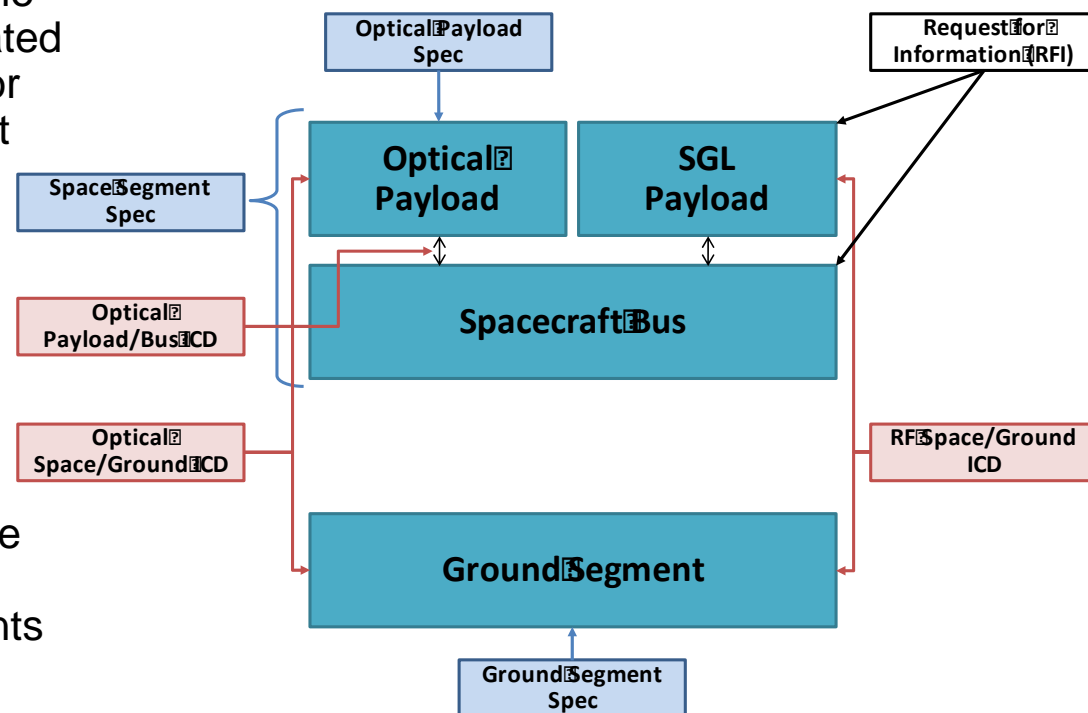

Study results provided a solid basis for evolving the next generation of relay spacecraft



# Conclusions



TDRS Project Office

- On-orbit testing confirms TDRS-K and L spacecraft exceed required MA & SA performance
  - TDRS K&L satellites provide 650 MHz Wideband Channel for support of higher data rates and MAR ground based beamforming
  - Effectiveness of on-orbit SA antenna reflector tuning demonstrated
  - On-orbit antenna pointing accuracy is better than specified
  - 3<sup>rd</sup> generation TDRS MAR ground based beamformer was validated and provided performance equivalent to 2<sup>nd</sup> generation TDRS
- Measured on-orbit performance of return BER better than requirement for all services; demonstrated on-orbit 300 Mbps at Ku and Ka-Band (225 MHz)
- Future SN higher data rates supporting DVB-S2/S2X : demonstrated up to 3.4 Gbps using 64-APSK with TDRS K Payload test bed error correction Low Density Parity Check Code with the 650 MHz channel
- Future laser/optical communications provides ultra-wide bandwidths with potential higher data rates support. The study results provided a solid basis for evolving the next generation of relay spacecraft with optical communications.

3<sup>rd</sup> Generation TDRS will provide NASA communications services well into the mid-2020s



# Contact Information



TDRS Project Office



**Marco Toral, Gregory Heckler**  
**NASA/Goddard Space Flight Center, Greenbelt, MD 20771**  
E-mail: [Marco.A.Toral@nasa.gov](mailto:Marco.A.Toral@nasa.gov); Tel: (301) 286-9861  
E-mail: [gregory.w.heckler@nasa.gov](mailto:gregory.w.heckler@nasa.gov); Tel: (301) 286-6565

**Patsy Pogorelc, Nicholas George**  
**Peraton, 12975 Worldgate Dr, Herndon, VA 20170**  
E-mail: [patricia.m.pogorelc@nasa.gov](mailto:patricia.m.pogorelc@nasa.gov); Tel: (703) 668-6274  
E-mail: [nicholas.e.george@nasa.gov](mailto:nicholas.e.george@nasa.gov); Tel: (703) 668-6181

**Katherine Han**  
**ASRC Federal Space & Defense (AS&D), 7515 Mission Drive Seabrook, MD 20706**  
E-mail: [katherine.s.han@nasa.gov](mailto:katherine.s.han@nasa.gov); Tel: (301) 286-5814



**TDRS M was launched on August 18, 2017  
and is in the process of the on-orbit  
testing/acceptance activities**



**TDRS: [tdrs.gsfc.nasa.gov](http://tdrs.gsfc.nasa.gov)**