

COMPARISON OF THE ESTIMATION OF THE DEGREE OF POLARIZATION FROM FOUR OR TWO INTENSITY IMAGES DEGRADED BY SPECKLE NOISE

Muriel Roche, Philippe Réfrégier

Physics and Image Processing Group - Fresnel Institute
Unité Mixte de Recherche 6133 - Ecole Généraliste d'Ingénieurs de Marseille
Domaine Universitaire de Saint-Jérôme - 13397 Marseille cedex 20 France
phone: + (33) 4 91 28 80 86, fax: + (33) 4 91 28 82 01, email: muriel.roche@fresnel.fr
web: www.fresnel.fr/phyti/

ABSTRACT

Active polarimetric imagery allows one to access the information present in a scene by revealing polarizing properties of the objects [1, 2]. Coherent light is considered in this paper as illumination of the scene, the images are thus degraded by speckle noise. The polarization properties of a scene are characterized by the degree of polarization. In standard polarimetric imagery system, four intensity images are needed to estimate this degree [3]. If we assume the uncorrelation of the measurements, this number can be decreased to two images using the Orthogonal State Contrast Image (OSCI) [4]. However, this approach appears too restrictive in some cases. We thus propose in this paper a new statistical parametric method to estimate the degree of polarization assuming correlated measurements with only two intensity images. The estimators obtained from four images, from the OSCI and from the proposed method, are compared using simulated polarimetric data degraded by speckle noise.

1. INTRODUCTION

Polarimetric imagery consists in forming an image of the state of polarization of the light backscattered by a scene. We consider in this paper that the scene is artificially illuminated with coherent light (laser). For example, this illumination is used in active imagery in order to combine night vision capability and to improve image resolution for a given aperture size. In practice, using a coherent illumination produces speckle noise that deteriorate the image [5]. However, the backscattered light gives information about the capability of the scene to polarize or depolarize the emitted light and thus allows one to determine the medium that compose the scene. These informations can be described by a scalar parameter: the degree of polarization of the light. This quantity is obtained in standard configurations of polarimetric systems using four pair of angular rotations of both a compensator and a polarizer. Four transmittance are thus recorded [3] that lead to the estimation of the degree of polarization. However, this system is complex and it is interesting to develop methods to estimate the degree of polarization that could reduce the number of images to register. In [4], the authors proposed to estimate the degree of polarization with only two intensity images, however this method relies on the assumption that the measurements of the two components are uncorrelated which can be in some cases a too restrictive hypothesis. This paper extends the work of [4] by taking into account the correlation of the different components.

2. BACKGROUND

The electric field of the light at a point of coordinates \mathbf{r} (vector of 3 component) in a 3D space and at time t can be written, if we assume the light to propagate in a homogeneous and isotropic medium, as

$$\mathbf{E}(\mathbf{r}, t) = [A_X(\mathbf{r}, t)\mathbf{e}_x + A_Y(\mathbf{r}, t)\mathbf{e}_y] \cdot e^{-i2\pi\nu t} \quad (1)$$

where ν is the central frequency of the field and $\mathbf{e}_x, \mathbf{e}_y$ are unitary orthogonal vectors (in the following bold letters represent vectors).

The terms $A_X(\mathbf{r}, t)$ and $A_Y(\mathbf{r}, t)$ are complex and define the random vector called Jones vector

$$\mathbf{A} = \begin{bmatrix} A_X(\mathbf{r}, t) \\ A_Y(\mathbf{r}, t) \end{bmatrix}. \quad (2)$$

The state of polarization of light corresponds to the properties of $\mathbf{E}(\mathbf{r}, t)$ at a particular point of space. It can be described by the covariance matrix Γ

$$\Gamma = \begin{bmatrix} \langle A_X^* A_X \rangle & \langle A_X^* A_Y \rangle \\ \langle A_Y^* A_X \rangle & \langle A_Y^* A_Y \rangle \end{bmatrix} \quad (3)$$

where $\langle \cdot \rangle$ and \cdot^* define respectively the statistical average and the complex conjugate. For sake of brevity, the following notations for Γ is introduced

$$\Gamma = \begin{bmatrix} a_1 & a_2 \\ a_2^* & a_4 \end{bmatrix} \quad (4)$$

Let us note that this matrix can be diagonalized since it is hermitic.

In the case of coherent light, the electric field is represented by the complex Jones vector \mathbf{A} which follows a Gaussian circular law [5]

$$p_{\Gamma}(\mathbf{A}) = \frac{1}{\pi^2 \det(\Gamma)} e^{-\mathbf{A}^\dagger \Gamma^{-1} \mathbf{A}} \quad (5)$$

where \mathbf{A}^\dagger stands for the adjoint of the vector \mathbf{A} .

The degree of polarization is defined by [5]

$$P = \frac{\mu_1 - \mu_2}{\mu_1 + \mu_2} \quad (6)$$

where μ_1 and μ_2 represent the eigenvalues of Γ ($\mu_1 \geq \mu_2 \geq 0$).

The scalar parameter P takes values in $[0, 1]$: in the case $P =$

0, the light is said to be totally unpolarized, and when $P = 1$, the light is said to be totally polarized. The light is partially polarized in the intermediate cases.

With the notations introduced in (4), one has [5]

$$P^2 = 1 - \frac{4(a_1 a_4 - |a_2|^2)}{(a_1 + a_4)^2}. \quad (7)$$

In the case of uncorrelated measurements, two intensity images give a good estimation of this degree using the OSCI [4]. However, in some cases the uncorrelation of the measurements may be not valid.

In this paper, an original estimation method is proposed. It both uses a pair of images and takes into account the correlation of the images. We recall in the following the method proposed in [4] and we extend it to correlated measurements. We then compare them through statistical measures using simulated data. The results are also presented when the standard estimation of P^2 is used (four images) as this case is expected to give the best results. Finally we conclude and give the perspectives of this work.

3. THE OSCI

In the case of two uncorrelated images, the Orthogonal State Contrast Image (OSCI) is determined from [4], [6], [7]

$$\frac{I_1(i) - I_2(i)}{I_1(i) + I_2(i)} \quad (8)$$

where $I_1(i)$ and $I_2(i)$ are intensity measurements at the pixel site (i), assuming a lexicographic order for the pixels. These two images are obtained with simple polarimetric systems. First, the scene is illuminated with coherent light that has a well-defined polarization state. Then the backscattered light is first analysed in the same polarization state as the incident light (which leads to $I_1(i) = |A_X(i)|^2$) and the second image is obtained by considering the reflected light with orthogonal polarization to the incident one (which leads to $I_2(i) = |A_Y(i)|^2$).

The OSCI is an estimation of P^2 in each pixel provided that the materials of the scene modify the degree of polarization of incident light without modifying its principal polarized state¹. Let us recall that this kind of material is called pure depolarizer. For such materials, the covariance matrix Γ is diagonal and, since the diagonal terms represent the intensity images, the OSCI gives an estimation of P^2 with

$$P_{OSCI}^2(i) = \left(\frac{I_1(i) - I_2(i)}{I_1(i) + I_2(i)} \right)^2 \quad (9)$$

In the case of non pure depolarizer objects (i.e. Γ is non diagonal), the OSCI still reveals interesting contrast image but no more defines P^2 . This leads us to a new method that considers the cases of correlated measurements. This is the object of the following part.

4. CORRELATED MEASUREMENTS

In the case of correlated measurements, the covariance matrix is non diagonal and of the form (4). In its standard estimation, the degree of polarization needs four measurements,

however, two images are sufficient to get an estimation of P^2 if one assumes that the field follows Gaussian fluctuations (Eq. 5). Indeed, the coefficient a_1 is obtained from one measurement, as the coefficient a_4 and the squared modulus of a_2 can be estimated from the cross-correlation coefficient δ_{XY} between two measurements I_1 and I_2 . We have

$$\delta_{XY} = \langle I_1 I_2 \rangle = \langle A_X^* A_X A_Y^* A_Y \rangle \quad (10)$$

Assuming that \mathbf{A} is Gaussian circular (i.e. the speckle is supposed to be fully developed) and using the complex gaussian moment theorem, it can be shown that the centered correlation coefficient defined by

$$\Delta_{XY} = \delta_{XY} - \langle I_1 \rangle \langle I_2 \rangle \quad (11)$$

gives

$$\Delta_{XY} = |a_2|^2 \quad (12)$$

Thus the coefficient $|a_2|^2$ can be obtained from two measurements with $\langle I_1 I_2 \rangle - \langle I_1 \rangle \langle I_2 \rangle$. This remark leads us to write the following property.

Property A: For fully developed speckle fluctuations, the degree of polarization can be obtained from only two intensity images.

One can easily note that the degree of polarization can be written as a function of the OSCI with

$$P^2(i) = P_{OSCI}^2(i) + 4 \frac{\Delta_{XY}}{(\langle I_1 \rangle + \langle I_2 \rangle)^2}(i) \quad (13)$$

From (9), the degree of polarization estimated from the OSCI is clearly under-estimated. Thus, we can correct the OSCI in order to get an estimation of the degree of polarization using the correlation coefficient Δ_{XY} .

In the following part, the different estimations of the degree of polarization are compared to the estimations with four images through simulated data.

5. COMPARISON WITH NUMERICAL EXPERIMENTS

We generated R experiments of N samples of complex Jones vectors which follow a Gaussian circular law. The covariance matrix is known and thus P^2 is also known. Under the assumption that the statistical average can be estimated by spatial averages in homogenous regions, the coefficients a_1 can be estimated from a single image ($I_1 = |A_X|^2$) like the coefficient a_4 ($I_2 = |A_Y|^2$) with

$$\hat{a}_1 = \frac{1}{N} \sum_{i=1}^N |A_X(i)|^2 \quad (14)$$

$$\hat{a}_4 = \frac{1}{N} \sum_{i=1}^N |A_Y(i)|^2 \quad (15)$$

where $\{A_X(i), A_Y(i)\}$ represents the component of the Jones vector for the sample i .

The estimation of P^2 differs in the studied cases by the way $|a_2|^2$ is estimated. Three different methods are used:

¹State represented by the eigenvector associated to eigenvalue μ_1 .

- Case of four images

In this situation, we have both the real and the imaginary part of the coefficient a_2 . The quantity $|a_2|^2$ is estimated by

$$|\widehat{a_2}|^2 = \left| \frac{1}{N} \sum_{i=1}^N A_X(i) A_Y^*(i) \right|^2 \quad (16)$$

- Case of two images with the OSCI

In this case a_2 is assumed to be equal to zero.

- Case of two images with the proposed approach

The coefficient $|a_2|^2$ is estimated using (11) with

$$\begin{aligned} \widehat{\Delta}_{XY} &= \frac{1}{N} \sum_{i=1}^N |A_X(i)|^2 |A_Y(i)|^2 \\ &\quad - \left(\frac{1}{N} \sum_{i=1}^N |A_X(i)|^2 \right) \left(\frac{1}{N} \sum_{i=1}^N |A_Y(i)|^2 \right) \end{aligned} \quad (17)$$

In the three cases, P^2 was estimated from the relation (7) with the estimated parameters. In order to characterize the precision of the estimation, one considers six examples of matrix Γ .

$$\Gamma_1 = \begin{bmatrix} 15 & 0.2 + 0.5i \\ 0.2 - 0.5i & 6 \end{bmatrix}; \Gamma_2 = \begin{bmatrix} 16 & 0 \\ 0 & 3.6 \end{bmatrix};$$

$$\Gamma_3 = \begin{bmatrix} 82 & 13i \\ -13i & 17 \end{bmatrix}; \Gamma_4 = \begin{bmatrix} 18 & 7 + 8i \\ 7 - 8i & 11 \end{bmatrix};$$

$$\Gamma_5 = \begin{bmatrix} 30 & 16 - 8i \\ 16 + 8i & 14 \end{bmatrix}; \Gamma_6 = \begin{bmatrix} 1.25 & 5.5i \\ -5.5i & 26 \end{bmatrix};$$

These matrices were chosen such as the degrees of polarization are approximately $\{0.2, 0.4, 0.5, 0.6, 0.8, 1\}$.

The simulations are performed for $R = 1000$ realisations of $N = 10000$ samples for the six covariance matrices. For the two matrices Γ_1 and Γ_5 , supplementary cases have been studied when $N \in \{100, 500, 1000, 5000, 10000\}$. The results are presented in figures 1, 2, 3, 4, 5, 6. Several points are important to notice. First of all, as expected, the best estimation of the degree of polarization, regarding all the cases tested, was achieved with four images. However the proposed approach that relies on two correlated images produces good estimations of the degree of polarization whatever the covariance matrix is used (fig.1) as soon as $N > 500$ (fig.3 and fig.5). Note that the estimation with the OSCI gives results which cannot be used if the term $\Delta_{XY} / ((\langle I_1 \rangle + \langle I_2 \rangle)^2)$ is too high (for example if $|a_2|^2$ is non negligible). Fig.2, 4 and 6 show that the experimental variance using four measurements or the OSCI are comparable whatever Γ and N are, whereas the variance obtained with the proposed approach is larger. However this precision should be sufficient for some practical applications. This point should be studied in details in a future work.

6. CONCLUSION

We have analyzed a new approach to estimate the degree of polarization on polarimetric images degraded by speckle

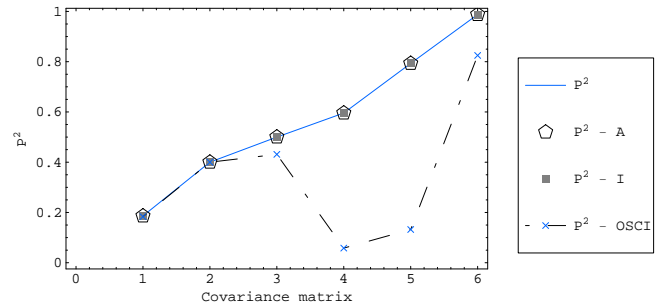


Figure 1: Degree of polarization plotted as a function of the six covariance matrices for $N = 10000$. P^2 is the true degree of polarization, $P^2 - A$ is the degree estimated from four measurements, $P^2 - I$ is the degree obtained with the numerical simulations using the proposed method for evaluating $|a_2|^2$, $P^2 - OSCI$ is the degree estimated from the OSCI.

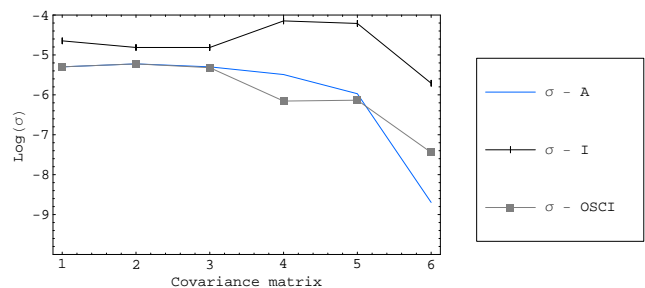


Figure 2: Experimental variance of the degree of polarization plotted as a function of the six covariance matrices for $R = 1000$ and $N = 10000$. $\sigma - A$ is the standard deviation of the degree of polarization estimated from four measures, $\sigma - I$ is the standard deviation of P^2 obtained with the numerical simulations using the proposed method for evaluating $|a_2|^2$, $\sigma - OSCI$ is the standard deviation of P^2 estimated from the OSCI.

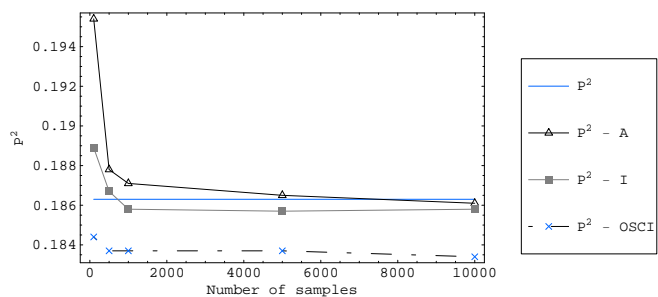


Figure 3: Degree of polarization plotted as a function of the number of sample N for the covariance matrix Γ_1 . P^2 is the true degree of polarization, $P^2 - A$ is the degree estimated from four measures, $P^2 - I$ is the degree obtained with the numerical simulations using the proposed method for evaluating $|a_2|^2$, $P^2 - OSCI$ is the degree estimated from the OSCI.

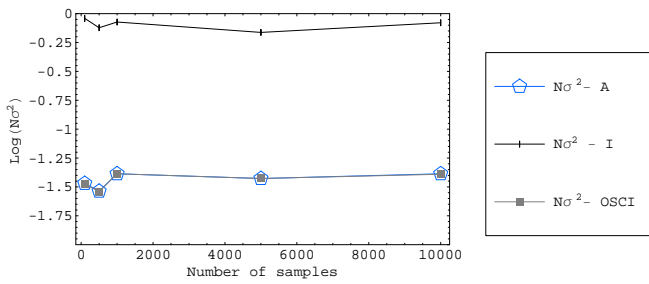


Figure 4: Product of N and the experimental variance of the degree of polarization (σ^2) plotted as a function of N for $R = 1000$ for the covariance matrix Γ_1 . $N\sigma^2 - A$ is the product obtained when P^2 is estimated from four measures, $N\sigma^2 - I$ is the product obtained when P^2 is estimated with the numerical simulations using the proposed method for evaluating $|a_2|^2$, $N\sigma^2 - OSCI$ is the product obtained when P^2 is estimated from the OSCI.

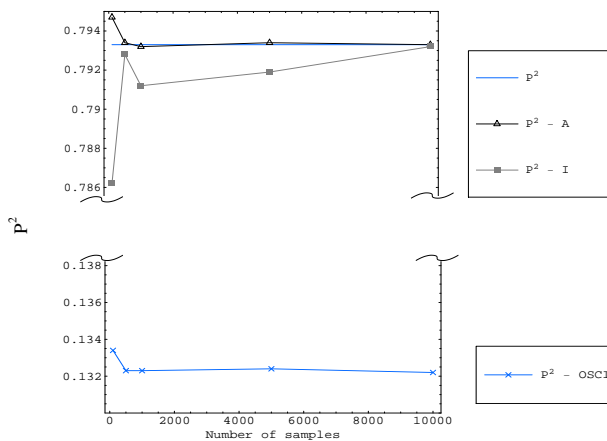


Figure 5: Idem as the Figure 3. using the covariance matrix Γ_5 instead of Γ_1 .

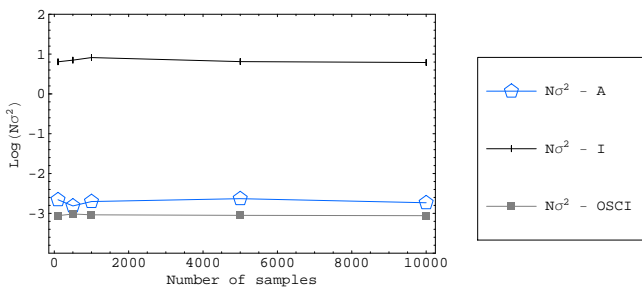


Figure 6: Idem as the Figure 4. using the covariance matrix Γ_5 instead of Γ_1 .

noise. Assuming that the speckle is fully developed, this method allows one to estimate this degree with only two intensity images whereas four images are needed in a standard experimental setup. This presents a potential interest in term of reduction of cost of the imagery system since the original setup can be simplified. The proposed approach has been tested on simulated data and compared to the standard estimation techniques that requires either 4 images or 2 independent images (OSCI). The results show that the proposed method gives good approximation of the degree of polarization. This study needs to be extended with a theoretical analyses in order to precise the conditions of validity of the proposed approach. Moreover, it would be necessary to verify when the assumption of fully developed speckle is realistic in the case of real images.

REFERENCES

- [1] L. B. Wolff, "Polarization camera for computer vision with a beam splitter," *J. Opt. Soc. Am. A*, vol. 11 (11), pp. 2935–2945, Nov. 1994.
- [2] Ph. Réfrégier, M. Roche and F. Goudail, "Invariant polarimetric contrast parameters of light with Gaussian fluctuations in three dimensions," *J. Opt. Soc. Am. A*, vol. 23, 2006.
- [3] C. Brosseau, *Fundamentals of polarized light - A statistical approach*, John Wiley and Sons, Inc., 1998.
- [4] F. Goudail and Ph. Réfrégier, "Statistical techniques for target detection in polarisation diversity images," *Optics Letters*, vol. 26 (9), pp.644-646, 2001.
- [5] J. W. Goodman, *Statistical Optics*, John Wiley and Sons, Inc., 1985.
- [6] S. Breugnot, and Ph. Clémenceau, "Modeling and performances of a polarization active imager at $\lambda=806$ nm", Laser Radar technology and applications IV, *Proc. SPIE* vol. 3707, pp. 449-460, 1999.
- [7] F. Goudail and Ph. Réfrégier, *Statistical image processing techniques for noisy images: an application oriented approach*, Kluwer, 2003.