1	So, how much of the Earth's surface <i>is</i> covered by rain gauges?
2	
3	By Chris Kidd, Andreas Becker, George J. Huffman, Catherine L. Muller, Paul Joe, Gail Skofronick-
4	Jackson and Dalia B. Kirschbaum
5	
6	Affiliations:
7	Kidd - University of Maryland, College Park, Maryland, 20740 and NASA/Goddard Space Flight
8	Center, Greenbelt, Maryland, 20771
9	Becker - Deutscher Wetterdienst, Offenbach am Main, Germany
10	Huffman, Skofronick-Jackson and Kirschbaum - NASA/Goddard Space Flight Center, Greenbelt,
11	Maryland, 20771;
12	Muller - Royal Meteorological Society, Reading, United Kingdom and School of Geography, Earth and
13	Environmental Sciences, University of Birmingham, UK;
14	Joe - Environment Canada, Meteorological Research Division, Toronto, Canada
15	
16	Corresponding author:
17	Chris Kidd, Code 613, NASA/Goddard Space Flight Center, Greenbelt, Maryland, 20771. E-mail:
18	chris.kidd@nasa.gov
19	
20	Summary Capsule:
21	The total area measured globally by all currently available rain gauges is surprisingly small, equivalent
22	to less than half a football field or soccer pitch.

24 Abstract

The measurement of global precipitation, both rainfall and snowfall, is critical to a wide range of users 25 and applications. Rain gauges are indispensable in the measurement of precipitation, remaining the de 26 facto standard for precipitation information across the Earth's surface for hydro-meteorological 27 purposes. However, their distribution across the globe is limited: over land their distribution and 28 density is variable, while over oceans very few gauges exist and where measurements are made, they 29 may not adequately reflect the rainfall amounts of the broader area. Critically, the number of gauges 30 available, or appropriate for a particular study, varies greatly across the Earth due to temporal sampling 31 resolutions, periods of operation, data latency and data access. Numbers of gauges range from a few 32 thousand available in near real time, to about a hundred thousand for all 'official' gauges, and to 33 possibly hundreds of thousands if all possible gauges are included. Gauges routinely used in the 34 generation of global precipitation products cover an equivalent area of between about 250 m^2 and 3,000 35 m^2 . For comparison, the center circle of a soccer pitch or tennis court is about 260 m^2 . Although each 36 gauge should represent more than just the gauge orifice, auto-correlation distances of precipitation vary 37 38 greatly with regime and the integration period. Assuming each Global Precipitation Climatology Centre (GPCC) -available gauge is independent and represents a surrounding area of 5 km radius, this 39 40 represents only about 1% of the Earth's surface. The situation is further confounded for snowfall which 41 has a greater measurement uncertainty.

42

Precipitation, including both rainfall and snowfall, is a key component of the energy and water cycle 44 influencing the Earth's climate system. Its measurement is not only fundamental in specifying the 45 current state of the distribution and intensity of precipitation that help define our climate, but also for 46 monitoring the changes in our climate. Precipitation is considered to be an essential global variable 47 (NASA 1988) and an Essential Climate Variable (GCOS 2010), and thus requires adequate 48 measurement. Fundamental to this must be high quality, long term observations at fine temporal and 49 spatial resolutions. Trenberth et al. (2003) emphasized the need to be able to assess and quantify the 50 changing character of precipitation through better documentation and processing of all aspects of 51 precipitation. In particular, Stephens et al. (2010) noted that precipitation is not well represented in 52 climate-scale models. Precipitation is also of great interest to a number of different scientific 53 disciplines beyond the atmospheric community, including the hydrological, oceanic, cryospheric, 54 55 environmental, ecological and biological communities. Not only is precipitation a critical component of 56 the Earth System, but also essential to life on Earth, impacting not only humanity, but also the natural 57 environment around us. Over land, precipitation is ultimately the source of all fresh water. The 58 monitoring and measurement of precipitation is of economic value for agriculture through agrobusinesses such as crop forecasting, water resource management, civil defense through mitigation of 59 60 droughts or floods, and through more benign economic returns through, for example, the removal of 61 particulate matter from the atmosphere (Thornes et al. 2010).

62

The measurement of precipitation (defined as deposition of water from the atmosphere in solid or liquid form) might at first appear to be straightforward; however, precipitation is relatively rare, highly variable, and consequently poorly monitored as an environmental parameter particularly on a global basis. Instantaneously, precipitation occurs globally probably less than 1% of the time (Barrett and Martin, 1981). When precipitation does occur, intensities may range from very light to very heavy; the

range of intensities for instantaneous precipitation is highly skewed towards lighter intensities.
Furthermore it has significant spatial and temporal variability, making it difficult to measure
satisfactorily; dense observational networks are necessary to adequately capture this variability,
particularly at fine temporal and spatial scales. Averaging over time and space generally results in
accumulated precipitation being more normally distributed and more representative (Bell et al. 1990);
climatological-scale accumulations require less dense networks, although these may not necessarily
faithfully capture small scale, extreme events or the variability over complex terrain.

75

Thus, the adequate measurement of precipitation is necessary at a number of scales and for a number of users. For flash flood studies precipitation measurements are required at local, fine scales with rapid access to the data (low latency) while for drought, longer term measurements will suffice, with less stringent spatial, temporal and latency requirements. For climate studies the accuracy of the measurements and the homogeneity of the data record are perhaps paramount over other criteria to enable the assessment of the subtleties due to climate change.

82

83 Gauge numbers

84 The number of gauges cited in the literature varies somewhat. In their Catalogue of National Standard 85 Precipitation Gauges, Sevruk and Klemm (1989b) put the number of gauges worldwide at more than 150,000, while Groisman & Legates (1995) estimated the number of 'different' gauges to be as many 86 as 250,000. However, New et al. (2001) put the number closer to the figure of 150,000 stations of 87 88 Sevruk and Klemm. The figure was quantified by Strangeways (2003) who identified at least 123,014 monthly accumulation gauges (summarized in Table 1). These variations are largely dependent upon on 89 the criteria used to count the number of gauges; for example, some of these numbers will include all the 90 'stations' that have existed and have provided some precipitation measurements at some time in their 91

92 observational record, while others will only report locations which currently return precipitation 93 measurements. Thus, while it is certain that many gauges exist, not all gauges have operated 94 continuously or simultaneously.

95

Not all gauge observations are available to the public or even to researchers. Those observations that 96 are available, are not necessarily available for all temporal samples (i.e. 3-hourly, daily, etc), or with 97 adequate data latency; flood monitoring and forecasting requires the timely delivery of data to be truly 98 useful, whereas climate application can accommodate longer data delivery times. The availability of 99 data from different countries/regions often depends upon the organization within the country, region or 100 101 locality. Often more than one agency within each country is tasked with the collection of rainfall data; 102 these agencies are not necessarily consistent from one country to the next. An additional and potentially 103 large number of gauge observations are available from commercial networks (e.g. water companies) 104 although such data may be deemed to be commercially sensitive and therefore access to such data is 105 often restricted.

106

Global meteorological data (including precipitation) is available through the World Meteorological 107 108 Organisation (WMO) Global Telecommunication System (GTS), collected from between 8,000 and 12,000 "first class" stations (WMO, 2011). The precipitation information contained with the SYNOP 109 report is collected for 3-hourly and daily periods at the fixed synoptic hours and distributed in near real 110 time, although the records for each station may not always be complete for an entire monthly record. 111 112 Figure 1 illustrates the coverage of these measurements by mapping the distance from each of the GTS stations across the globe; it can be seen that the data coverage for near real-time data on a global scale 113 is relatively poor. While some regions such as Europe and eastern Asia (including Japan) have 114 reasonable coverage, elsewhere gauges are sparse. This means that applications such as flash flood 115

monitoring that require fine temporal and spatial resolutions generally rely upon gauge and radar
(where available) observations obtained from local or regional meteorological organizations, or
satellite-based infrared estimates (Arkin and Xie, 1989)

119

At the daily scale, the situation is somewhat better. A more comprehensive set of daily gauge data is 120 organized through the Global Precipitation Climatology Project (GPCP) at the Global Precipitation 121 Climatology Centre (GPCC; Becker et al. 2013) which provides perhaps the foremost repository of 122 global precipitation data derived from gauges. Access to existing data sets hitherto unavailable to the 123 GPCC has been improved through the WMO-implemented Global Terrestrial Network for Hydrology 124 (GTN-H) observing system since 2001. Although the data released by the GPCC is restricted to a 125 gridded product, it reveals the number of rain gauges operating across the globe that report information 126 127 on a regular and reliable basis. As of 2013 (2015) a total of 180 institutions contribute data to the 128 GPCC from about 85,000 (100,000) gauge locations that have provided observations at least once since 129 the start of the dataset in 1901. Initial daily and monthly products are available a few days after the end 130 of the integration period, with a more complete 'monitoring' product after about 8 weeks and full daily and monthly products available after about 2 years. For this full, long-term or climatological analysis it 131 132 is critical to ensure continuous records of precipitation from any single station, consequently the GPCC imposes a 10-year minimum constraint. This restricts the number of available stations as of 2013 133 (2015) to 67,298 (75,165) for the best month, or 67,149 (75,033) for the worst, or a total 65,335 134 (73,586) stations across all 12 months of the year (Becker et al. 2013; Schneider et al., 2015). Figure 2 135 136 shows the coverage of the GPCC gauge data. Most of Germany lies within 10 km of the nearest rain gauge, while large areas of Europe, the US, eastern South America, India and the more populated 137 regions of Australia are less than 25 km from a gauge. Other regions with lesser, but still good 138 coverage include Turkey and Iran, parts of Africa (South Africa in particular) and the Andes in South 139

America. Some of the GTS stations 'disappear' in the GPCC dataset primarily due the fragmentednature of their observational record.

142

A number of other key gauge data products exist that provide a greater range of precipitation products 143 at varying temporal and spatial resolutions. It should be noted that many of these data products utilize 144 the same gauge information as the GPCC product, rather than providing information from additional 145 gauges. Such global data sets include the CPC Gauge-Based Analysis of Global Daily Precipitation 146 (Xie et al. 2010) and the Global Historical Climatology Network (GHCN; Menne et al. 2012), both of 147 which provide daily gridded precipitation products derived from meteorological observations 148 worldwide. The number of available gauges varies considerably by year (and by region/year) with a 149 maximum (for precipitation observations) of just over 30,000 stations, about half of which are in the 150 151 US. The GHCN also collects information on snow depth from about 17,000 stations, again virtually all 152 in the US. The Climate Research Unit at the University of East Anglia gauge product (Mitchell and 153 Jones 2005) aims to provide a consistent precipitation data set exploiting historical precipitation 154 records. Regional data sets, such as the APHRODITE product (Yatagi et al. 2012) and the China Gauge-based Daily Precipitation Analysis (CGDPA; Shen and Xiong 2016) are often able to obtain a 155 156 greater number of regional gauges through local sources.

157

It is therefore clear that the number of gauges used in creating precipitation products varies considerably. The numbers of sub-daily rainfall gauge observations available in near real-time is small, although more observations are available if the user is willing to wait longer for the data to become available. Daily gauge accumulations, although hindered by non-uniform reporting times globally, represent perhaps the greatest number of official data entries since this is in line with the WMO recommendations and most easily implemented by the individual meteorological agencies. At longer time scales the potential number of stations declines slowly, not least if a complete data record is required since some stations might not report precipitation (including zero-rain) 100% of the time.

166

167 Gauge Representativeness

If the rain gauges alone are considered, the surface area of the orifices is surprisingly small. The most 168 common gauges, as noted in Table 1, provide a total surface area estimated to cover just $3,026 \text{ m}^2$ from 169 123,014 gauges. Scaling the GTS and GPCC data sets using an average orifice size of 246 cm² would 170 result in equivalent surface areas of about 295 m^2 and 1,612 m^2 respectively. For comparison, Table 2 171 provides the areas of pitches/courts/fields for common sporting activities; the comparisons between the 172 GTS and GPCC against the equivalent areas are illustrated in Figure 3. For the 3-hourly GTS data set, 173 assuming that the maximum number of gauges report data, an area just greater than that of the center 174 175 circle of a soccer pitch is actually measured; in reality less than half of the GTS stations regularly report rainfall measurements. The GPCC gauges provide an area equivalent to about 4 basketball 176 177 courts.

178

179 However, fundamental to the measurement of precipitation using rain gauges is that they are accurate at 180 the location and are representative of their surrounding area. The 'capture' of precipitation, particularly solid precipitation, by a rain gauge is largely affected by the wind-effect around the orifice, an effect 181 that is exacerbated with increased exposure (Duchon and Essenberg, 2001; Goodison et al, 1998), 182 together with losses or errors that may also arise from the mechanical construction of the gauge. 183 184 However, despite errors associated with rain gauges, they remain arguably the most accurate instrument by which to measure rainfall. The measurement of snowfall is more difficult than the 185 measurement of rainfall due to nature of falling (and blowing) snow, the variety of snow gauges used 186 and the catchment (in)efficiencies of the gauges and is the focus of the WMO Solid Precipitation 187

Intercomparison Experiment (SPICE) project (Nitu and Wong, 2010b, ; Rasmussen et al, 2012). The 188 majority of these measurements are now made by automated systems (Nitu and Wong 2010a), 189 predominantly by weighing or tipping bucket gauges, the latter being poor at measuring snowfall 190 191 (Goodison et al. 1998). Despite the measurement accuracy for snowfall being strongly affected by the wind due to the collector-snow particle flow dynamics, only about 28% of precipitation gauges are 192 equipped with shields to modify the air flow over the gauge, although most automated snow gauges are 193 heated in order to prevent snow accumulating on the rim or sides of the collector (Nitu and Wong, 194 2010a). While rainfall can be usually be measured to within 10-20% (Vuerich et al, 2009), wind-effects 195 196 may result in less than 25% of the snowfall being caught (Goodison et al. 1998). However, errors and 197 uncertainties associated with such precipitation measurements for manual gauges are reasonably well understood and corrections (or quality control) can be applied. The SPICE project is currently 198 199 addressing corrections necessary for automatic gauges.

200

201 Spatially, at the very local scale, the gauge should at least represent the rainfall falling in its immediate 202 vicinity, over scales of a few metres and preferably a few kilometres. However, gauge measurements have their limitations given the spatial and temporal variability of precipitation and the fact that gauges 203 204 are (small) point measurements. Standards set by the WMO (2008) are designed to ensure consistency 205 between gauge measurements to reduce some of the inherent errors, such as those caused by siting or exposure. However, even under ideal situations the representativeness or auto-correlation length of 206 precipitation is surprisingly small; Habib et al. (2001) showed that for instantaneous precipitation over 207 208 the mid-western US the correlation coefficient between adjacent gauges fell to less than 0.5 just 4 km away; similar results were found for frozen precipitation. Furthermore, this correlation length is 209 dependent upon the meteorology of the precipitation event and the local topography. Fortunately, 210 accumulating precipitation over time, increases the correlation length (Bell et al. 1990); over longer 211

periods, the gauges become more representative of the regional precipitation regime. Although many schemes exist for the interpolation of precipitation, care is needed since the same interpolation scheme applied to instantaneous or monthly precipitation data could produce undesired results: Indeed, the interpolation of instantaneous gauge data should be avoided where possible due to the inherent heterogeneity of precipitation at fine temporal and spatial scales.

217

Considering the representativeness of gauges on a global scale, Figure 4 illustrates the area of the Earth 218 within the defined distances from the GTS and GPCC gauge locations, divided into four regions, ocean 219 220 or land and 60° -polewards or 60° S- 60° N. It is clear that the vast majority of the Earth's surface closest 221 to gauges are (not surprisingly) concentrated over the land areas between $60^{\circ}S-60^{\circ}N$, with relatively few gauges over land polewards of 60°. Over the oceans only a very small area is within 100 km of a 222 223 gauge, and most of this area would be deemed 'coastal waters'. Considering the GPCC data globally, 224 only 1.6% of the Earth's surface lies within 10 km of a rain gauge, although 5.9% lies within 25 km; 225 over 60°S-60°N land areas this improves to 6.5% and 23.0% respectively. This contrasts with less than 226 4% of the Earth's oceans lying within 100 km of a gauge.

227

Filling the gaps

It is clear that gaps exist within the currently available gauge networks over the various temporal scales which require additional information if the representativeness of the precipitation measurements are sufficiently adequate to meet user requirements. Despite significant progress having been made in addressing some of the larger data gaps resulting from non-availability of regional gauge data sets, it is also clear that not all existing rain gauges that could be used are currently exploited. The gauges incorporated into the GPCC database derive from meteorological agencies which adhere to the requirements laid down by the WMO to ensure consistent measurements between different sites and regions. Perhaps the next great challenge will be whether to, and how to incorporate observationsand/or measurements from non-traditional sources.

238

239 Citizen science or crowdsourcing offers one such source of additional information generated through addressing an underlying curiosity and interest in the weather (see Muller et al. 2015). An increasing 240 number of internet-enabled, low-cost sensors and instrumentation are now easily available for personal, 241 research and operational use. A number of these devices are capable of measuring precipitation, e.g. 242 tipping bucket gauges or rainfall disdrometers (see Minda and Tsuda 2012) connected to small 243 computers (Goodwin 2013). The data collected (manually or electronically) by these devices can be 244 245 transmitted via a range of communication techniques, making a large amount of data available in near real time. Numerous websites have been set up to crowdsource data from these devices; these include 246 247 the Community Collaborative Rain, Hail and Snow Network (CoCoRaHS: http://www.cocorahs.org/; 248 Cifelli et al. 2005), Weather Underground (http://www.wunderground.com/), UK Met Office Weather Observation Website (WOW: http://wow.metoffice.gov.uk; Tweddle et al. 2012), the NOAA Citizen 249 250 Weather Observer Program (CWOP: http://wxqa.com/) and gauge-enabled Netatmo weather stations (www.netatmo.com). Social media holds potential for providing information on the phase of 251 252 precipitation. The National Oceanic and Atmospheric Administration's (NOAA) Precipitation Identification Near the Ground (PING) project (Binau 2012) and the mobile PING (mPING; Elmore et 253 al. 2014) project provide information on the phase of precipitation to directly improve radar estimates 254 of precipitation, while the 'UK snow map' (http://uksnowmap.com/#/) was set up to monitor and map 255 256 snowfall across the UK with citizens giving the snowfall a rating out of ten which, in conjunction with a range of specific hash-tags (e.g. #UKSnowMap, #UKSnow), whilst Muller (2013) used social media 257 to obtain higher-resolution snow-depths across Birmingham, UK. 258

259

260 The potential of harvesting amateur weather data from thousands of sites, which may now outnumber those of standard measurement sites, does have drawbacks however. Although the crowdsourced data 261 has the potential to overcome the spatial and temporal representativeness of standard data sets, issues 262 arise from utilising non-traditional sources of data, i.e. calibration, exposure and other quality 263 assurance/quality control (QA/QC) issues (Muller et al. 2015). For example, Bell et al. (2015) found 264 variations in annual rainfall totals from low-cost weather stations ranged from about 76% to 111% of 265 standard co-located gauges, although after correction differences throughout the year rarely exceeded 266 5%. Another issue is that the locations of crowdsourced observations are population-centric (see 267 Elmore et al. 2014); while these additional data observations are not necessarily useful at the global-268 scale, the fine temporal observations and the fact that they are population-centric makes them ideal for 269 certain applications, such as urban flood monitoring, by filling in information about particularly 270 271 variations over short distances.

272

273 *Radar networks*, although not a direct measurement, provide another important source of large scale 274 rainfall information. Weather radars offer the advantage of providing frequent spatial observations of precipitation over relatively large areas compared to gauge observations. This spatial information 275 276 provides additional insights into the variability of precipitation, particularly in the gaps between gauge observations. Although radars are capable of producing reasonable estimates of rainfall, they do suffer 277 from a number of artefacts, not least persistent errors related to beam blockage and range effects, as 278 well as transient errors resulting from imperfect backscatter to rainfall relationships. The spatial 279 280 distribution of operational radars is also somewhat limited on a global scale, being limited primarily to the US/Canada, Europe/Western Russia and Japan/Korea/Australia and New Zealand; these are regions 281 where the density of gauge data are generally adequate. Despite the drawbacks and some repetition of 282

gauge coverage, radars can provide spatial measurements at time scales that fulfil a niche in the measurement of precipitation, at least on a local to regional scale.

285

Satellite observations of remotely-sensed precipitation have been available over much of the globe for 286 almost four decades and have the potential to be available on a truly global scale (Arkin and Ardunay, 287 1989). In particular, satellite estimates have a distinct advantage for assessing precipitation over data-288 sparse regions such as the world's oceans. Satellite observations from visible, infrared, and in 289 particular, passive and active microwave systems are used to generate precipitation estimates using a 290 number of techniques (see Kidd and Huffman 2011), although techniques differ in performance 291 292 regionally and temporally. The Tropical Rainfall Measuring Mission (TRMM; Kummerow et al. 1998) Precipitation Radar (PR) and the Global Precipitation Measurement (GPM) mission (Hou et al. 2014) 293 294 Dual-frequency Precipitation Radar (DPR) provide more direct measurements of precipitation. 295 Although the PR and DPR provide intermittent measurements covering 36°S-36°N and 66°S-66°N 296 respectively, the detailed information they provide is proving invaluable for a number of applications 297 including hurricane monitoring and forecasting, as well as acting as a calibrator for other satellite precipitation measurements. 298

299

The potential for *repurposing* data from non-meteorological networks has also shown potential. Numerous municipal networks exist and collect routine data for various applications and may have the potential to be used as proxies for monitoring variables such as precipitation. For example, Overeem et al. (2013) used the received signal level data from microwave links in cellular communication networks to monitor precipitation in the Netherlands. Furthermore, multi-observational precipitation products have been developed to exploit the information from individual data sources. In particular, a number of mature satellite-based precipitation techniques incorporate surface precipitation data sets,

allowing good spatial and temporal resolution precipitation products to be generated with the accuracy
of surface measurements (e.g. Huffman et al. 2009): surface gauge measurements provide the anchor
points for remotely-sensed products.

310

311 Conclusions

The surface area that is equivalent to the orifice area all of the worldwide operational rain gauges is 312 surprisingly small, amounting to only 0.00000000593% of the Earth's surface. There are clearly a 313 large number of gauges in existence, but the actual number of gauges available to the user is highly 314 variable depending upon the period of study and latency requirements. The GPCC rain gauge data set, 315 316 arguably the most comprehensive currently available global gauge dataset, comprises of a little over 65,000 gauges whose combined area is roughly equivalent to less than half a soccer pitch. If the 317 318 number of gauges that provide near real time data is considered, as available through the WMO GTS 319 network, the gauges could easily fit into a tennis court or the center circle of a soccer pitch. However, 320 since gauges represent more than just the actual point location of the orifice, it may be assumed that a 321 greater part of the Earth's surface might be covered: if each GPCC gauge represented an area extended to 5 km from each gauge (assuming no overlap) this still only represents about 1% of the Earth's 322 323 surface.

324

Improving worldwide information on precipitation is fundamentally important. Information utilizing crowdsourced precipitation measurements (as opposed to just observations) from 'amateur' gauge networks has potential for many applications, including meteorology, but is probably more difficult to achieve due to timely access to the data, continuity and absolute calibration of the measurements. Furthermore, the spatial availability of both amateur and crowdsourced information tends to mimic that of existing precipitation information due to being population-centric. Great efforts have been made in

obtaining gauge data in data sparse regions; however additional high-quality measurements are still
needed to fill gaps in certain regions. In particular, the continental interiors of South America, Africa
and Australia together with the northern regions of the continental land masses in the Northern
Hemisphere and Antarctica are deficient in precipitation gauges. Projects such as the Trans-African
HydroMeteorological Observatory (TAHMO; http://tahmo.org) are now beginning to address this need.

336

Ultimately gauge data has a critical role to play in not only the observation and monitoring of the
Earth's climate, but also for enabling and improving other means of estimating global precipitation,
whether through numerical models or through satellite observations.

340

341 Acknowledgements.

The authors thank the many colleagues who provided information and advice in the preparation of this paper. In particular the authors, along with other scientists thank the many national meteorological agencies for their continued provision of gauge data to regional and global data sets; their data is invaluable in furthering precipitation science.

346

347

348 **SIDEBAR**:

WHAT IS A RAIN GAUGE? Fundamentally, a rain gauge may be described as any object that collects rain(water) which can be measured. The most common gauges have historically been 'simple cans' that accumulate rain water over a set period of time; evidence of such gauges may be traced back over two thousand years ago (see Strangeways 2010). While the basic concept of the gauge is simple, the practical implementation necessary to meet user requirements has led to a great diversity of gauge types; Sevruk and Klemm (1989a) identified more than 50 different manual gauge types alone. These can be categorized into the physical design of the gauge, the mechanisms used to collect and quantizethe rainfall and the technology necessary to report the rainfall.

357

358 Design: The vast majority of gauges share one common feature; the orifice. This is usually circular with the rim and interior designed to ensure an accurate catch of the precipitation. The differences in 359 the size of the orifice do not appear to critically affect the accuracy of the catch (Stangeways 2003), 360 most official gauges having orifices typically between about 127 cm² and 400 cm²: Figure S1a shows a 361 Casella tipping bucket rain gauge with a 400 cm² orifice together with a Snowdon MkII accumulation 362 gauge with a 127 cm² orifice However, the wind flow over the orifice, affects the accuracy of the catch 363 often resulting in an under-measurement for light intensity precipitation and stronger winds 364 (Strangeways 2004). A number of designs therefore make the gauges more aerodynamic to reduce this 365 366 under-catch (Robinson and Rodda 1969). An example of the adaptation of a rain gauge for measuring snowfall is shown in Figure S1b which shows an OTT-Hydromet Pluvio2 200 weighing gauge with a 367 368 heated rim, an inner Tretykov shield and an outer alter fence.

369

Mechanical: Despite the simplicity of the accumulation gauge the variability of precipitation over short time scales cannot be adequately captured by such gauges. Numerous mechanisms have therefore been devised to enable the precipitation collected to be suitably quantized over time. These include mechanically recording gauges such as the siphon gauge and weighing gauges, electrically recording such as tipping bucket gauges, electronic weighing gauges, capacitance gauges and drop counting gauges (see Strangeways 2010).

376

Technological: The cost of manual or mechanically recorded gauges together with the development of
electrically recording gauges has led to the development of (quasi-) automatic gauges that can measure,

record and report the rainfall in near real time through the use of electronic data loggers and communication systems (satellite or phone networks). The availability of gauge measurements in near real time greatly enhances the usefulness of such measurements for meteorological and hydrological applications.

383

384 **References**

Arkin, P. and P. Ardunay, 1989: Estimating Climate Scale Precipitation from Space: a Review, J. of
Climate, 2, 1229-1238

387

Arkin, P. and P. Xie, 1994: The Global Precipitation Climatology Project, First Algorithm
Intercomparison Project, Bulletin of the American Meteorological Society, 75, 401-419.

390

Barrett, E. C. and D. W. Martin, 1981: The use of satellite data in rainfall monitoring. Academic Press,
London. 340pp

- Becker, A., P. Finger, A. Meyer-Christoffer, B. Rudolf, K. Schamm, U. Schneider, and M.
 Ziese, 2013: A description of the global land-surface precipitation data products of the Global
 Precipitation Climatology Centre with sample applications including centennial (trend) analysis from
 1901–present, *Earth Syst. Sci. Data*, **5**, 71-99, doi:10.5194/essd-5-71-2013.
- 398
- Bell, S., D. Cornford, and L. Bastin, 2015. How good are citizen weather stations? Addressing a biased
 opinion. *Weather* 70, 3, 75-84
- 401

404	2205.
403	tropical rainfall: Monte Carlo study using a space-time stochastic model. J. Geophys. Res., 95, 2195-
402	Bell, T. L., A. Abdullah, R. L. Martin, and G. R. North, 1990: Sampling errors for satellite-derived

Binau, S., 2012: The PING Project [www] http://www.erh.noaa.gov/iln/ping.php (accessed 18 August
2015).

408

Cifelli, R., N. Doesken, P. Kennedy, L. D. Carey, S. A. Rutledge, C. Gimmestad, T. Depue, 2005: The
Community Collaborative Rain, Hail, and Snow Network. *Bull. Am. Meteor. Soc.* 86, 1069-1077. DOI:
10.1175/BAMS-86-8-1069

412

Duchon, C. E. and G. R. Essenberg, 2001: Comparative rainfall observations from pit and above
ground rain gauges with and without wind shields. *Water Resources Research* 37, 3253-3263.

415

Elmore, K. L., Z. L. Flamig, V. Lakshmanan, B. T. Kaney, V. Farmer, H. D. Reeves, L. P. Rothfusz,
2014: MPING Crowd-Sourcing Weather Reports for Research. *Bull. Am. Meteor. Soc.* 95, 1335-1342.
DOI: 10.1175/BAMS-D-13-60014.1

419

420 GCOS, 2010: Implementation plan for the Global Observing System for Climate in Support of the
421 UNFCCC, 186pp. http://www.wmo.int/pages/prog/gcos/Publications/gcos-138.pdf (last access: 8
422 August 2015).

423

Goodison, B. E., P. Y. T. Louie, and D. Yang, 1998: WMO Solid Precipitation Measurement
Intercomparison. Instruments and Observing Methods, Report No.67, WMO/TD No 872.

- Goodwin, S., 2013: Raspberry Pi. In Smart Home Automation with Linux and Raspberry Pi, Lowman
 (ed). Apress publishers, New York, NY. 275-296. Doi: 10.1007/978-1-4302-5888-9_8.
- 429
- Groisman, P. Y. and D. R. Legates, 1995: Documenting and detecting long-term precipitation trends:
 where are we and what should be done? *Climate Change* **31**, 601-622.
- 432
- Habib, E., W. F. Krajewski and G. J. Ciach, 2001: Estimation of Rainfall Interstation Correlation. J. *Hydrometeor*, 2, 621–629. doi: 10.1175/1525-7541(2001)002<0621:EORIC>2.0.CO;2

435

- 436 Hou, A. Y., R. K. Kakar, S. Neeck, A. A. Azarbarzin, C. D., Kummerow, M. Kojima, R. Oki, K.
- 437 Nakamura and T. Iguchi, 2014: The Global Precipitation Measurement Mission. *Bull. Amer. Meteor.*438 *Soc.* 5, 701-722. doi:10.1175/BAMS-D-13-00164.1

439

440 Huffman, G. J, R. F. Adler, D. T. Bolvin, and G. Gu 2009: Improving the Global Precipitation Record:

441 GPCP Version 2.1. *Geophys. Res. Lett.*, **36**, L17808, doi:10.1029/2009GL040000.

- Kidd, C. and G. Huffman, 2011: Global precipitation measurement. *Meteorological Applications* 18,
 334-353. DOI: 10.001/met.284
- 445
- Kummerow, C., W. Barnes, T. Korzu, J. Shuie and J. Simpson, 1998: The Tropical Rainfall Measuring
 Mission (TRMM) sensor package. *J. Atmos. Oceanic Technol.* 15, 809-917.
- 448

449	Menne, M. J., I. Durre, R. S. Vose, B. E. Gleason and T. G. Houston, 2012: An overview of the Global
450	Historical Climatology Network-Daily Database. J. Atmos. Oceanic Technol. 29, 897-910. DOI:
451	10.1175/JTECH-D-11-00103.1
452	
453	Minda, H. and N. Tsuda, 2012: Low-cost laser disdrometer with the capability of hydrometeor imaging
454	IEEJ Transaction on Electrical and Electronic Engineering 7, S132-S138. DOI: 10.1002/tee.21827
455	
456	Mitchell, T. D. and P. D. Jones, 2005: An improved method of constructing a database of monthly
457	climate observations and associated high-resolution grids. Int. J. Climatol., 25, 693–712.
458	
459	Muller C. L., 2013: Mapping snow depth across the West Midlands using social media-generated data.
460	<i>Weather</i> , 68 (3), 82.
461	
462	Muller, C. L., L. Chapman., S. Johnston, C. Kidd, S. Illingworth, G. Foody, A. Overeem, and R. R.
463	Leigh, 2015: Crowdsourcing for climate and atmospheric sciences: current status and future potential,
464	Int. J. Climatol, in press, DOI: 10.1002/joc.4210
465	
466	NASA, 1988: Earth System Science: A Closer View. NASA. Washington, DC. 208pp.
467	
468	New, M., M. Todd, M. Hulme, and P. Jones, 2001: Precipitation measurements and trends in the
469	twentieth century. Int. J. Climatol. 21, 1899-1922.
470	

471	Nitu, R. and K. Wong, 2010a: CIMO survey on national summaries of methods and instruments for
472	solid precipitation measurement at automatic weather stations. WMO Instruments and Observing
473	Methods, Rep. 102, WMO/TD-1544, 57 pp.

- 474
- 475 Nitu, R. and K. Wong, 2010b: Measurement of Solid Precipitation at Automatic Weather Stations,
- 476 Challenges and opportunities; TECO-2010 WMO Technical Conference on Meteorological and
- 477 Environmental Instruments and Methods of Observation, *Helsinki, Finland, 30 August 1 September*478 2010
- 479
- 480 Overeem, A., H. Leijnse and R. Uijlenhoet, 2013: Country-wide rainfall maps from cellular
 481 communication networks, *Proceedings of the National Academy of Sciences of the United States of*482 *America*, 110, 2741-2745
- 483
- Rasmussen, R., B. Baker, J. Kochendorfer, T. Meyers, S. Landolt, A. P. Fischer, J. Black, J. M.
 Thériault, P. Kucera, D. Gochis, C. Smith, R. Nitu, M. Hall, K. Ikeda and E. Gutmann, 2012: How
 Well Are We Measuring Snow: The NOAA/FAA/NCAR Winter Precipitation Test Bed. *Bull. Amer. Meteor. Soc.*, 93, 811–829.
- 488
- Robinson, A. C. and J. C. Rodda, 1969: Rain, wind and the aerodynamic characteristics of raingauges. *Met. Mag.* 98, 113-120.
- 491
- 492 Schneider, U., M. Ziese, A. Becker, A. Meyer-Christoffer, and P. Finger, 2015: Global Precipitation
 493 Analysis Products of the GPCC.
- 494 ftp://ftp-anon.dwd.de/pub/data/gpcc/PDF/GPCC_intro_products_2008.pdf (accessed 12 May 2016)

496 Sevruk, B. and S. Klemm, 1989a: Types of standard precipitation gauges. *In Proceedings of the*497 *WMI/IAHS/ETH Workshop on Precipitation Measurement*. St. Moritz, Switzerland, 3-7 December
498 1989, WMO, Geneva.

499

Sevruk, B. and S. Klemm, 1989b: Catalogue of national standard precipitation gauges. *Instruments and observing methods Report No. 39*. WMO/TD-No. 313. World Meteorological Office, Geneva. 50pp.
(available online https://www.wmo.int/pages/prog/www/IMOP/publications/IOM-39.pdf; accessed 8
August 2015)

504

Shen, Y. and A. Y. Xiong, 2016: Validation and comparison of a new gauge-based precipitation
analysis over mainland China. Int. J. Climat., 36, 252-265DOI: 10.1002/joc.4341

507

Stephens, G. L., T. L'Ecuyer, R. Forbes, A. Gettlemen, J.-C. Golaz, A. Bodas-Salcedo, K. Suzuki, P.
Gabriel, and J. Haynes, 2010: Dreary state of precipitation in global models, J. Geophys. Res. 115,
D24211, doi:10.1029/2010JD014532.

511

Strangeways, I. C., 2003: *Measuring the Natural Environment*. 2nd Ed. Cambridge University Press.
Cambridge. 534pp

514

515 Strangeways, I. C., 2004: Improving Precipitation Measurement. *Int. J. Climatol.* **2**4, 1443-1460.

516

517 Strangeways, I. C., 2010: A history of rain gauges. *Weather* **65**, 133-138. doi: 10.1002/wea.548

- 519 Thornes, J., W. Bloss, S. Bouzarovski, X. Cai, L. Chapman, J. Clark, S. Dessai, S. Du, D. van der
- 520 Horst, M. Kendall, C. Kidd and S. Randalls, 2010: Communicating the value of atmospheric services.

521 Meteorol. App. 17, 243-250. DOI: 10.1002/met.200

- 523 Trenberth, K. E., A. Dai, R. M. Rasmussen and D. B. Parsons, 2003: The Changing Character of
- 524 Precipitation. Bull. Am. Meteor. Soc. 84, 1205-1217. DOI: 10.1175BAMS-84-9-1205.
- 525
- Tweddle, J. C., L. D. Robinson, M. J. O. Pocock and H. E. Roy, 2012: Guide to citizen science:
 developing, implementing and evaluating citizen science to study biodiversity and the environment in
 the UK. Natural History Museum and NERC Centre for Ecology & Hydrology for UK-EOF. Available
 online: www.ukeof.org.uk (accessed 8 August 2015)
- 530
- 531 Vuerich, E., C. Monesi, L. Lanza, L. Stagi, E. Lanzinger, 2009: World Meteorological Organization,
- WMO Field Intercomparison of Rainfall Intensity Gauges, WMO Instruments and Observing Methods,
 Rep. 102, WMO/TD-1504, 290 pp.
- 534
- World Meteorological Organization, 2008: *Guide to Meteorological Instruments and Methods of Observation*, 7, WMO No. 8, Geneva. Available online at
 https://www.wmo.int/pages/prog/www/IMOP/publications/CIMO-Guide/Ed2008Up2010/Part-
- 538 I/WMO8_Ed2008_PartI_Ch6_Up2010_en.pdf
- 539
- 540 World Meteorological Organization, 2011: Observing stations and WMO catalogue of Radiosondes,
- 541 WMO publication No 9. Volume A, Geneva. http://www.wmo.int/pages/prog/www/ois/volume-a/vola-
- 542 home.htm (last accessed 8 August 2015)

Xie, P., M. Chen and W. Shi, 2010: CPC unified gauge-based analysis of global daily precipitation. In *Preprints, 24th Conf. on Hydrology, Atlanta, GA, Amer. Meteor. Soc* (Vol. 2).

546

- 547 Yatagai, A., K. Kamiguchi, O. Arakawa, A. Hamada, N. Yasutomi and A. Kitoh, 2012: APHRODITE:
- 548 Constructing a Long-Term Daily Gridded Precipitation Dataset for Asia Based on a Dense Network of
- 549 Rain Gauges, Bull. Am. Meteor. Soc. 93, 1401-1415. DOI:10.1175/BAMS-D-11-00122.1

- Table 1: Monthly manually-read gauges by type (after Strangeways 2003)

Country of origin	Number	Countries	Orifice area	Total
		deployed		
Germany (Hellmann)	30,080	30	200 cm^2	601.6 m ²
China	19,676	3	314 cm^2	617.8 m ²
United Kingdom	17,856	29	127 cm^2	226.7 m ²
(Mk2/Snowdon)				
Russia	13,620	7	200 cm^2	272.4 m ²
United States	11,342	6	324 cm^2	367.5 m^2
India	10,975	1	200 cm^2	219.5 m ²
Australia	7,539	3	324 cm^2	247.5 m ²
Brazil	6,950	1	400 cm^2	278.0 m ²
France	4,876	23	400 cm^2	195.0 m ²
Total	123,014			3,026 m ²

- Table 2: Dimensions and areas of common sporting fields/pitches/courts together with numbers of
- 557 gauges with the equivalent area.
- 558

	Dimensions	Area	Equivalent gauges [*]
Soccer pitch	105 x 68 m	7140.0 m ²	178,500 - 562,204
Centre circle of soccer pitch	9.15 m radius	263.0 m ²	6,575 - 20,709
American Football	109.7 x 48.8 m	5353.4 m ²	133,834 - 421,524
Tennis Court	23.78 x 10.97 m	260.9 m ²	6,522 - 20,541
Basketball (FIBA)	28.0 x 15.0 m	420.0 m ²	10,500 - 33,071

*range based upon to 400 cm^2 to 127 cm^2 orifice areas.

560

562 Figure captions:

563

Figure 1: Map showing the distance to nearest GTS gauge, typical of 3-hourly/daily measurements available in near real time; blank areas in the figure are beyond 100 km from the nearest gauge.

566

Figure 2: Map showing the distance to nearest GPCC gauge, typical of all regular and reliable gauge
measurements; blank areas in the figure are beyond 100 km from the nearest gauge.

569

Figure 3: Equivalent areas of common sports pitches and courts compared with the total areas oforifices of all GTS and GPCC gauges.

572

Figure 4. Areas of the Earth within certain distances from the nearest precipitation gauge for the GTS
network (left) and the GPCC dataset (right). The whole square represents the whole of the Earth's
surface, while the subdivisions are for land and ocean and 60°-polewards and 60°S-60°N.

576

Figure S1 a) Two Casella tipping bucket rain gauges (green) and Snowdon MkII accumulation gauge
(copper-color) at the University of Birmingham (UK) Winterbourne II climate station, and b) an OTT-

579 Hydromet Pluvio2 200 weighing gauge with a heated rim, an inner Tretykov shield and an outer alter

580 fence during the GPM Cold-season Precipitation Experiment (GCPEx) in Canada.

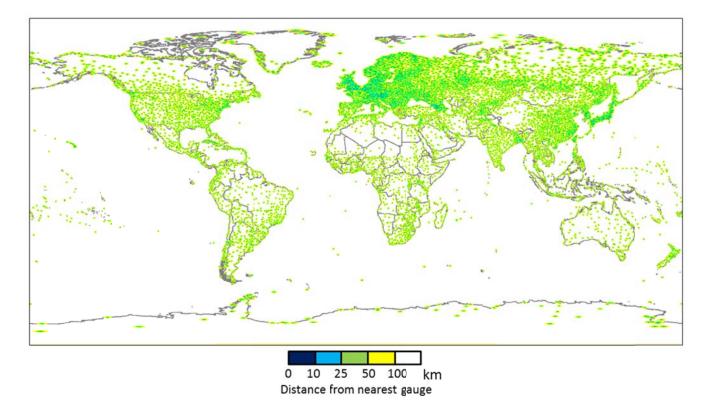
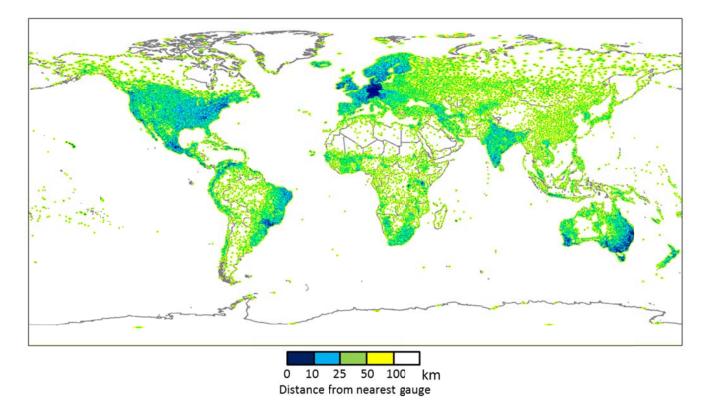


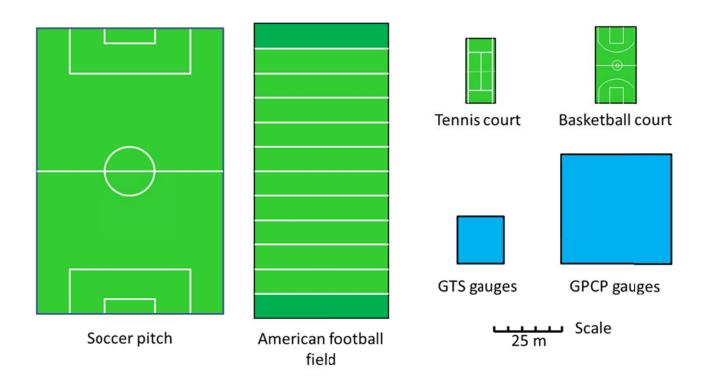


Figure 1: Map showing the distance to nearest GTS gauge, typical of 3-hourly/daily measurementsavailable in near real time; blank areas in the figure are beyond 100 km from the nearest gauge.



588 Figure 2: Map showing the distance to nearest GPCC gauge, typical of all regular and reliable gauge

measurements; blank areas in the figure are beyond 100 km from the nearest gauge.



593 Figure 3: Equivalent areas of common sports pitches and courts compared with the total areas of

594 orifices of all GTS and GPCC gauges.

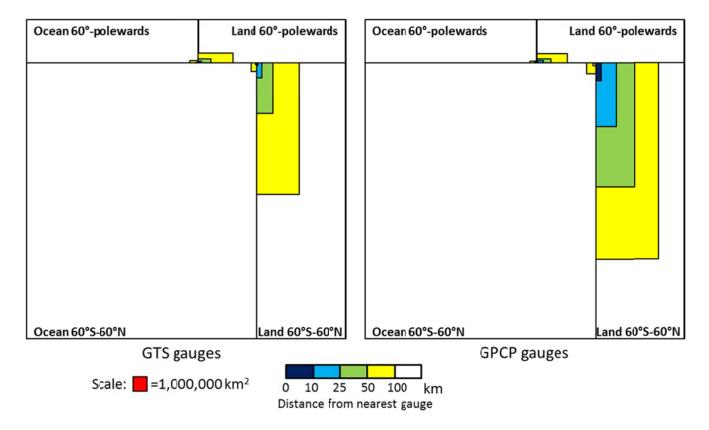


Figure 4. Areas of the Earth within certain distances from the nearest precipitation gauge for the GTS
dataset (left) and the GPCC dataset (right). The whole square represents the whole of the Earth's
surface, while the subdivisions are for land and ocean and 60°-polewards and 60°S-60°N.

