



5...4...3...2...1...

# SPACE LAUNCH SYSTEM

11 JAN 2019

**Comparison of SLS Sectional Loads from  
Pressure-Sensitive Paint and CFD**

AIAA SciTech Forum 2019

Jamie Meeroff, Henry Lee, Derek Dalle, Stuart Rogers,  
Nettie Roozeboom, Jennifer Baerny


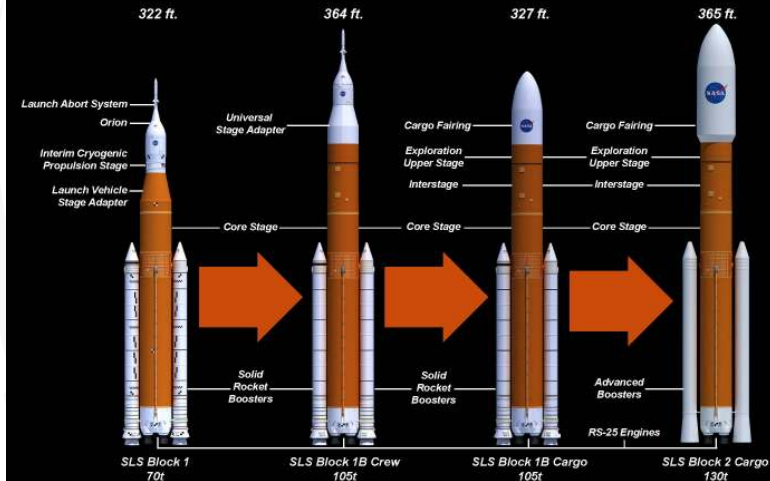


Image Credit: NASA/MSFC

# EXPLORATION MISSION-2

Crewed Hybrid Free Return Trajectory, demonstrating crewed flight and spacecraft systems performance beyond Low Earth Orbit (LEO)

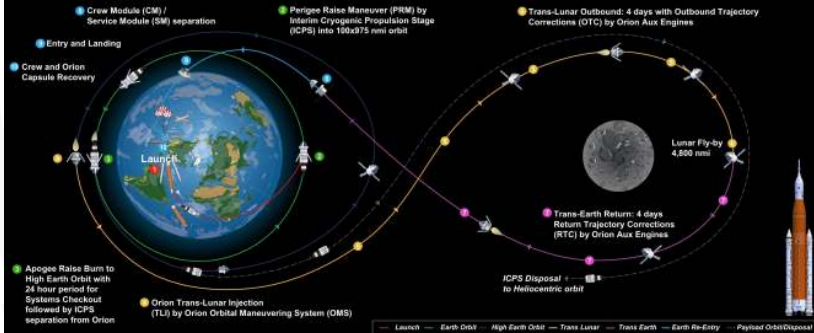

SLS Configuration (Block 1) with Human Rated ICPS | 22x975 nmi (40.7x1806 km) insertion orbit | 28.5 deg inclination

4 astronauts | Total distance traveled: 1,090,320 km – Mission duration: 9 Days – Re-entry speed: 24,500 mph (Mach 32)

Image Credit: NASA

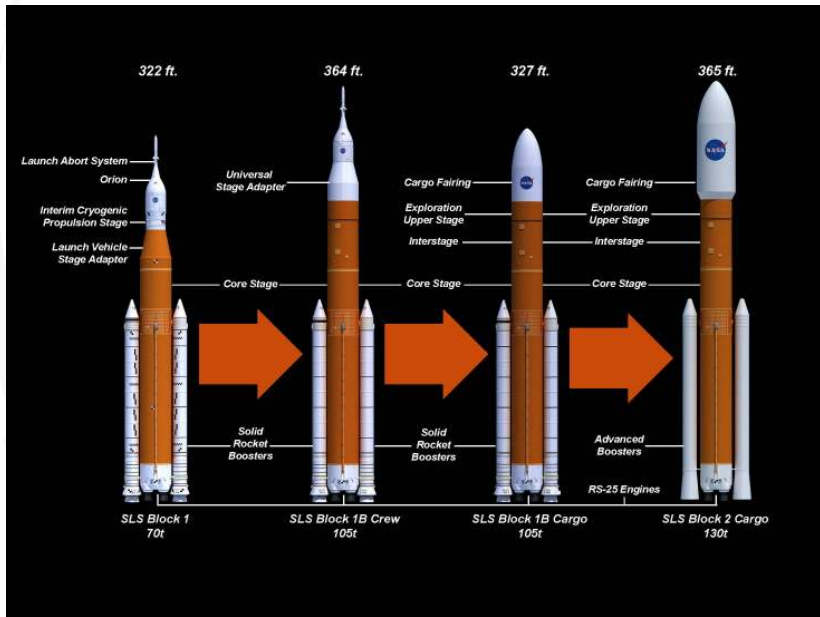
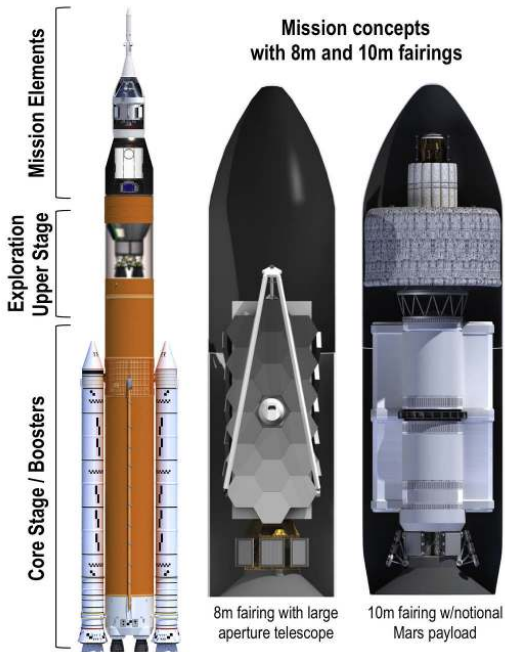


Image Credit: NASA/MSFC




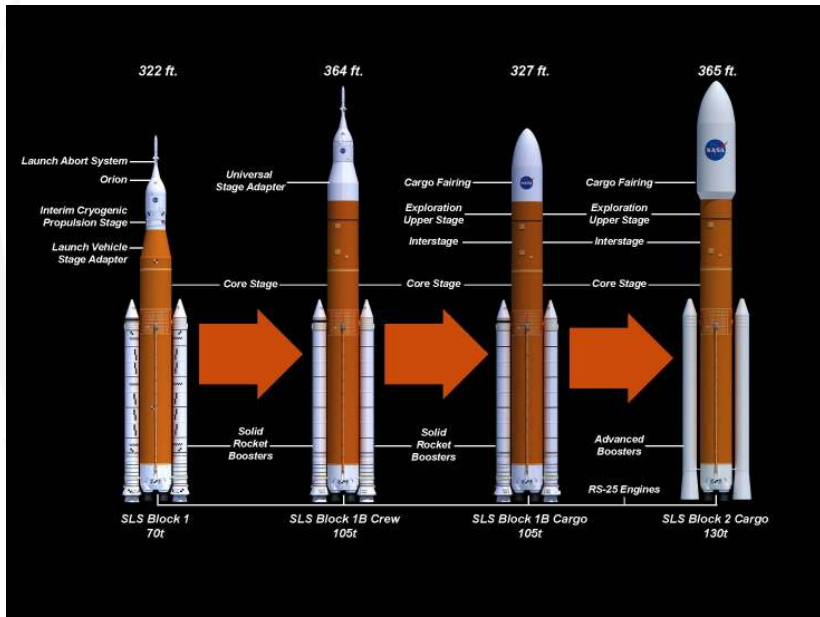



Image Credit: NASA/MSFC

# Introduction: Aerodynamic Databases


## Ascent Forces and Moments



## Protuberance Air Loads



## Surface Pressures



## Line Loads



- Additional databases for other portions of flight (i.e. liftoff and transition)
- Most databases are a combination of wind tunnel data and CFD simulations



# Sectional Loads (Line Loads)






# Sectional Loads/Line Loads



Sectional load slices for SLS Block 1B Crew configuration

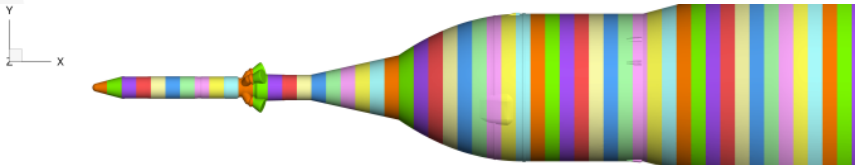

Sectional load slices on forward portion of SLS Block 1B

- Line loads are a tool to evaluate the impact of aero loads on vehicle structures by dividing vehicle into a number of fixed width slices
- Calculate the load on each slice, normalized by slice width
- Valid for long/skinny vehicles, like a rocket

# Sectional Load Calculation

Line loads for a section  $i$  typically take the form of:

$$C_{N,i} = \int_{\hat{x}_i}^{\hat{x}_{i+1}} \int C_N(\hat{x}, s) ds d\hat{x}$$

Where  $\hat{x}$  is a non-dimensionalized axial coordinate and  $s$  is a parametric variable along the vehicle edge

In practice, these line loads are divided by slice length to provide a universal value:

$$\hat{C}_{N,i} = \frac{1}{\hat{x}_{i+1} - \hat{x}_i} \int_{\hat{x}_i}^{\hat{x}_{i+1}} \int C_N(\hat{x}, s) ds d\hat{x}$$


discretized value for the derivative of  $C_N$  with respect to  $\hat{x}$ , i.e.  $dC_N/d(x/L_{ref})$

**The TRILOAD\* routine from the CGT package (NASA Ames) is used to calculate the final profiles**


\* Pandya, S. and Chan, W. M., Computation of Sectional Loads from Surface Triangulation and Flow Data, AIAA Paper 2011-3680

# Example of a Sectional Load


- Deliver three force components (no moments)
- Profiles are a function of axial distance along the rocket
- For SLS, we use 200 slices and deliver line loads on the core, left booster, and right booster all separately
- Delivered database based on **Flight CFD**, wind tunnel runs used as "sanity check"



Lateral loads:  $c_Y(\hat{x})$



Axial loads:  $c_A(x/L_{ref}) = c_A(\hat{x})$



Normal loads:  $c_N(\hat{x})$




# Experimental Setup



# Experimental Setup

## NASA Ames UPWT

- Tests completed in 11x11-foot and 9x7-foot test sections
- Three configurations tested: Block 1 Crew, Block 1B Crew, Block 1B Cargo
- Tested at 1.3% scale

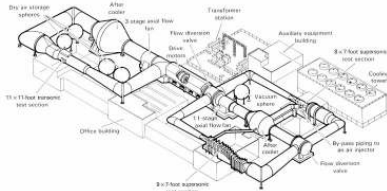

From: Baals, D. D. and Corliss, W., Wind Tunnels of NASA, Tech. Rep. NASA-SP-440

## Pressure-Sensitive Paint



- Steady PSP collected for all three configurations in 11-foot test section (Mach 0.2 to 1.4)
- No viscous contributions
- Light source: 40 x 400 nm LEDs
- Image collection: 8 cameras around plenum



Image Credit: NASA/ARC/Dominic Hart


# PSP Surface Representation

- Format: Plot3D, multiple zone, no I-blanks
- Structured patches - user determined
- Resolution limited by image reduction process - coarse protuberances

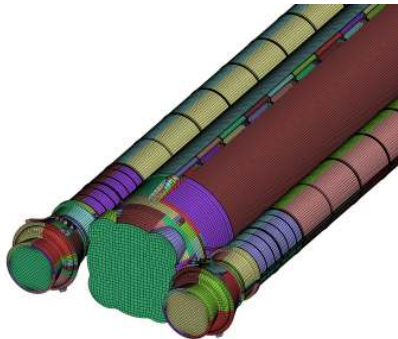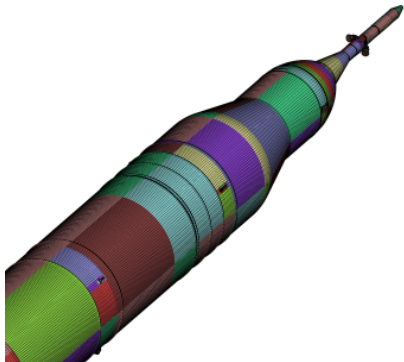

# PSP Optical Access

- PSP requires clear optical path to produce accurate data
- Difficult to get optical access to regions under pressurization lines and between booster and core (among others)
- These regions are considered to have  $C_P = 0$

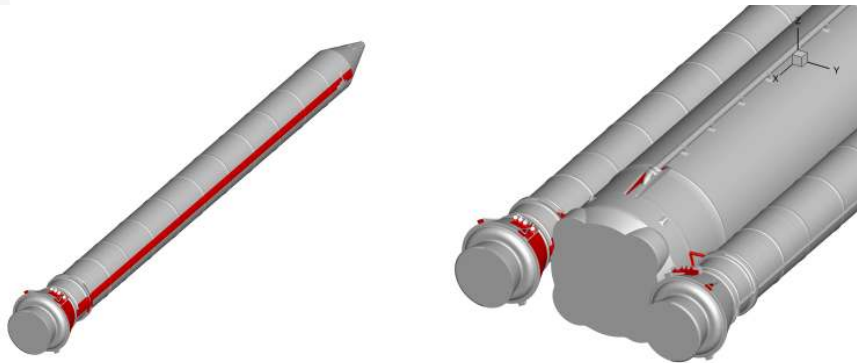

Areas in red show regions with no optical access

# PSP Sectional Load Extraction



Post-processed  
surface  $C_P$  on  
Plot3D mesh

Split Cells  
→

Surface  $C_P$  on  
triangulated  
mesh

*TRILOAD*  
→

Sectional load  
profile









# CFD Setup



# Flow Solver

- FUN3D - 3D unstructured (mixed-element) flow solver developed at NASA LaRC\*
- Run in RANS or uRANS (whenever RANS solution was not steady) mode using Spalart-Allmaras turbulence model
- 2 feature-based adaptations during every run
- 2250 FUN3D simulations run - only a subset is comparable to PSP


## CFD Mesh



\*Biedron, R. T., et al., FUN3D Manual: 13.1, Tech. Rep. TM-2017-219580

# Sample CFD Solution



Converged CFD Solution, Block 1B Crew, Mach 1.6 and  $\alpha_t = 4^\circ$

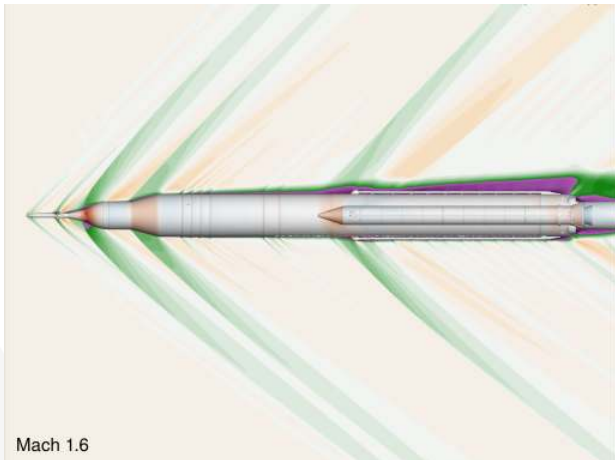

Flow field is colored by Mach number, surface is shaded by  $C_p$

# Sample CFD Solution

Converged CFD Solution, Block 1B Crew, Mach 1.6 and  $\alpha_t = 4^\circ$

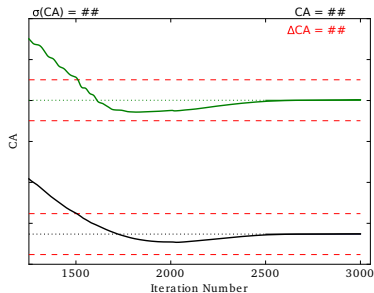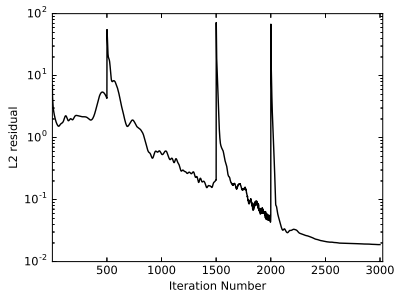

$L_2$  norm has converged a few magnitudes and bulk forces are stable





# Sectional Load Comparisons



# Sectional Load Comparisons

- Comparisons made at three Mach numbers: 0.95, 1.10, and 1.30
- All at  $\alpha_t = 4.0^\circ$  and five different roll angles (missile axis CS)

## Block 1B Crew STACK/CA at Mach 1.30



— Solid lines = PSP  
- - - Dashed lines = CFD



- $\alpha_t = 4^\circ, \phi = 180^\circ$  ( $\alpha = -4^\circ, \beta = 0^\circ$ )
- $\alpha_t = 4^\circ, \phi = 90^\circ$  ( $\alpha = 0^\circ, \beta = 4^\circ$ )
- $\alpha_t = 4^\circ, \phi = 360^\circ$  ( $\alpha = 4^\circ, \beta = 0^\circ$ )
- $\alpha_t = 4^\circ, \phi = 45^\circ$  ( $\alpha = 2.8^\circ, \beta = 2.8^\circ$ )
- $\alpha_t = 4^\circ, \phi = 225^\circ$  ( $\alpha = -2.8^\circ, \beta = -2.8^\circ$ )



# Block 1 Crew



## STACK/CN at Mach 0.95

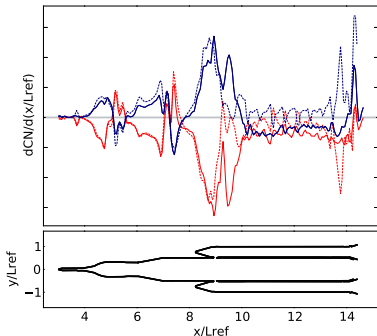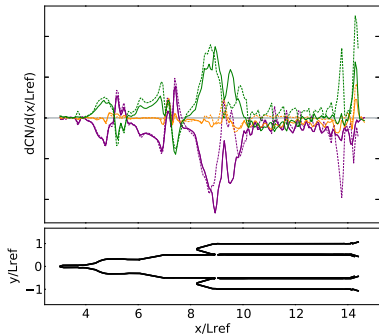



- Good matching except at attach hardware and between booster and core

— Solid lines = PSP  
 - - - Dashed lines = CFD

—  $\alpha_t = 4^\circ, \varphi = 180^\circ$  ( $\alpha = -4^\circ, \beta = 0^\circ$ )  
 —  $\alpha_t = 4^\circ, \varphi = 90^\circ$  ( $\alpha = 0^\circ, \beta = 4^\circ$ )  
 —  $\alpha_t = 4^\circ, \varphi = 360^\circ$  ( $\alpha = 4^\circ, \beta = 0^\circ$ )  
 —  $\alpha_t = 4^\circ, \varphi = 45^\circ$  ( $\alpha = 2.8^\circ, \beta = 2.8^\circ$ )  
 —  $\alpha_t = 4^\circ, \varphi = 225^\circ$  ( $\alpha = -2.8^\circ, \beta = -2.8^\circ$ )



## STACK/CY at Mach 0.95

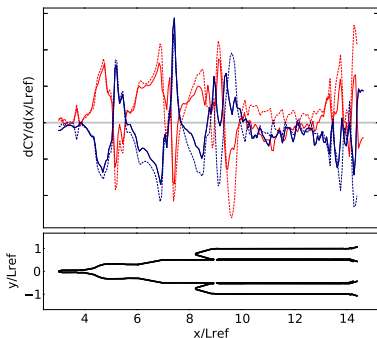
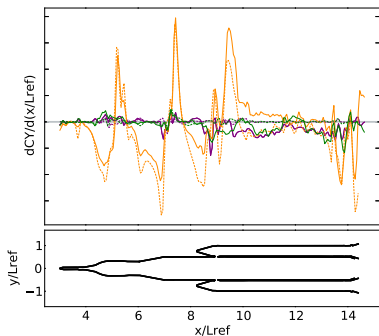


- Trends match, but more differences - larger projected area in  $Y$

— Solid lines = PSP  
 - - - Dashed lines = CFD

—  $\alpha_t = 4^\circ, \phi = 180^\circ (\alpha = -4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 90^\circ (\alpha = 0^\circ, \beta = 4^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 360^\circ (\alpha = 4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 45^\circ (\alpha = 2.8^\circ, \beta = 2.8^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 225^\circ (\alpha = -2.8^\circ, \beta = -2.8^\circ)$

## STACK/CY at Mach 1.10

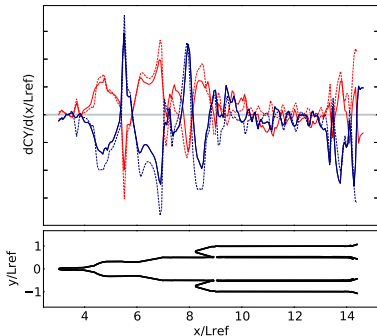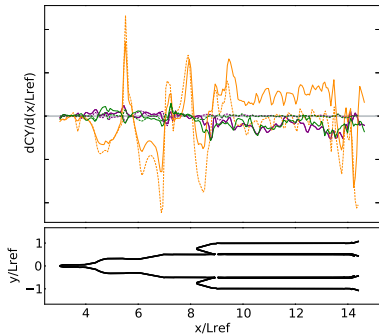

- Large differences between booster and core at  $\phi = 90^\circ$  due to shielding

— Solid lines = PSP  
 - - - Dashed lines = CFD



—  $\alpha_t = 4^\circ, \phi = 180^\circ (\alpha = -4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 90^\circ (\alpha = 0^\circ, \beta = 4^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 360^\circ (\alpha = 4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 45^\circ (\alpha = 2.8^\circ, \beta = 2.8^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 225^\circ (\alpha = -2.8^\circ, \beta = -2.8^\circ)$



# Block 1B Cargo



## STACK/CY at Mach 0.95

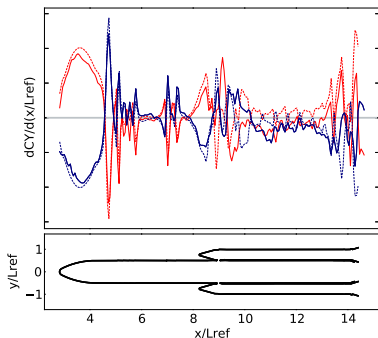
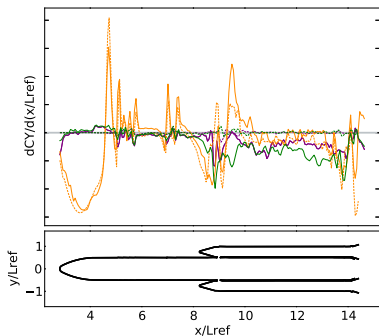


- Divergence starts at FWD attach and continues downstream

— Solid lines = PSP  
 - - - Dashed lines = CFD

—  $\alpha_t = 4^\circ, \varphi = 180^\circ (\alpha = -4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \varphi = 90^\circ (\alpha = 0^\circ, \beta = 4^\circ)$   
 —  $\alpha_t = 4^\circ, \varphi = 360^\circ (\alpha = 4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \varphi = 45^\circ (\alpha = 2.8^\circ, \beta = 2.8^\circ)$   
 —  $\alpha_t = 4^\circ, \varphi = 225^\circ (\alpha = -2.8^\circ, \beta = -2.8^\circ)$

## STACK/CN at Mach 1.10

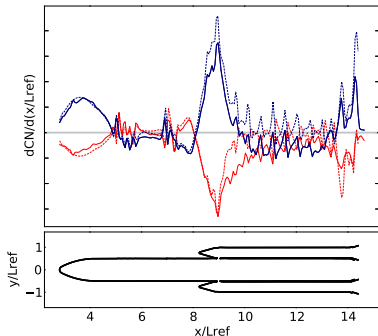
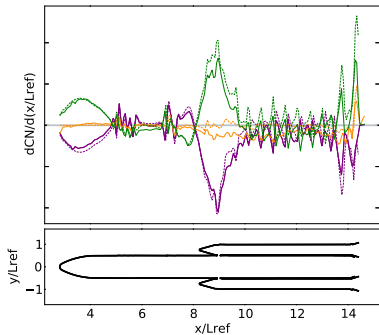


- Very good agreement in normal force at this condition

— Solid lines = PSP  
 - - - Dashed lines = CFD

—  $\alpha_t = 4^\circ, \varphi = 180^\circ (\alpha = -4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \varphi = 90^\circ (\alpha = 0^\circ, \beta = 4^\circ)$   
 —  $\alpha_t = 4^\circ, \varphi = 360^\circ (\alpha = 4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \varphi = 45^\circ (\alpha = 2.8^\circ, \beta = 2.8^\circ)$   
 —  $\alpha_t = 4^\circ, \varphi = 225^\circ (\alpha = -2.8^\circ, \beta = -2.8^\circ)$

## STACK/CY at Mach 1.30

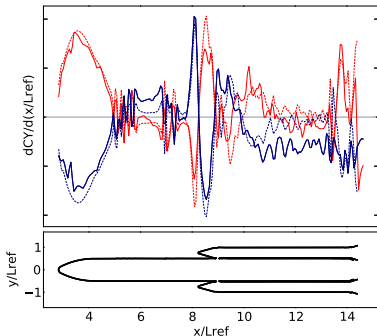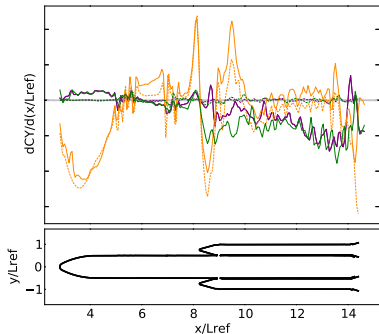

- Still poor agreement between booster and core, symmetry lacking

— Solid lines = PSP  
- - - Dashed lines = CFD


- $\alpha_t = 4^\circ, \varphi = 180^\circ (\alpha = -4^\circ, \beta = 0^\circ)$
- $\alpha_t = 4^\circ, \varphi = 90^\circ (\alpha = 0^\circ, \beta = 4^\circ)$
- $\alpha_t = 4^\circ, \varphi = 360^\circ (\alpha = 4^\circ, \beta = 0^\circ)$
- $\alpha_t = 4^\circ, \varphi = 45^\circ (\alpha = 2.8^\circ, \beta = 2.8^\circ)$
- $\alpha_t = 4^\circ, \varphi = 225^\circ (\alpha = -2.8^\circ, \beta = -2.8^\circ)$



# Block 1B Crew



## STACK/CN at Mach 0.95

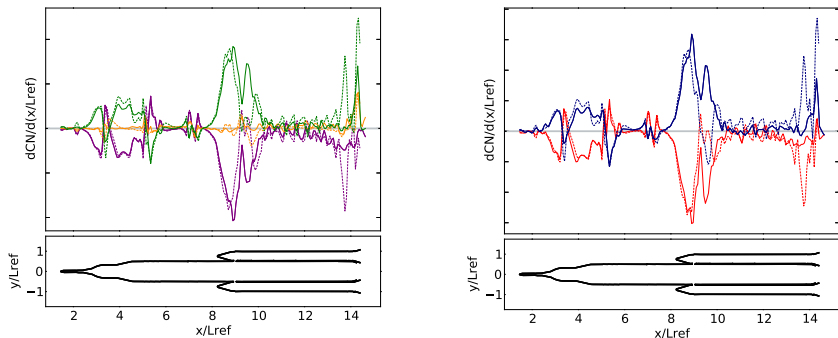



- Good agreement except at attach points

— Solid lines = PSP  
 - - - Dashed lines = CFD

—  $\alpha_t = 4^\circ, \phi = 180^\circ$  ( $\alpha = -4^\circ, \beta = 0^\circ$ )  
 —  $\alpha_t = 4^\circ, \phi = 90^\circ$  ( $\alpha = 0^\circ, \beta = 4^\circ$ )  
 —  $\alpha_t = 4^\circ, \phi = 360^\circ$  ( $\alpha = 4^\circ, \beta = 0^\circ$ )  
 —  $\alpha_t = 4^\circ, \phi = 45^\circ$  ( $\alpha = 2.8^\circ, \beta = 2.8^\circ$ )  
 —  $\alpha_t = 4^\circ, \phi = 225^\circ$  ( $\alpha = -2.8^\circ, \beta = -2.8^\circ$ )



## STACK/CY at Mach 1.10

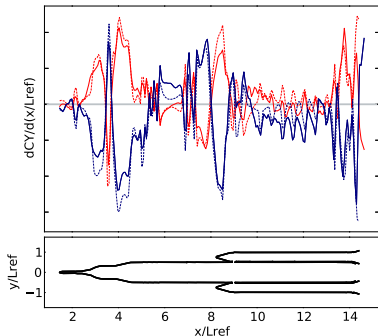
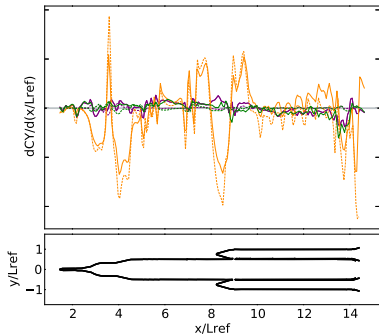


- Offset between booster and core seen for Block 1 Crew no longer present

— Solid lines = PSP  
 - - - Dashed lines = CFD

—  $\alpha_t = 4^\circ, \phi = 180^\circ (\alpha = -4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 90^\circ (\alpha = 0^\circ, \beta = 4^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 360^\circ (\alpha = 4^\circ, \beta = 0^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 45^\circ (\alpha = 2.8^\circ, \beta = 2.8^\circ)$   
 —  $\alpha_t = 4^\circ, \phi = 225^\circ (\alpha = -2.8^\circ, \beta = -2.8^\circ)$

## STACK/CY at Mach 1.30

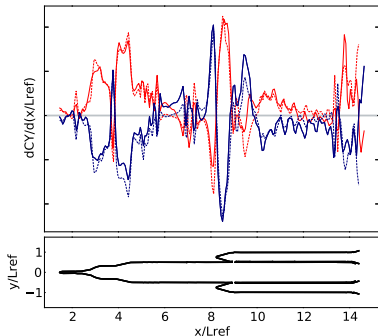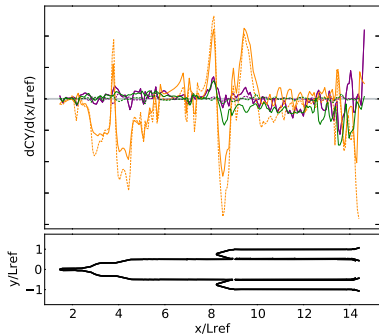

- Trends match well, peaks at different magnitudes

— Solid lines = PSP  
 - - - Dashed lines = CFD

—  $\alpha_t = 4^\circ, \phi = 180^\circ$  ( $\alpha = -4^\circ, \beta = 0^\circ$ )  
 —  $\alpha_t = 4^\circ, \phi = 90^\circ$  ( $\alpha = 0^\circ, \beta = 4^\circ$ )  
 —  $\alpha_t = 4^\circ, \phi = 360^\circ$  ( $\alpha = 4^\circ, \beta = 0^\circ$ )  
 —  $\alpha_t = 4^\circ, \phi = 45^\circ$  ( $\alpha = 2.8^\circ, \beta = 2.8^\circ$ )  
 —  $\alpha_t = 4^\circ, \phi = 225^\circ$  ( $\alpha = -2.8^\circ, \beta = -2.8^\circ$ )




# Effects of Optical Shielding




# Accounting for Optical Shielding

- Line loads calculated by zeroing out areas of no or little optical access
- These areas are sometimes regions of volatile loading (fwd/aft attach)
- **Solution: remove cells from shielded areas in final CFD solution**

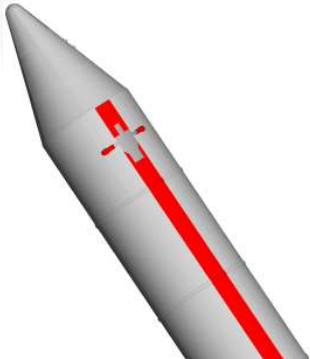

PSP Surface with Shielded Regions in Red

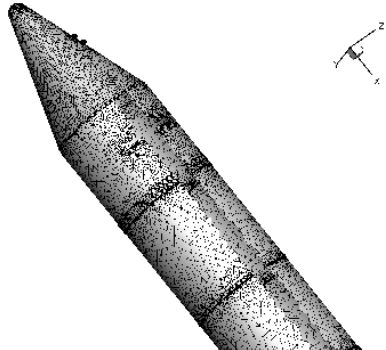


Masked CFD Surface Mesh

# Accounting for Optical Shielding

- Line loads calculated by zeroing out areas of no or little optical access
- These areas are sometimes regions of volatile loading (fwd/aft attach)
- **Solution: remove cells from shielded areas in final CFD solution**



$C_p$  on RSRB after Masking

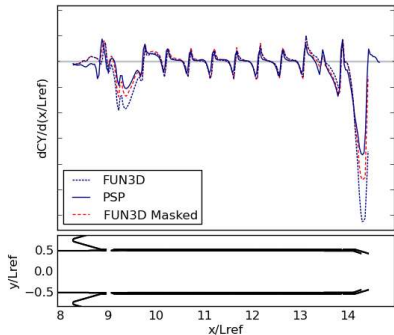

RSRB/CY Line Loads

Mach = 1.05,  $\alpha_t = 8^\circ$ ,  $\phi = 0^\circ$

# Summary

- Sectional loads for three different configurations of SLS were extracted from PSP data and compared to those from CFD simulations
- Relatively good agreement can be seen between the two data sources
  - $C_A$  and  $C_N$  - good
  - $C_Y$  - worse, but still favorable [optical effects amplified]
- Areas of poor agreement often correspond to areas of poor optical access (i.e. attach hardware)
- Favorable comparisons with PSP sectional loads gives more credence for using CFD for database delivery
  - Sectional load databases currently come from CFD at flight conditions
  - CFD solutions from WT simulations used as sanity check for those at flight conditions

## Future Work

- Extend masking for all sectional loads
- Continue to improve PSP grid resolution and optical access
- Database buildup and uncertainty quantification

# Acknowledgments

- SLS Program; this work is part of the SLS Aero Task Team
- Patrick Shea and team for organizing wind tunnel test efforts
- Other members of the NASA ARC/TNA SLS CFD Team:
  - Jeff Onufer
  - Tom Pulliam
  - and many previous members
- NASA Advanced Supercomputing facilities
- NASA Ames UPWT



# Backup Slides







# Wind Tunnel vs. Flight CFD

Block 1B Crew, Mach 1.6 and  $\alpha_t = 4^\circ$

Wind Tunnel

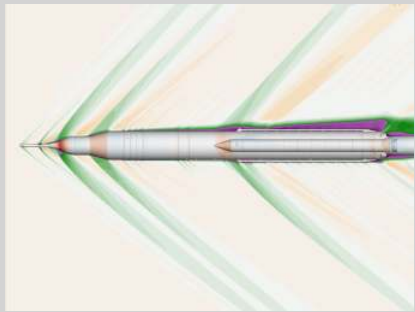

Flight

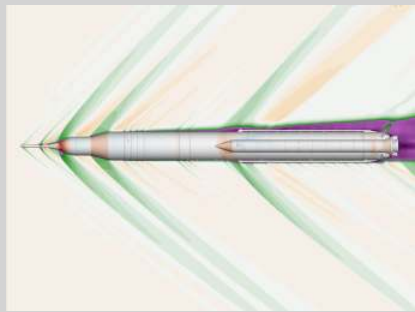

Flow field is colored by Mach number, surface is shaded by  $C_p$

Salient differences: Reynolds number and plume-on effects