NASA Fuel Cell and Hydrogen Activities

Presented by: Ian Jakupca
NASA Glenn Research Center

Department of Energy
Annual Merit Review
30 April 2019

Overview

- **National Aeronautic and Space Administration**
- **Definitions**
- **NASA Near Term Activities**
- **Energy Storage and Power**
  - Batteries
  - Fuel Cells
  - Regenerative Fuel Cells
  - Electrolysis
- **ISRU**
- **Cryogenics**
- **Review**

National Aeronautics and Space Administration

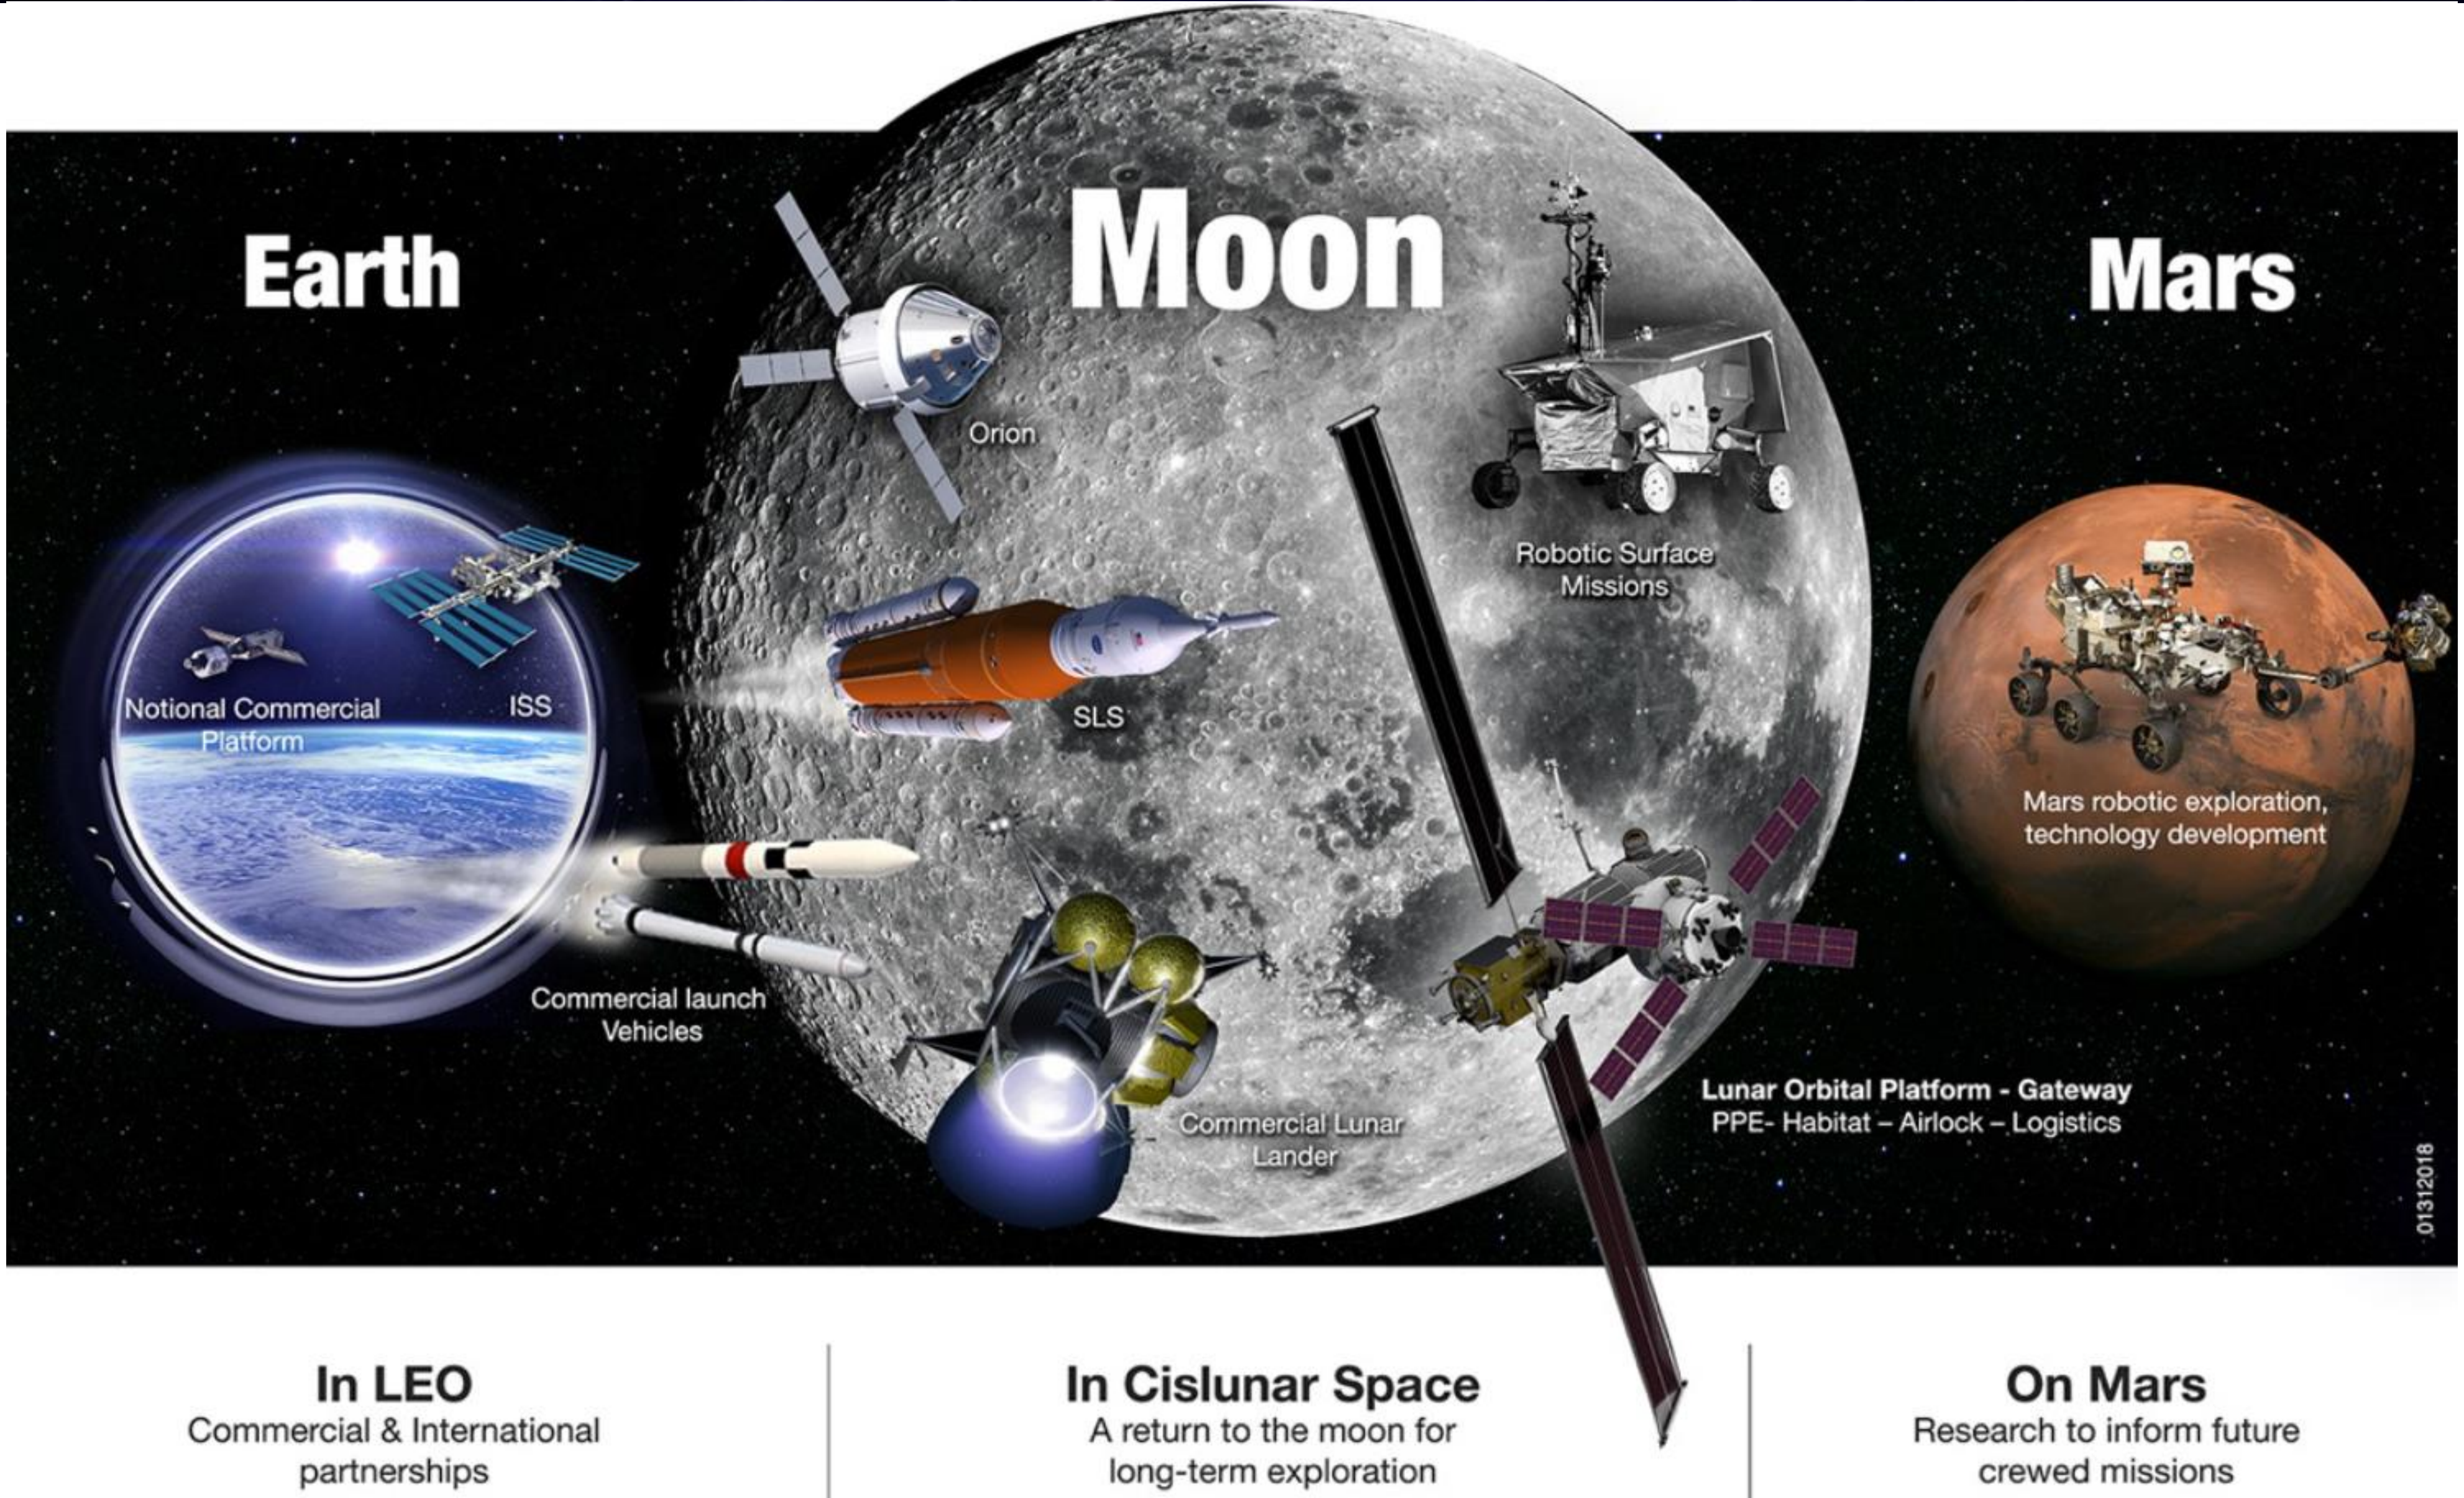

Acknowledgements

NASA has many development activities supported by a number of high quality people across the country. This list only includes the most significant contributors to the development of this presentation.

Headquarters

- *Lee Mason, Space Technology Mission Directorate, Deputy Chief Engineer*
- *Gerald (Jerry) Sanders, Lead for In-Situ Resource Utilization (ISRU) System Capability Leadership Team*

Jet Propulsion Laboratory

- *Erik Brandon, Ph.D, Electrochemical Technologies*
- *Ratnakumar Bugga, Ph.D, Electrochemical Technologies*

Marshall Space Flight Center

- *Kevin Takada, Environmental Control Systems*

Kennedy Space Center

- *Erik Dirschka, PE, Propellant Management*

Glenn Research Center

- *William R. Bennett, Photovoltaic and Electrochemical Systems*
- *Fred Elliott, Space Technology Project Office*
- *Ryan Gilligan, Cryogenic and Fluid Systems*
- *Wesley L. Johnson, Cryogenic and Fluid Systems*
- *Lisa Kohout, Photovoltaic and Electrochemical Systems*
- *Dianne Linne, ISRU Project Manager*
- *Phillip J. Smith, Photovoltaic and Electrochemical Systems*
- *Tim Smith, Chief, Space Technology Project Office*

Electrochemical System Definitions

Primary Power

Discharge Power Only

Description
- Energy conversion system that supplies electricity to customer system
- Operation limited by initial stored energy

Examples
- Nuclear (e.g. RTG, KiloPower)
- Primary Batteries
- Primary Fuel Cells

NASA Applications:
Missions without access to continuous power (e.g. PV)
- All NASA applications require electrical power
- Each primary power solution fits a particular suite of NASA missions

Energy Storage

Charge + Store + Discharge

Description
- Stores excess energy for later use
- Supplies power when baseline power supply (e.g. PV) is no longer available
- Tied to external energy source

Examples
- Rechargeable Batteries
- Regenerative Fuel Cells

NASA Applications:
Ensuring Continuous Power
- Satellites (PV + Battery)
- ISS (PV + Battery)
- Surface Systems (exploration platforms, ISRU, crewed)
- Platforms to survive Lunar Night

Commodity Generation

Chemical Conversion

Description
- Converts supplied chemical feedstock into useful commodities
- Requires external energy source (e.g. thermal, chemical, electrical, etc.)

Examples
- ISS Oxygen Generators (OGA, Elektron)
- ISRU Propellant Generation

NASA Applications:
Life-support, ISRU
- Oxygen Generation
- Propellant Generation
- Material Processing
- Recharging Regenerative Fuel Cells

Electrochemical System Definitions

Primary Fuel Cell

Discharge Power Only

$2H_2 + O_2 \rightarrow 2H_2O + 4e^- + Heat$

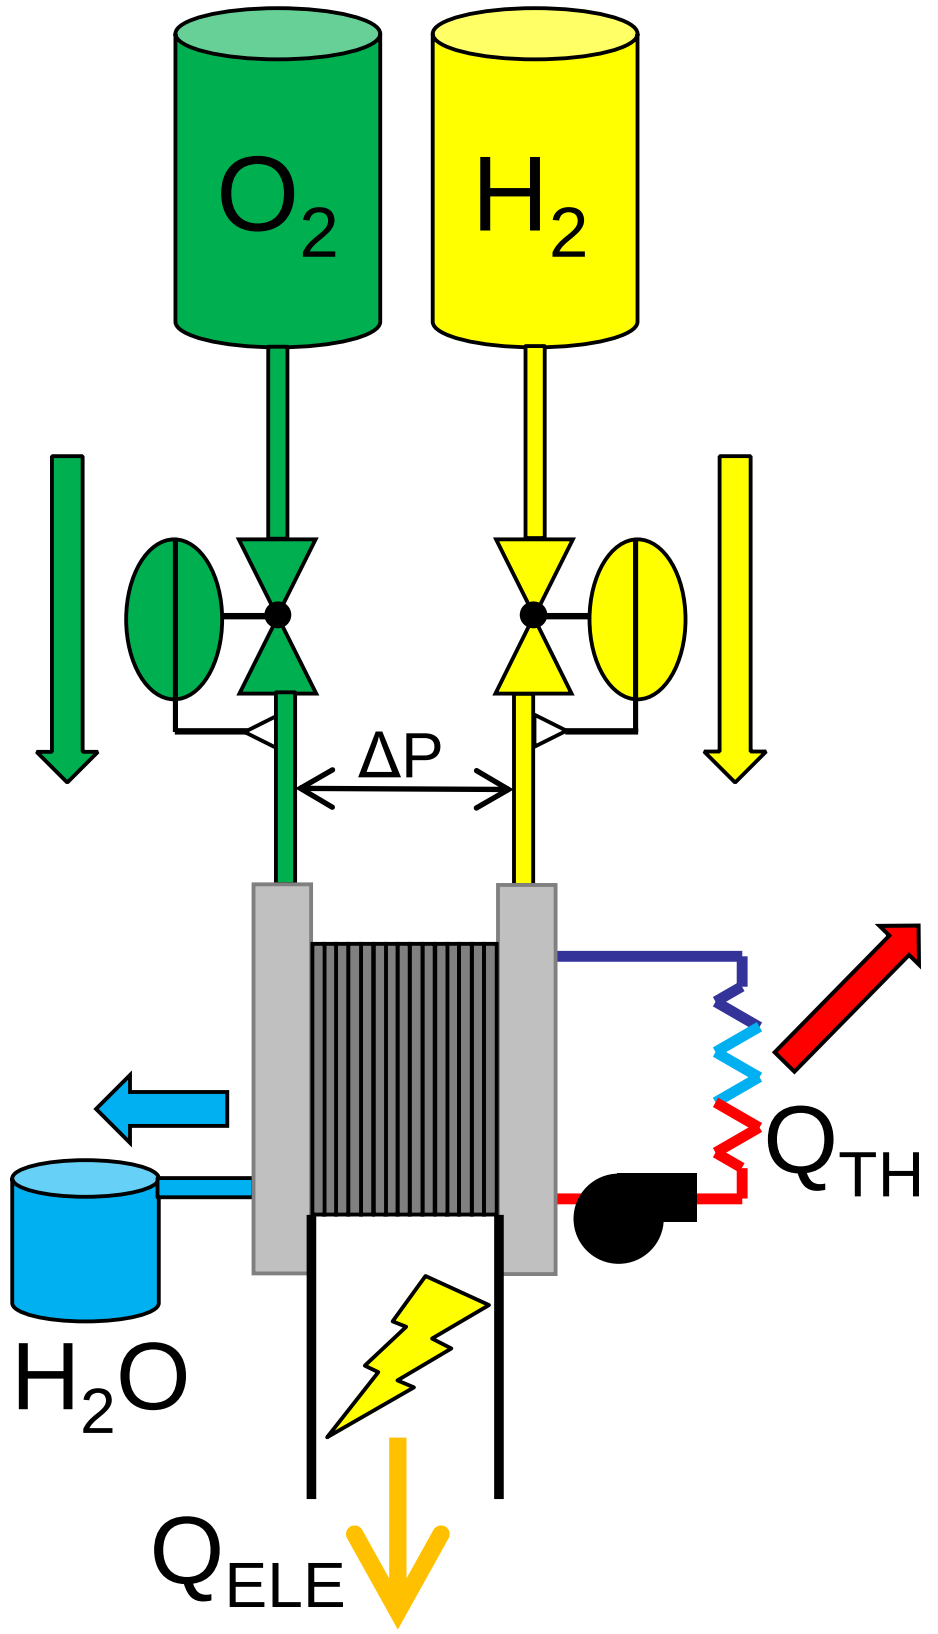

Discharging

Regenerative Fuel Cell

Charge + Store + Discharge

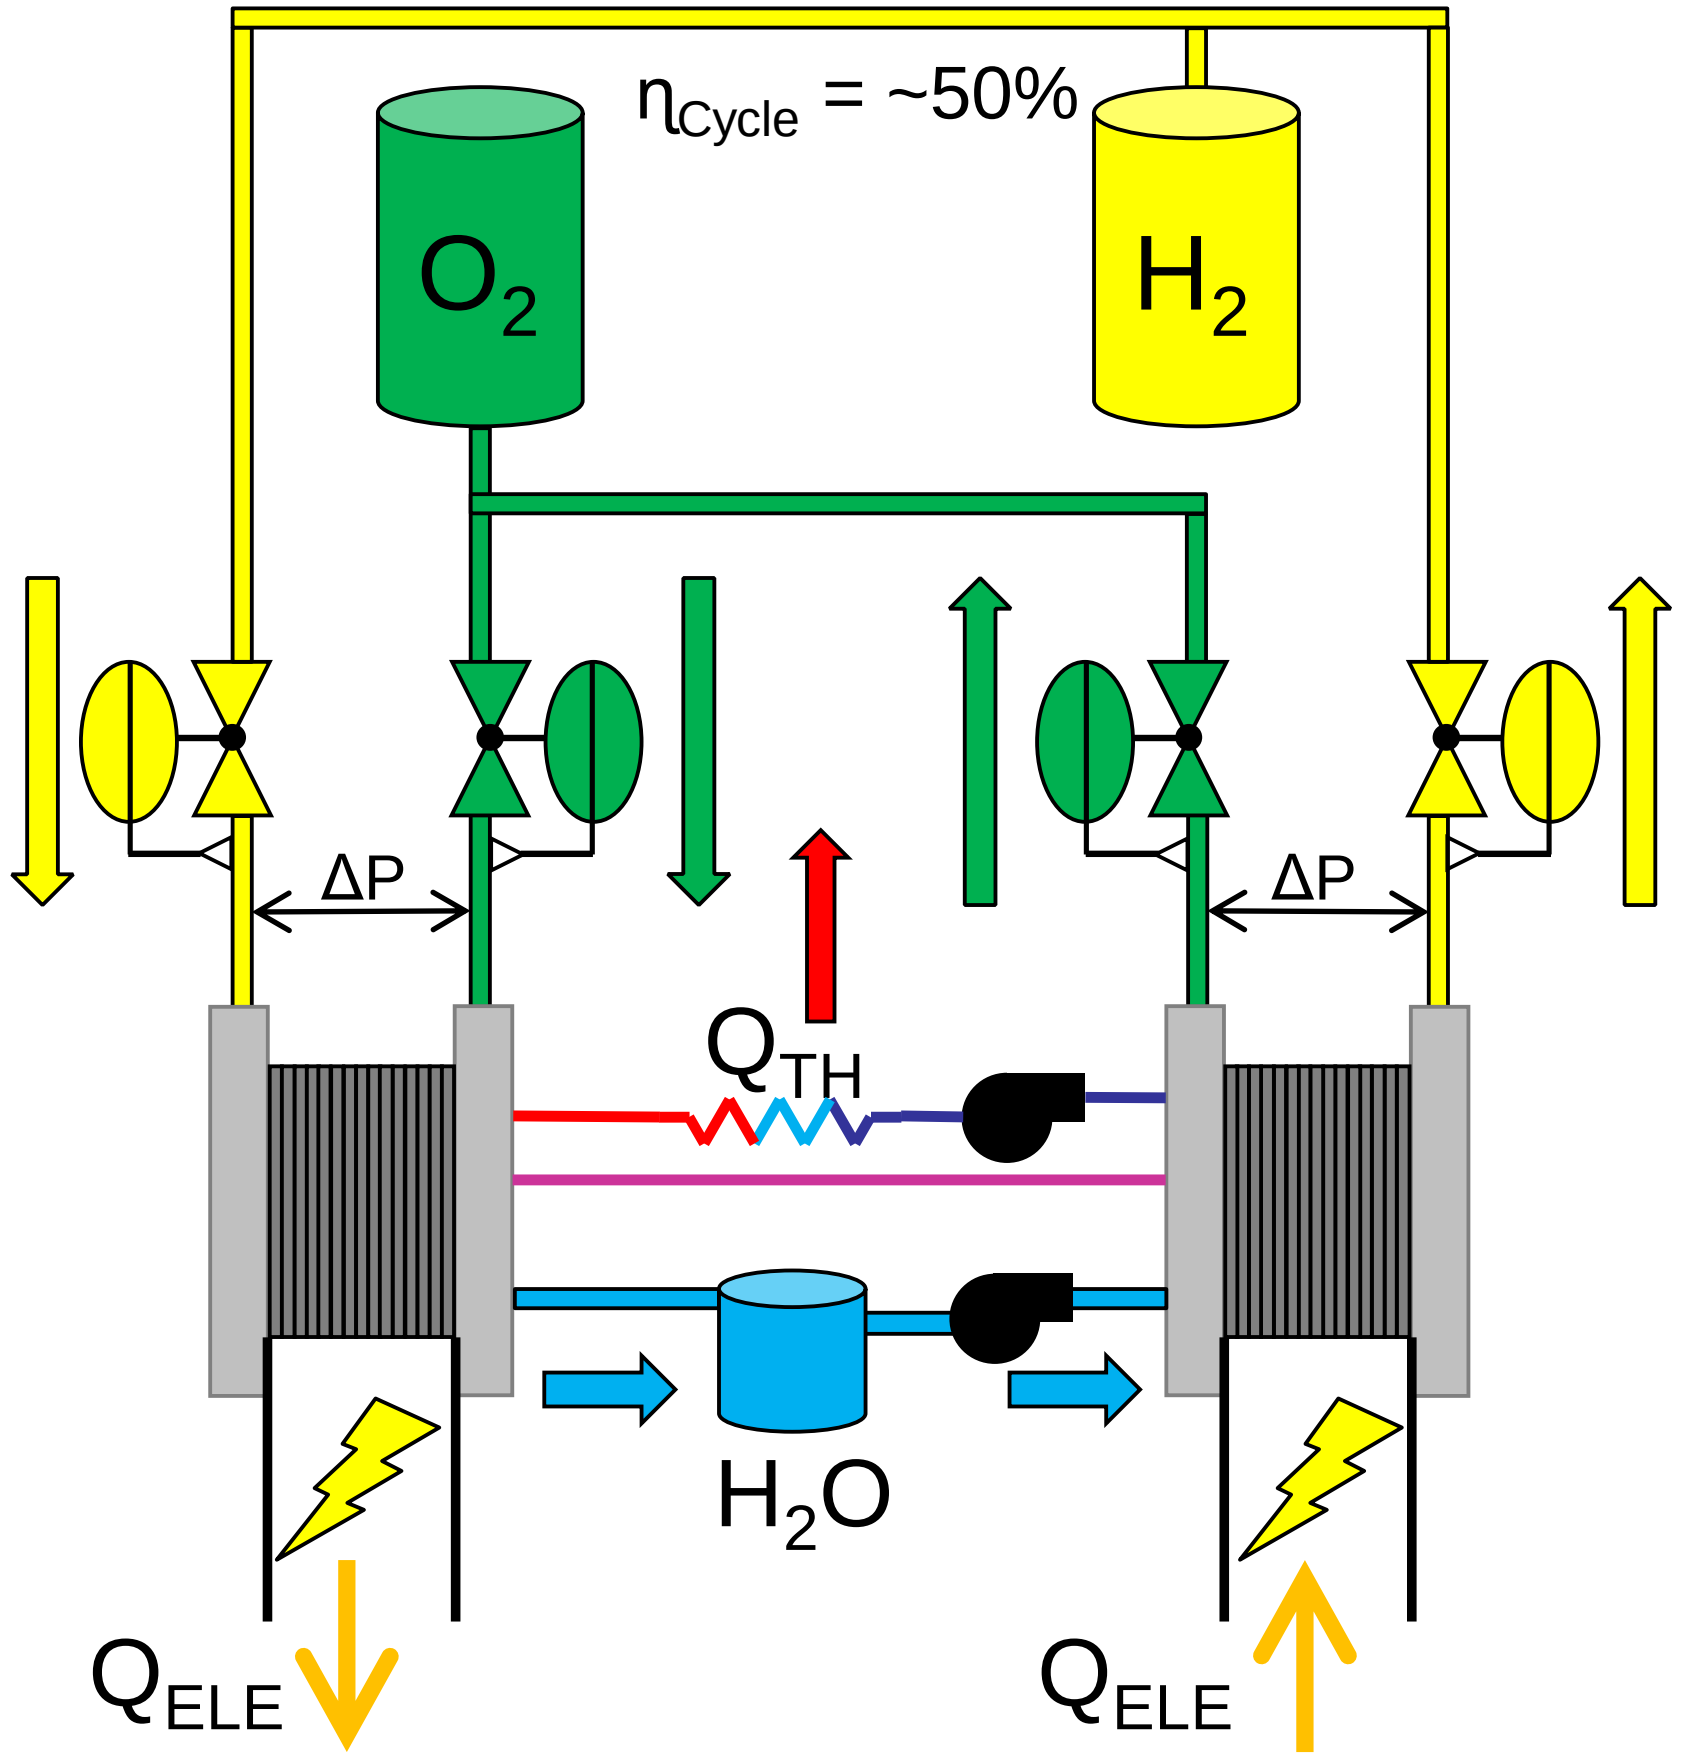

Discharging

Charging

Electrolysis

Chemical Conversion

$2H_2O + 4e^- \rightarrow 2H_2 + O_2 + Heat$

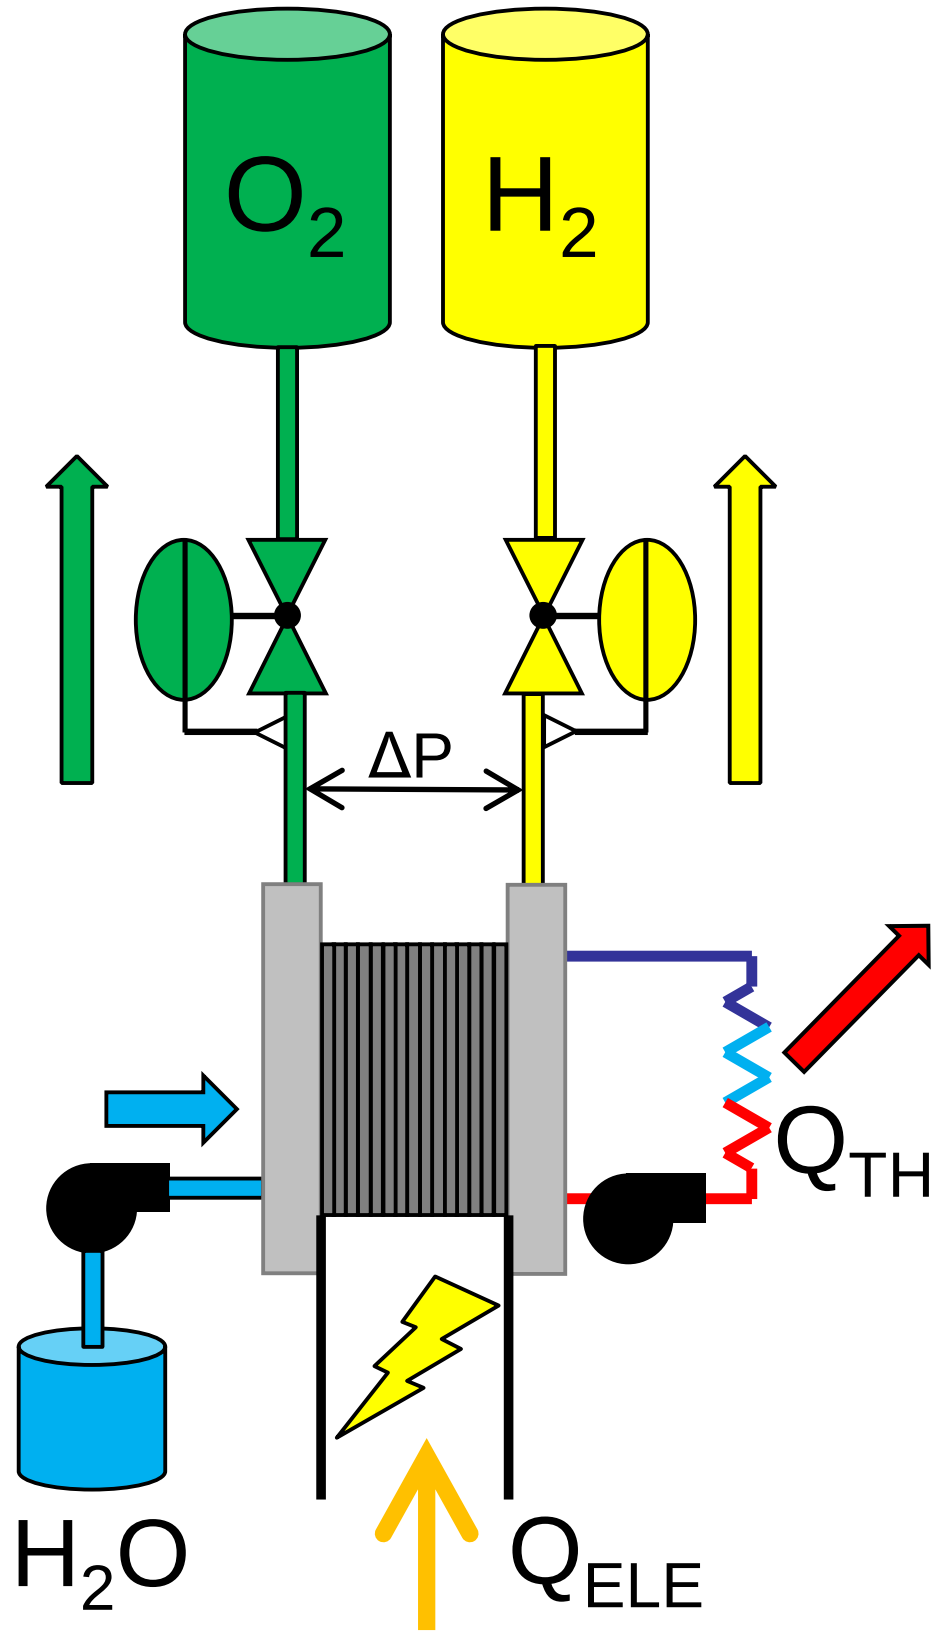

Charging

Regenerative Fuel Cell = Fuel Cell + Interconnecting Fluidic System + Electrolysis

POWER to explore the LUNAR SURFACE

Multiple power technologies comprise the Lunar Surface Power Architecture

Each power technology contributes to an integrated Regenerative Fuel Cells (RFCs) for Lunar Exploration

- Batteries meet energy storage needs for low energy applications
- RFCs address high energy storage requirements where nuclear power may not be an option (in locations near humans)
- Nuclear and radio isotope power systems provide constant power independent of sunlight

Energy Storage Options for Space Applications

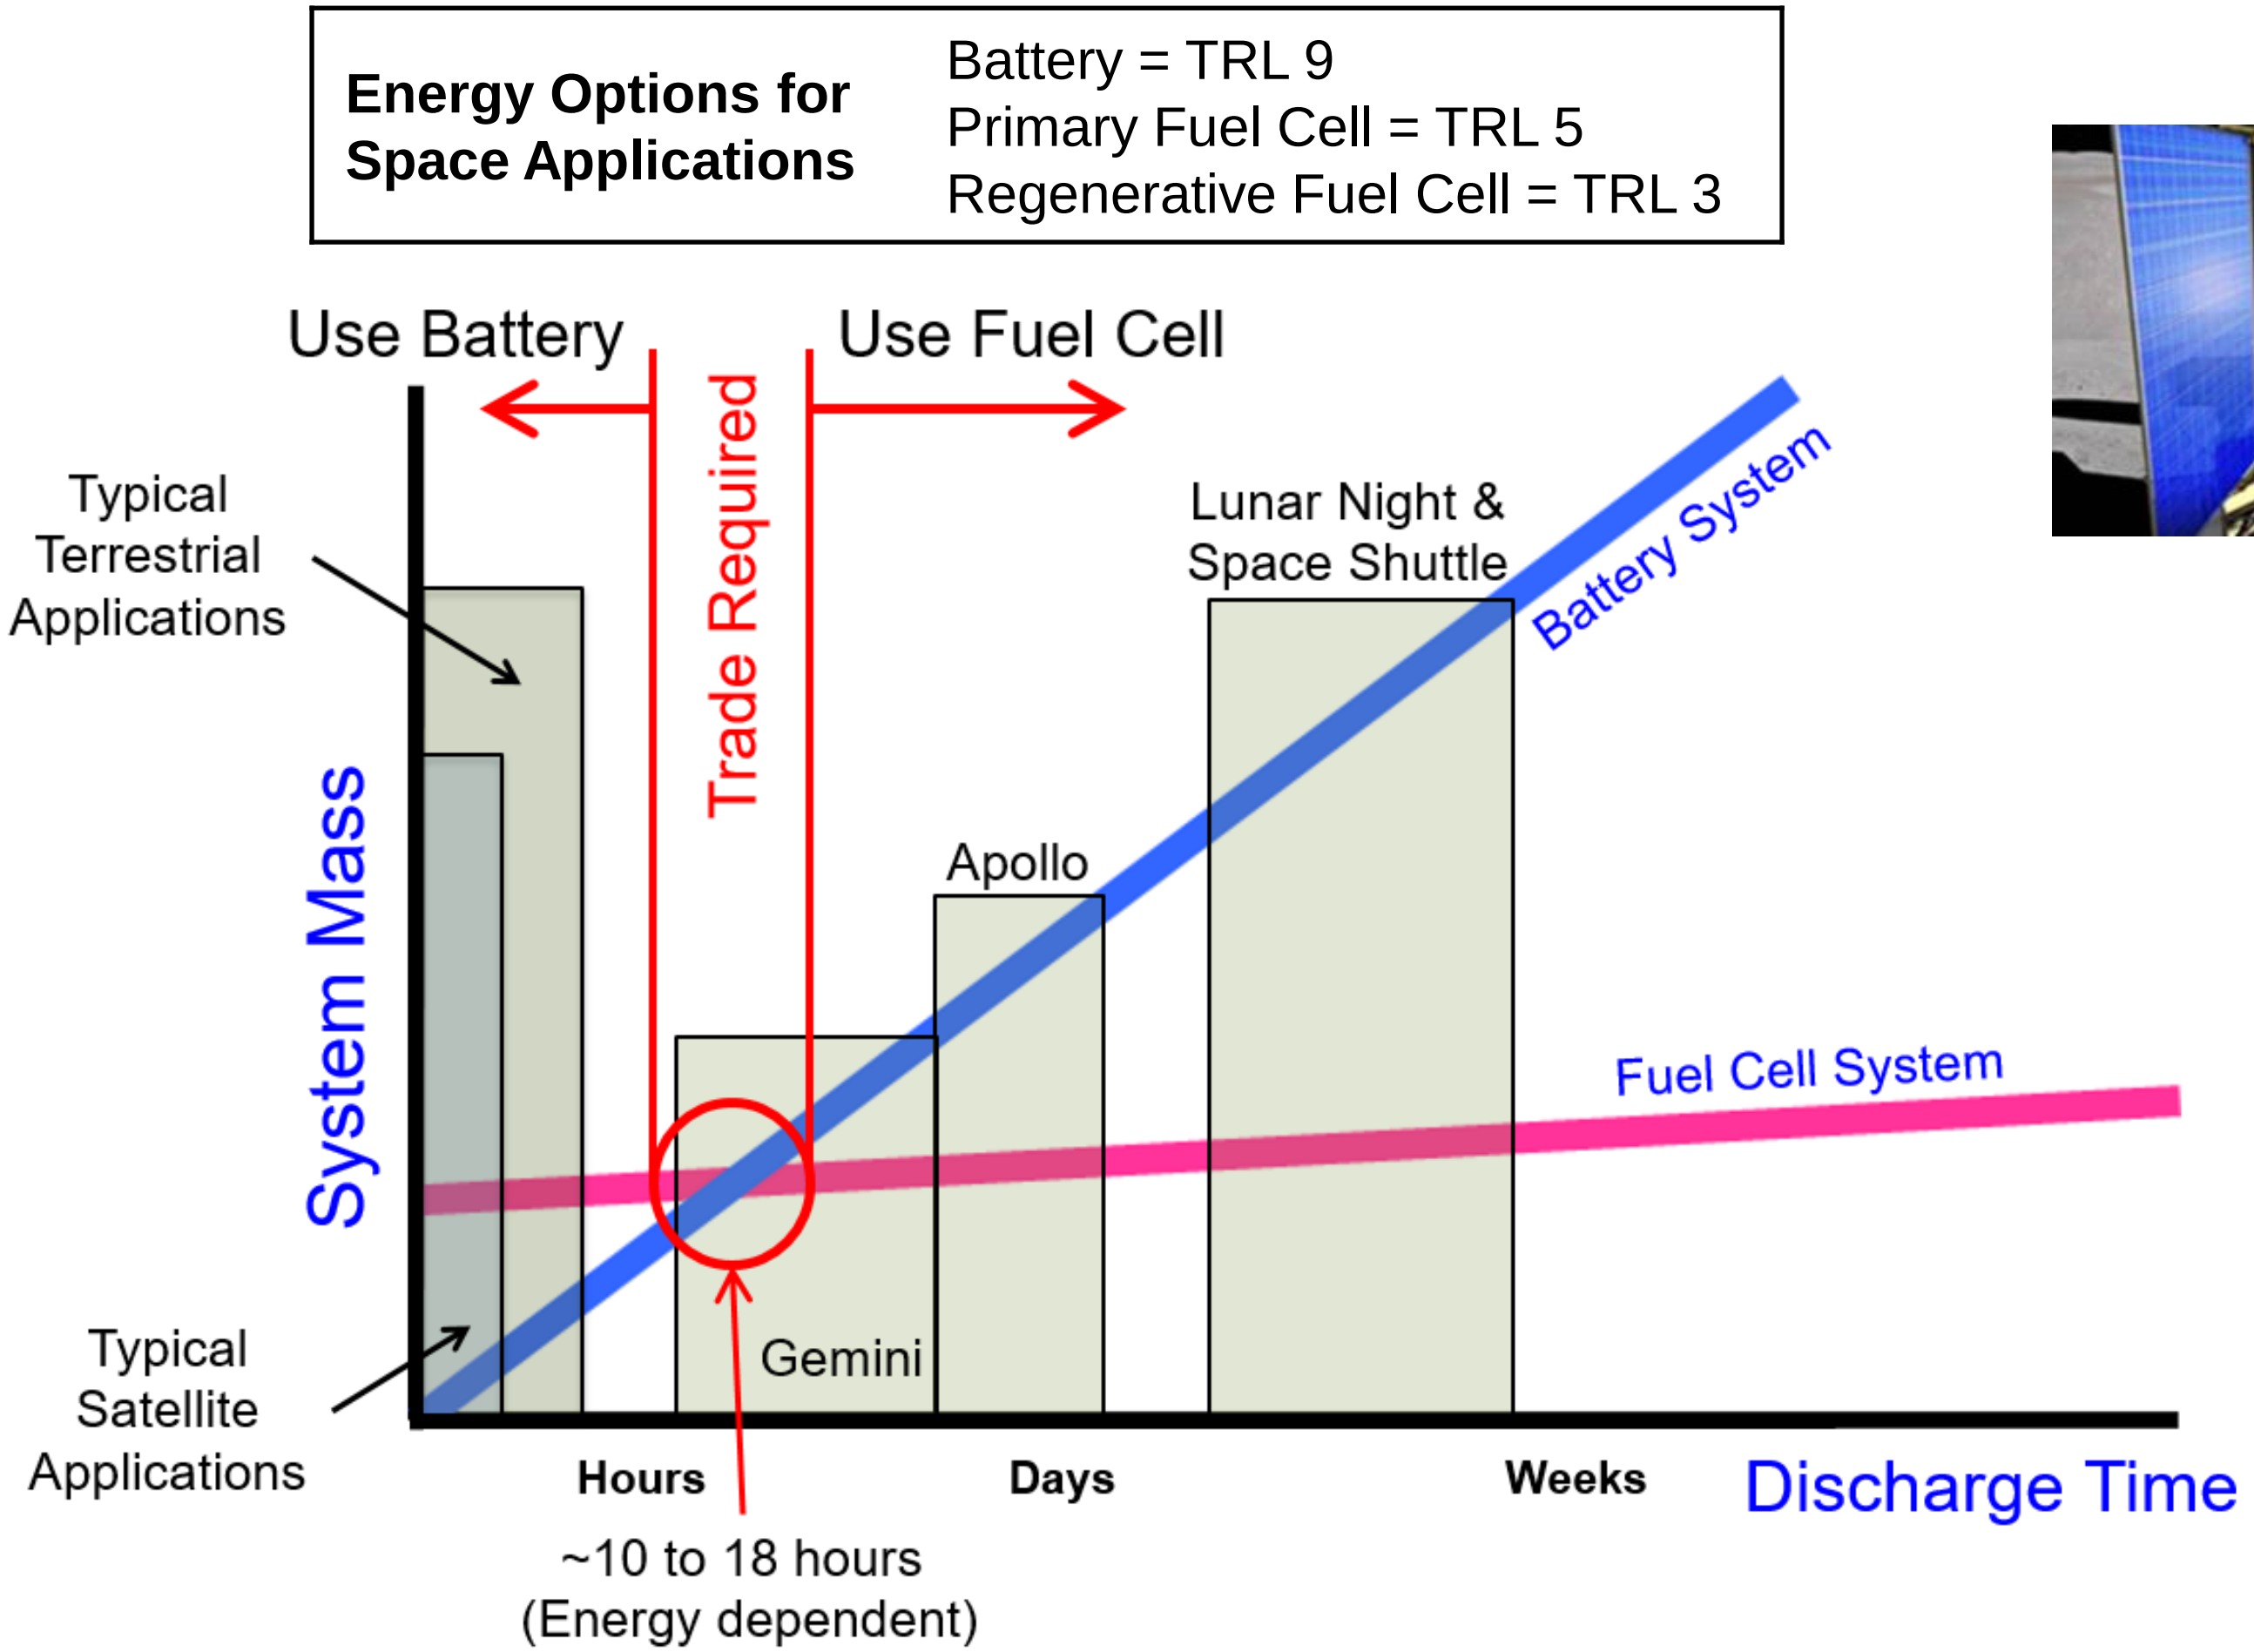



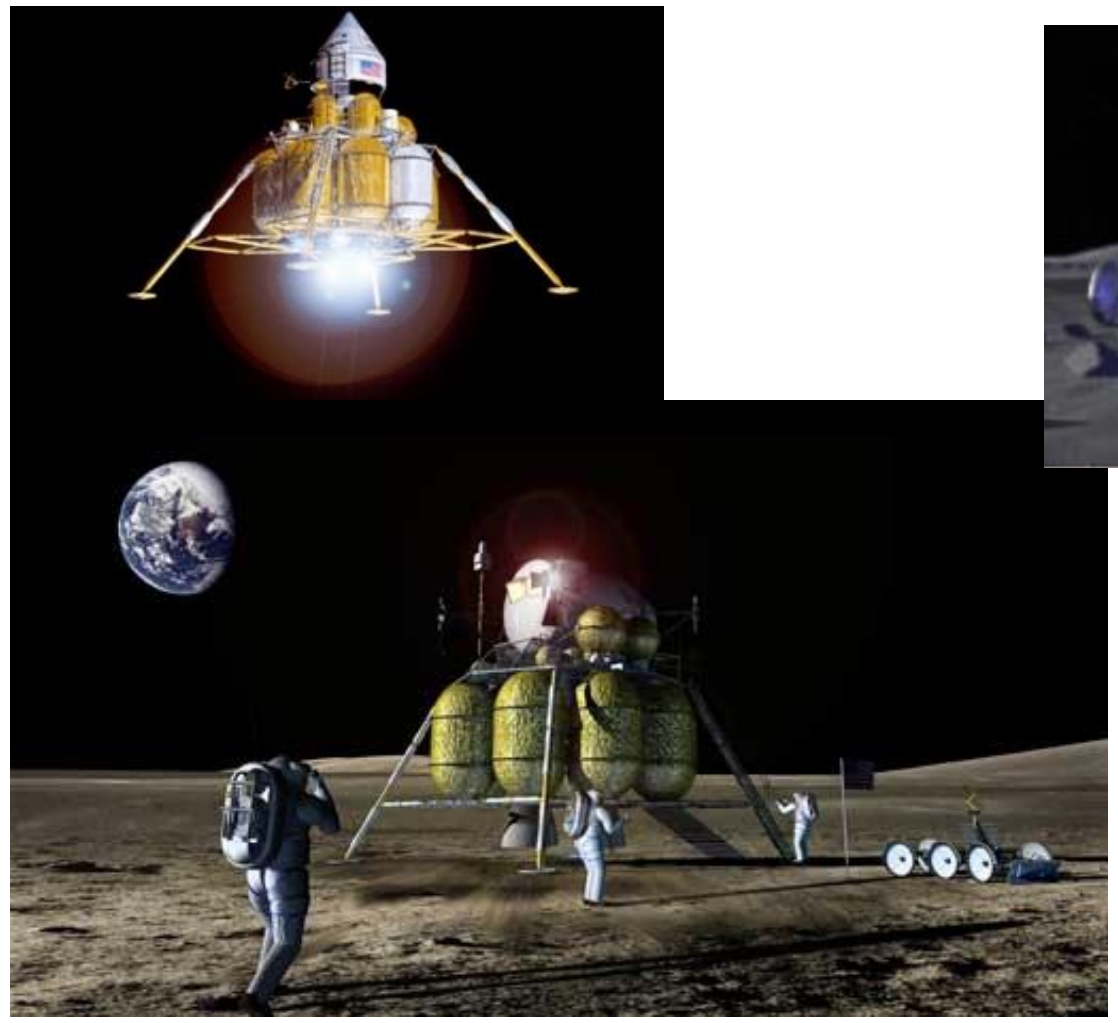

- Current energy storage technologies are insufficient for NASA exploration missions
- Availability of flight-qualified fuel cells ended with the Space Shuttle Program
- Terrestrial fuel cells not directly portable to space applications
  - Different wetted material requirements (air vs. pure O_2)
  - Different internal flow characteristics
- No space-qualified high-pressure electrolyzer exists
  - ISS O_2 Generators are low pressure electrolyzers
  - Terrestrial electrolyzers have demonstrated >200 ATM operation

Battery Activities in Support of NASA Missions

- Low temperature electrolytes to extend operating temperatures for outer planetary missions
- High temperature batteries for Venus missions
- Non-flammable separator/electrolyte systems
- Solid-state high specific energy, high power batteries
- Li-air batteries for aircraft applications

  Improved cathode and electrolyte stability in Lithium-Oxygen batteries
- Multi-functional load-bearing energy storage
- X-57 Maxwell distributed electric propulsion flight demonstration
- Safe battery designs and assessments for aerospace applications

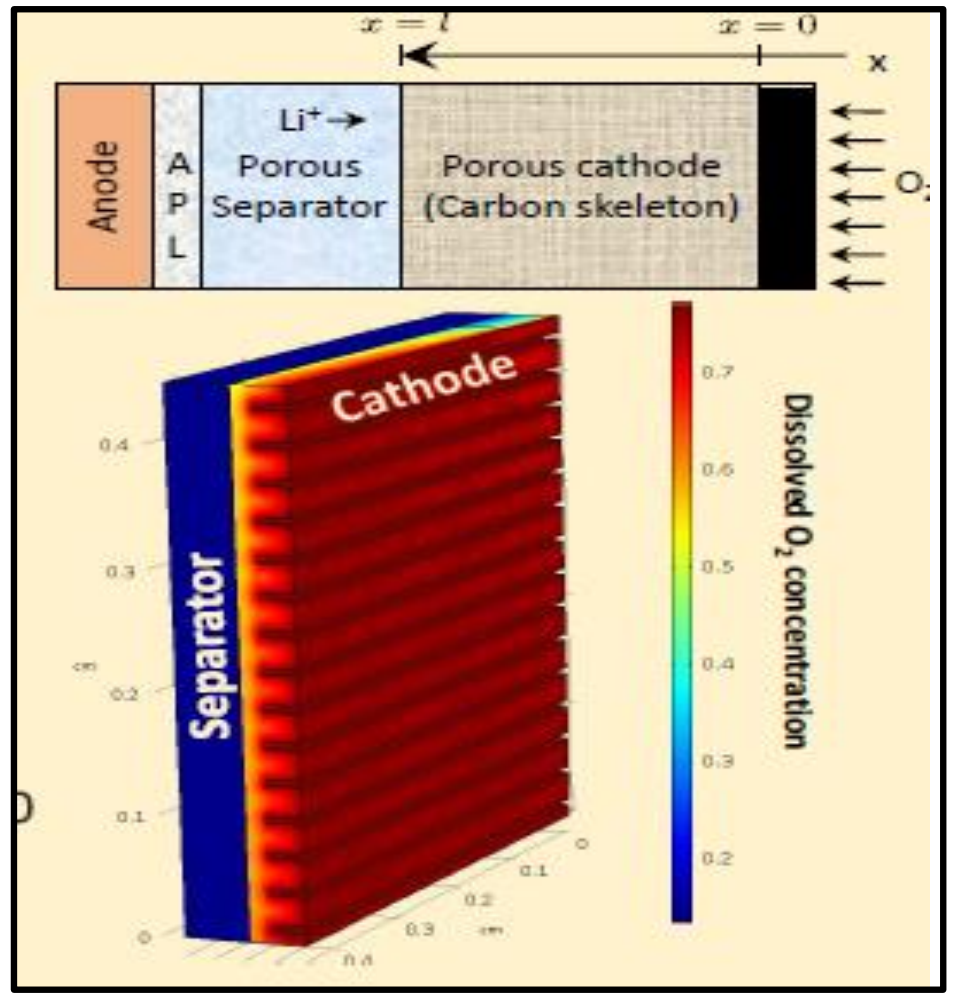

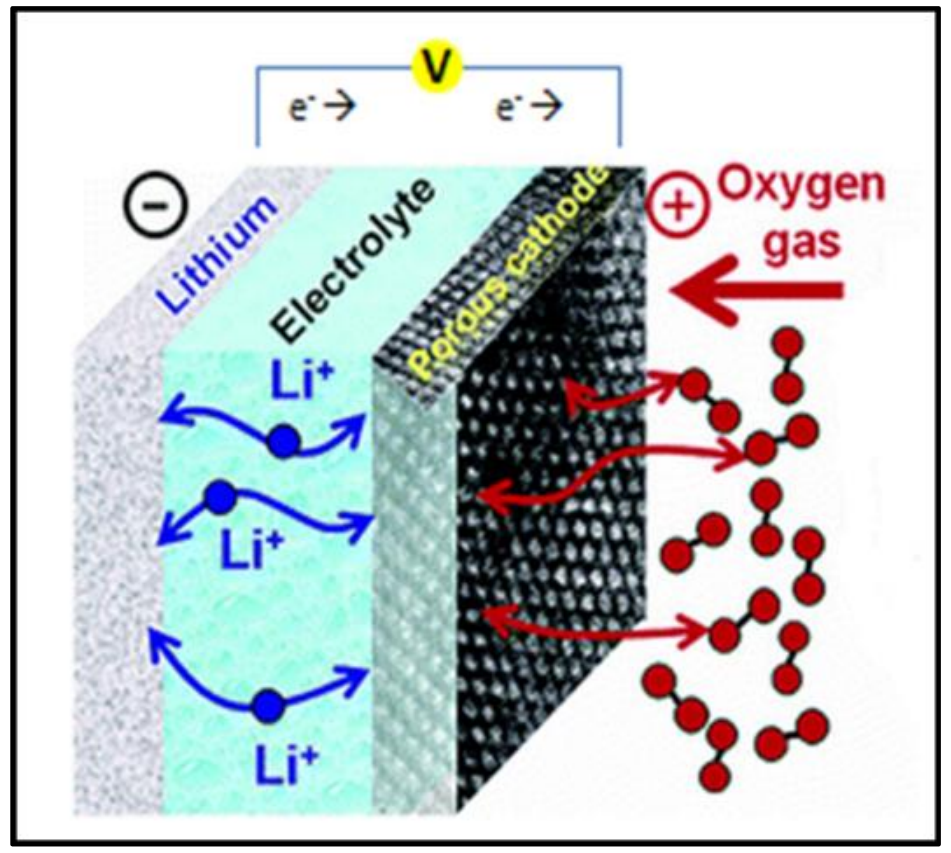



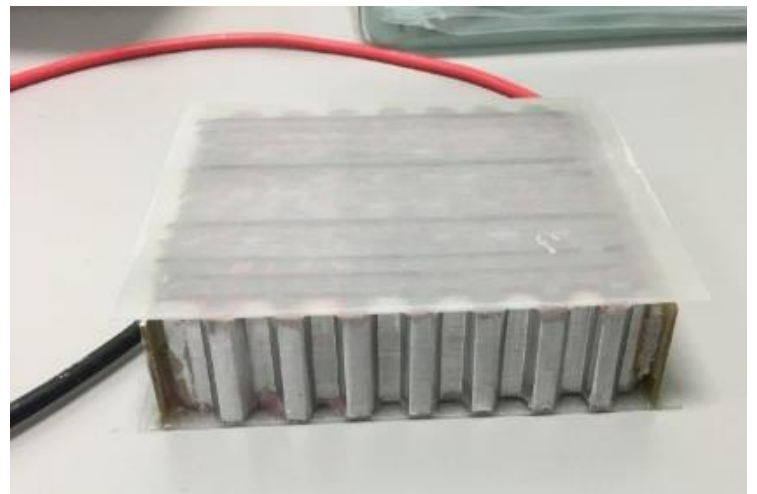

Energy Storage System Needs for Future Planetary Missions

- **Primary Batteries/Fuel Cells for Surface Probes:**
  - High Temperature Operation (> 465C)
  - High Specific Energy (>400 Wh/kg)
  - Operation in Corrosive Environments
- **Rechargeable Batteries for Aerial Platforms:**
  - High Temperature Operation (300-465C)
  - Operation in Corrosive Environments
  - Low-Medium Cycle Life
  - High Specific Energy (>200 Wh/kg)
  - Operation in High Pressures

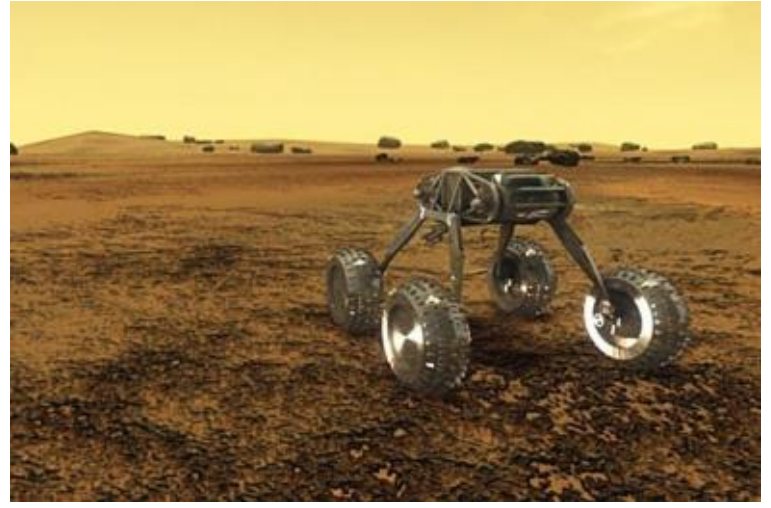

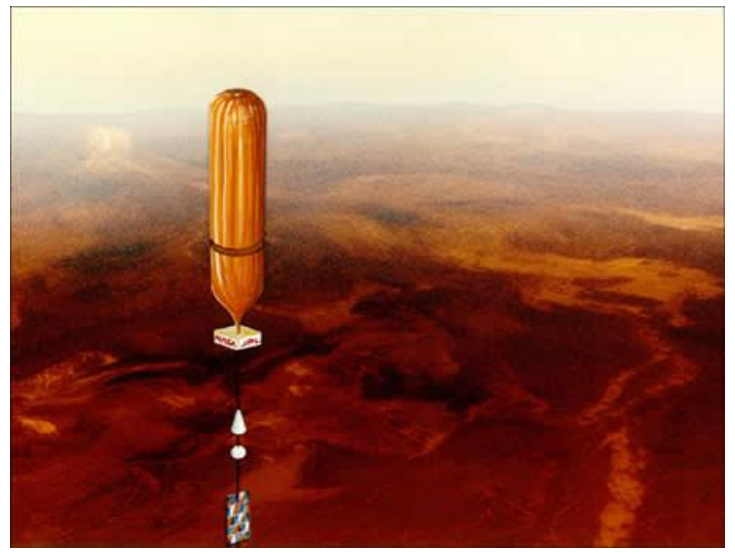

Inner Planets

Outer Planets

- **Primary Batteries/Fuel cells for planetary landers/probes:**
  - High Specific Energy (> 500 Wh/kg),
  - Long Life (> 15 years),
  - Radiation Tolerance & Sterilizable by heat or radiation
- **Rechargeable Batteries for flyby/orbital missions:**
  - High Specific Energy (> 250 Wh/kg)
  - Long Life (> 15 years)
  - Radiation Tolerance & Sterilizable by heat or radiation.
- **Low temperature Batteries for Probes and Landers:**
  - Low Temperature Primary batteries (< -80C)
  - Low Temperature Rechargeable Batteries (< -60 C)



Europa Orbiter

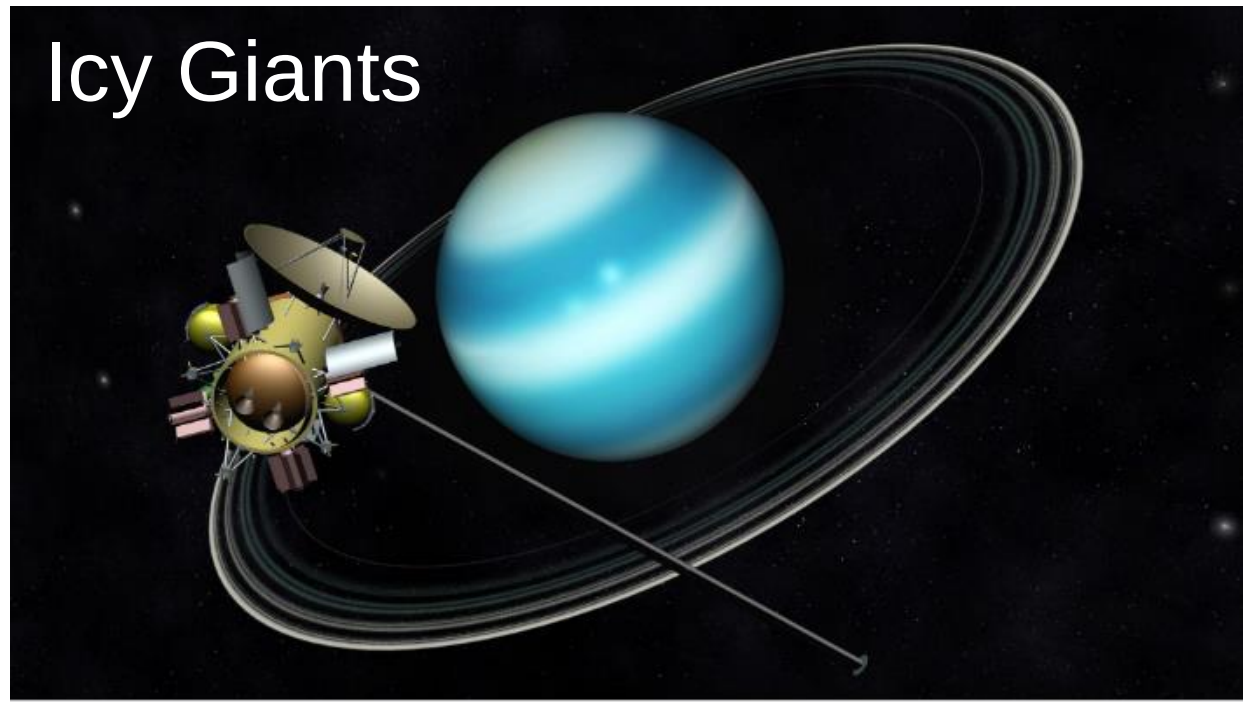

Uranus/Neptune missions

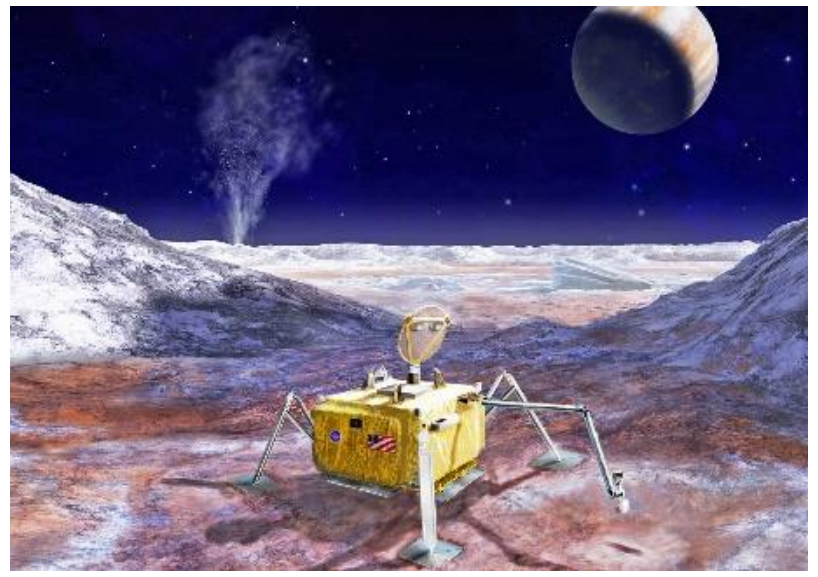

Europa Lander

All images are Artist's Concepts

Lunar RFC Trade Study Results

10 kW H_2/O_2 RFC Energy Storage System for Lunar Outpost

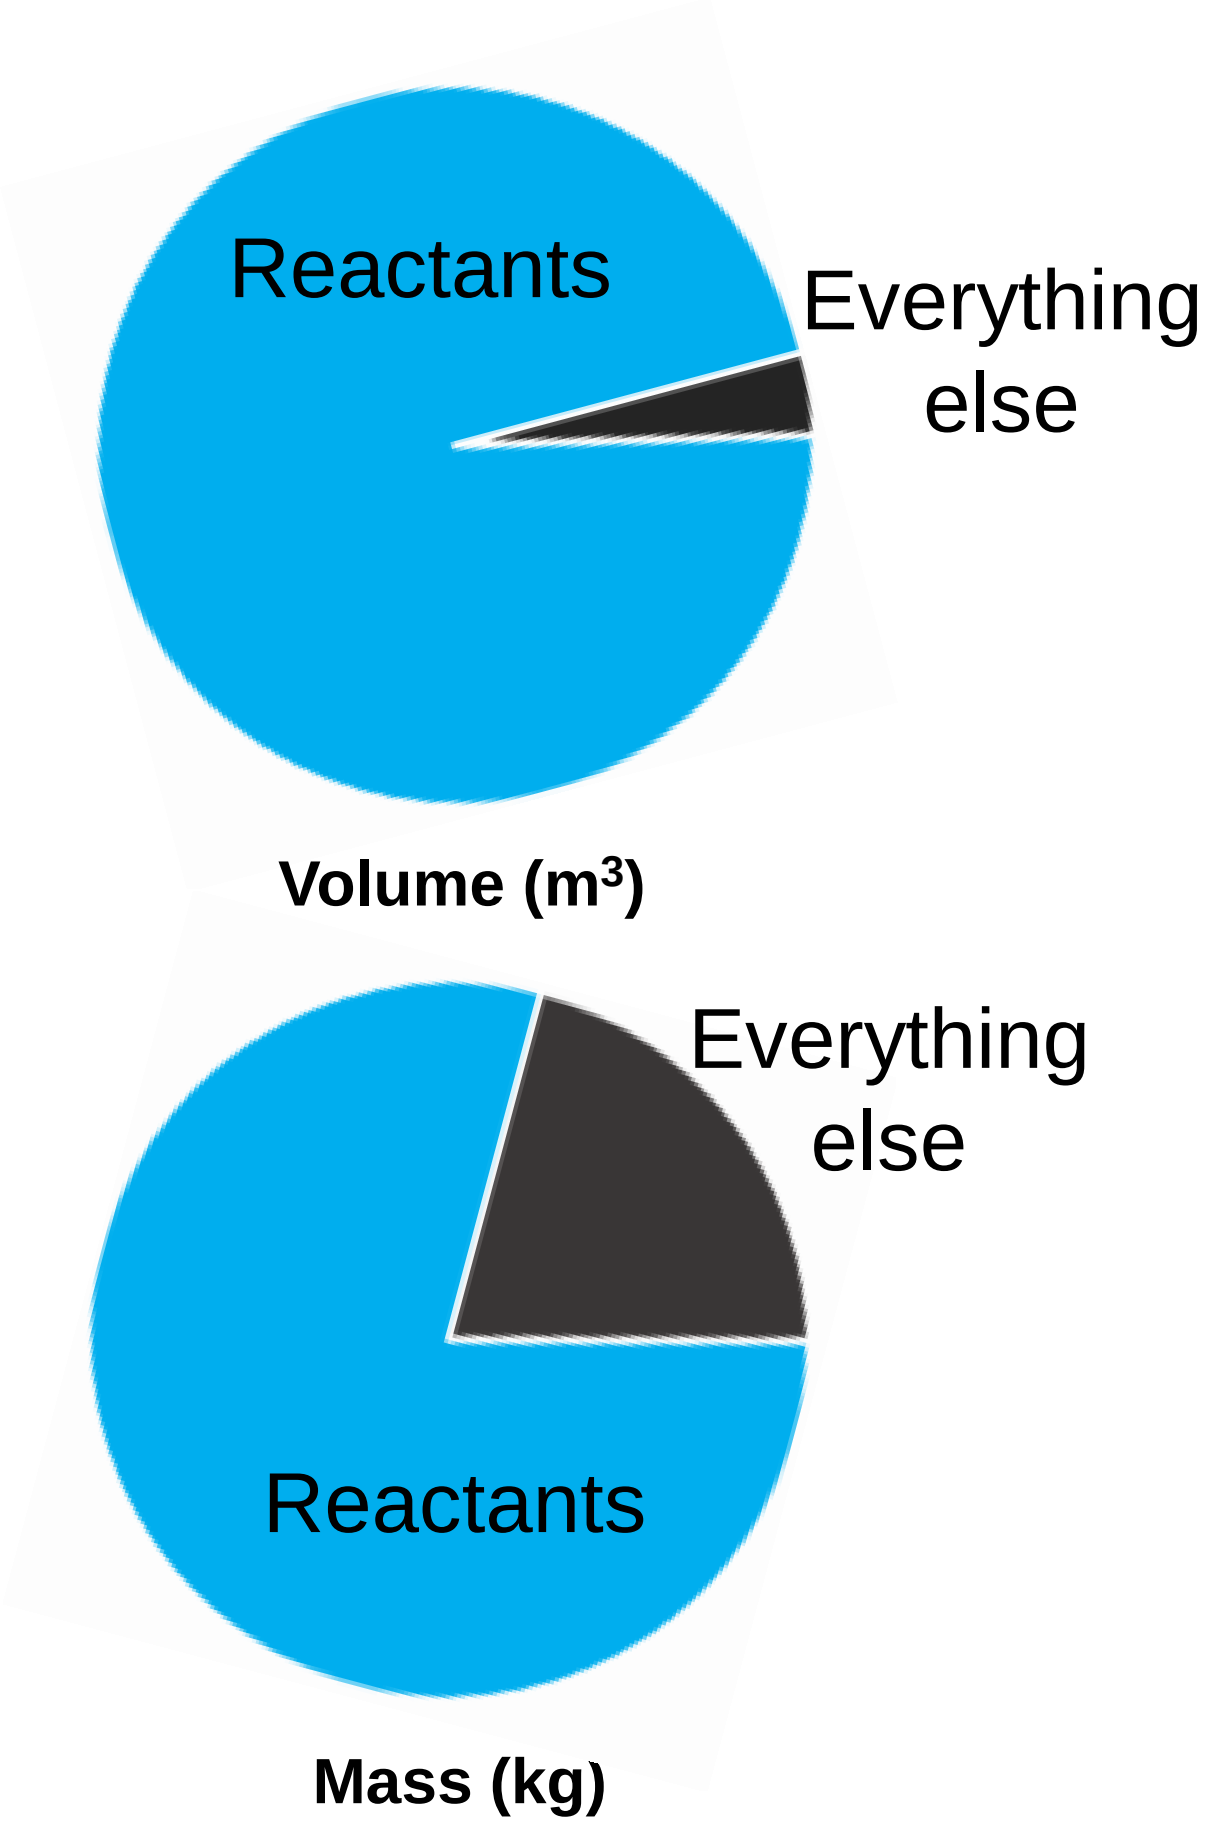

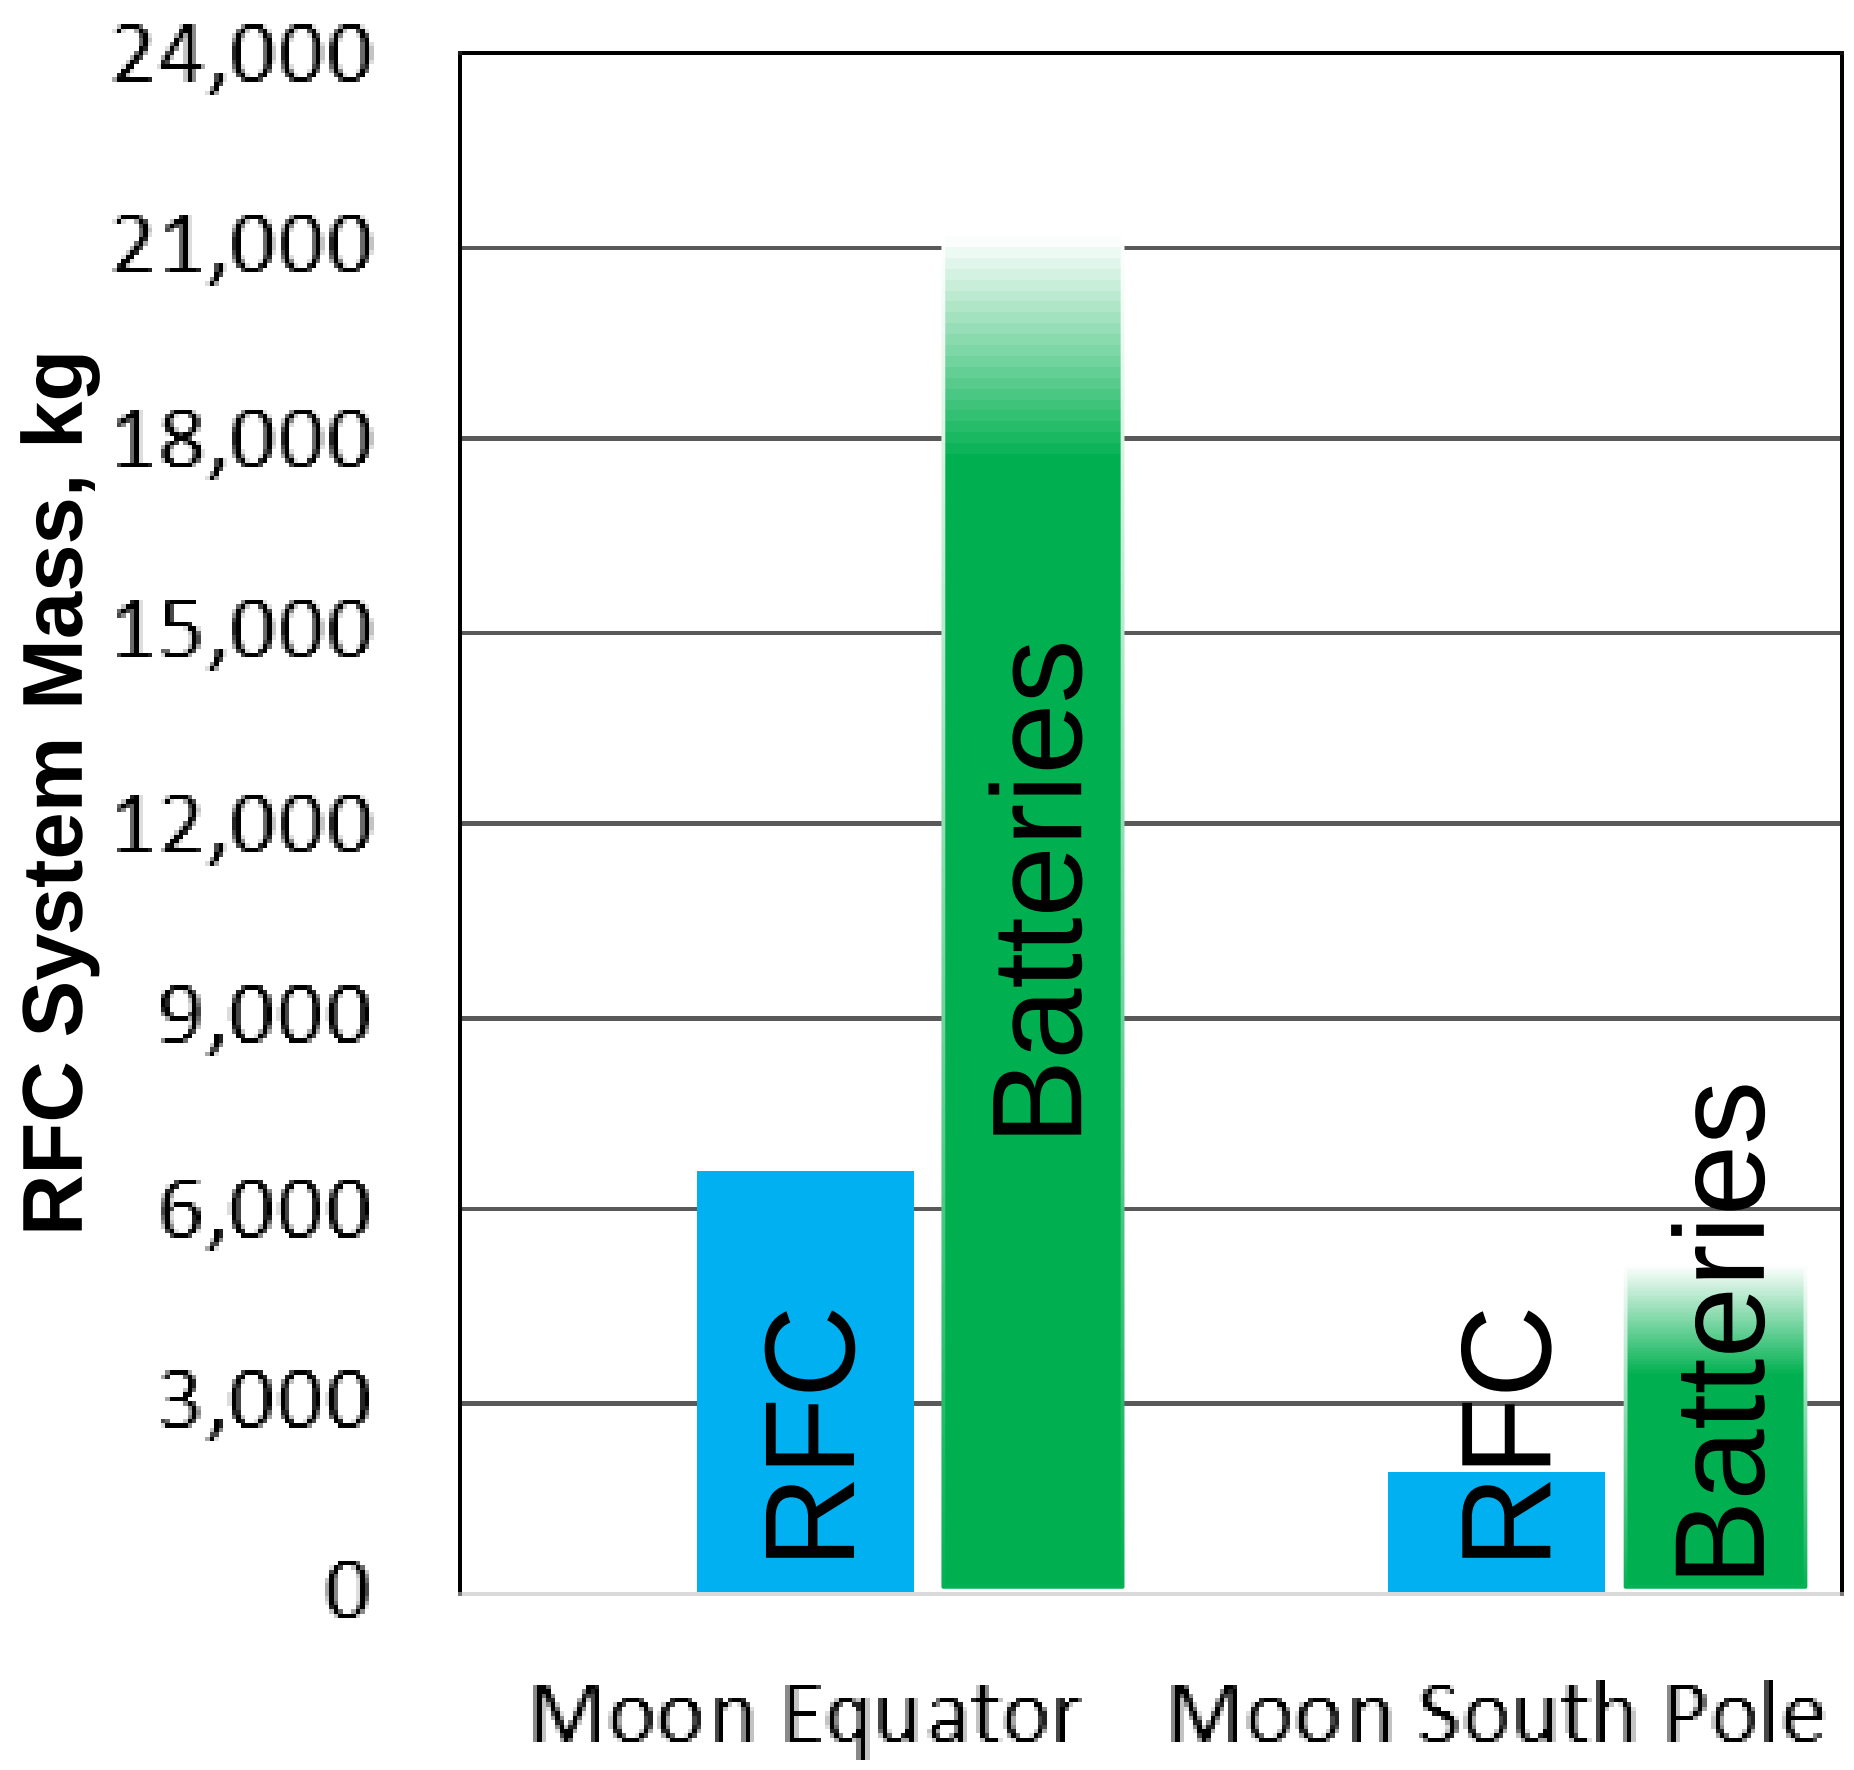

RFCs enable missions to survive the lunar night

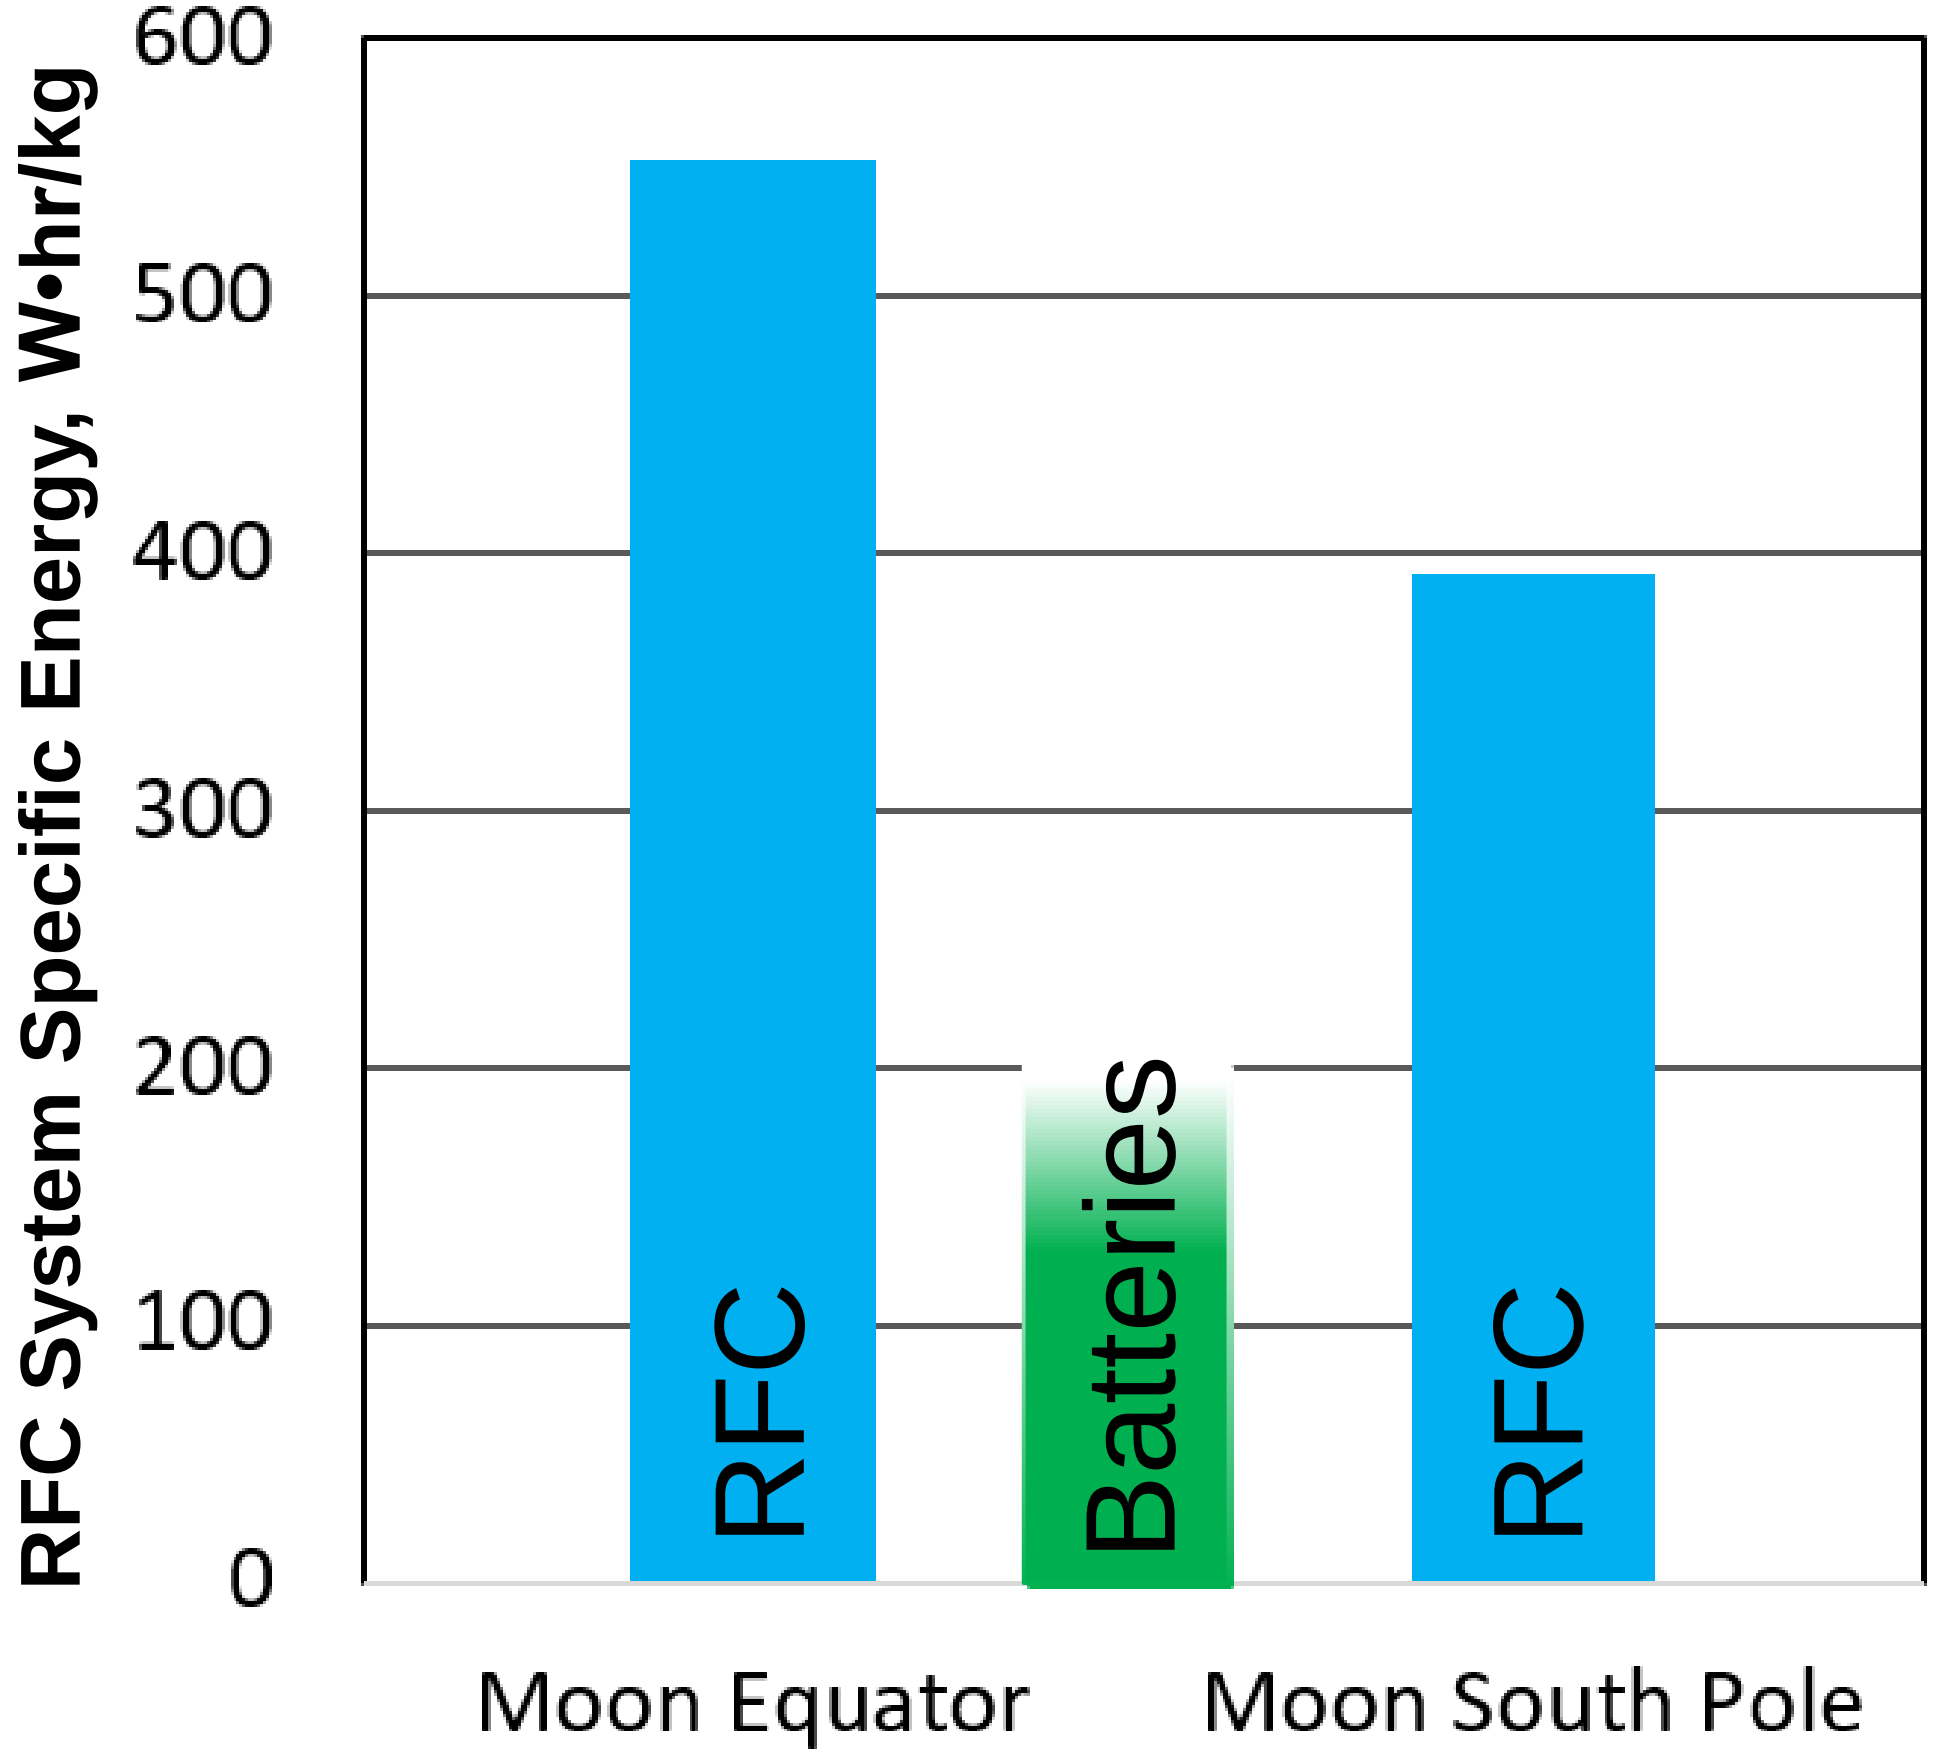

RFC specific energy dependent on location.
Battery specific energy independent of location.

Venus Power Concept for Variable Altitude Balloon

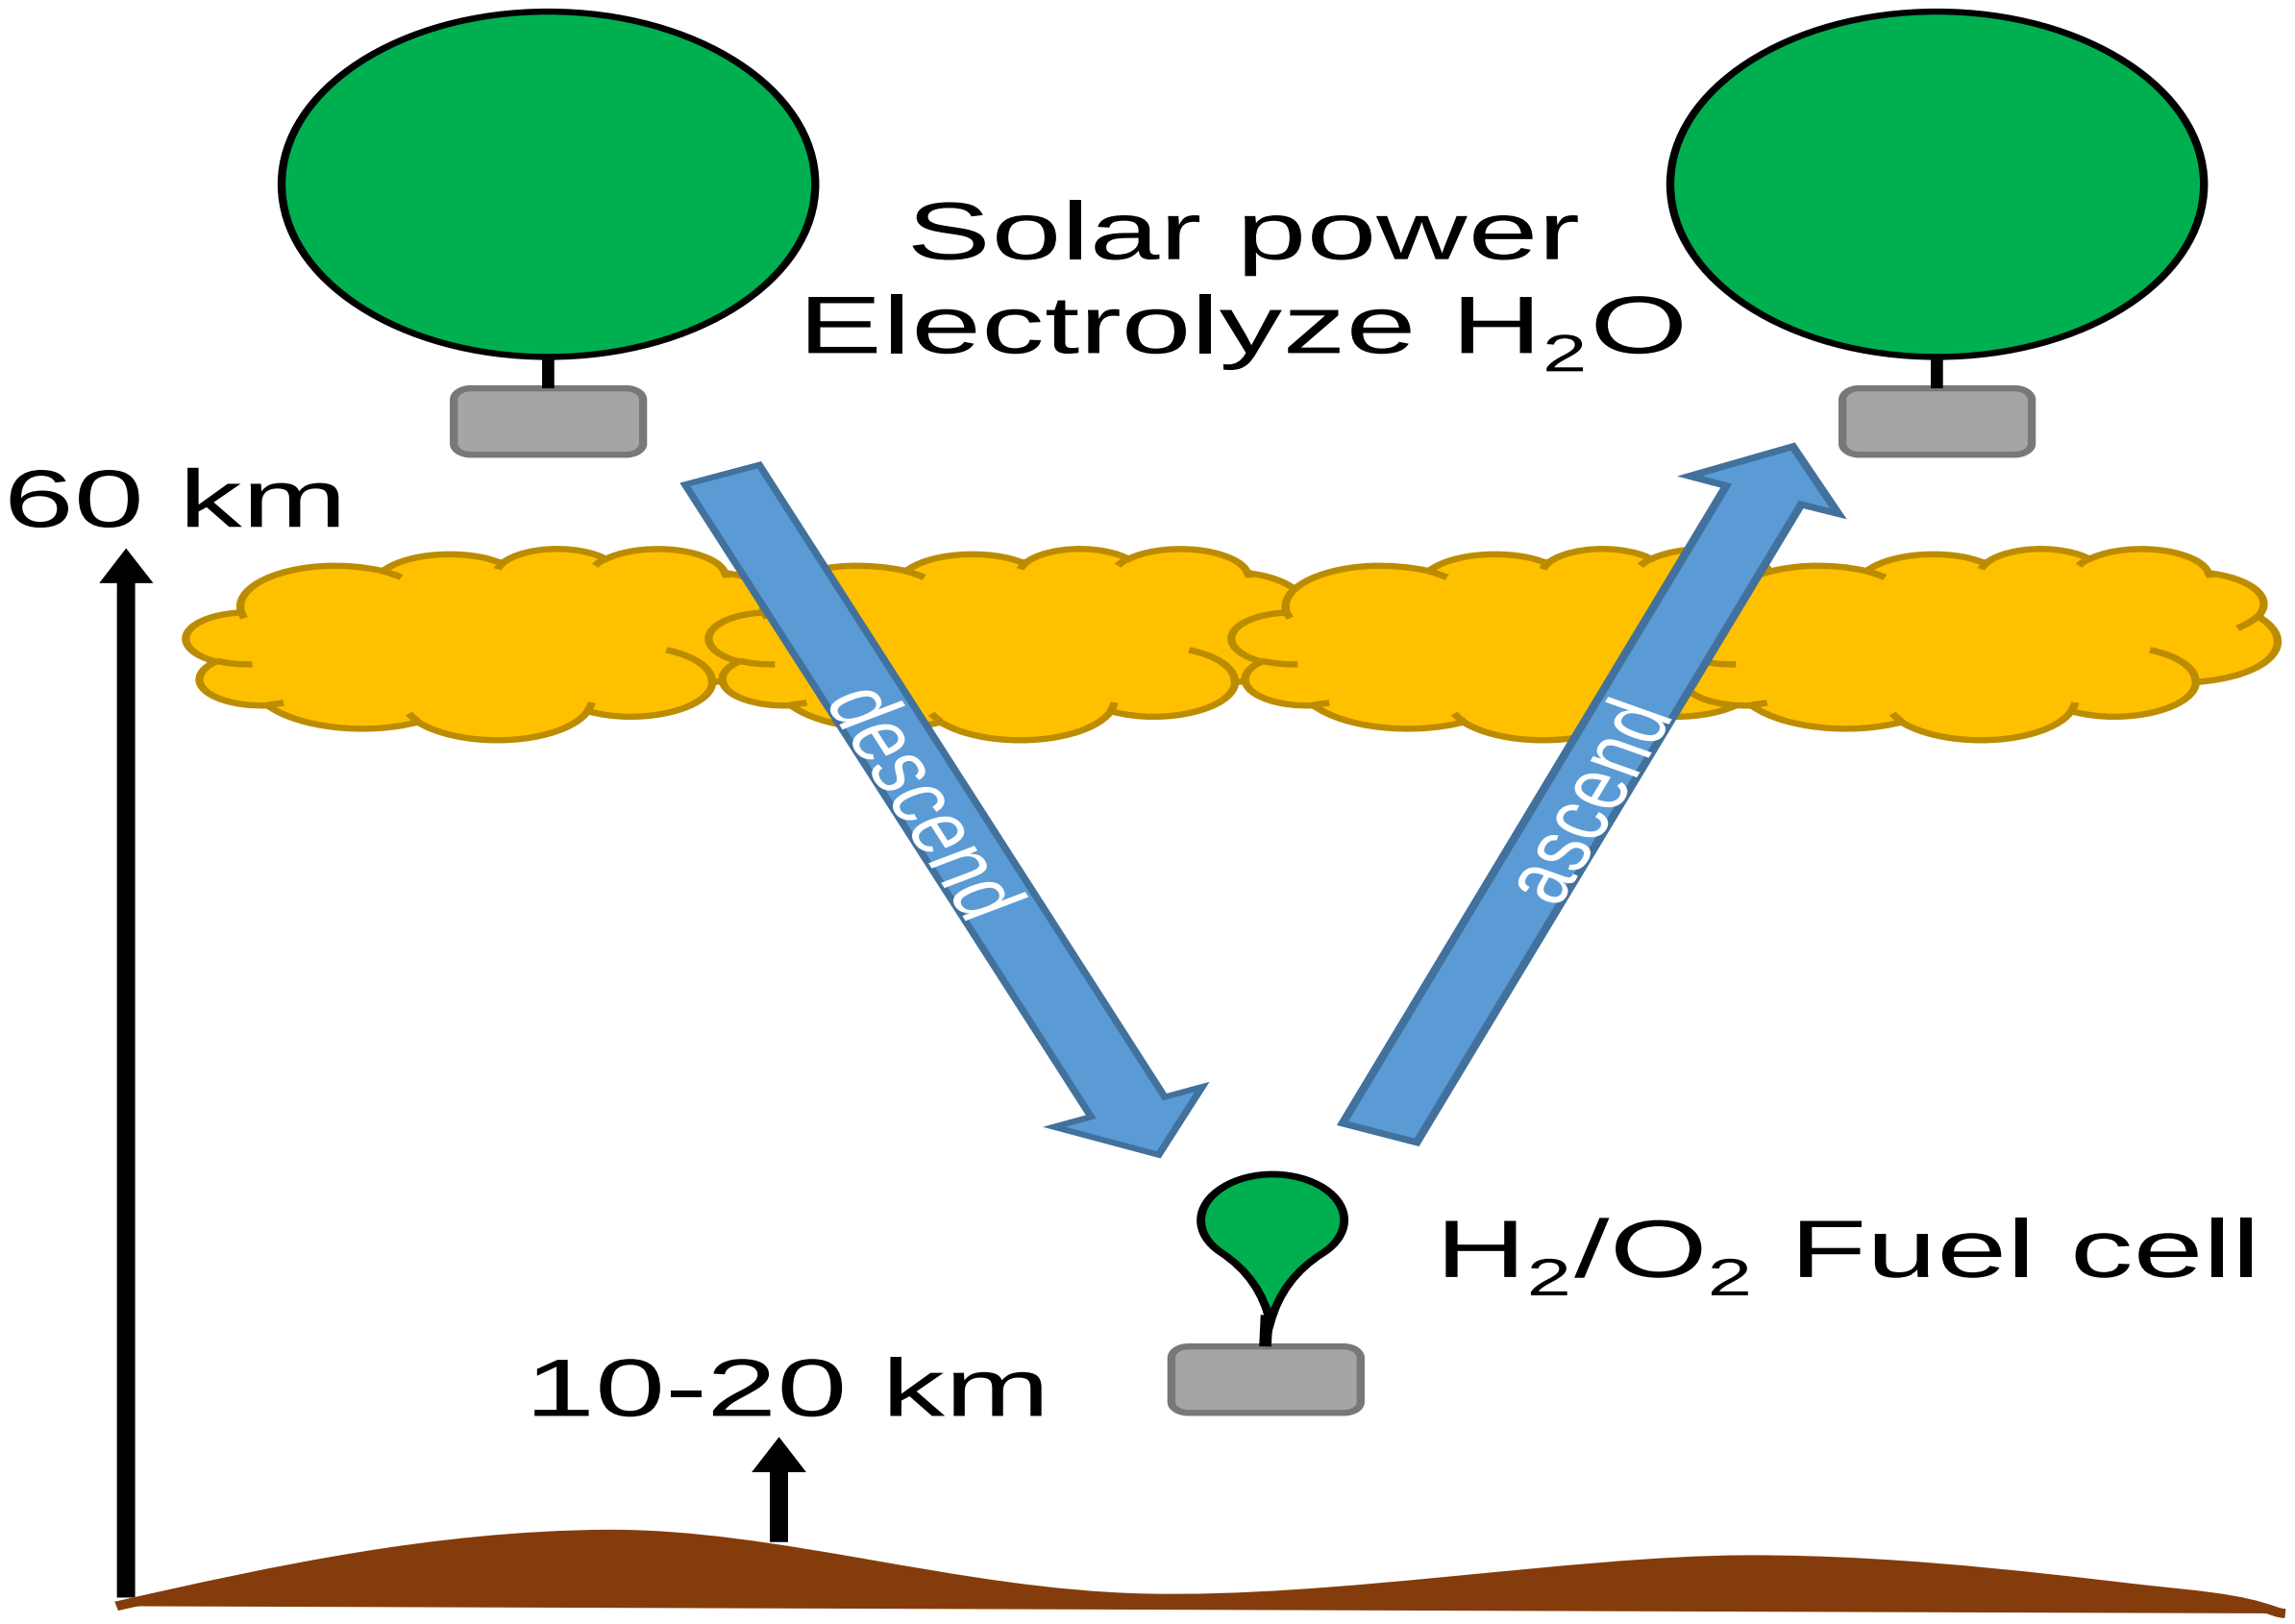

Above the clouds
- SOEC recharges H_2 & O_2 from H_2O
- Consumes stored H_2O
- Solar array powers probe

H_2 from balloon into hydride to descend below the clouds

H_2 from hydride into balloon to ascend above the clouds

Below the clouds
- SOFC generates power from H_2 & O_2 to power probe
- Store H_2O byproduct

- A solar array powers the probe at high altitude and generates H_2 and O_2 with Solid Oxide Electrolysis Cell (SOEC) using water carried from ground as a closed-system.
- Metal hydride H_2 storage and compressed gas O_2 storage
- Solid Oxide Fuel Cell (SOFC) will powers the probe at low altitudes from the stored H_2 and O_2.
- H_2-filled balloon will be used for buoyancy and altitude control (60-15 km).

Electrolysis within NASA

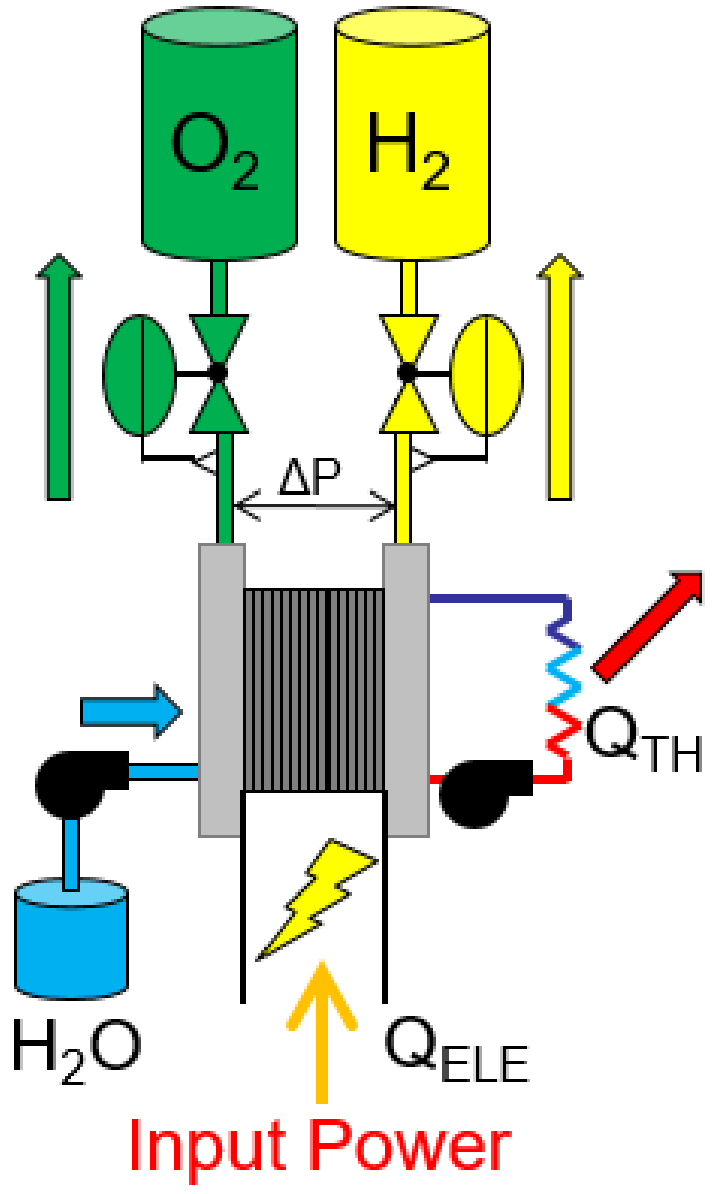

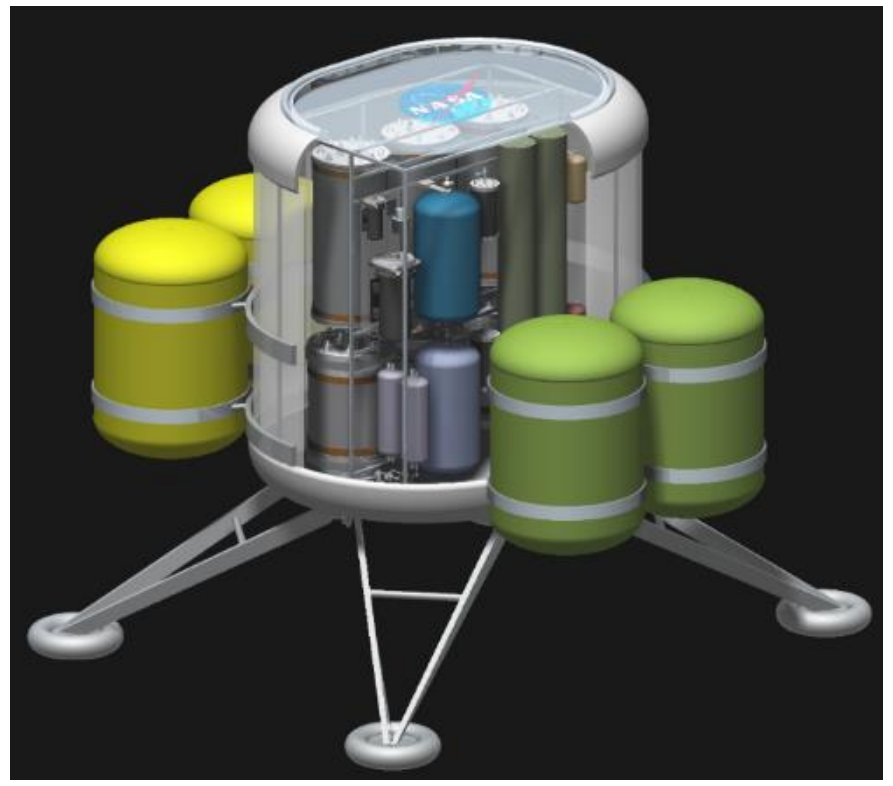

Fundamental Process

- Electrochemically dissociating water into gaseous hydrogen and oxygen
- Multiple chemistries – Polymer Electrolyte Membrane (PEM), Alkaline, Solid Oxide
- Multiple pressure ranges
  - ISRU & Life support = low pressure
  - Energy storage = high pressure

Life Support: Process recovered H_2O to release oxygen to source breathing oxygen

- Redesign ISS Oxygen Generator assembly for increased safety, pressure, reliability, and life
- Evaluate Hydrogen safety sensors

Energy Storage: Recharge RFC system by processing fuel cell product H_2O into H_2 fuel and O_2 oxidizer for fuel cell operation

ISRU: Process recovered H_2O to utilizing the resulting H_2 and O_2

- Hydrogen Reduction – Hydrogen for material processing
- Life Support – Oxygen to source breathing oxygen
- Propellant Generation – Oxygen for liquefaction and storage

In-situ Resource Utilization (ISRU)

Modular Power Functions/ Elements

- Power Generation
- Power Distribution
- Energy Storage (O_2 & H_2)

Support Functions /Elements

- ISRU
- Life Support & EVA
- O_2, H_2, and CH_4 Storage and Transfer

Shared Hardware to Reduce Mass & Cost

- Solar arrays/nuclear reactor
- Water Electrolysis
- Reactant Storage
- Cryogenic Storage
- Mobility

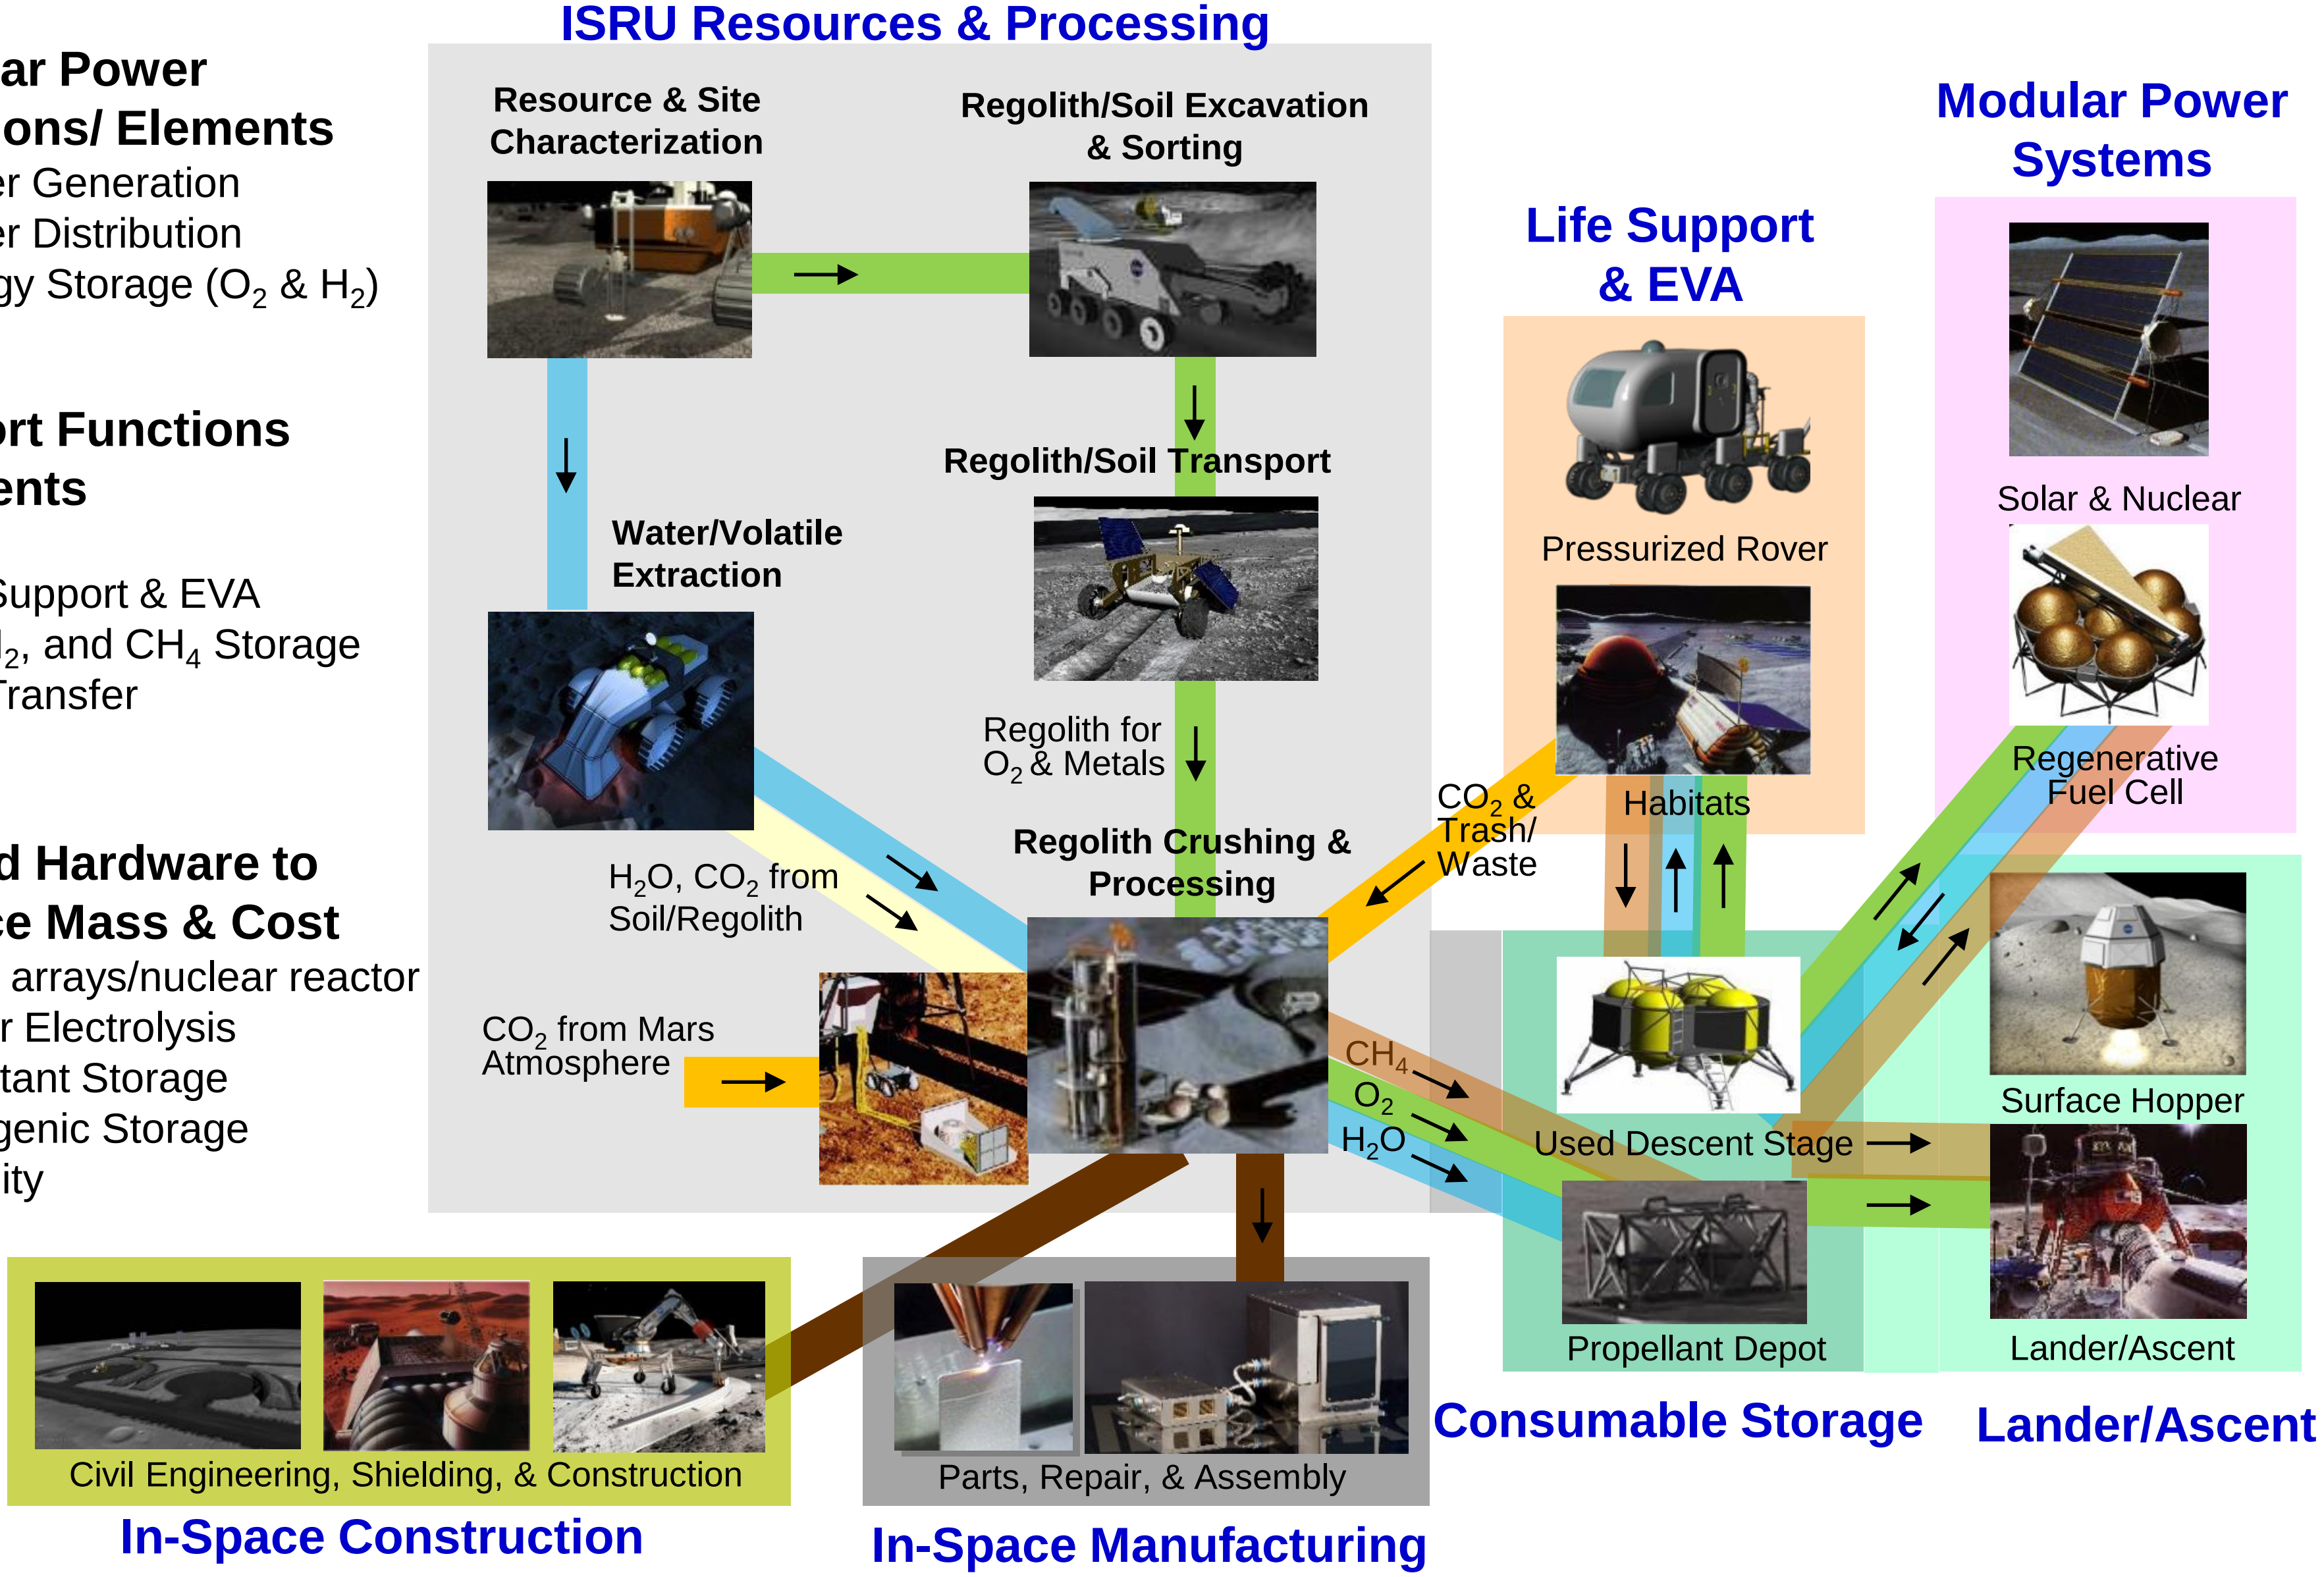

Lunar ISRU Mission Capability Concepts

Resource Prospecting – Looking for Polar Ice

Excavation & Regolith Processing for O_2 Production

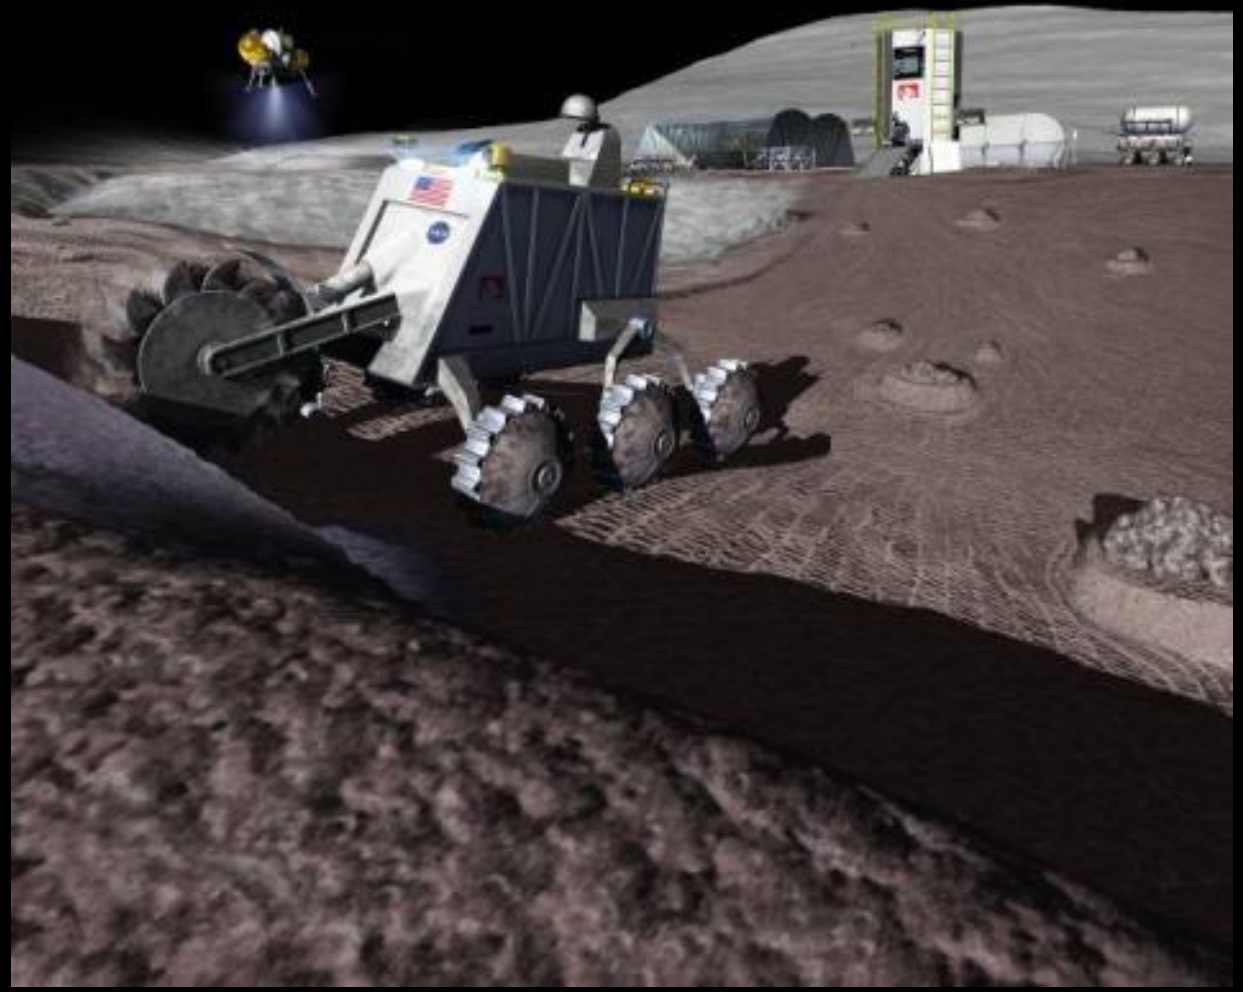

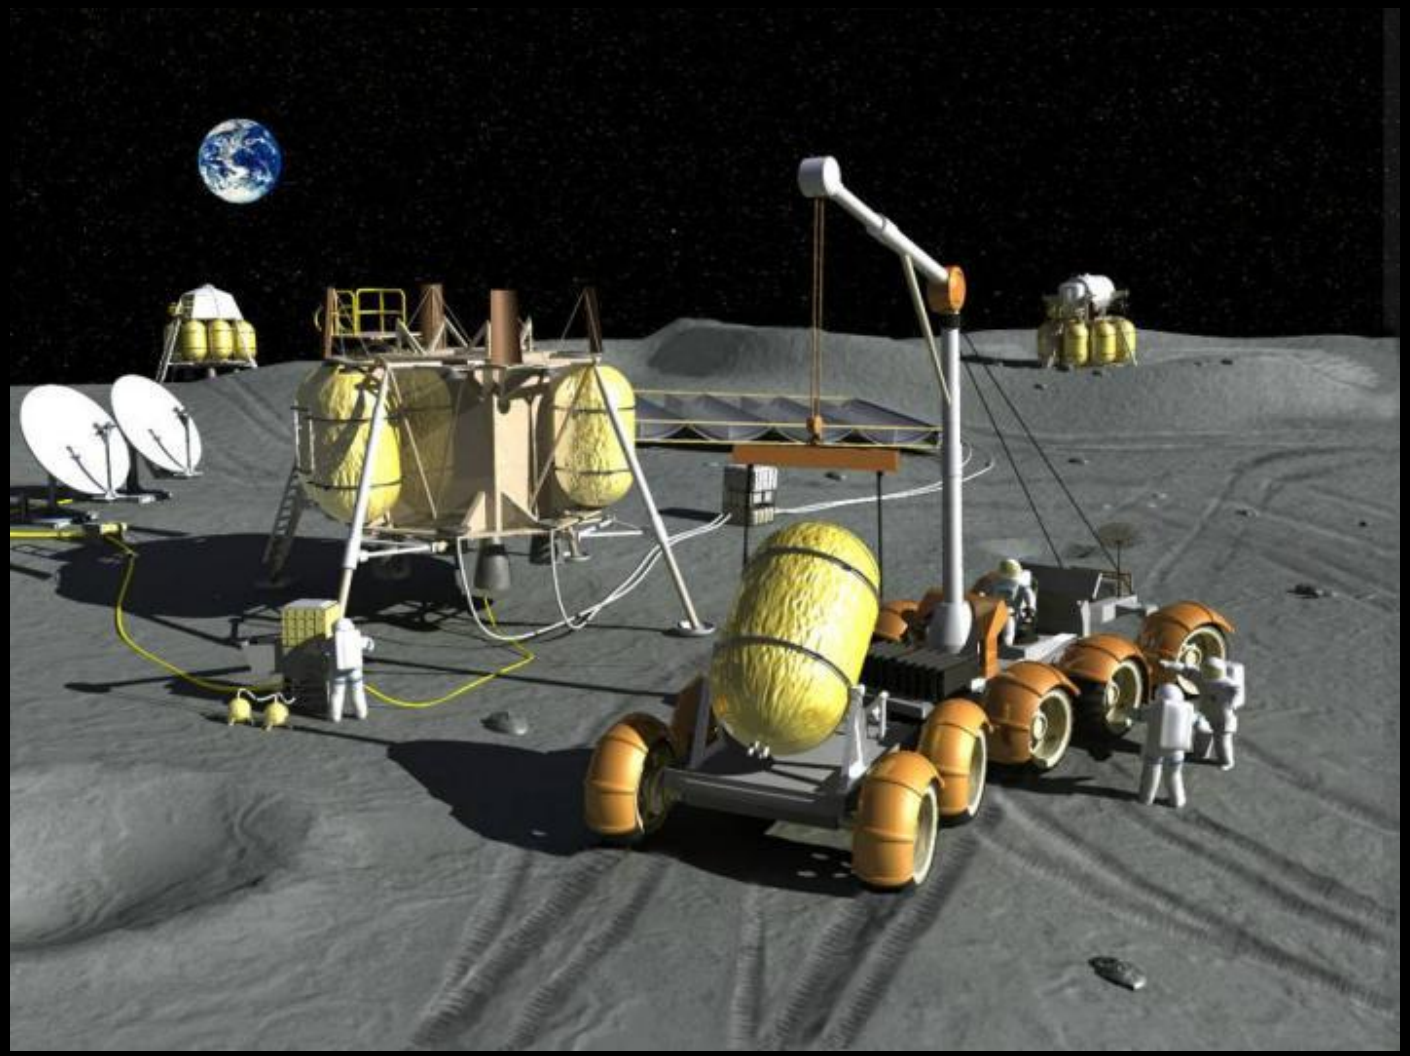

Carbothermal Processing with Altair Lander Assets

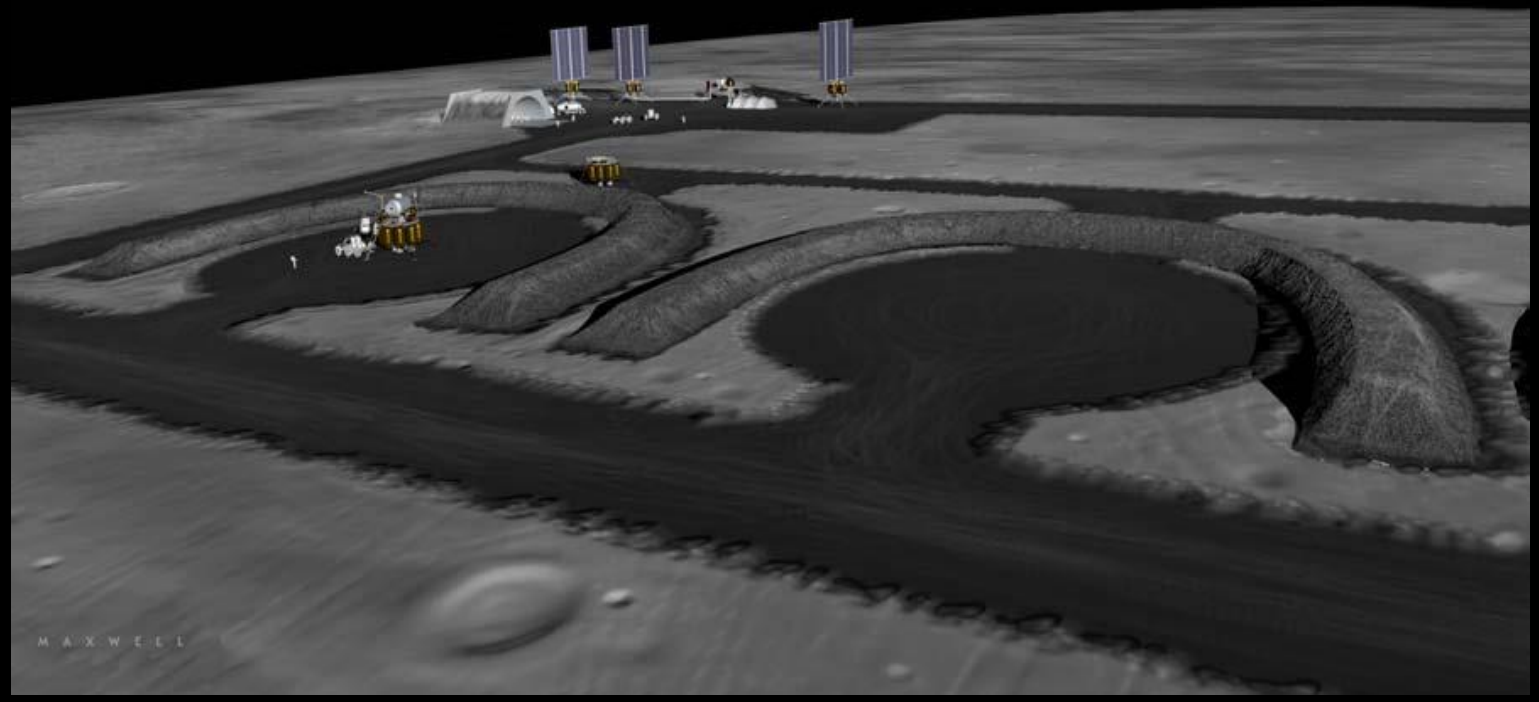

Landing Pads, Berm, and Road Construction

Thermal Energy Storage Construction

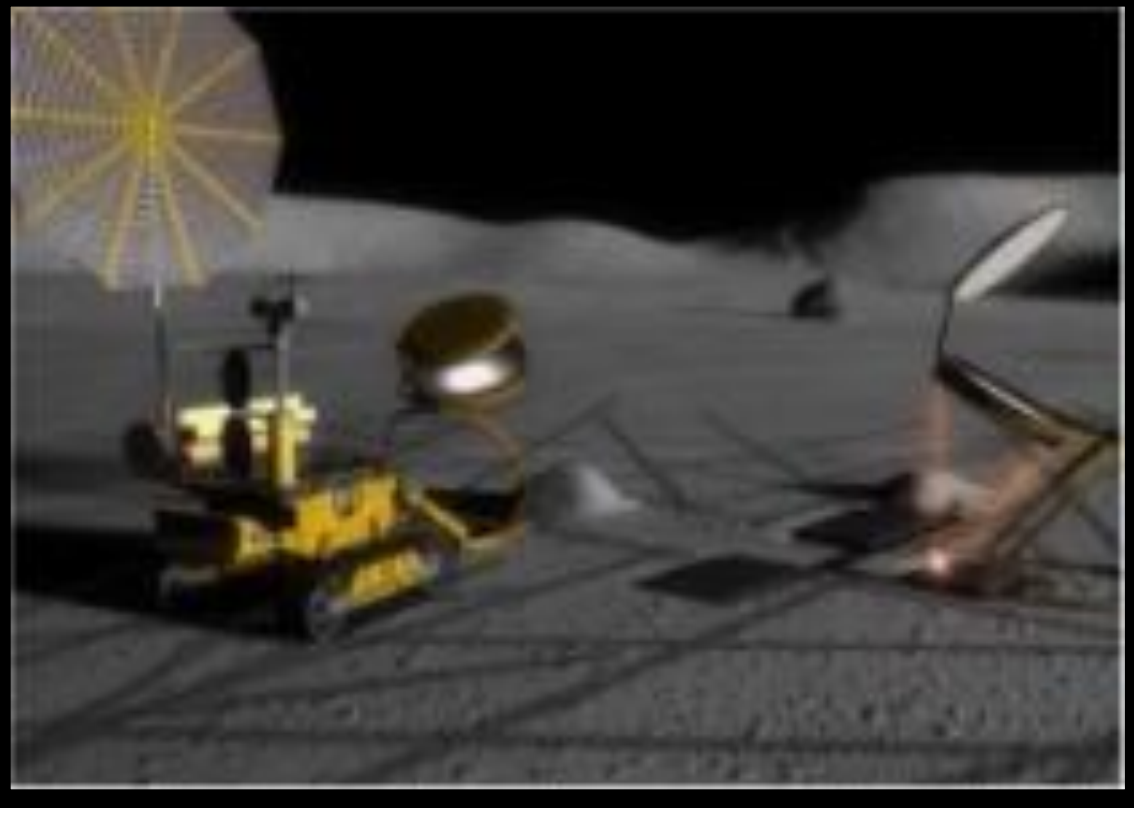

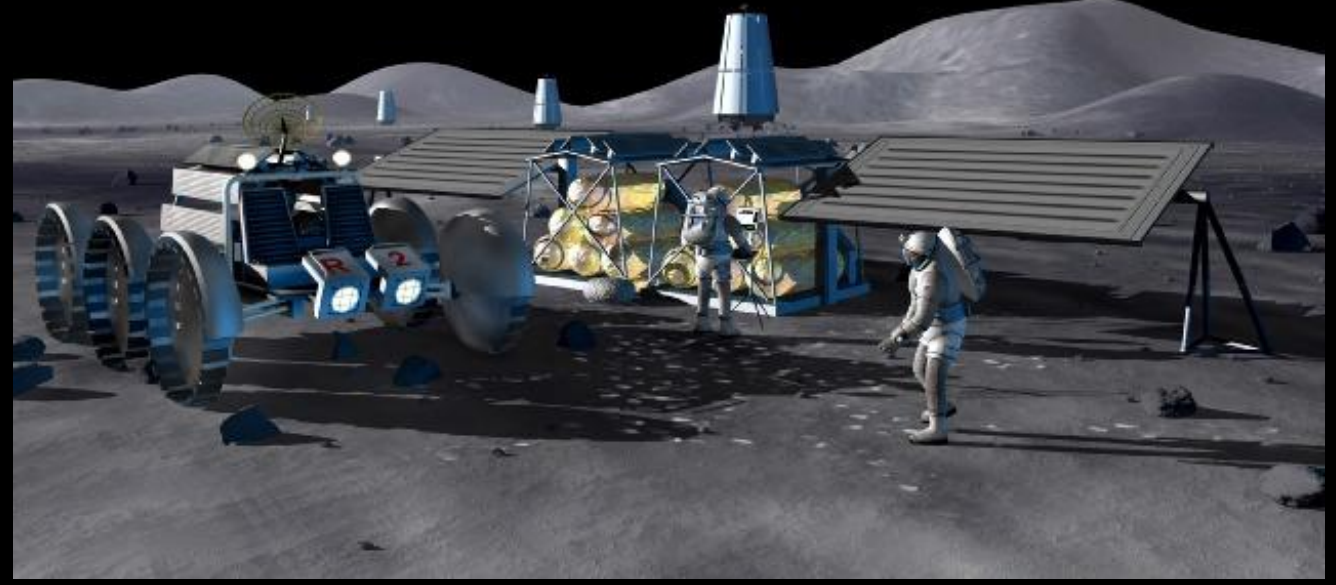

Consumable Depots for Crew & Power

ISRU is Similar to Establishing Remote Mining Infrastructure and Operations on Earth

Communications
- To/From Site
- Local

Transportation to/from Site:
- Navigation Aids
- Loading & Off-loading Aids
- Fuel & Support Services

Planned, Mapped, and Coordinated Mining Ops:
Areas for: i) Excavation, ii) Processing, and iii) Tailings

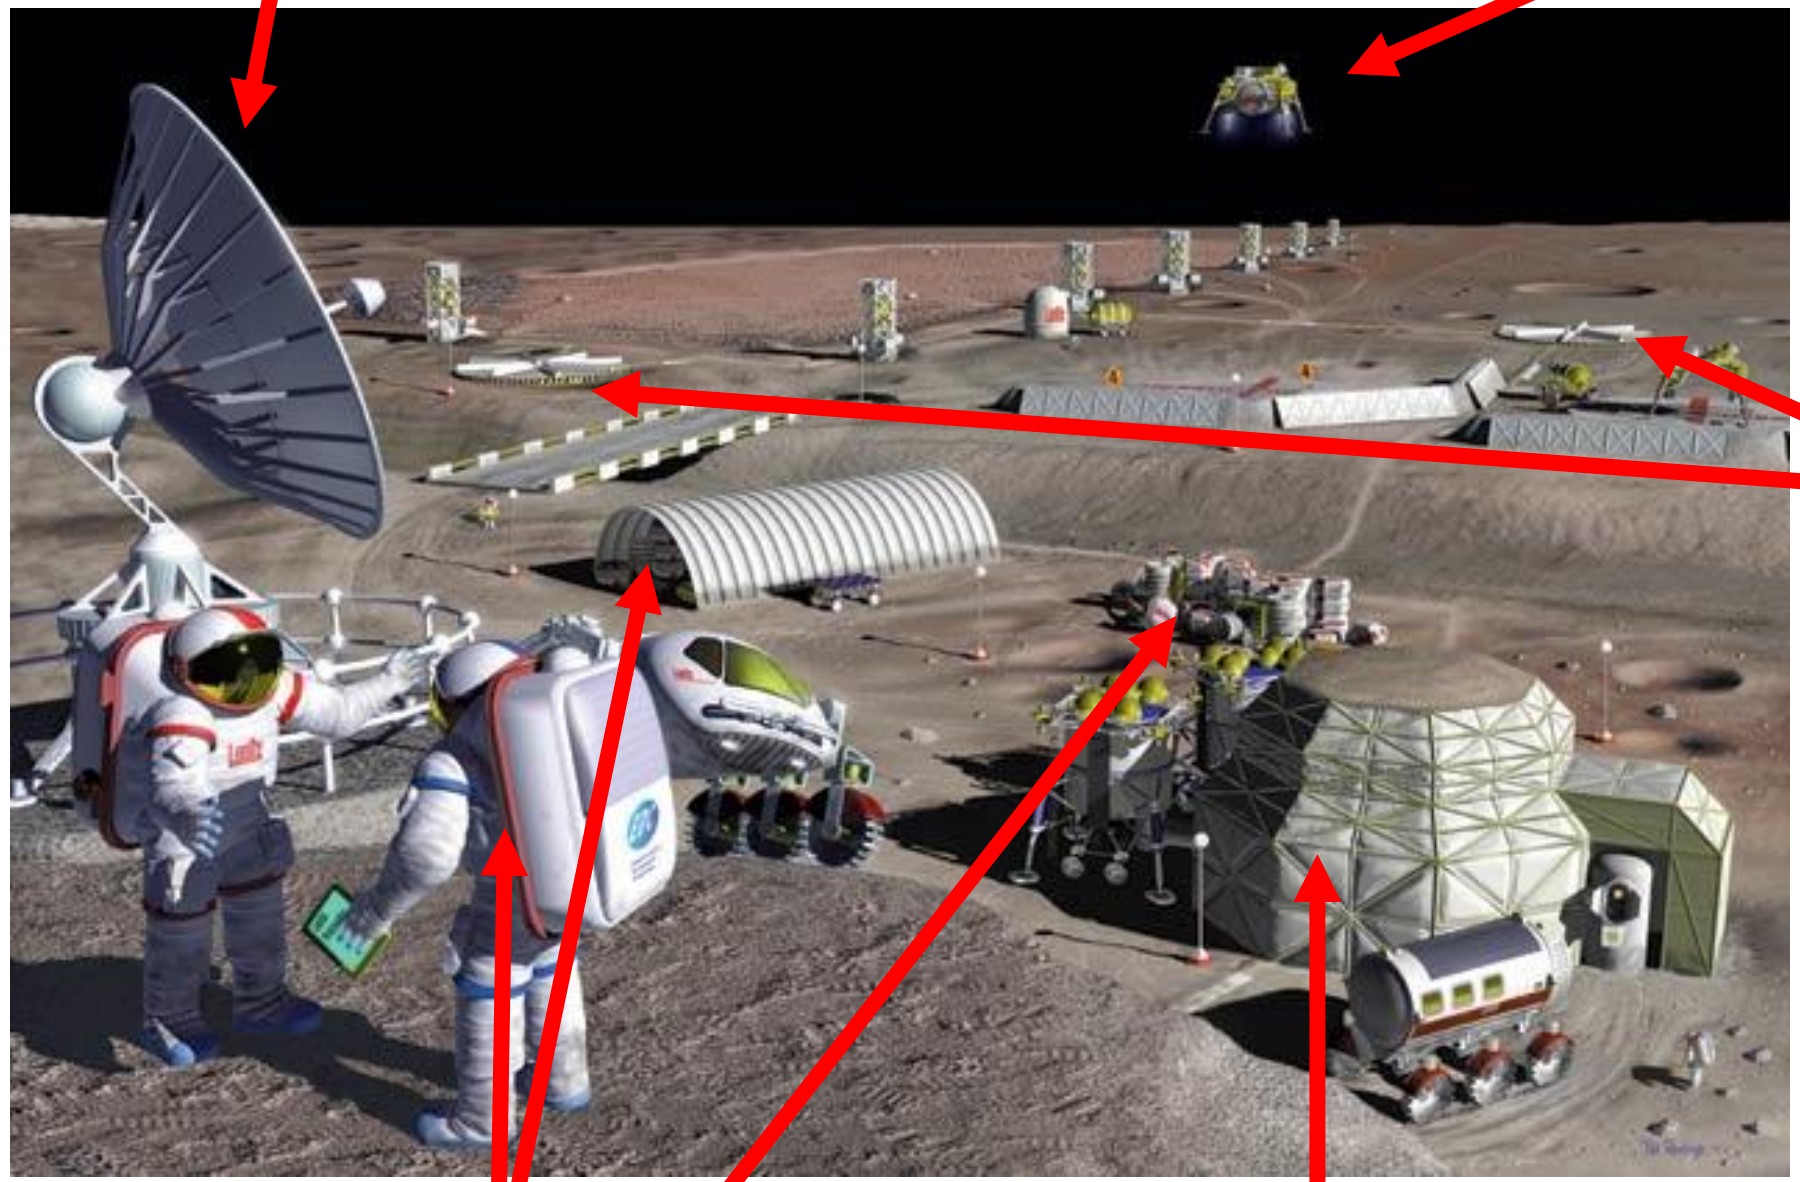

Power:
- Generation
- Storage
- Distribution

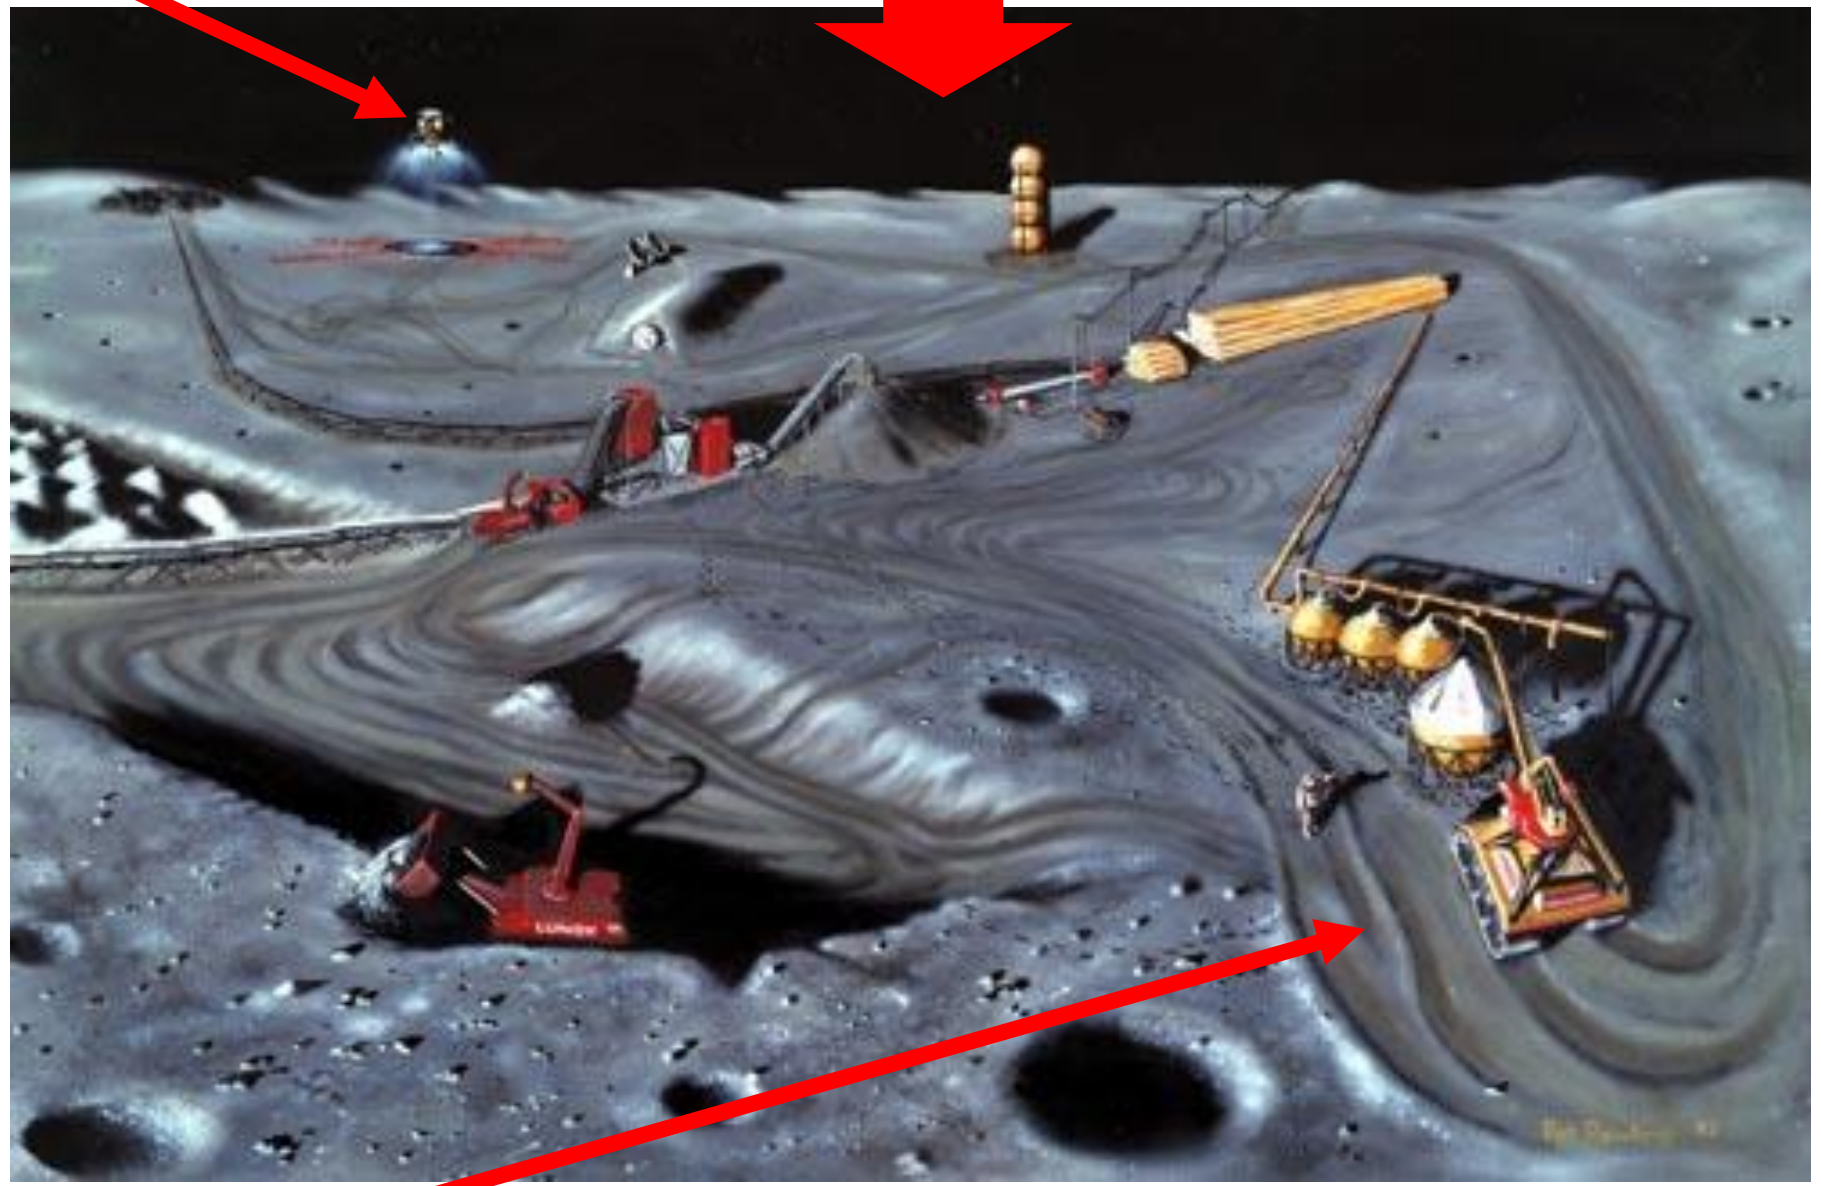

Maintenance & Repair

Living Quarters & Crew Support Services

Logistics Management

Construction and Emplacement

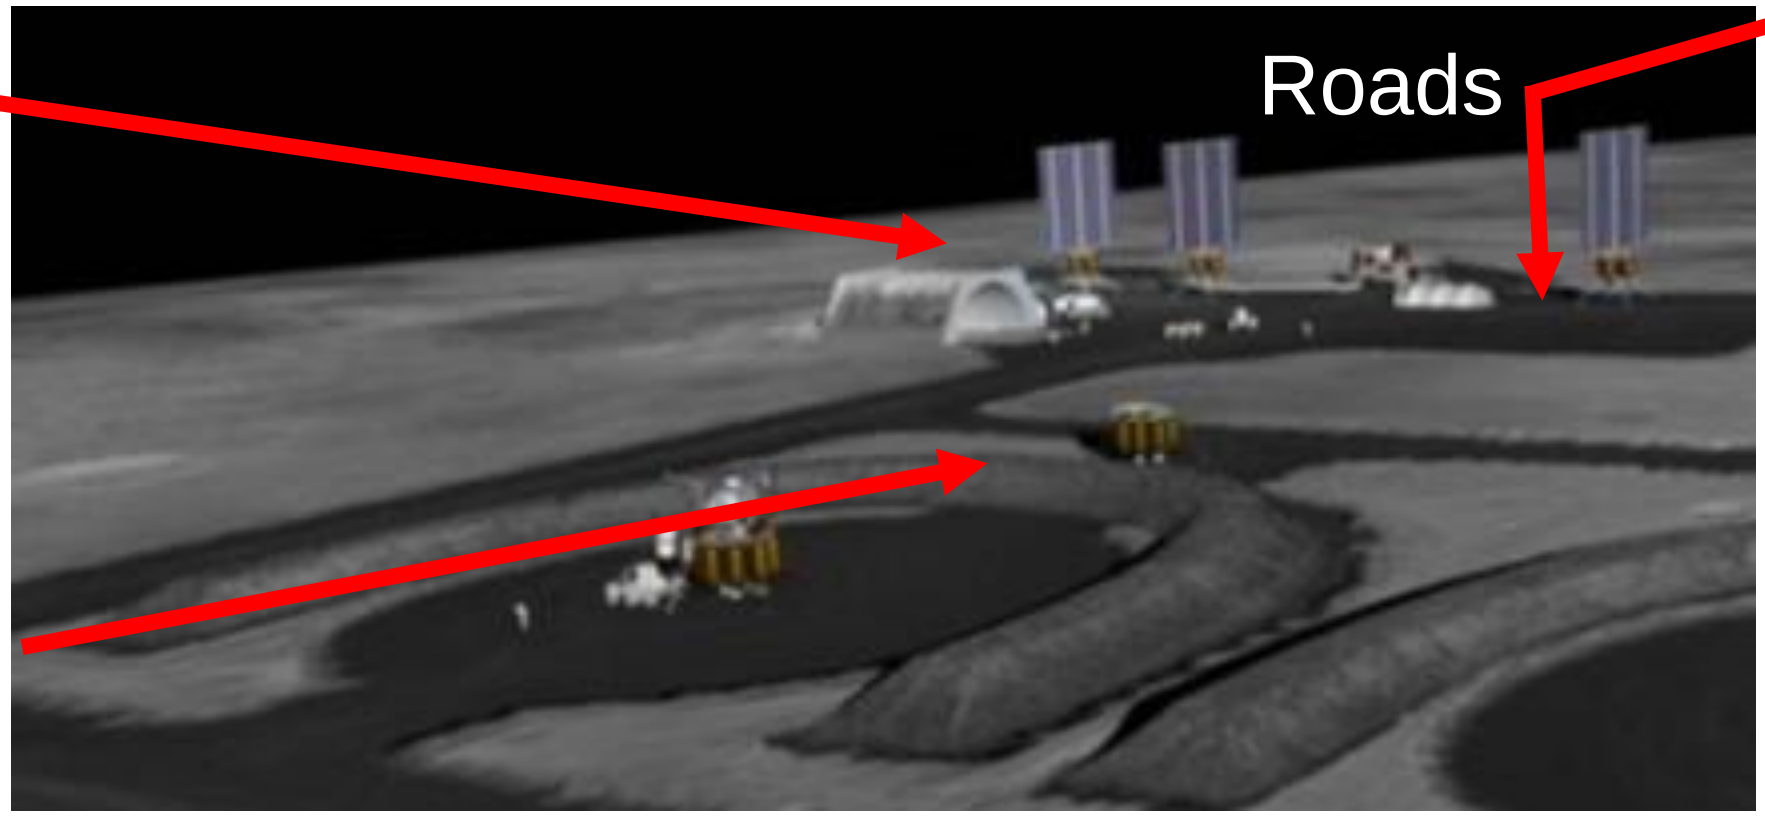

Reactant Processing and Storage

Oxygen

MOXIE O_2 Generator

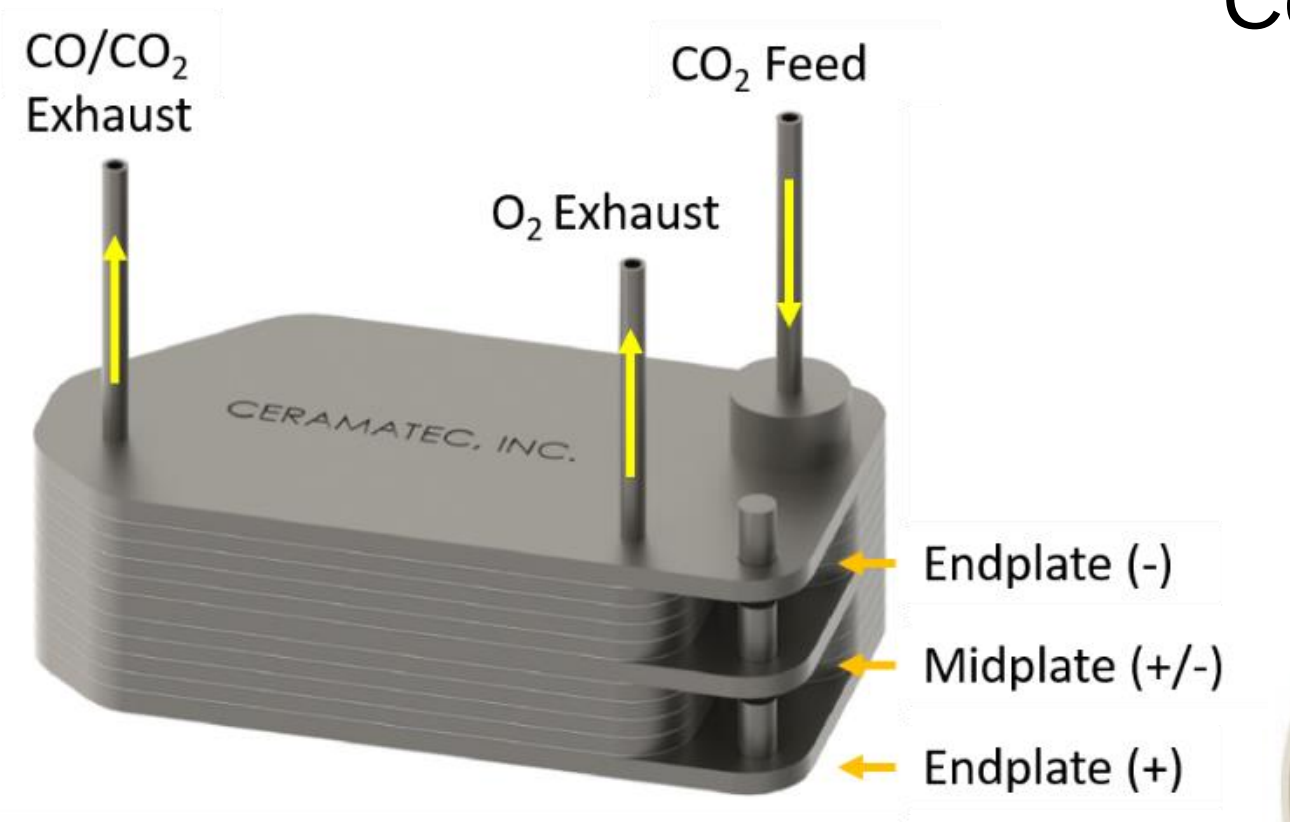

Oxygen Concentrators

CryoFILL Liquefaction and Storage

Tank-to-Tank Transfer

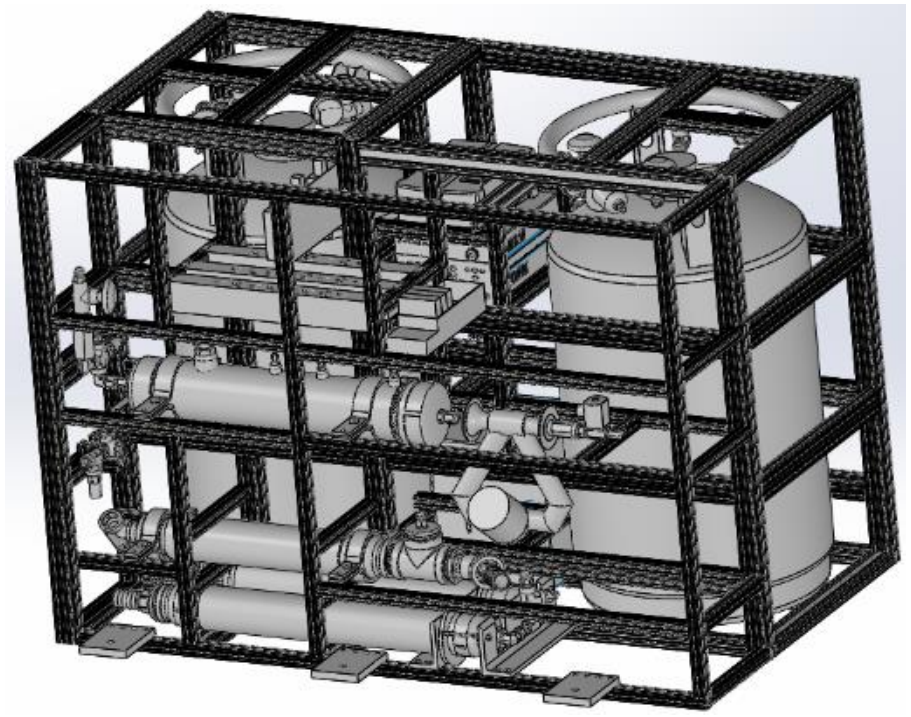

Radio Frequency Mass Gauge (RFMG)

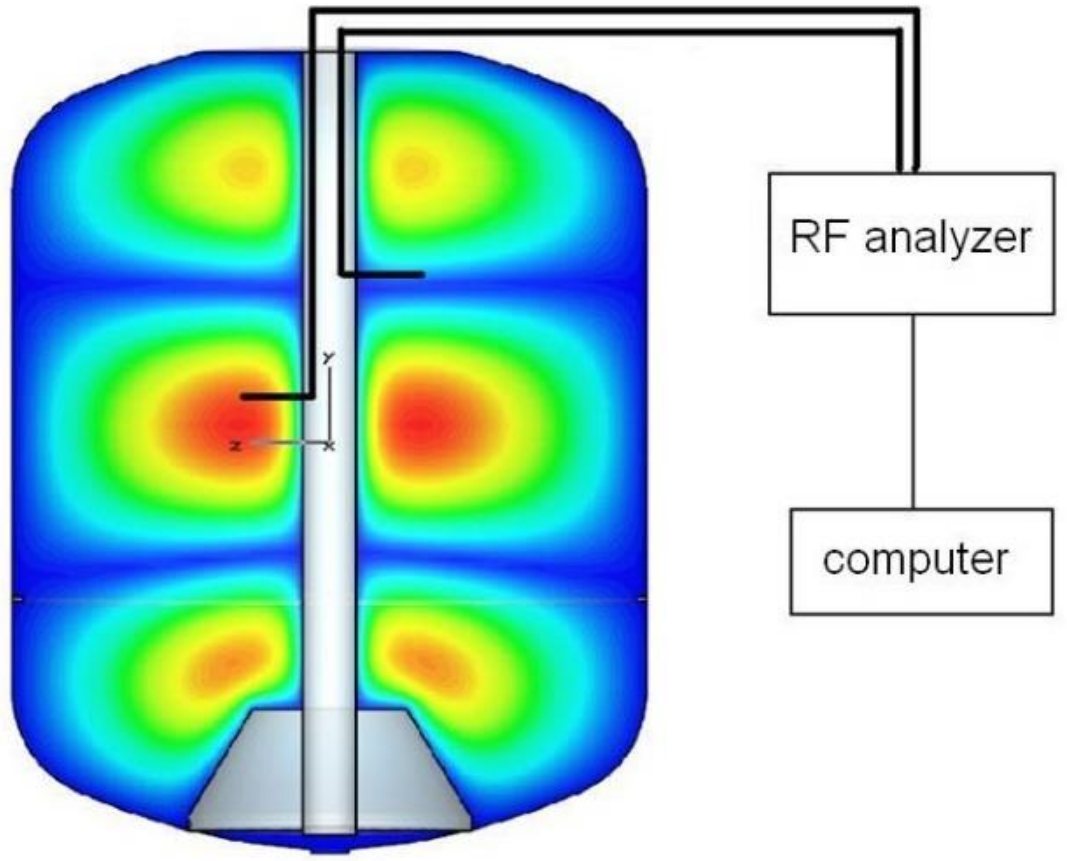

Hydrogen

Zero Boil-Off Tank (ZBOT) Experiment

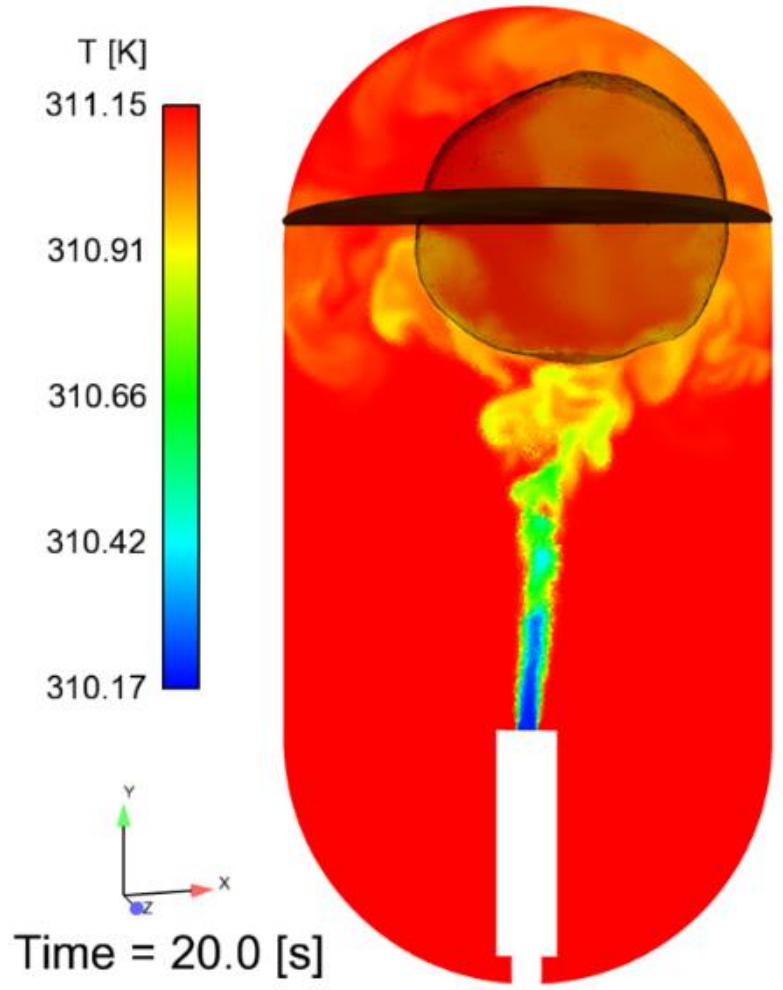

Purification and Recovery

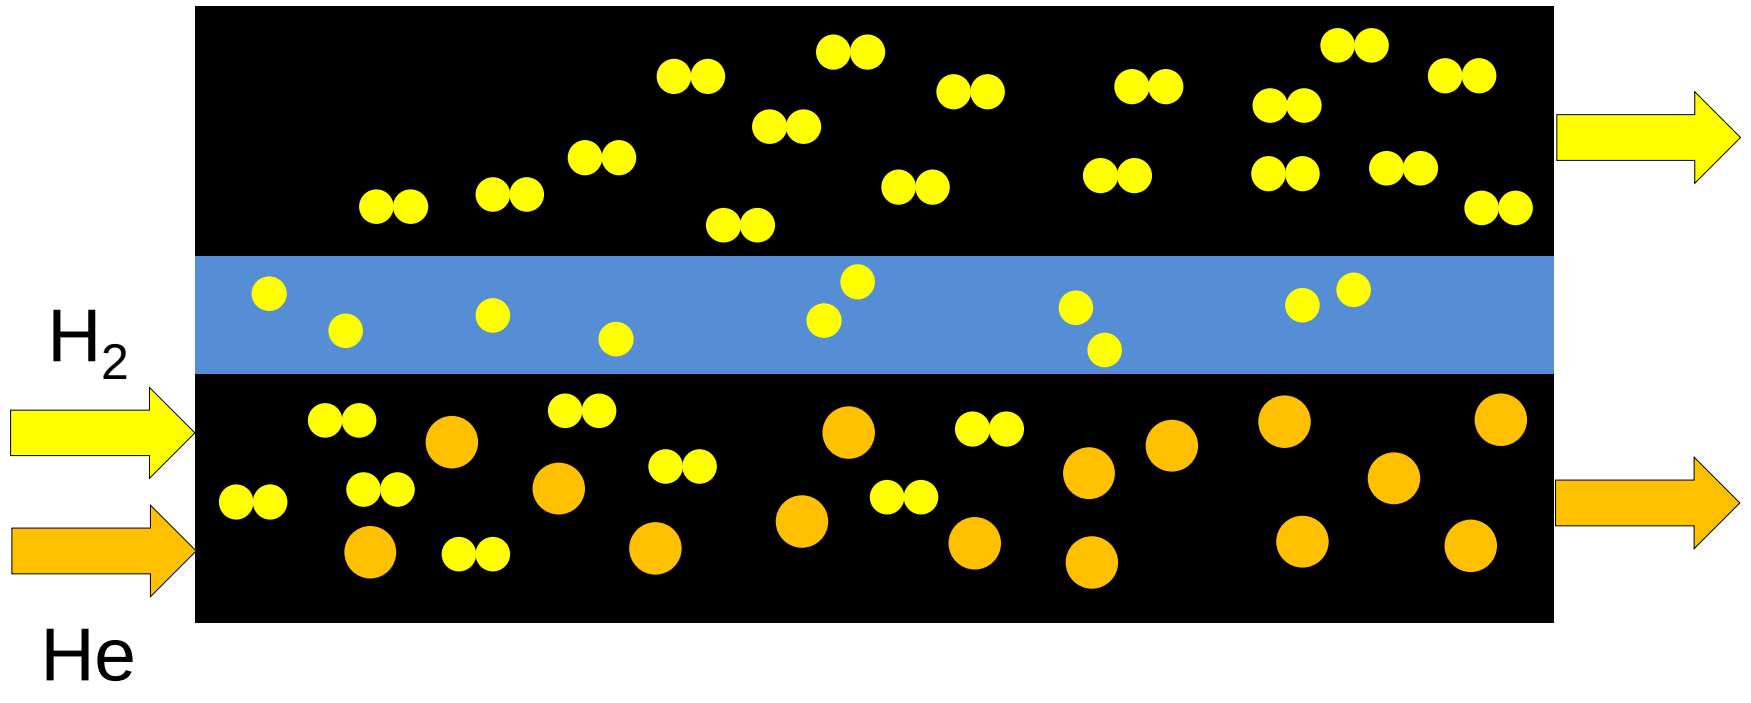

Zero Boil-off Cryogenics

Zero Boil-Off Tank (ZBOT) Experiment: Hardware in MSG Aboard ISS

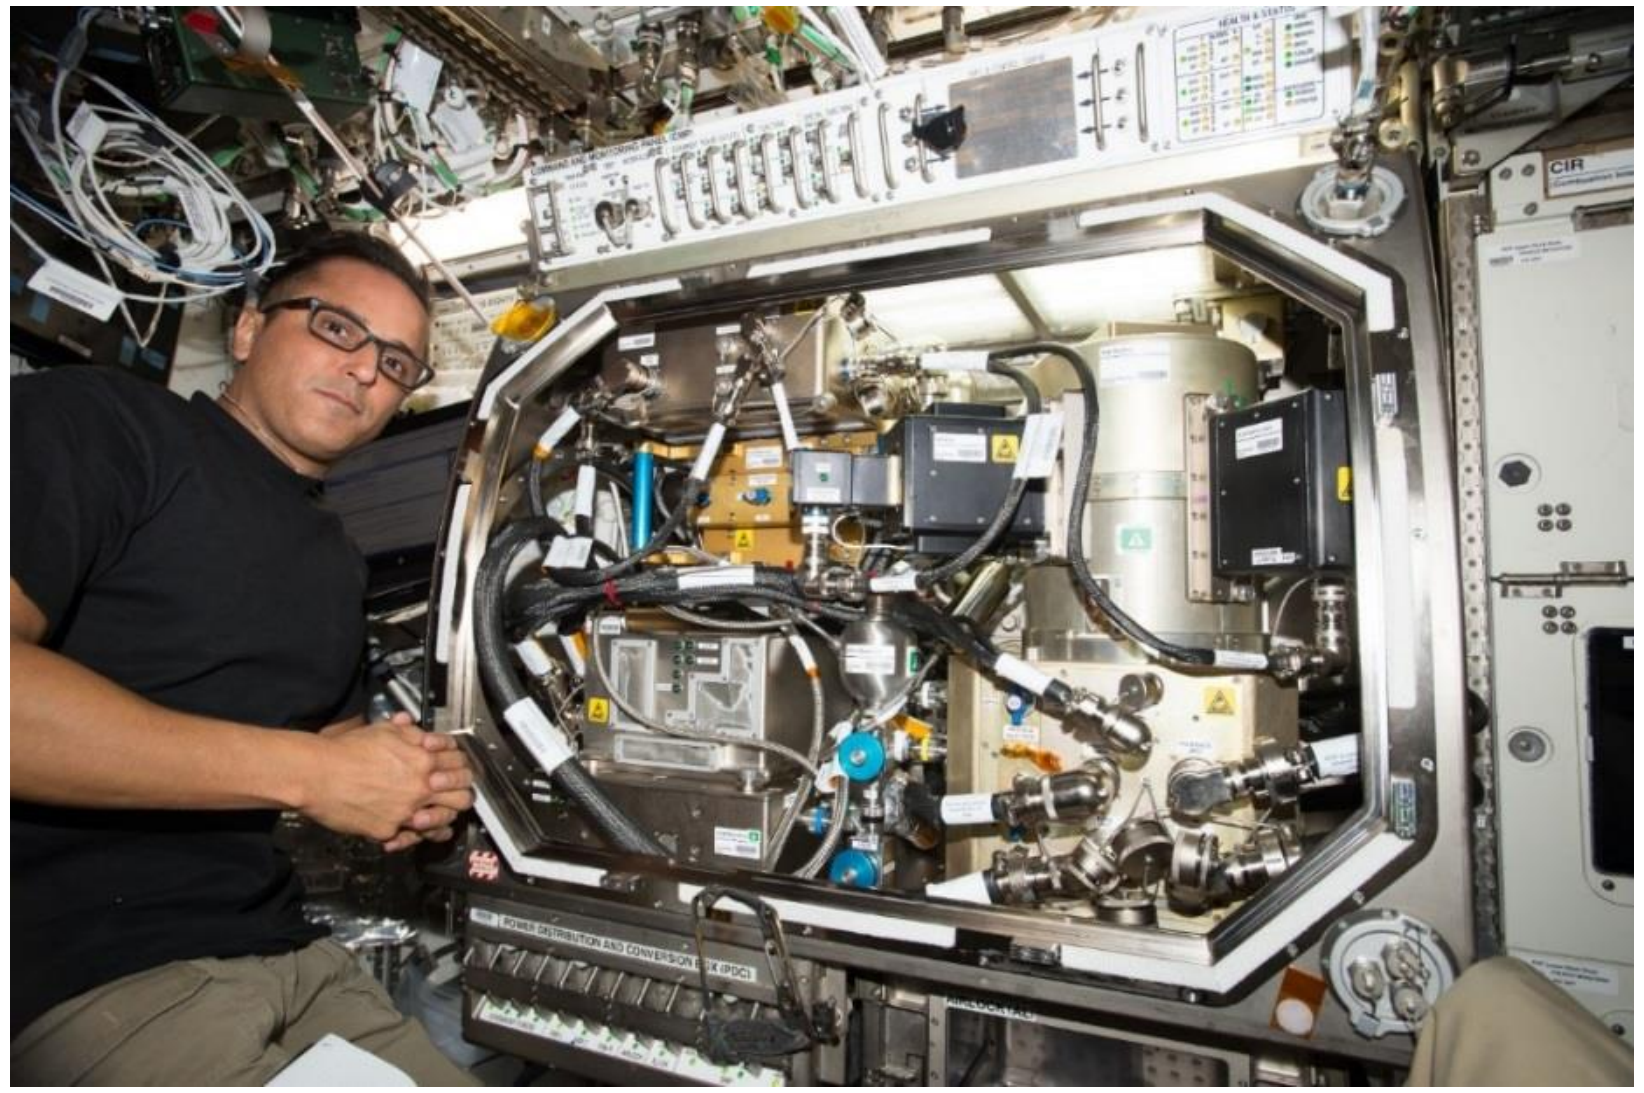

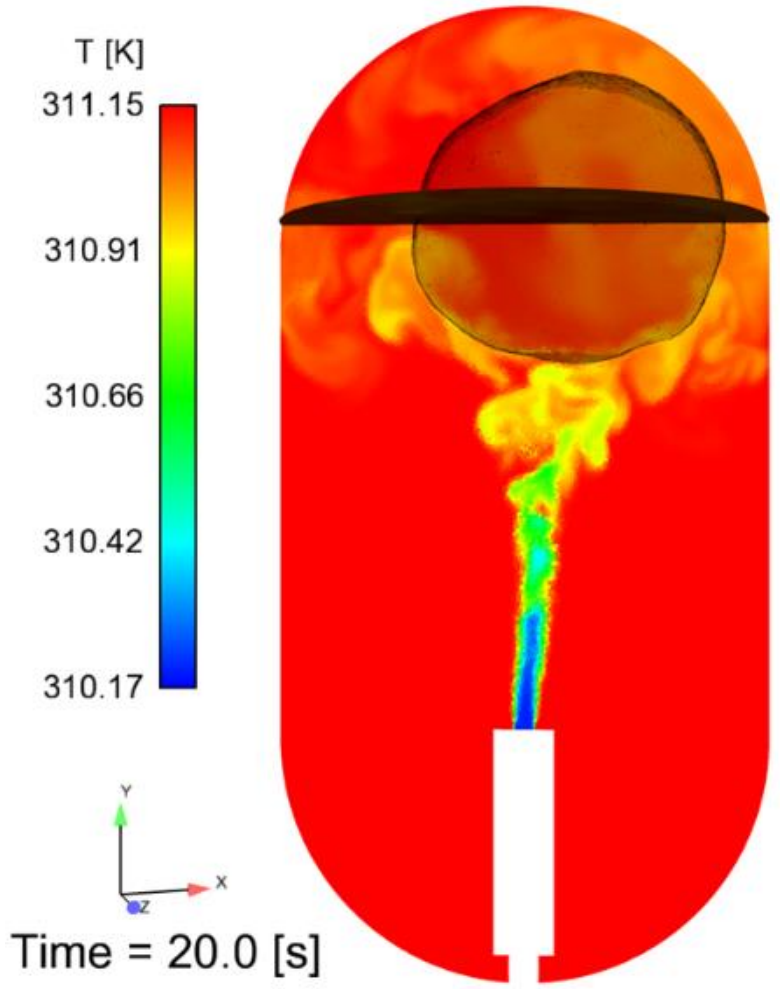

ZBOT Experiment During Jet Mixing

1g (1W), 90%, Self-Pressurization

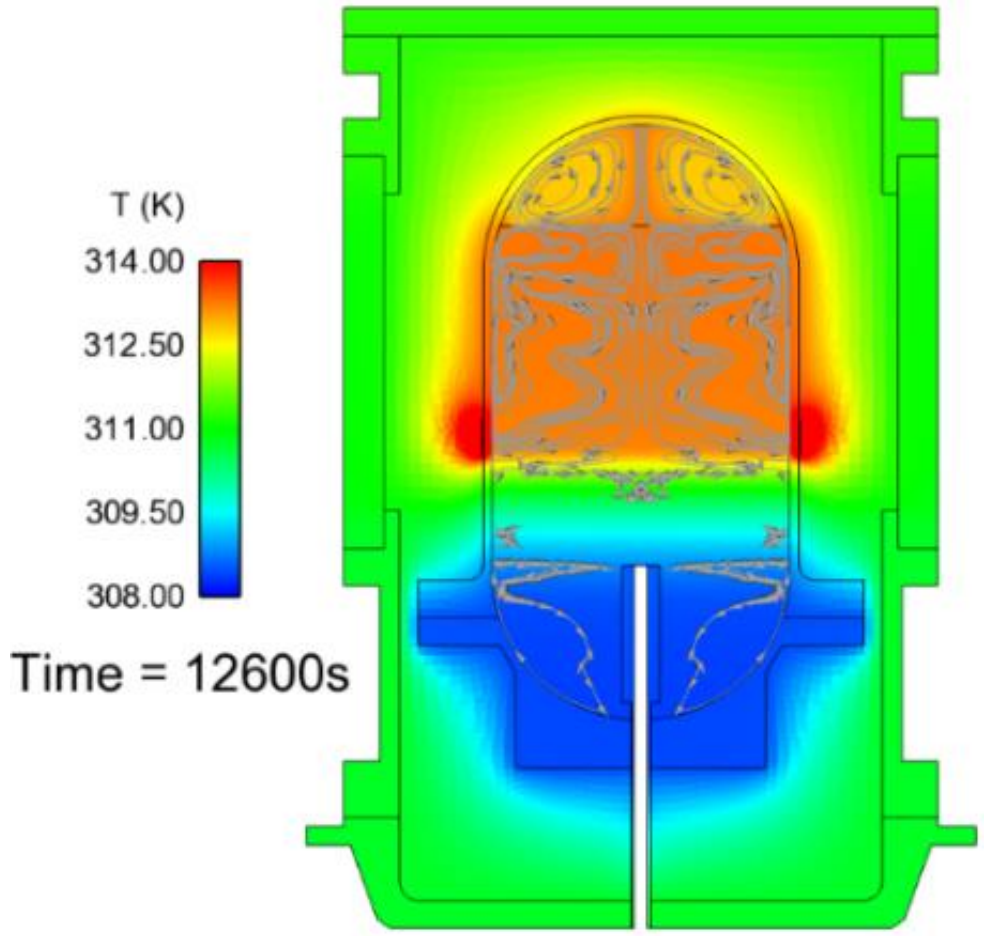

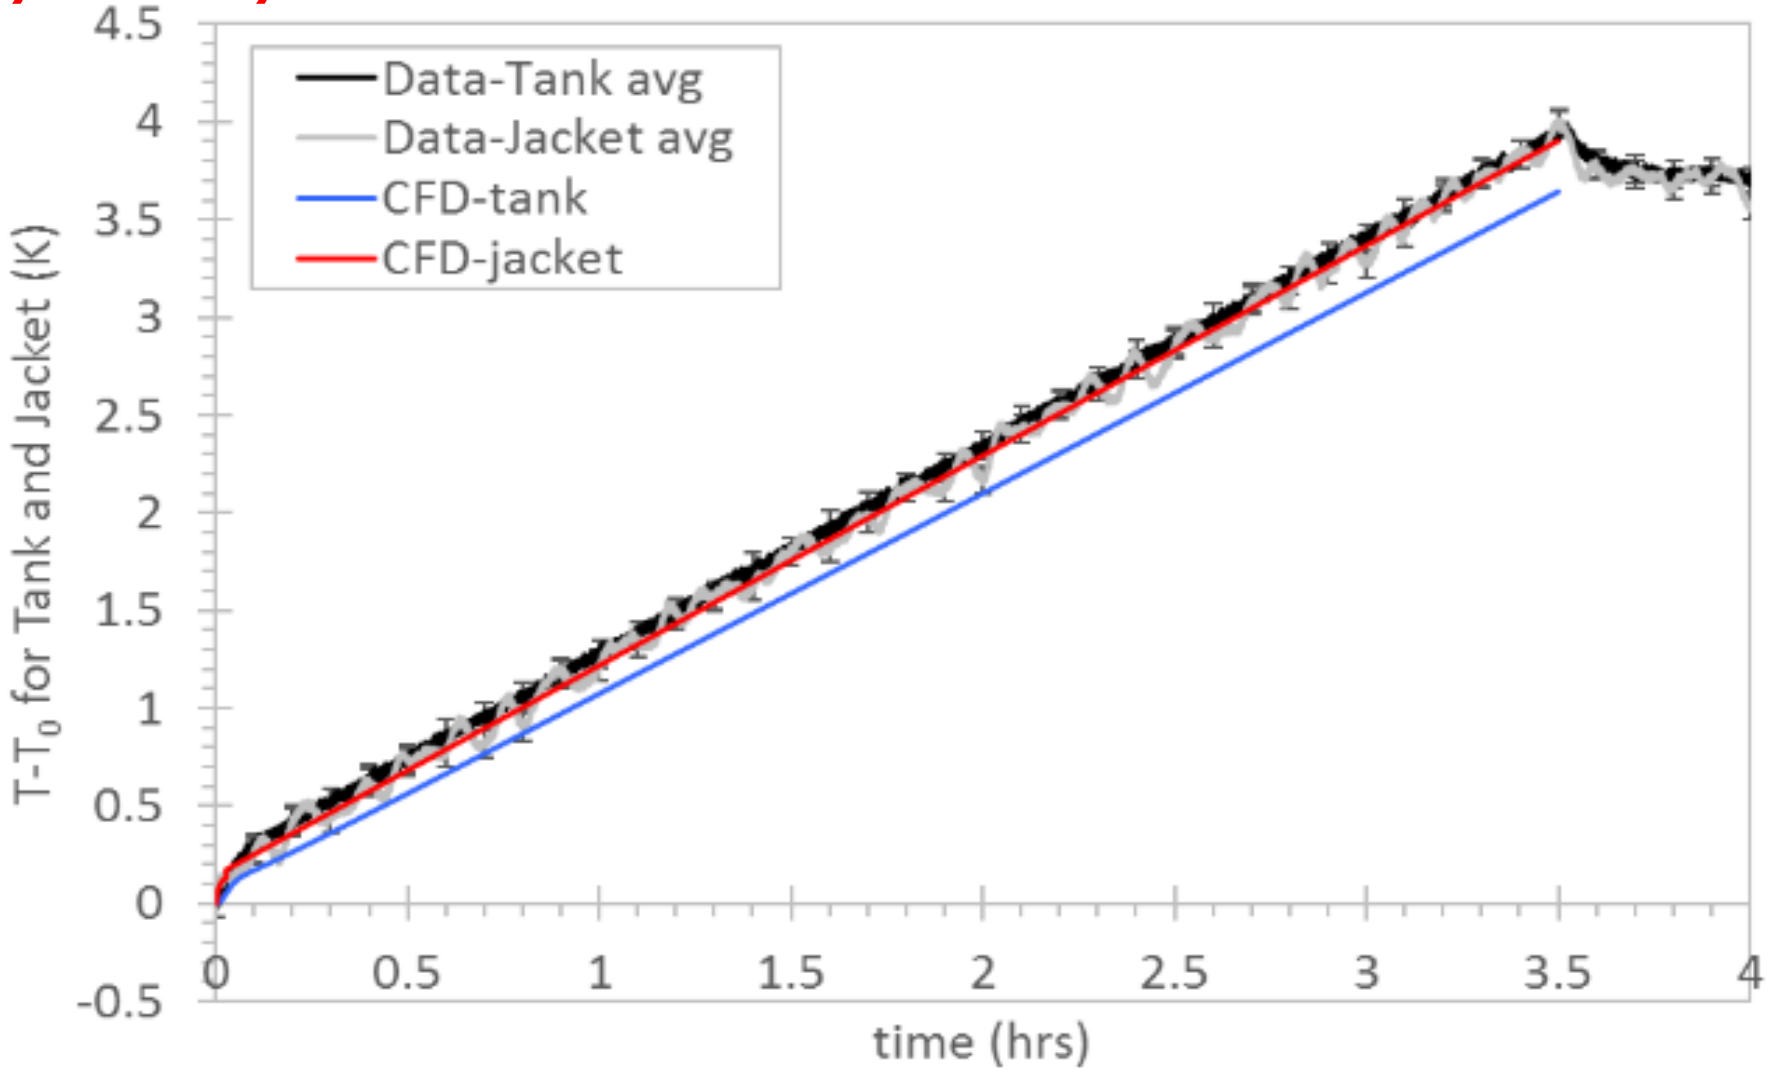

Micro-g (0.5W), 70%, Self-Pressurization

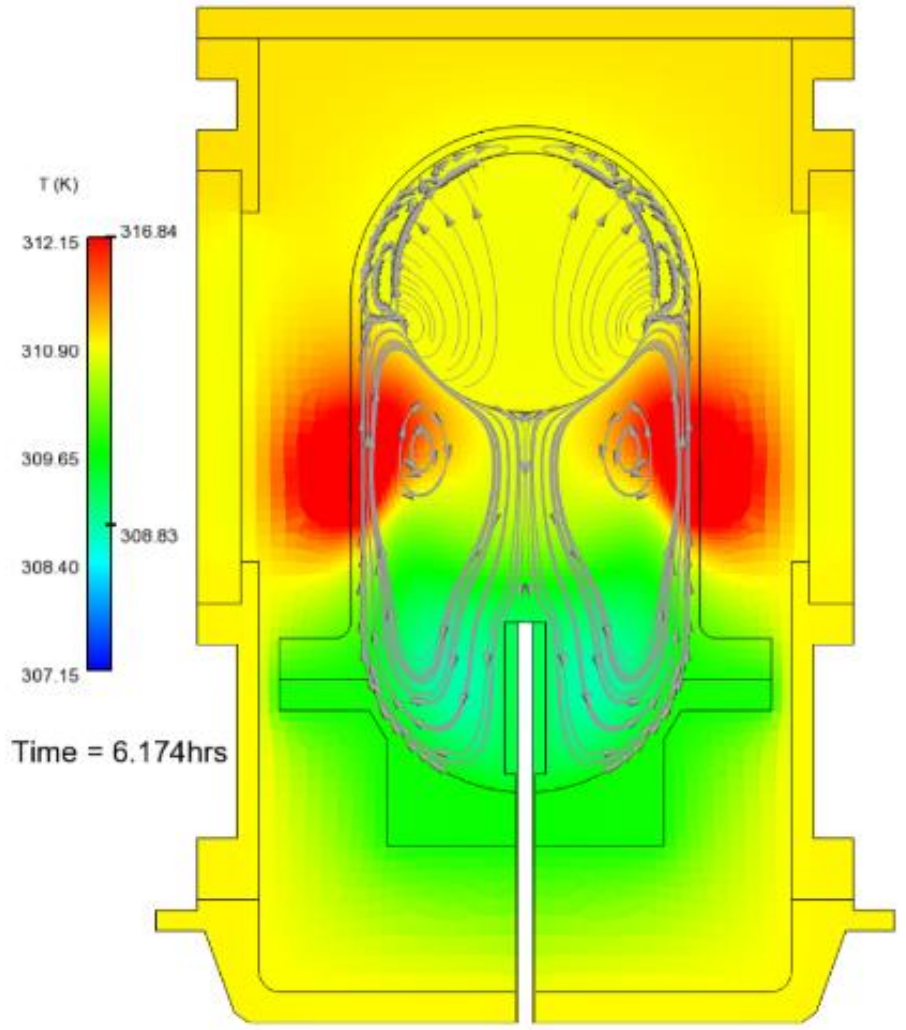

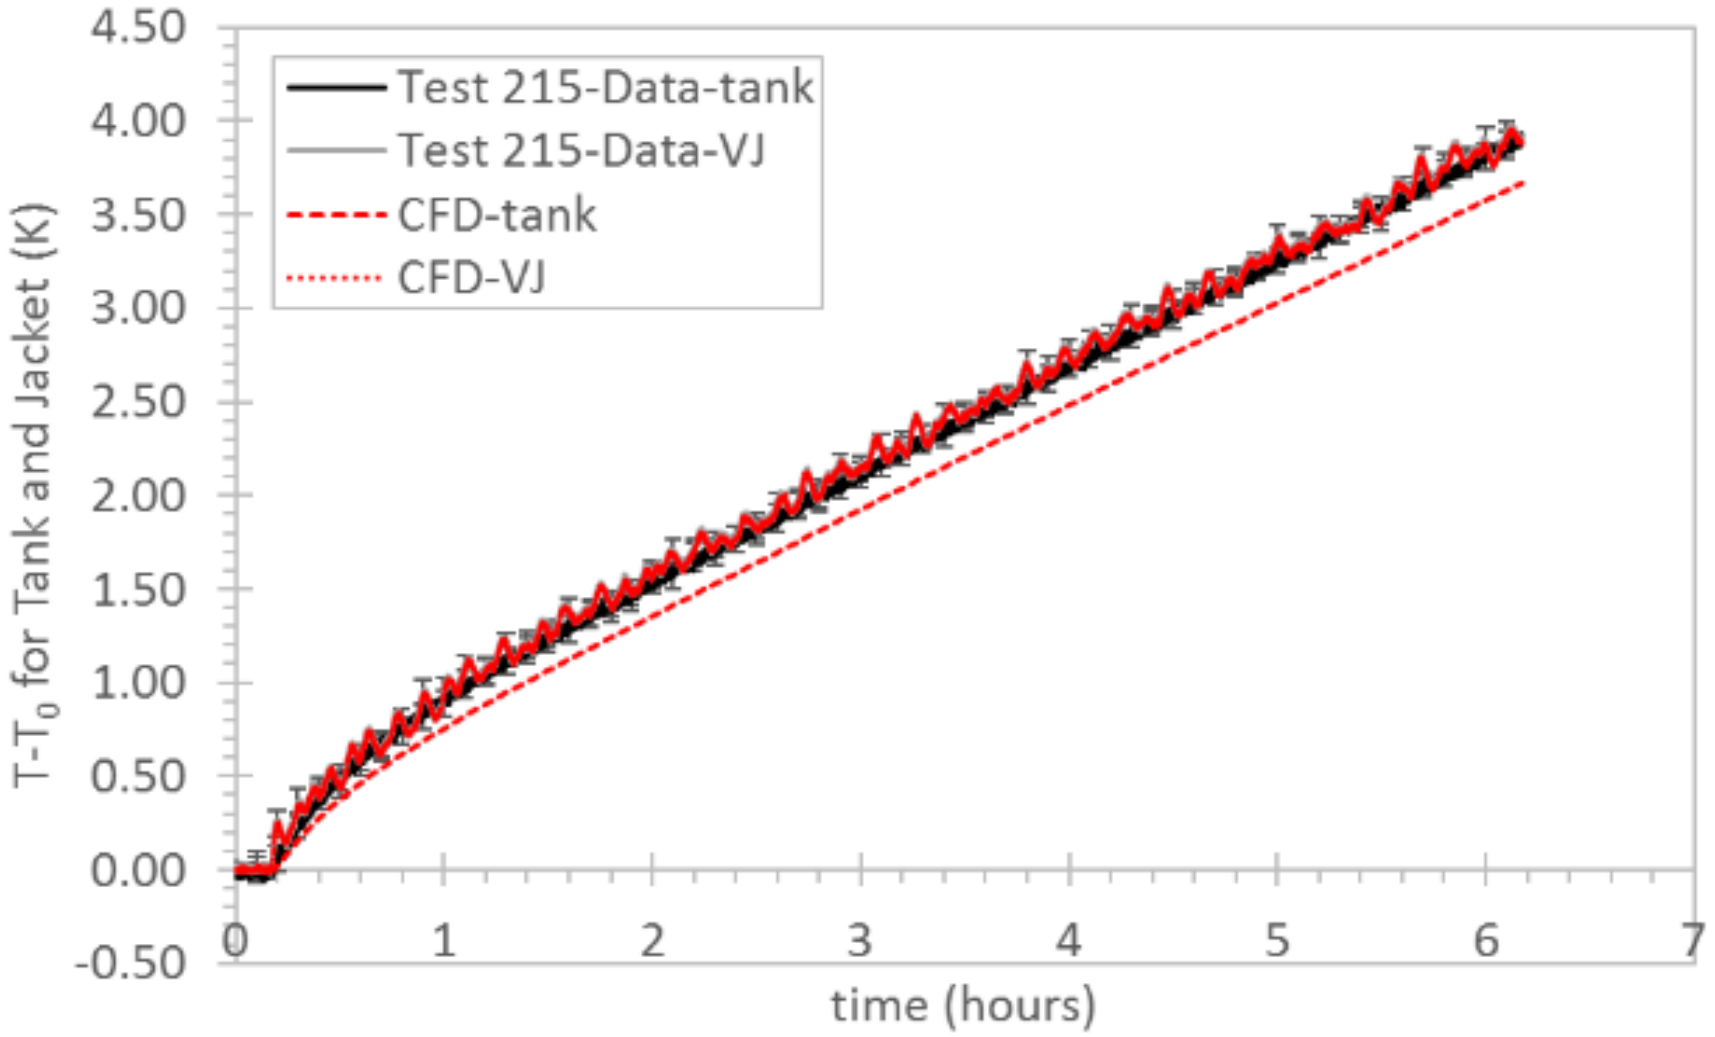


Thank you for your attention.
Questions?